




20kVA to 180kVA






3 Phase Power System

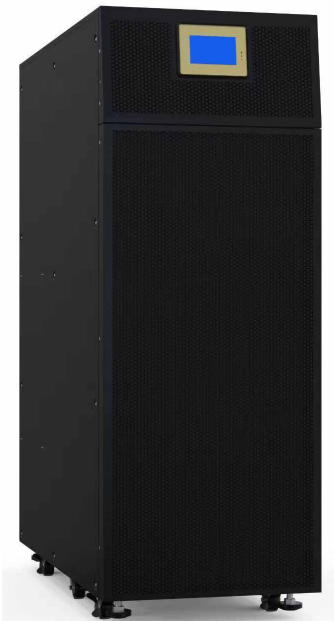

Lithium Battery power System

RTL



20~180kVA High Frequency Tower UPS

LabPower-RTL 20~180kVA series represents the pinnacle of technological advancement, seamlessly integrating cutting-edge online double conversion technology to establish a groundbreaking standard in safeguarding against grid anomalies. Engineered to deliver a steadfast and pristine sinusoidal power supply, our UPS solutions ensure uninterrupted operation for our customers' most critical applications.

Driven by an unyielding commitment to innovation, each unit undergoes meticulous craftsmanship, surpassing even the highest performance expectations. Our relentless pursuit of excellence manifests in unparalleled reliability and performance, setting new benchmarks in the industry.

Furthermore, our dedication to environmental stewardship permeates every facet of our design philosophy. With a sharp focus on sustainability, our UPS systems boast a significantly enhanced input power factor and minimal input current harmonics. This not only optimizes energy efficiency but also underscores our dedication to eco-conscious operation, ensuring a greener future for generations.



Applications

Small and medium-sized data centers, IT machine rooms, financial institutions, traffic dispatch centers, security monitoring, and an array of related facilities find optimal support in this comprehensive solution. Its versatility ensures seamless integration across diverse environments, enhancing operational efficiency and reliability. With a keen focus on meeting the unique needs of each industry, our solution delivers unparalleled performance and flexibility, making it the ideal choice for a wide range of applications.



Features

Our solution boasts a broad input voltage range, fortified by online double conversion technology, ensuring unmatched reliability in performance. With an impressive output power factor of 0.9 and N+X redundancy, our system provides added security against downtime. Additionally, our solution offers unparalleled versatility and robustness, featuring multiple communication options such as RS485, Relay card, USB, and SNMP integration, catering to diverse operational needs with utmost efficiency.



1978 - 2017
IN LOVING MEMORY OF TLM



Website at www.kabellab.com

The Kabellab Logo is designed by Kabellab Technologies Company. Third-party trademarks mentioned are the property of their respective owners.

Specifications

Model		RTL10	RTL20	RTL30	RTL40	RTL60	RTL180	RTL100	RTL120	RTL150	RTL180	
Capacity (kVA)		10	20	30	40	60	80	100	120	150	180	
Input	Phase	3 Phase 4 Wires and Ground										
	Rated Voltage	380/400/415Vac										
	Operating voltage range	138~485Vac										
	Operating frequency range	40Hz-70Hz										
	Power factor	≥ 0.99										
	Harmonic distortion (THDi)	≤ 3% (100% non-linear load)										
	Bypass voltage range	Max. voltage: 220Vac +25% (optional +10%, +15%, +20%) Max. voltage: 230Vac +20% (optional +10%, +15%) Max. voltage: 240Vac +15% (optional +10%)										
		Min. voltage: -45% (optional - 10%, -20%, -30%)										
		Frequency protection range: ±10%										
Generate input	Support											
Output	Phase	3 Phase 4 Wires and Ground										
	Output voltage	380/400/415Vac										
	Power factor	0.9										
	Voltage regulation	± 1%										
	Output frequency	Utility Mode: ±1% / ±2% / ±4% / ±5% / ±10% Optional Battery Mode: (50/60 ± 0.1%)										
	Crest factor	3:1										
	THD	≤ 2% with linear load ≤ 4% with non linear load										
	Efficiency	95.5%										
	Overload	Load ≤ 110%, last 60min, ≤ 125%, last 10min, ≤ 150%, last 1min >150% change to bypass										
Battery	Voltage	long unit 30-50pcs std unit 30-40pcs default 32pcs	long unit 30-50pcs std unit 40-64pcs default 64pcs		±180V / ±192V / ±204V / ±216V / ±228V / ±240 / ±252V / ±264V / ±276V / ±288V / ±300Vdc (30 / 32 / 34 / 36 / 38 / 40 / 42 / 44 / 46 / 48 / 50pcs Optional)							
	Charge Current	Max.10A				Max.15A		Max.30A		Max.45A		
Transfer Time		Utility to Battery: 0ms, Utility to bypass: 0ms										
Environment	Operating temperature	0°C~40°C										
	Storage temperature	-25°C ~ 55°C (no battery)										
	Humidity range	0~95% (non condensing)										
	Altitude	< 1500m										
	Noise level	<55dB				<58dB		<60dB		<65dB		
Protection	Alam	overload, utility abnormal, UPS fault, battery low, ect										
	Protection	short circuit, overload, over temperature, battery low, fan fault alarm										
	Communication	USB, CAN, RS485, FE, LBS, Parrallel card, Relay card, SNMP card (optional)										
Physical	Dimension DxWxH (mm)	720x250x535		720x250x535		868x250 x862	885x440x1200					
	Net weight (kg)	32	33	35	38	70.5	150	160	162	196	198	
Standard Complied			EN62040-1, EN62040-2									



Lithium Battery power System




LabPower serves as an OEM for lithium batteries sourced from another factory, offering a comprehensive solution for lithium iron phosphate battery systems tailored for UPS and energy storage applications. Featuring a broad voltage range of 96V to 1000V, this system ensures adaptability across various scenarios. Renowned for its safety and reliability, it finds applicability in UPS, home storage, industrial, commercial energy storage, and various other fields.




Features

- Safety, reliability, and longevity assured
- Modular and standardized design for seamless integration
- Dual control for precise charge and discharge management
- Gap-free power supply for uninterrupted operation
- Comprehensive CAN/RS485/LAN interface for seamless communication
- Intuitive visualization via touch screen interface
- Scalability with support for up to 20 parallel units
- Efficient operation and maintenance, including remote maintenance capabilities



Specifications

Voltage range(V)	300~432
Cell	3.2V50Ah
PACK	1P15S
Parallel & Series	1P120S
Rated voltage(V)	384
Rated capacity(Ah)	50
Rated energy (kWh)	19.2
Max output power(kW)	76.8
Max discharge current(A)	200
Max charge current(A)	50
Discharge cut-off voltage(V)	300
Max charge voltage(V)	432
Advise back-up time(min)	15
Cycles(25°C,0.5C/1C,100%DOD)	>2500
Working temperature(°C)	0~40
Working humidity	<95%R.H(non-condensing)
Communication	CAN2.0/RS485/DO
Pack dimention(W*D*H,mm)	440*470*133
Cabinet dimention(W*D*H,mm)	600*800*2000
Cabinet count	1
Protection level	IP20
System weight(kg)	Approx. 385
Certification	UL/CE/UN38.3

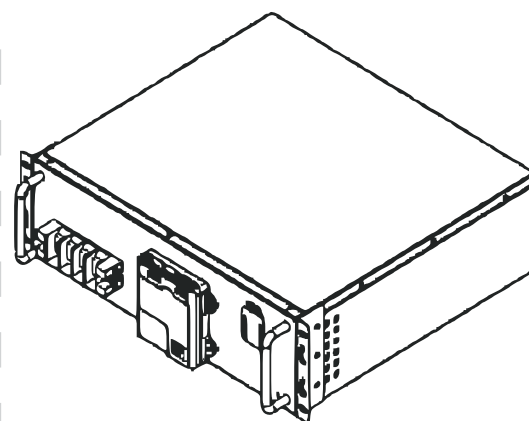

1978 - 2017
IN LOVING MEMORY OF TLM



Website at www.kabellab.com

The Kabellab Logo is designed by Kabellab Technologies Company. Third-party trademarks mentioned are the property of their respective owners.