

LabActiv-MS 2

Commercial Media Converter 1 x Gigabit Port, 1 x SFP Slot




Overview

LabActiv-MS2 is equipped with one 10/100/1000BASE-T RJ45 copper and one 100/1000BASE-X SFP fiber optic interface with built-in power supply. The media converter fulfills 100/1000M auto-sensation at fiber optic port, which increase the flexibility of the whole network. The SFP slot of the LNK-3012-SFP is compatible with 100BASE-FX and 1000BASE-SX / LX / WDM through SFP fiber-optic transceivers.

Customer can easily migrate from 100M fiber to Gigabit without changing customer premise equipment (CPE). Start using the **LabActiv-MS2** in your current 100M infrastructure. When you are ready to move to Gigabit Ethernet, only change the central switch and all the **LabActiv-MS2** will automatically adjust to Gigabit speed. This cut the number of customers visit in half and reduce installation cost with 50%. No need for proprietary equipment, it is compatible with you existing Ethernet products and follows all the accepted standards.

Features and Benefits

- 1-port 10/100/1000BASE-T RJ45 with auto MDI / MDI-X function
- 1 SFP interface, 100/1000BASE-X dual mode (auto detection)
- IEEE 802.3 / 802.3u / 802.3ab / 802.3z Ethernet standard compliant
- Supports auto-negotiation and 10/100Mbps half / full duplex and 1000Mbps full duplex mode
- Prevents packet loss with back pressure (half-duplex) and IEEE 802.3x pause frame flow control (full-duplex)
- 9K jumbo frame size support
- LFP function support

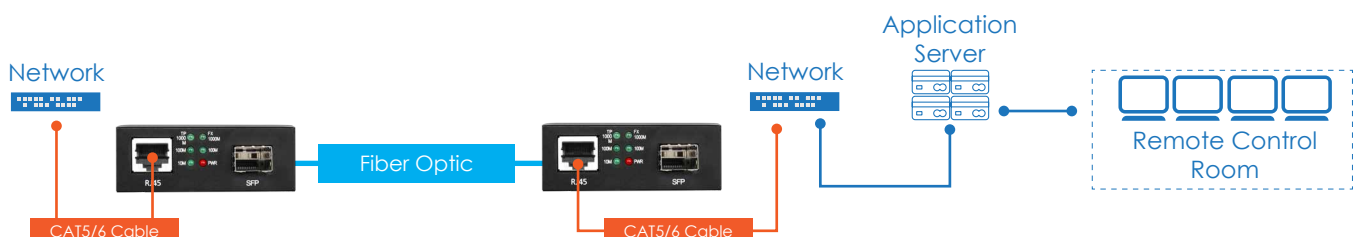

1978 - 2017
IN LOVING MEMORY OF TLM



Website at www.kabellab.com

Kabellab and the Kabellab Logo are designed of Kabellab Technologies Company. Third party trademarks mentioned are the property of their respective owners. The use of ward partner does not imply a partnership relationship between Kabellab and any other company. Since 2009, Kabellab established by Brian and owned the Kabellab products development and design. Kabellab has appointed agent/partners in few country, which are Brunei Darussalm, Malaysia, Taiwan, Filippine & China.

Technical Specifications

Ethernet	
IEEE Standard	IEEE802.3 10Base-T
	IEEE802.3u 100Base-TX
	IEEE802.3ab 1000Base-T
	IEEE802.3z 1000Base-X
	IEEE 802.3z 1000Base-SX/LX
	IEEE 802.3x Flow Control
RJ45 Port Interface	1 x 10/100/1000BASE-T RJ45 TP Auto-MDI/MDI-X, auto-negotiation
SFP Slot Interface	1xSFP Slot
	Dual Mode, Auto Detection
	Compatible SX/LX/BX Transceiver

Electrical and Mechanical	
Input Power	AC 100-240V 50/60Hz 0.15A Max
Power Consumption	< 3W
LED Indicators	TP: 10M
	TP: 100M
	TP: 1000M
	FX: 100M
	FX: 1000M
Dimension (WxDxH)	PWR
	71 x 94 x 26 mm
Weight	200g

LAN Cable	
10/100/1000BASE-T	Cat 5, 5e, 6 UTP cable (100 meters, max.)
	EIA/TIA-568 100-ohm STP (100 meters, max.)
100/1000BASE-SX	Multi-mode (50/125µm or 62.5/125µm) fiber optic cable, up to 550m (varying on SFP module)
100/1000BASE-LX	Single-mode fiber optic cable, up to 10/20/30/40/50/60/70/120 kilometers (varying on SFP module)

Environment	
Operating Temperature	0°C to 50°C
Storage Temperature	10°C to 70°C
Relative Humidity	5% to 95% non-condensing

Order Information	
Part Number	Description
KA-MS2001	LabActiv-MS2 Media Converter Built-in PSU 1xSFP (Dual Mode), 1xGigabit
KA-MM01G-SX	LabActiv-SFP SX 1.2Gbps 850nm Dual Fiber Transceiver, Industrial Grade 550M
KA-SM01G-LX	LabActiv-SFP LX 1.2Gbps 1310nm Dual Fiber Transceiver, Industrial Grade 20KM



1978 - 2017
IN LOVING MEMORY OF TLM



Website at www.kabellab.com

Kabellab and the Kabellab Logo are designed of Kabellab Technologies Company. Third party trademarks mentioned are the property of their respective owners. The use of ward partner does not imply a partnership relationship between Kabellab and any other company. Since 2009, Kabellab established by Brian and owned the Kabellab products development and design. Kabellab has appointed agent/partners in few country, which are Brunei Darussalm, Malaysia, Taiwan, Filippine & China.