



LabActiv-REVO 1

Industrial Media Converter 1 x Gigabit POE+, 1 x SFP Slot

1 x **30W** (Option HPOE)

Overview

LabActiv-REVO 1 is a DIN rail type media converter that supports external SFP Modules and meets EN55022 standard. The Ethernet port support high power PoE (Power Sourcing Equipment) which complies with IEEE802.3af standard. It is a hardened grade product whose operating temperature range is -40°C to +75°C. LNK-IMC1200GP-SFP supports 10/100/1000Base-T with 30W PoE+ and 100/1000Base-X SFP Port. The Ethernet port supports both half-duplex and full-duplex mode. Users can use different type of SFP modules (single-mode/multi-mode fiber, 1/2 core) as needed.

Features and Benefits

- 1-port 10/100/1000BASE-T RJ45 with auto MDI / MDI-X function
- 1xSFP Port, 100Base-FX or 1000Base-X dual mode (auto detection)
- Supports IEEE802.3af PoE (15.4W) or IEEE802.3af PoE+(30W)
- Supports Link Fault Pass Through
- Supports Full/Half-duplex, Auto-negotiation
- 9K Bytes Jumbo Frame
- 12~48VDC Terminal Block Power Input
- Supports DIN-Rail & Wall-mount installation
- Environmentally hardened -40°C to 75°C (-40°F to 167°F) operating temperature


Compliance

EMI:

EN55022:2010+AC: 2011, Class A
EN 61000-3-2: 2006+A1: 2009+A2: 2009
EN 61000-3-3: 2013, EN55024: 2010

EMS:

IEC 61000-4-2: 2008 (ESD), IEC 61000-4-3: 2010 (RS)
IEC 61000-4-4: 2012 (EFT), IEC 61000-4-5: 2014 (Surge)
IEC 61000-4-6: 2013 (CS), IEC 61000-4-8: 2009 (PFMF)

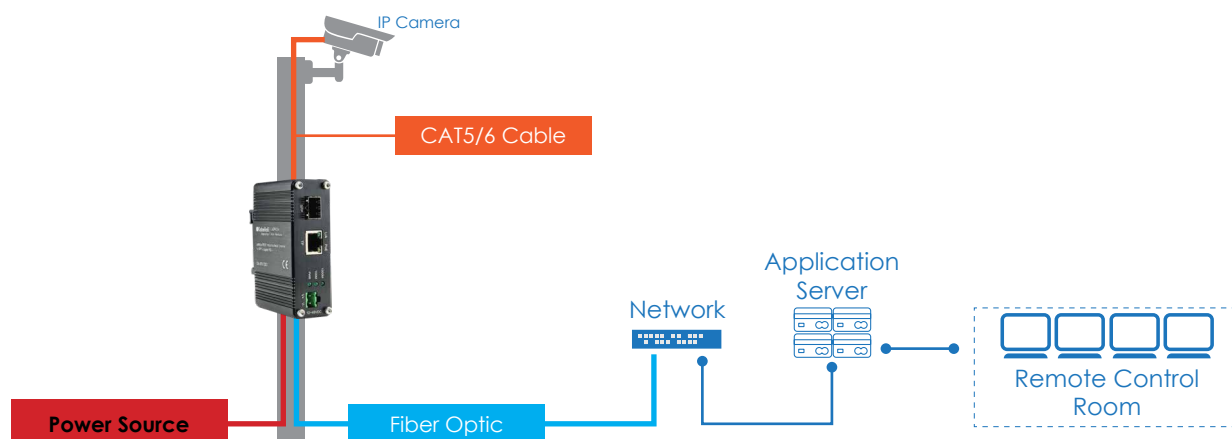

1978 - 2017
IN LOVING MEMORY OF TLM



Website at **www.kabellab.com**

Kabellab and the Kabellab Logo are designed of Kabellab Technologies Company. Third party trademarks mentioned are the property of their respective owners. The use of ward partner does not imply a partnership relationship between Kabellab and any other company. Since 2009, Kabellab established by Brian and owned the Kabellab products development and design. Kabellab has appointed agent/partners in few country, which are Brunei Darussalm, Malaysia, Taiwan, Filippine & China.

Technical Specifications

Ethernet	
IEEE Standard	IEEE802.3 10Base-T
	IEEE802.3u 100Base-TX/FX
	IEEE802.3ab 1000Base-T
	IEEE802.3z 1000Base-X
	IEEE802.3af Power over Ethernet
	IEEE802.3at Power over Ethernet
Processing Type	Store-and-Forward
Forward Filter Rate	14,880pps (10Mbps)
	148,800pps (100Mbps)
	1,488,000pps (1000Mbps)
Packet Buffer Memory	1 Mbit
Max Packet Length	9K Bytes
Address Table Size	2048K MAC Addresses

Interface	
Connector	1xRJ45 PoE+ 30W
Optical Port	1xSFP Slot (Auto 100/1000Mbps)

Electrical and Mechanical	
Input Power	12~48VDC, 2-pin terminal block
Output Power	48VDC
Power Consumption	36W Max
LED Indicators PWR	Power Status
LED Indicators L/A	Data LINK Status
LED Indicators POE	PoE Status
LED Indicators 100M/1000M	Fiber LINK Status
Dimension (WxDxH)	95 x 70 x 30 mm
Weight	0.25Kg
Casing	Aluminum Case
Mounting Options	DIN-RAIL / Wall-Mount

Environment	
Operating Temperature	-40°C to 75°C (-40°F to 167°F)
Storage Temperature	-40°C to 85°C (-40°F to 185°F)
Relative Humidity	5% to 95% non-condensing
MTBF	> 200,000 hrs

Order Information

Part Number	Description
KA-RV1001	LabActiv-REVO 1 Industrial Media Converter 1xSFP, 1xGigabit PoE+ 30W, Din Rail
KA-RV1001H	LabActiv-REVO 1 Industrial Media Converter 1xSFP, 1xGigabit PoE+ 90W, Din Rail
KA-MM01G-SX	LabActiv-SFP SX 1.2Gbps 850nm Dual Fiber Transceiver, Industrial Grade 550M
KA-SM01G-LX	LabActiv-SFP LX 1.2Gbps 1310nm Dual Fiber Transceiver, Industrial Grade 20KM



1978 - 2017
IN LOVING MEMORY OF TLM



Website at www.kabellab.com

Kabellab and the Kabellab Logo are designed of Kabellab Technologies Company. Third party trademarks mentioned are the property of their respective owners. The use of ward partner does not imply a partnership relationship between Kabellab and any other company. Since 2009, Kabellab established by Brian and owned the Kabellab products development and design. Kabellab has appointed agent/partners in few country, which are Brunei Darussalm, Malaysia, Taiwan, Filippine & China.