



Photon

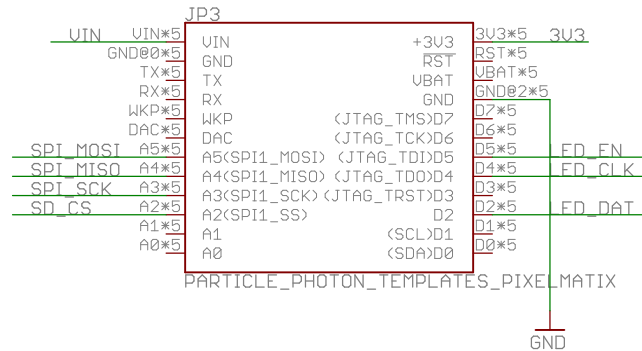


Power




Optionally add jumper to JP8/JP6
or place diode at D2 to power strip through UUSB

C2 may be unnecessary, will test

microSD Card

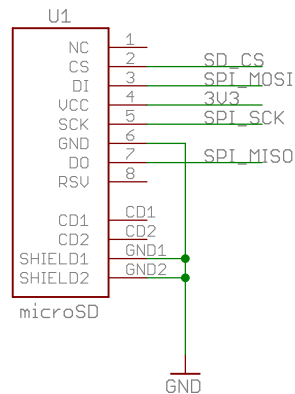

APA102 Buffers

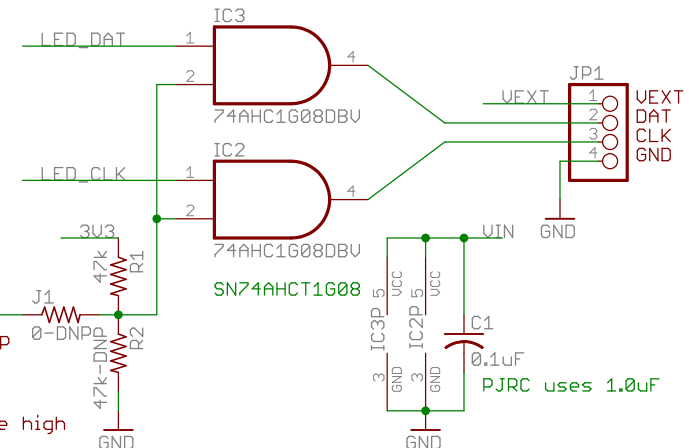

CONFIG OPTIONS
Default: R1 47k, R2 DNP, J1 DNP
LEDs will always be driven
Alt: R1 DNP, R2 47k, J1 0-ohm
LED_EN controls drivers, active high

SmartMatrix APA102 Shield for Photon
Pixelmatrix 2016 CC BY-SA 4.0

TITLE: SmartMatrixPhotonApa

Document Number:

REV:
V0.1

Date: 4/27/16 9:39 AM

Sheet: 1/1