


DRILL CHART: TOP to BOTTOM				
ALL UNITS ARE IN MILS				
FIGURE	FINISHED_SIZE	TOLERANCE_DRILL	PLATED	QTY
⊙	40.0	+3.0/-3.0	PLATED	11
⊕	93.0	+3.0/-3.0	NON-PLATED	2

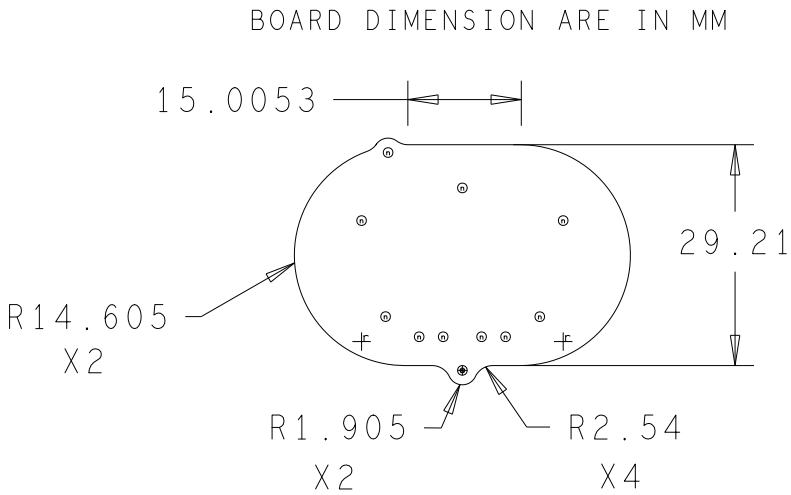

- NOTES: (UNLESS OTHERWISE SPECIFIED)
- FABRICATE PER IPC-6012B TYPE 2 CLASS 3
 - MATERIAL:
BASE MATERIAL : FR4 Tg 180
 - BOARD THICKNESS: 1.6 MM +/-5% TOL.
 - FINISHED CU THICKNESS FOR ALL LAYERS : 2 OZ.
 - NO OF LAYERS: 2
 - SURFACE FINISH: ENIG FINISH
 - SOLDERMASK CLEARANCE IS GIVEN SAME AS PAD SIZE EXCEPT FIDUCIALS.
VENDOR SHALL MODIFY THE MASK CLEARANCE AS PER THE REQUIRED MANUFACTURING TOLERANCE
COLOR:GREEN
 - SILKSCREEN:SINGLE SIDE WITH PERMANENT NON CONDUCTIVE WHITE EPOXY INK
SILKSCREEN MAY BE TRIMMED OFF ANY SOLDERED ENTITY.
 - BOW AND TWIST NOT TO EXCEED 0.180MM (0.007") PER INCH AS MEASURED PER IPC-TM-650.
 - 100%CONTINUITY TESTING USING DATABASE NETLIST SHALL BE PERFORMED.
 - VENDOR SHOULD FOLLOW ROHS COMPLAINT PROCESS FOR MANUFACTURING.