

MAWLANA BHASHANI SCIENCE AND TECHNOLOGY  
UNIVERSITY

Santosh,Tangail - 1902



Course Title: Computer Networks Lab

Lab Report Name: Python for

Networking Lab Report No: 03

Submitted by,

Name: wahidul hasan piyal &

tania sultana asha

ID: IT-18048 & 18010

Session: 2017-18

Dept. ICT,MBSTU

Submitted to,

NAZRUL ISLAM,

Assistant Professor

Dept. of ICT, MBSTU

## Theory

**Third-party libraries:** Although the Python's standard library provides a great set of awesome functionalities, there will be times that you will eventually run into the need of making use of third party libraries. Can you imagine building a webserver from scratch? Or making a port to a database driver? Or, maybe, coming up with an image manipulation tool?. Third party libraries are welcome in a way that they prevent you from reinventing the something that exist. They save you time to focus on finishing and delivering your application.

**Networking Glossary:** Before we begin discussing networking with any depth, we must define some common terms that you will see throughout this guide, and in other guides and documentation regarding networking.

- **Connection:** In networking, a connection refers to pieces of related information that are transferred through a network. This generally infers that a connection is built before the data transfer (by following the procedures laid out in a protocol) and then is deconstructed at the end of the data transfer.
- **Packet:** A packet is, generally speaking, the most basic unit that is transferred over a network. When communicating over a network, packets are the envelopes that carry your data (in pieces) from one end point to the other. Packets have a header portion that contains information about the packet including the source and destination, timestamps, network hops, etc. The main portion of a packet contains the actual data being transferred. It is sometimes called the body or the payload.

- **Network Interface:** A network interface can refer to any kind of software interface to networking hardware. For instance, if you have two network cards in your computer, you can control and configure each network interface associated with them individually. A network interface may be associated with a physical device, or it may be a representation of a virtual interface. The "loopback" device, which is a virtual interface to the local machine, is an example of this.

- **LAN:** LAN stands for "local area network". It refers to a network or a portion of a network that is not publicly accessible to the greater internet. A home or office network is an example of a LAN.
- **WAN:** WAN stands for "wide area network". It means a network that is much more extensive than a LAN. While WAN is the relevant term to use to describe large, dispersed networks in general, it is usually meant to mean the internet, as a whole. If an interface is said to be connected to the WAN, it is generally assumed that it is reachable through the internet.
- **Protocol:** A protocol is a set of rules and standards that basically define a language that devices can use to communicate. There are a great number of protocols in use extensively in networking, and they are often implemented in different layers. Some low level protocols are TCP, UDP, IP, and ICMP. Some familiar examples of application layer protocols, built on these lower protocols, are HTTP (for accessing web content), SSH, TLS/SSL, and FTP. **Port:** A port is an address on a single machine that can be tied to a specific piece of software. It is not a physical interface or location, but it allows your server to be able to communicate using more than one application.
- **Firewall:** A firewall is a program that decides whether traffic coming into a server or going out should be allowed. A firewall usually works by creating rules for which type of traffic is acceptable on which ports. Generally, firewalls block ports that are not used by a specific application on a server.
- **NAT:** NAT stands for network address translation. It is a way to translate requests that are incoming into a routing server to the

relevant devices or servers that it knows about in the LAN. This is usually implemented in physical LANs as a way to route requests through one IP address to the necessary backend servers.

- **VPN:** VPN stands for virtual private network. It is a means of connecting separate LANs through the internet, while maintaining privacy. This is used as a means of connecting remote systems as if they were on a local network, often for security reasons.

- **Interfaces:** Interfaces are networking communication points for your computer. Each interface is associated with a physical or virtual networking device. Typically, your server will have one configurable network interface for each Ethernet or wireless internet card you have. In addition, it will define a virtual network interface called the "loopback" or localhost interface. This is used as an interface to connect applications and processes on a single computer to other applications and processes. You can see this referenced as the "lo" interface in many tools. Many times, administrators configure one interface to service traffic to the internet and another interface for a LAN or private network.
- **Protocols:** Networking works by piggybacking a number of different protocols on top of each other. In this way, one piece of data can be transmitted using multiple protocols encapsulated within one another. We will talk about some of the more common protocols that you may come across and attempt to explain the difference, as well as give context as to what part of the process they are involved with. We will start with protocols implemented on the lower networking layers and work our way up to protocols with higher abstraction.

## Exercises:

### 4.1. Enumerating interfaces on your

machine Code:

```
import sys
```

```
import
```

socket

import fcntl

import

struct

import

array

SIOCGIFCONF = 0x8912 #from C library sockios.h

```
STUCT_SIZE_32 = 32
```

```
STUCT_SIZE_64 = 40
```

```
PLATFORM_32_MAX_NUMBER =
```

```
2**32 DEFAULT_INTERFACES = 8
```

```
def list_interfaces():
```

```
    interfaces = []
```

```
    max_interfaces = DEFAULT_INTERFACES
```

```
    is_64bits = sys.maxsize > PLATFORM_32_MAX_NUMBER
```

```
    struct_size = STUCT_SIZE_64 if is_64bits else
```

```
    STUCT_SIZE_32 sock = socket.socket(socket.AF_INET,
```

```
    socket.SOCK_DGRAM) while True:
```

```
        bytes = max_interfaces * struct_size
```

```
        interface_names = array.array('B', '\0' *
```

```
        bytes) sock_info = fcntl.ioctl(
```

```
        sock.fileno(),
```

```
        SIOCGIFCON
```

```
        F,
```

```
        struct.pack('iL', bytes, interface_names.buffer_info()[0])
```

```
    )
```



```
outbytes = struct.unpack('iL',  
sock_info)[0] if outbytes == bytes:  
max_interfaces  
*= 2 else:
```

```

break

namestr =

interface_names.tostring() for i
in range(0, outbytes, struct_size):

interfaces.append((namestr[i:i+16].split('\0',
1)[0])) return interfaces

if __name__ == '__main__':

interfaces = list_interfaces()

print( "This machine has %s network interfaces: %s."
%(len(interfaces), interface))

```

### Output:

```
This machine has 2 network interfaces: ['lo', 'eth0'].
```

## Exercise 4.2: Finding the IP address for a specific interface on your

### machine Code:

```

import

argparse

import sys

import socket

```

```
import fcntl

import struct

import array

def get_ip_address(ifname):
    s = socket.socket(socket.AF_INET,
socket.SOCK_DGRAM) return
socket.inet_ntoa(fcntl.ioctl(
```

```

s.fileno(),
0x8915, # SIOCGIFADDR
struct.pack('256s', ifname[:15])
)[20:24])
if __name__ == '__main__':
    #interfaces = list_interfaces()
    parser = argparse.ArgumentParser(description='Python
networking utils') parser.add_argument('--ifname',
action="store", dest="ifname", required=True)
    given_args =
    parser.parse_args() ifname
    = given_args.ifname
    print ("Interface [%s] --> IP: %s" %(ifname,
get_ip_ address(ifname)))

```

### Output:

**Interface [eth0] --> IP: 10.0.2.15**

Exercise 4.3: Finding whether an interface is up on your

machine Code:

```
import
```

argparse

import socket

import struct

import fcntl

import nmap

```

SAMPLE_PORTS = '21-23'

def get_interface_status(ifname):
    sock = socket.socket(socket.AF_INET,
        socket.SOCK_DGRAM) ip_address =
        socket.inet_ntoa(fcntl.ioctl(
            sock.fileno(),
            0x8915, #SIOCGIFADDR, C socket library
            sockios.h struct.pack('256s',
                ifname[:15])))[20:24])
    nm = nmap.PortScanner() nm.scan(ip_address,
        SAMPLE_PORTS) return nm[ip_address].state()

if __name__ == '__main__':
    parser = argparse.ArgumentParser(description='Python
        networking utils')
    parser.add_argument('--ifname', action="store",
        dest="ifname", required=True)
    given_args =
        parser.parse_args() ifname

```

```
= given_args.ifname
```

```
print ("Interface [%s] is: %s" %(ifname,
```

```
get_interface_status(ifname)))
```

**OUTPUT:**

**Interface [eth0] is: up**

**Exercise 4.4: Detecting inactive machines on your**

**network Code:**

```

import

argparse

import time

import sched

from scapy.all import sr, srp, IP, UDP, ICMP, TCP, ARP, Ether

RUN_FREQUENCY = 10

scheduler = sched.scheduler(time.time,

time.sleep) def

detect_inactive_hosts(scan_hosts):

    """

    Scans the network to find scan_hosts are live

    or dead scan_hosts can be like 10.0.2.2-4 to

    cover range.

    See Scapy docs for specifying

    targets. """

    global scheduler

    scheduler.enter(RUN_FREQUENCY, 1, detect_inactive_hosts,

(scan_ hosts, ))

```



```
inactive_hosts =
```

```
[] try:
```

```
ans, unans = sr(IP(dst=scan_hosts)/ICMP(),retry=0,
```

```
timeout=1) ans.summary(lambda(s,r) :
```

```
r.sprintf("%IP.src% is alive"))
```

```
for inactive in unans:
```

```
print "%s is
```

```
inactive" %inactive.dst
```

```
inactive_hosts.append(inactive.
```

```
dst)
```

```
print "Total %d hosts are
inactive" %(len(inactive_hosts)) except
KeyboardInterrupt:
exit(0)
if __name__ == "__main__":
    parser = argparse.ArgumentParser(description='Python
networking utils') parser.add_argument('--scan-hosts',
action="store", dest="scan_
hosts", required=True)
given_args =
parser.parse_args()
scan_hosts = given_args.scan_hosts
scheduler.enter(1, 1, detect_inactive_hosts,
(scan_hosts, )) scheduler.run()
```

**OUTPUT:**

```
$ sudo python 3_7_detect_inactive_machines.py --scan-hosts=10.0.2.2-4
Begin emission:
.*...Finished to send 3 packets.
.
Received 6 packets, got 1 answers, remaining 2 packets
10.0.2.2 is alive
10.0.2.4 is inactive
10.0.2.3 is inactive
Total 2 hosts are inactive
Begin emission:
*.Finished to send 3 packets.
Received 3 packets, got 1 answers, remaining 2 packets
10.0.2.2 is alive
10.0.2.4 is inactive
10.0.2.3 is inactive
Total 2 hosts are inactive
```

## Exercise 4.5: Pinging hosts on the network with

ICMP Code:

```
import os

import

argparse

import socket

import struct

import select

import time

ICMP_ECHO_REQUEST = 8 # Platform

specific DEFAULT_TIMEOUT = 2

DEFAULT_COUNT = 4

class Pinger(object):

    """ Pings to a host -- the Pythonic way """

    def __init__(self, target_host,

count=DEFAULT_COUNT,

timeout=DEFAULT_TIMEOUT):

    self.target_host =

target_host self.count =

count self.timeout =
```

timeout

def do\_checksum(self,

source\_string): """ Verify the

packet integrity """ sum = 0

max\_count =

(len(source\_string)/2)\*2 count =

0

while count < max\_count:

```

val = ord(source_string[count + 1])*256 +
ord(source_string[count])

sum = sum + val

sum = sum &

0xffffffff count =

count + 2

if max_count<len(source_string):

sum = sum +

ord(source_string[len(source_string)-1]) sum =

sum & 0xffffffff

sum = (sum>>16) + (sum &

0xffffffff) sum = sum +

(sum >> 16)

answer = ~sum

answer = answer & 0xffff

answer = answer >> 8 | (answer << 8

& 0xff00) return answer

def receive_pong(self, sock, ID,

timeout): """

```

Receive ping from the

socket. """

time\_remaining =

timeout while True:

start\_time = time.time()

readable = select.select([sock], [], [], time\_remaining)

```

time_spent = (time.time() -
start_time) if readable[0] == []: #

Timeout

return

time_received = time.time()

recv_packet, addr =

sock.recvfrom(1024) icmp_header

= recv_packet[20:28]

type, code, checksum, packet_ID, sequence =

struct.unpack( "bbHHh", icmp_header

)

if packet_ID == ID:

bytes_In_double = struct.calcsize("d")

time_sent = struct.unpack("d",

recv_packet[28:28 + bytes_In_double])[0]

return time_received - time_sent

time_remaining = time_remaining -

time_spent if time_remaining <= 0:

return

```



We need a `send_ping()` method that will send the data of a ping request to the target host.

Also, this will call the `do_checksum()` method for checking the integrity of the ping data,

as follows:

```

def send_ping(self, sock, ID):
    """
    Send ping to the target

    host """

    target_addr =

    socket.gethostbyname(self.target_host)

    my_checksum = 0

    # Create a dummy header with a 0 checksum.
    header = struct.pack("bbHHh", ICMP_ECHO_REQUEST,

    0, my_checksum, ID, 1)

    bytes_in_double =

    struct.calcsize("d") data = (192

    - bytes_in_double) * "Q"

    data = struct.pack("d", time.time()) + data

    # Get the checksum on the data and the dummy

    header. my_checksum =

    self.do_checksum(header + data) header =

    struct.pack

    ( "bbHHh", ICMP_ECHO_REQUEST, 0,

```

```
socket.htons(my_checksum), ID, 1 )
```

```
packet = header + data
```

```
sock.sendto(packet, (target_addr,
```

```
1)) def ping_once(self):
```

```
icmp =
```

```
socket.getprotobyname("icmp")
```

```
try:
```

```
sock = socket.socket(socket.AF_INET,  
socket.SOCK_RAW, icmp)  
  
except socket.error, (errno, msg):  
  
if errno == 1:  
  
# Not superuser, so operation not permitted  
  
msg += "ICMP messages can only be sent from  
root user processes"  
  
raise  
  
socket.error(msg)  
  
except Exception, e:  
  
print  
  
"Exception: %s" %(e)  
  
my_ID = os.getpid() &  
  
0xFFFF  
  
self.send_ping(sock,  
  
my_ID)  
  
delay = self.receive_pong(sock, my_ID,  
  
self.timeout) sock.close()
```

```
return delay
```

```
def
```

```
ping(self):
```

```
"""
```

```
Run the ping
```

```
process """
```

```
for i in xrange(self.count):
```

```
    print "Ping to %s..." %
```

```
self.target_host, try:
```

```

delay =

self.ping_once()

except socket.gaierror,

e:

print "Ping failed. (socket error:

'%s')" % e[1] break

if delay == None:

print "Ping failed. (timeout

within %sssec.)" % \ \ self.timeout

else:

delay = delay * 1000

print "Get pong in %0.4fms" %

delay if __name__ == '_'

__main__':

parser = argparse.ArgumentParser(description='Python

ping') parser.add_argument('--target-host', action="store",

dest="target_ host", required=True)

given_args = parser.parse_args()

target_host = given_args.target_host

```

pinger =


Pinger(target\_host=target\_host)

pinger.ping()

## OUTPUT:

```
$ sudo python 3_2_ping_remote_host.py --target-host=www.google.com
Ping to www.google.com... Get pong in 7.6921ms
Ping to www.google.com... Get pong in 7.1061ms
Ping to www.google.com... Get pong in 8.9211ms
Ping to www.google.com... Get pong in 7.9899ms
```

## Exercise 4.6: Pinging hosts on the network with ICMP using pc resources Code:

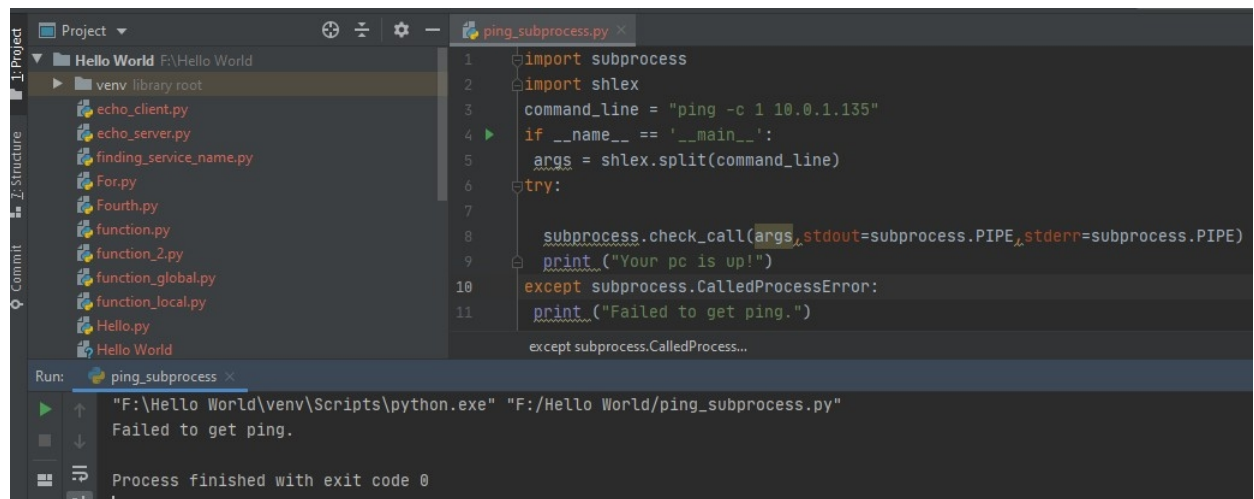

```
1 import subprocess
2 import shlex
3 command_line = "ping -c 1 10.0.1.135"
4 if __name__ == '__main__':
5     args = shlex.split(command_line)
6     try:
7
8         subprocess.check_call(args, stdout=subprocess.PIPE, stderr=subprocess.PIPE)
9         print("Your pc is up!")
10    except subprocess.CalledProcessError:
11        print("Failed to get ping.")
12
13    except subprocess.CalledProcessError:
```

Run: ping\_subprocess

"F:\Hello World\venv\Scripts\python.exe" "F:/Hello World/ping\_subprocess.py"

Failed to get ping.

Process finished with exit code 0

## Exercise 4.7: Scanning the broadcast of packets Code:

from scapy.all

import \* import os

captured\_data =

dict()

END\_PORT = 1000

def monitor\_packet(pkt):

if IP in pkt:

if not

captured\_data.has\_key(pkt[IP].src):

captured\_data[pkt[IP].src] = []

if TCP in pkt:

if pkt[TCP].sport <= END\_PORT:

if not str(pkt[TCP].sport) in

captured\_data[pkt[IP].src]:

captured\_data[pkt[IP].src].append(str(pkt[TCP].s



```
port)) os.system('clear')
ip_list =
sorted(captured_data.keys()) for
key in ip_list:
ports=',
'.join(captured_data[key]) if
len (captured_data[key]) == 0:
print '%s' % key
```

```

else:
print '%s (%s)' % (key,
ports) if __name__
__ == '__main__':
sniff(prn=monitor_packet, store=0)


```

## Output:

```

10.0.2.15
XXX.194.41.129 (80)
XXX.194.41.134 (80)
XXX.194.41.136 (443)
XXX.194.41.140 (80)
XXX.194.67.147 (80)
XXX.194.67.94 (443)
XXX.194.67.95 (80, 443)

```

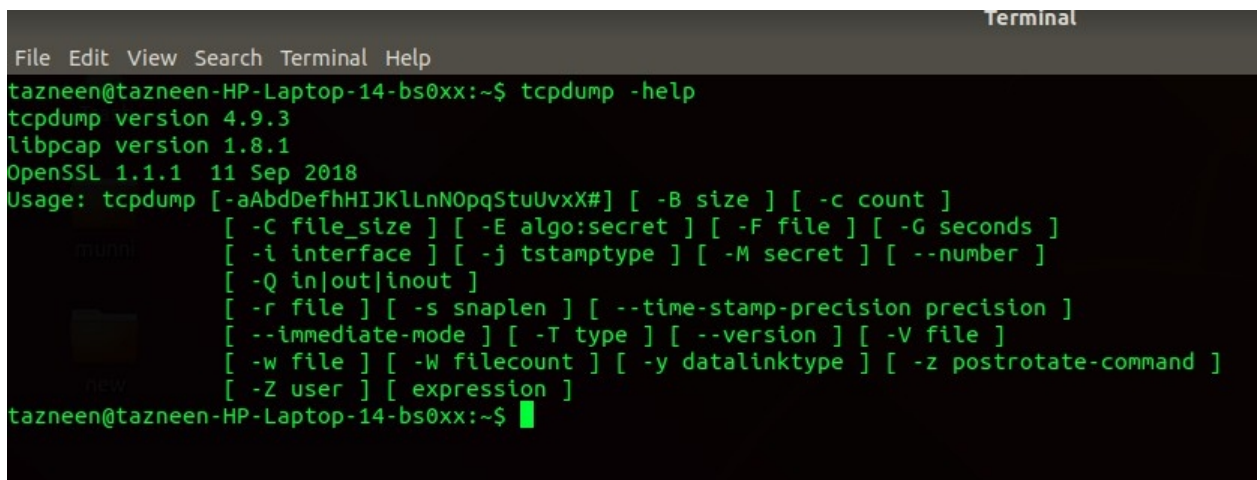

```

Terminal
File Edit View Search Terminal Help
tazneen@tazneen-HP-Laptop-14-bs0xx:~$ tcpdump -help
tcpdump version 4.9.3
libpcap version 1.8.1
OpenSSL 1.1.1 11 Sep 2018
Usage: tcpdump [-aAbdDefhHIJKlLnOpqStuUvxX#] [-B size] [-c count]
               [-C file_size] [-E algo:secret] [-F file] [-G seconds]
               [-i interface] [-j tstamptype] [-M secret] [--number]
               [-Q in|out|inout]
               [-r file] [-s snaplen] [--time-stamp-precision precision]
               [--immediate-mode] [-T type] [--version] [-V file]
               [-w file] [-W filecount] [-y datalinktype] [-z postrotate-command]
               [-Z user] [expression]
tazneen@tazneen-HP-Laptop-14-bs0xx:~$

```

## Exercise 4.8: Sniffing packets on your network

**Conclusion:** There are two levels of network service access in Python. These are:

- Low-Level Access

- High-Level Access

In the first case, programmers can use and access the basic socket support for the operating system using Python's libraries, and programmers can implement both connection-less and connection-oriented protocols for programming.

Application-level network protocols can also be accessed using high-level access provided by Python libraries. These protocols are HTTP, FTP, etc. A socket is the end-point in a flow of communication between two programs or communication channels operating over a network. They are created using a set of programming requests called socket API (Application Programming Interface). Python's socket library offers classes for handling common transports as a generic interface.

Sockets use protocols for determining the connection type for port-to-port communication between client and server machines.

The protocols are used for:

- Domain Name Servers (DNS)
- IP addressing
- E-mail
- FTP (File Transfer Protocol) etc...

Python has a socket method that let programmers' set-up different types of socket virtually. After you defined the socket, you can use several methods to manage the connections. Some of the important server socket methods are:

- **listen()**: is used to establish and start TCP listener.
- **bind()**: is used to bind-address (host-name, port number) to the socket.
- **accept()**: is used to TCP client connection until the connection arrives.
- **connect()**: is used to initiate TCP server connection.
- **send()**: is used to send TCP messages.
- **recv()**: is used to receive TCP messages.

- `sendto()`: is used to send UDP messages
- `close()`: is used to close a socket.

Sending messages back and forth using different basic protocols is simple and straightforward. It shows that programming takes a significant role n

client-server architecture where the client makes data request to a server, and the server replies to those machines.