

Sensor placement — 12 m low-floor bus, 2 double doors (parameters ASSUMED, see box)

A — side view (from curb)

ToF node above lintel, face down (×2)
(see node_design.md)

Parameters (ASSUMED unless noted)

$L_{\text{bus}} = 12 \text{ m}$ · $W_{\text{bus}} = 2.55 \text{ m}$

$H_{\text{ceil}} \approx 2.3 \text{ m}$ · $H_{\text{door}} \approx 2.0 \text{ m}$


$W_{\text{door}} \approx 1.25 \text{ m}$

$x_{\text{d1}} \approx 0.9 \text{ m}$ · $x_{\text{d2}} \approx 5.9 \text{ m}$


FoV $60^\circ \times 60^\circ$, 90° diag (confirmed)

$d_{\text{line}} \in 1.2\text{--}2.2 \text{ m}$ (Finding C)

$s_{\text{off}} \geq d_{\text{line}} - F/2$ (node_design.md)

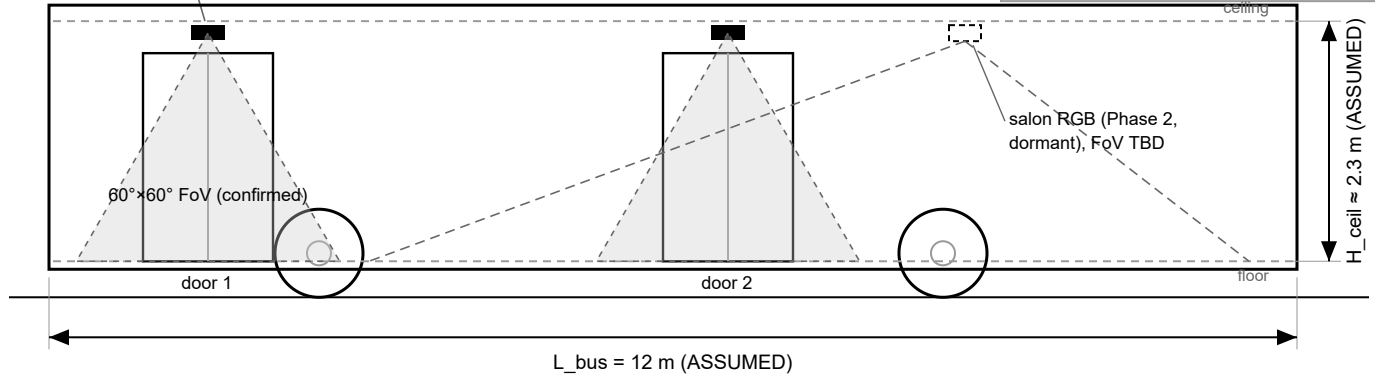

B — top view

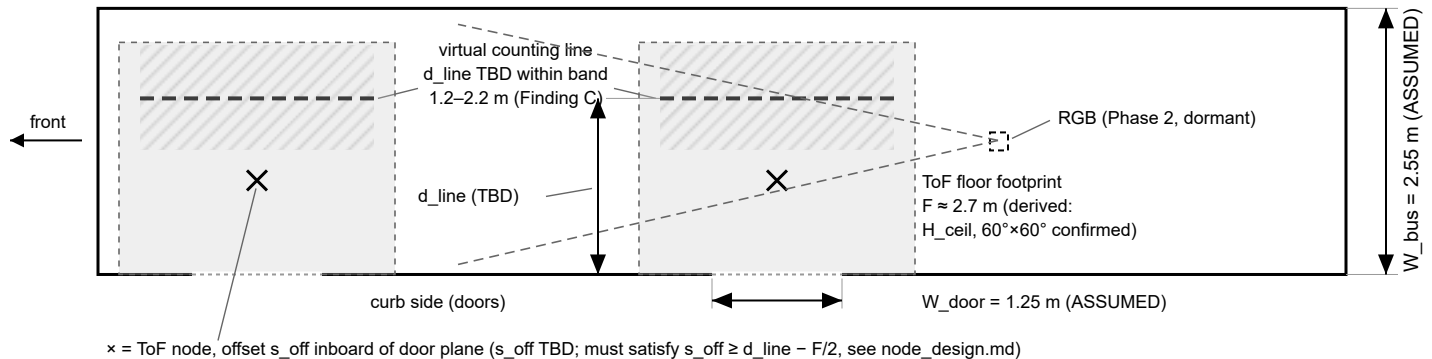

Virtual line sits inside the vestibule, not across the aperture: kerbside threshold positions fall outside depth range;
all 25/25 boarding/alighting trajectories cross the in-cabin band (Finding C, experiments/log.md 2026-08-10).