


Power and data wiring — 24 V vehicle supply, CAN trunk (2-door bus)

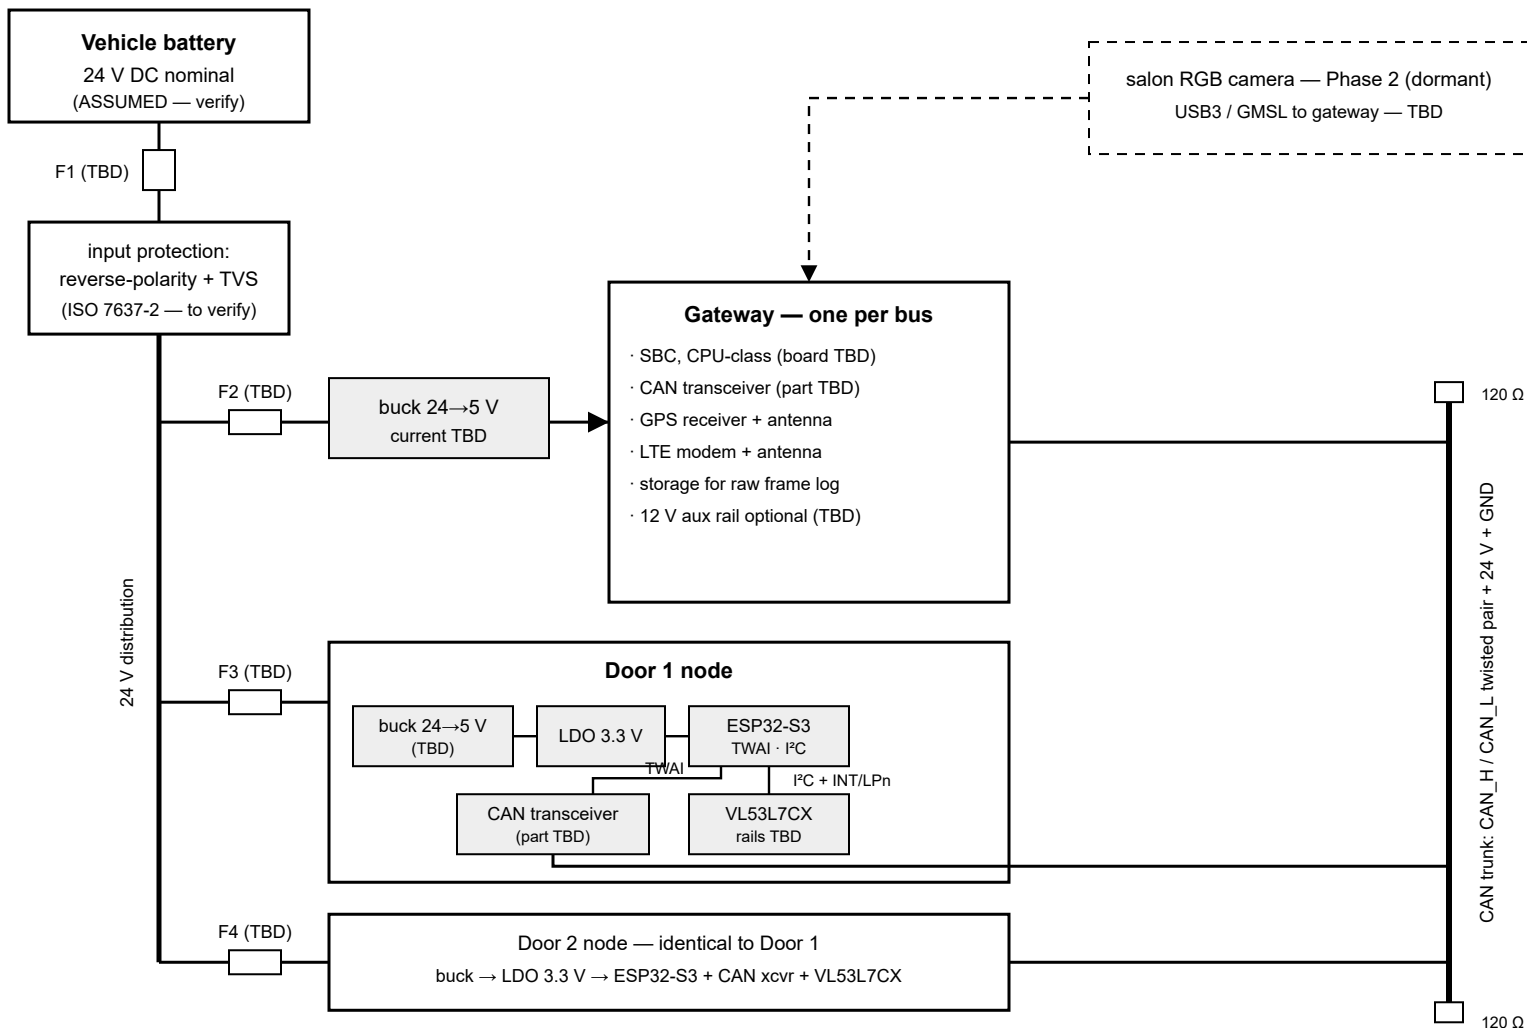

Wire gauges and fuse ratings TBD after power budget (docs/hardware/bom.md, docs/trade_study.md). Connectors: automotive-grade, locking, TBD.

Single-point chassis ground at gateway; GND conductor carried in the trunk as CAN reference. Named ICs (VL53L7CX, ESP32-S3) are the only fixed parts.