DruSight reference colour card

DS-CARD-A version 1.0.0 - used by: DS-DEMO-001, DS-DEMO-002

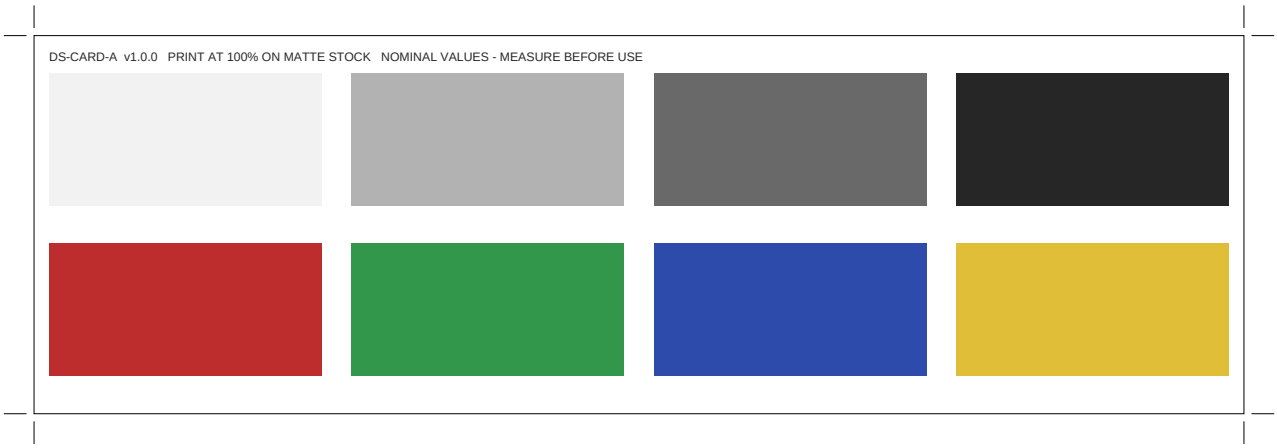

Scale check



this bar must measure exactly 100 mm

Printing

1. Print at 100% scale. Do not use 'fit to page' or 'shrink to fit'.
2. Use MATTE stock. Glossy paper produces specular highlights that the app's glare gate will reject.
3. Disable any 'photo enhance', 'vivid' or auto-correction setting in the printer driver. Those alter the patch colours, which is the one thing this sheet exists to control.
4. Verify the scale bar above, then cut along the black keyline.

Before you trust a measurement taken with this card

The values printed here are NOMINAL - they are the numbers in the kit profile, not the numbers your printer produced. No consumer printer reproduces sRGB accurately, so as printed this card carries an unknown colour error, and every measurement calibrated against it inherits that error.

To make the card a real reference, measure the eight patches with a spectrophotometer or a characterised colorimeter, and replace the expectedSrgb values in the kit profile with the measured values. Record the measurement date in lastVerifiedDate. Until that is done, treat the card as a geometry target and a consistency aid, not as a photometric standard. See docs/LIMITATIONS.md.

Do NOT display this card on a screen instead of printing it. A backlit emissive display has a different gamut and white point from a reflective print, is not in the same plane or illumination as the sample, and will produce moire against the camera sensor.

In the field

Keep the card flat, clean and unfaded, and keep it clear of reagents.
Place it in the SAME plane and the SAME light as the reaction area, with both inside their on-screen guides in one frame.
Replace the card if it is stained, creased or sun-bleached.

Presumptive field-test result. Confirmatory laboratory testing is required.