

ANORD MARDIX
A Flex Company

DATABAR®

FLEXIBLE INTELLIGENT
RACK POWER DISTRIBUTION

IEC 61439-1/6
160/250/400/630/800/1000/1250A

DATABAR INTELLIGENT DATA HALL BUSWAY SYSTEM

Unique integral coupling system

Integrated joint system enables quicker installation and ease of use at on site environments



Features

- Independently certified by ASTA Intertek/ DEKRA to IEC 61439-1/6
- Continuous open channel allows tap-offs anywhere along the bar
- Ships in standard lengths up to 3 meters
- Integral plug and play jointing system with no separate joint parts
- Optional over rated neutrals or 100% integral ground conductor
- Complete ground path via one piece extruded aluminium housing

DATABAR is a modular open-channel busway system designed for critical rack power distribution in data centres. Its patented integrated joint pack system ensures rapid installation and simple tap-off integration. This makes DATABAR the ideal solution for evolving white space environments where flexibility and reliability are paramount.

Why choose DATABAR?

DATABAR combines over fifty years of engineering expertise with a design that prioritises simplicity and safety. With only two sizes covering all ratings, operators benefit from a streamlined approach:

- DX one size for 160A,250A,400A,630A
- DX+ one size for 800A,1000A,1250A

Both sizes share the same low-profile housing, accommodating 4 pole or 5 pole configurations while maintaining the smallest possible footprint. No separate joint packs are required, and all assemblies are fully factory tested for true plug and play functionality.


Compact design


DATABAR's market leading tap-offs are extremely compact with minimal mounting clearance, the smallest in the industry. This optimises over rack space utilisation, particularly in environments with low ceiling heights or competing IT and fibre conduits.

Safety in simplicity

Safety is built into every aspect of DATABAR. The unique actuation system ensures that tap-off contacts cannot engage under load, interlocking with the switching device for added protection. Finger safe IP2X design provides peace of mind during installation and operation.

ANORD MARDIX
A Flex Company

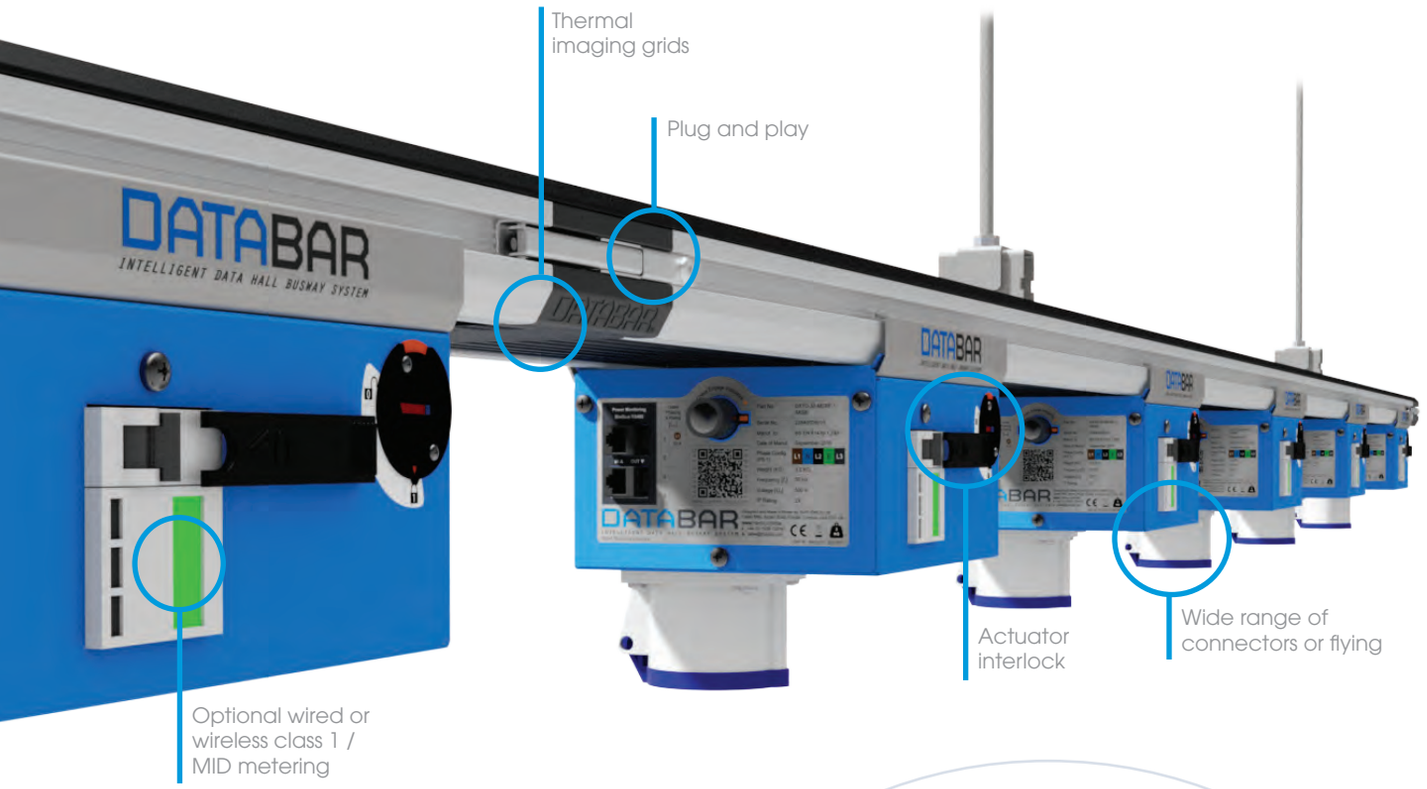

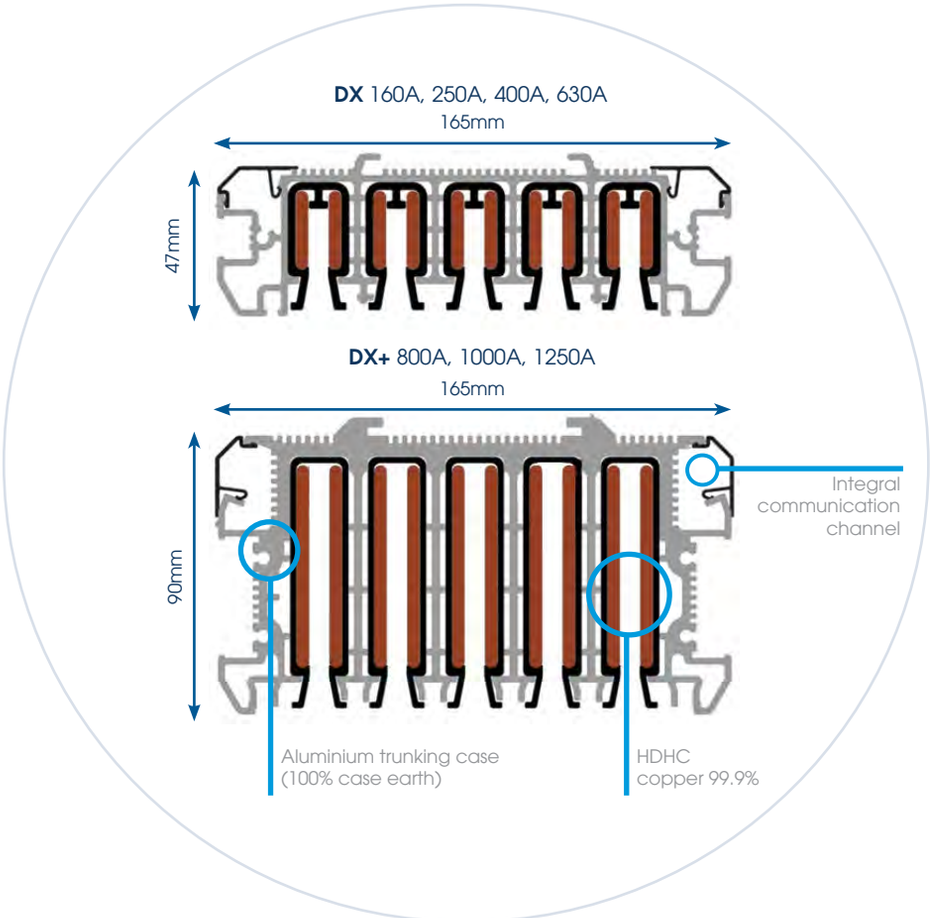

ANORD MARDIX
A Flex Company

Technical overview

Specification	DX range	DX+ range	
Rated current (In)	**160A, 250A, 400A, 630A**	**800A, 1000A**	**1250A**
Rated operating voltage (Ue)	1000V	1000V	1000V
Rated insulation voltage (Ui)	1000V	1000V	1000V
Frequency (f)	50/60Hz	50/60Hz	50/60Hz
Degree of protection (IP)	IP2X	IP2X	IP2X
Casing material	Aluminium	Aluminium	Aluminium
Conductor material	Copper (99.9%) BS EN 13601	Copper (99.9%) BS EN 13601	Copper (99.9%) BS EN 13601
Case dimensions (4 or 5 pole systems)	165mm (W) × 47mm (H)	165mm (W) × 90mm (H)	165mm (W) × 90mm (H)
Phase, neutral or isolated earth conductor CSA	194mm^2	514mm^2	514mm^2
Case earth (PE) CSA	1457mm^2	3189mm^2	3574mm^2
Weight (4 pole systems)	12.9kg/m	29.1kg/m	30.2kg/m
Weight (5 pole systems)	14.5kg/m	34.1kg/m	35.2kg/m
Rated short-time current for 3-phase fault (Icw)	30kA rms (0.12 s)	50kA rms (0.06 s)	35kA rms (0.06 s)
Allowable peak current for 3-phase fault (Ipk)	63kA	105kA	73.5kA
Rated conditional protection for 3-phase fault (Icc)	50kA	100kA	100kA
Conditional protection peak current rating (Ipk)	105kA	220kA	220kA
Impact resistance (IK)	IK08	IK08	IK08

ANORD MARDIX
A Flex Company

Installation and service

DATABAR busway systems are typically suspended on drop rods from supporting T-slot ceilings or Unistrut style hardware.

- Standard hangers: Two hangers are supplied with the DX Range and three hangers with the DX Plus Range.
- Alternative supports: Underfloor or server rack-top supports are available for project-specific requirements.





Full service delivery including system installation, on-site testing (with load bank where required), commissioning, and integration with existing power management systems.



Designed for straightforward assembly and rapid setup, reducing installation time and minimizing disruption to the facility.



Can be installed in side mounted, flat mounted, or under floor configurations to suit different room layouts and infrastructure constraints.



Tap-off units and distribution sections can be repositioned or expanded easily, supporting future upgrades or layout modifications.



Slim, space efficient design reduces the need for additional containment and fits well within high density environments.



Engineered for tight installation along ceiling structures, maximizing available vertical space and improving overall room efficiency.

ANORD MARDIX
A Flex Company

Busway accessories


Busway accessories

Cable end feeds

DATABAR is typically suspended on drop rods from supporting T-slot ceilings or Unistrut style hardware. Busway is usually fed by cable from switchboards or high power busbar tap-offs. End feeds accommodate cable terminations and can be configured for left hand or right hand feed locations.


Optional features include:

- End feed metering and indication
- Integral switch isolators
- Custom RAL colours
- Pre-punched glanding plates for specific cable requirements




End caps

Each busway length is terminated with an end cap. These can be removed and refitted if the system is extended or reduced. Male and female end caps allow for lleft or right hand fed systems.



Elbows

While most installations are straight runs, elbows are available for directional changes. Standard options include left and right 90° angles. Combinations of elbows can navigate building supports. Breaks in runs can be engineered using cable connections between end-feed units.

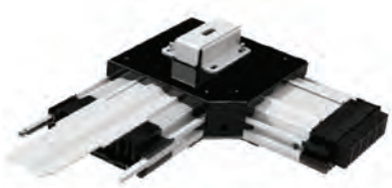

Channel closure strip

A clip-in cover supplied in 3m lengths, cut to size on site. It provides a blanking cover for the open channel busway and can be fitted between tap-offs or across unused lengths.



Comms channel cover

Clips onto the housing to retain Ethernet cables in wired metering applications. Supplied in 3m lengths with colour coding options for different power streams.



ANORD MARDIX
A Flex Company

Modular Circuit Monitoring System (MCMS)

The MCMS provides real-time visibility of circuit performance when used alongside DATABAR.

Its compact Core Module™ design enables fast installation ideal for both new and retrofit deployments and can monitor up to 96 circuits without disrupting live loads.

With an onboard web server, MCMS delivers instant access to real-time and logged data, while multiple connectivity options (including Modbus, BACnet, Wi-Fi and cellular) ensure easy integration into existing power management systems. Advanced features such as breaker-status detection, predictive circuit-health analytics, and high accuracy energy monitoring enhance operational reliability across the data hall.




Learn more about MCMS

Modbus wired metering

In wired metering applications, CAT6 cables are used to daisy-chain metered tap-offs back to the Ethernet gateway.

The aluminium housing includes dedicated cable channels on both the front and rear faces, with each channel capable of carrying up to four cables.

A comms channel closure strip is provided to secure and contain the cabling. Metered tap-offs are supplied with RJ45 terminals, allowing straightforward link-out of the Modbus chain. The end feeds can host SPD, metering, communication and thermal monitoring.

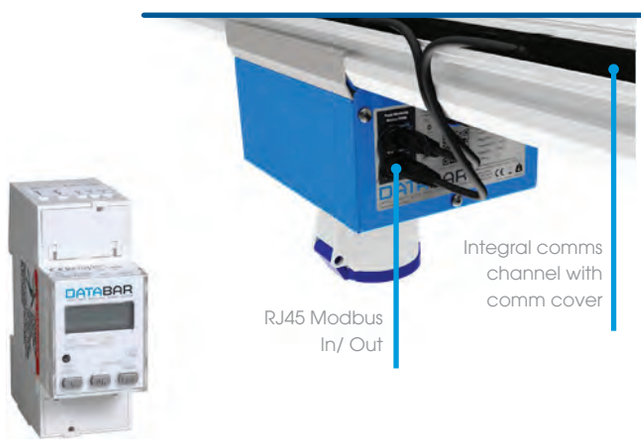

ANORD MARDIX
A Flex Company

Tap-off options

DATABAR tap-offs are engineered for fast, simple, and safe installation. The range incorporates several unique features specifically developed to improve installation speed and ease of use. Tap-off units mount onto the busway in just a few seconds using our **fast fit, tool free attachment mechanism**, ensuring rapid deployment and minimal disruption on site.



Tap-off device options

Tap-offs are available with a variety of protection. Standard options typically include fuses, MCBs and MCCBs in 15-50kA Isc in SP, DP, TP or FP version with or without metering.

Tap-off installation overview

DATABAR tap-offs incorporate multiple safety and orientation controls to ensure correct installation every time:

- The tap-off actuator cannot be operated without the tap-off first being mounted on the busway. The interlock prevents the switching device(s) from being turned on before installation/actuation
- Mechanical features on both the tap-off and the busway ensure correct orientation and prevent incorrect mounting.
- Conductor connection springs remain fully shrouded throughout installation, ensuring a safe "make first, break last" connection for the case earth.
- Once mounted, the patent-applied-for actuator is operated using the supplied actuator key. After actuation, the interlock can be retracted, allowing the switching device to be turned on.

Outlet connector options

A broad range of outlet configurations ensures compatibility across IT and facility power requirements:

- Panel mounted straight or angled IEC 60309 receptacles
- Locking IEC 60320 appliance couplers (C19/C21 – 16 A)
- Locking NEMA receptacles
- Drop cords/flying leads terminated with the required coupler.

Features

- Mechanically and electrically interlocked with busway
- Case earth - make first, break last
- Vendor-neutral fuses /MCBs/MCCBs in SP/ DP/ TP/ FP
- Fast fit installation: mounts in seconds
- Same tap-offs fit all DATABAR ratings from 160A to 1250A
- Optional enhancements include:
  - LED supply for phase indication
  - Breaker status monitoring

ANORD MARDIX
A Flex Company


Tap-off example

Front view | Side view | Bottom view



Fig: Metered single pole 32A MCB with straight IEC 60309 receptacle

Part numbering

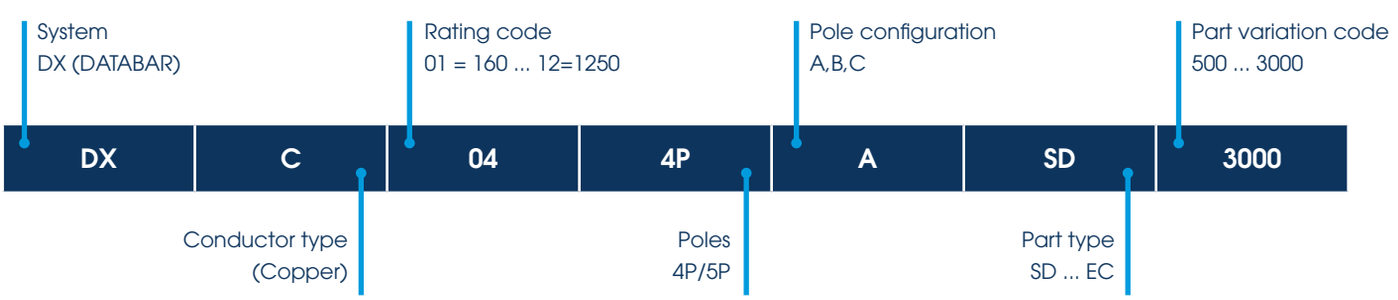

ANORD MARDIX
A Flex Company



ANORD MARDIX
A Flex Company

Anord Mardix, a Flex company, is a leading provider of power distribution and protection equipment to the global market. We are a vendor of choice to many of the world's core markets, from data centers to cloud computing.

With over 100 years of combined expertise we offer clients the most comprehensive product range in the industry. Our ability to customize our product offering to each project, and manufacture on a global scale, ensures reliable and bespoke end-to-end critical power solutions to all our customers, from independent providers to hyperscale leaders.

Find us here:

The information and specifications in this document is believed to be correct at the time of publication. However, no liability is accepted for inaccuracies, printing errors or for any consequences thereof.
Anord Mardix reserves the right to change the contents of this document at any time without prior notice.