

ANORD MARDIX
A Flex Company

DATABAR®

FLEXIBLE INTELLIGENT
RACK POWER DISTRIBUTION

MADE IN USA

UL 857
160/250/400/600/800/1000A

DATABAR INTELLIGENT DATA HALL BUSWAY SYSTEM

Unique integral coupling system

Integrated joint system enables quicker installation and ease of use at on site environments



DATABAR is a modular open-channel busway system designed for mission-critical rack power distribution in data centers. Its patented integrated joint pack system ensures rapid installation and simple tap-off integration. This makes DATABAR the ideal solution for evolving white space environments where flexibility and reliability are paramount.

Features

- Independently tested and listed to UL857
- Available in 160A, 250A, 400A, 600A, 800A and 1000A ratings with 4 or 5-pole configurations in a shared footprint
- Continuous open channel allows tap-offs anywhere along the bar
- Ships in standard lengths up to 10 ft.
- Integral plug-and-play jointing system with miniature busway joint zone (no separate joint parts)
- Optional over-rated neutrals or 100% integral ground conductor
- 100% ground path via one-piece extruded aluminum housing
- Independently tested for resistance to Arc Flash in accordance with IEEE 1584
- Independent seismic testing in accordance with IEEE Std 344-2013 & IEC 60068-3-3

Why Choose DATABAR?

DATABAR combines over fifty years of engineering expertise with a design that prioritizes simplicity and safety. With only two sizes covering all ratings, operators benefit from a streamlined approach:

- **DX** One size for 160A,250A,400A,630A
- **DX+** One size for 600A,800A,1000A

Both sizes share the same low-profile housing, accommodating both 4 and 5 pole configurations while maintaining the smallest possible footprint. No separate joint packs are required, and all assemblies are fully factory tested for true plug-and-play functionality.


Compact design


DATABAR's market-leading tap-offs are extremely compact and require only 1.2 inches of mounting clearance, the smallest in the industry. This optimizes over-rack space utilization, particularly in environments with low ceiling heights or competing IT and fiber conduits.

Safety in simplicity

Safety is built into every aspect of DATABAR. The unique actuation system ensures that tap-off contacts cannot engage under load, interlocking with the switching device for added protection. Finger-safe IP2X design provides peace of mind during installation and operation.

ANORD MARDIX
A Flex Company

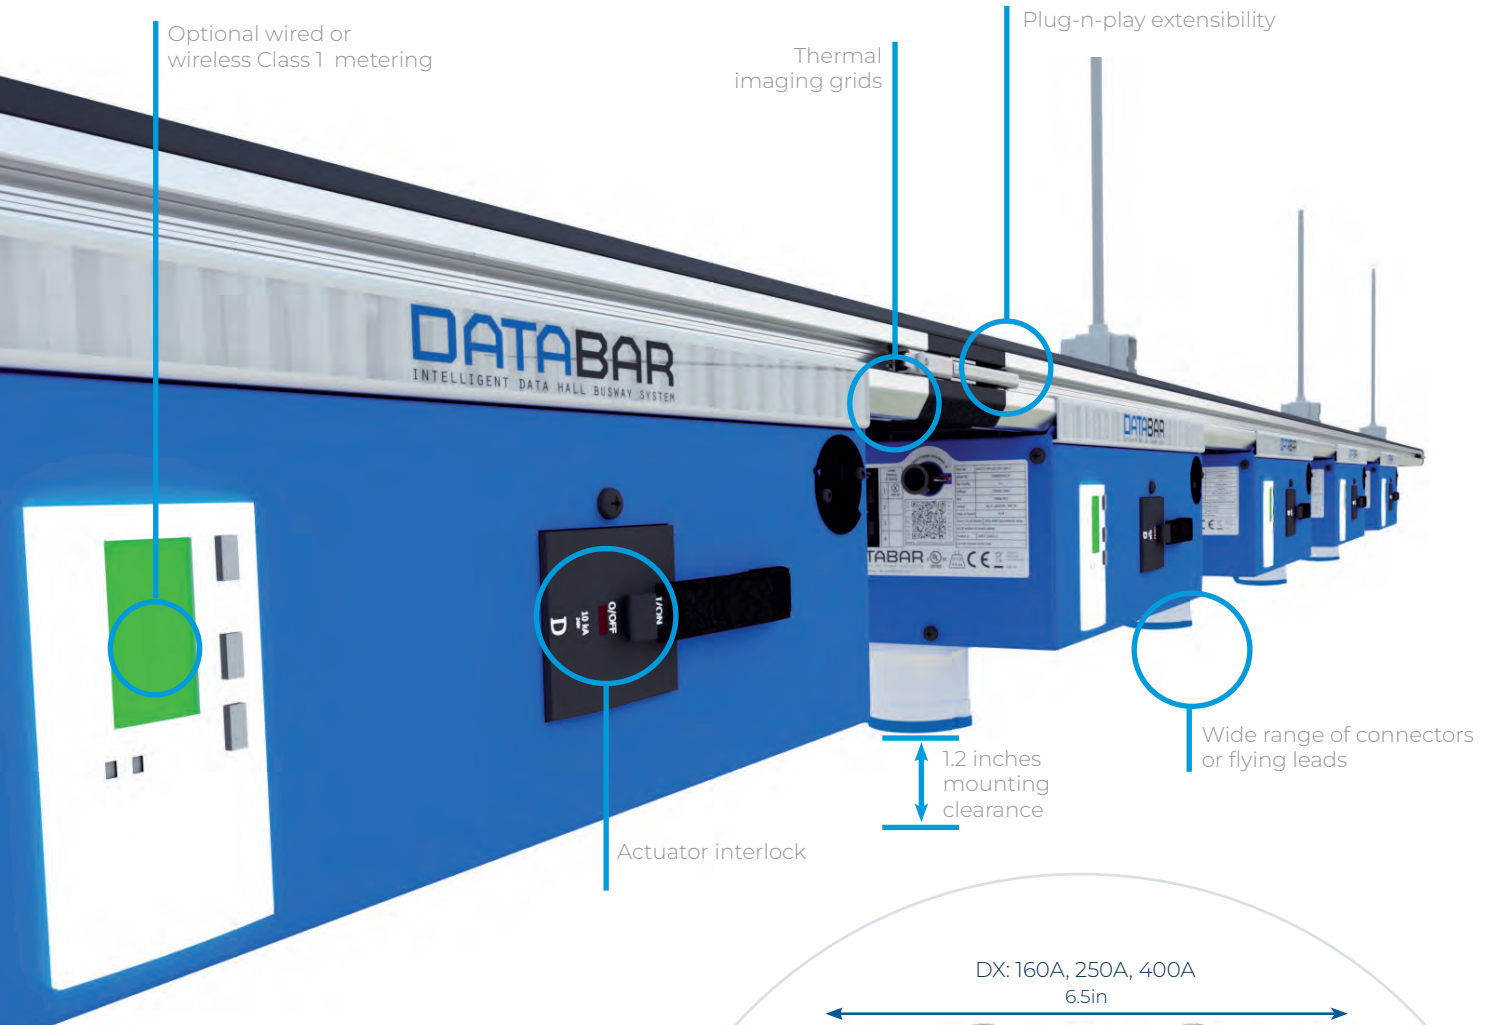

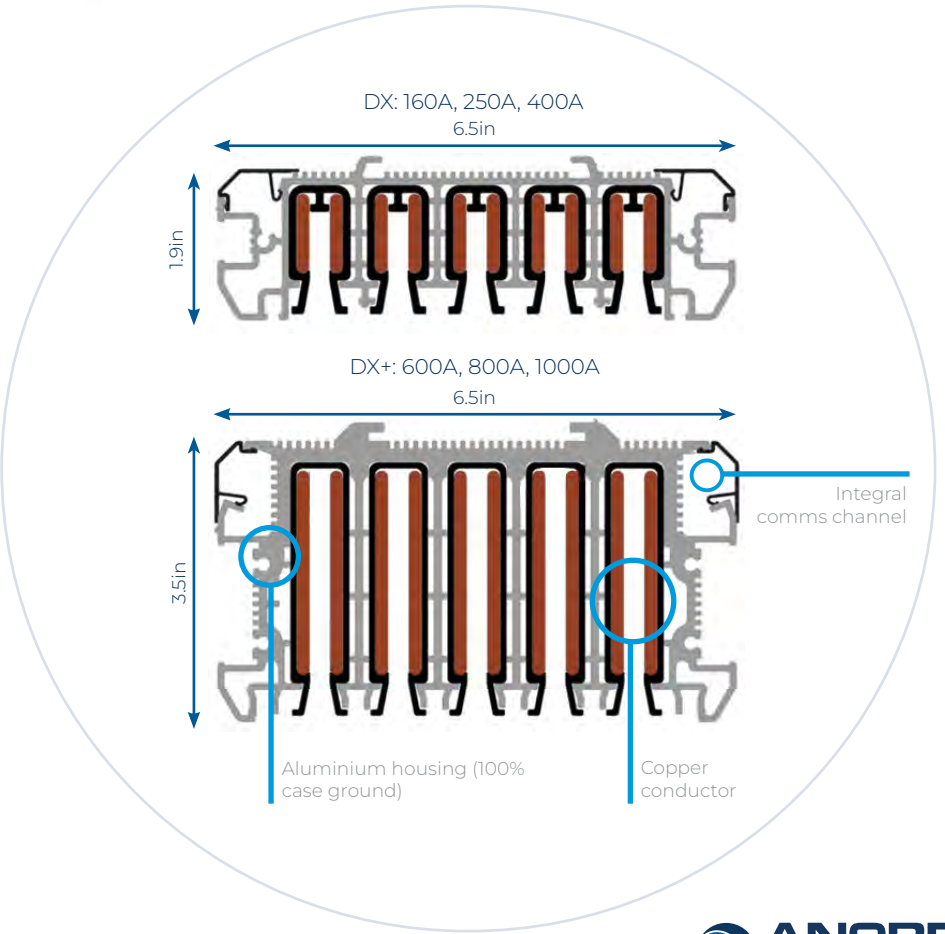

ANORD MARDIX
A Flex Company

Technical overview

Specification	DX Range	DX+ Range	
System ampacity	**160A, 250A, 400A**	**600A, 800A, 1000A**	
Operating voltage	Up to 600V	Up to 600V	
Frequency	50/60 Hz	50/60 Hz	
Degree of protection	Finger Safe (IP2X)	Finger Safe (IP2X)	
Casing material	Aluminium	Aluminium	
Conductor material	Copper	Copper	
Conductor finish	Plain (Plated Opt.)	Tin Plated	
Short circuit current rating (unprotected)	42 kAIC up to 208VAC*, 35 kAIC up to 600VAC	50kAIC up to 600VAC**, 35kAIC up to 415VAC, 35kAIC up to 600VAC 35kAIC up to 415V	
Case overall dimensions (4P & 5P)	6.5 x 1.9 in 165 x 47 mm	6.5 x 3.5 in 165 x 90 mm	
Phase conductor CSA	0.3 in^2 194 mm^2	0.8 in^2 194 mm^2	
Neutral conductor CSA	0.3 in^2 194 mm^2	0.8 in^2 194 mm^2	
Isolated ground conductor CSA	0.3 in^2 194 mm^2	0.8 in^2 194 mm^2	
Housing CSA (ground)	2.26 in^2 1457 mm^2	4.94 in^2 3189 mm^2	5.54 in^2 3574 mm^2
System weight (4P)	8.7 lbs/ft 12.9 kg/m	19.6 lbs/ft 12.9 kg/m	20.3 lbs/ft 12.9 kg/m
System weight (5P)	9.7 lbs/ft 14.5 kg/m	22.9 lbs/ft 34.1 kg/m	23.7 lbs/ft 35.2 kg/m

System configurations

Phase Configuration	Total No. Poles	Phases [3 Poles]	Neutral [No. of Poles]	Ground
TP/N	4	100%	100% [1]	100% Case
TP/2N	5	100%	200% [1]	100% Case
TP/E	4	100%	-	100% Isolated
TP/N/E	5	100%	100% [1]	100% Isolated

TP: Three phase ; N: Neutral; E: Earth

Case refers to aluminum casing used as ground.
Isolated refers to internal insulated pole for ground.
*Option to upgrade to 42kA, standard rating is 35kA.
**Option to upgrade to 50kA, standard rating is 35kA

ANORD MARDIX
A Flex Company

Installation and service

DATABAR busway systems are typically suspended on drop rods from supporting T-slot ceilings or Uni-strut style hardware. Three hangers are supplied with each length. Underfloor or server rack-top supports are available for project-specific requirements.



Full service delivery including system installation, on-site testing (with load-bank where required), commissioning, and integration with existing power management systems.

Designed for straightforward assembly and rapid setup, reducing installation time and minimizing disruption to the facility.

Can be installed in side-mounted, flat-mounted, or under-floor configurations to suit different room layouts and infrastructure constraints.

TaTap-off units and distribution sections can be repositioned or expanded easily, supporting future upgrades or layout modifications.

Slim, space-efficient design reduces the need for additional containment and fits well within high-density environments.

Engineered for tight installation along ceiling structures, maximizing available vertical space and improving overall room efficiency.

ANORD MARDIX
A Flex Company


Busway accessories

Cable end feeds

DATABAR busway systems are typically suspended on drop rods from supporting T-slot ceilings or Uni-strut style hardware. Busway is usually fed by cable from switchboards or high-power busbar tap-offs. End feeds accommodate cable terminations and can be configured for left-hand or right-hand feed locations.


Optional features include:

- End-feed metering and indication
- Integral switch isolators
- Custom RAL colors
- Pre-punched glanding plates for specific cable requirements




End caps

Each busway length is terminated with an end cap. These can be removed and re-fitted if the system is extended or reduced. Male and female end caps allow for left- or right-hand fed systems.



Elbows

While most installations are straight runs, elbows are available for directional changes. Standard options include left and right 90° angles. Combinations of elbows can navigate building supports. Breaks in runs can be engineered using cable connections between end-feed units.

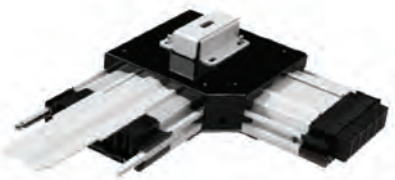

Channel closure strip

A clip-in cover supplied in 3m lengths, cut to size on-site. It provides a blanking cover for the open channel busway and can be fitted between tap-offs or across unused lengths.



Comms channel cover

Clips onto the housing to retain Ethernet cables in wired metering applications. Supplied in 3m lengths with color-coding options for different power streams.



ANORD MARDIX
A Flex Company

Modular circuit monitoring system (MCMS)

The Modular Circuit Monitoring System (MCMS) provides real-time visibility of circuit performance when used alongside DATABAR.

Its compact Core Module™ design enables fast installation ideal for both new and retrofit deployments and can monitor up to 96 circuits without disrupting live loads.

With an onboard web server, MCMS delivers instant access to real-time and logged data, while multiple connectivity options (including Modbus, BACnet, Wi-Fi and cellular) ensure easy integration into existing power management systems. Advanced features such as breaker-status detection, predictive circuit-health analytics, and high-accuracy energy monitoring enhance operational reliability across the data hall.



Fig 2: Core Module™

Learn more about MCMS

Modbus wired metering

In wired metering applications, CAT5e/CAT6 cables are used to daisy-chain metered tap-offs back to the Ethernet gateway.

The aluminum housing includes dedicated cable channels on both the front and rear faces, with each channel capable of carrying up to four cables.

A comms channel closure strip is provided to secure and contain the cabling. Metered tap-offs are supplied with RJ45 terminals, allowing straightforward link-out of the Modbus chain. The end feeds can host SPD, metering, communication and thermal monitoring.



ANORD MARDIX
A Flex Company

Tap-off options

DATABAR tap-offs are engineered for fast, simple, and safe installation. The range incorporates several unique features specifically developed to improve installation speed and ease of use.

Tap-off units mount onto the busway in just a few seconds using our **fast fit, tool-free attachment** mechanism, ensuring rapid deployment and minimal disruption on site.



Fig 2: NEMA receptacles

Tap-off device options

Tap-offs are available with a variety of protection. Standard options typically include fuses, MCBs and MCCBs in 10-50kA Isc in SP, DP, TP or FP version with or without metering.

Tap-off installation overview

DATABAR tap-offs incorporate multiple safety and orientation controls to ensure correct installation every time:

- The tap-off actuator cannot be operated until the unit is physically mounted on the busway.
- A built-in switching device interlock prevents the breaker from being turned on before the tap-off is fully installed and actuated.
- Mechanical features on both the tap-off and the busway ensure correct orientation and prevent incorrect mounting.
- Conductor connection springs remain fully shrouded throughout installation, ensuring a safe “make-first, break-last” connection for the case earth.
- Once mounted, the patent-applied-for actuator is operated using the supplied actuator key. After actuation, the interlock retracts, allowing the switching device to be turned on.

Outlet connector options

A broad range of outlet configurations ensures compatibility across IT and facility power requirements:

- Panel-mounted straight or angled IEC 60309 receptacles
- NEMA twist lock and straight blade receptacles
- Drop cords / flying leads terminated with the required coupler

Features

Mechanically and electrically interlocked with the busway


- **Case earth - make first, break last**
- **Vendor-neutral fuses/ MCBs/ MCCBs in SP/ DP/ TP/ FP**
- **Fast fit installation: mounts in seconds**
- **Requires only 1.2 inches of mounting clearance**
- **Same tap-offs fit all DATABAR ratings from 160 A to 1000 A**
- **Options include:**
  - **LED supply available indication**
  - **Phase indication**
  - **Breaker status monitoring**

ANORD MARDIX
A Flex Company

Tap-off example



Fig 3: Example Tap-off (Single Pole 32A MCB with Straight IEC 60309 Receptacle)

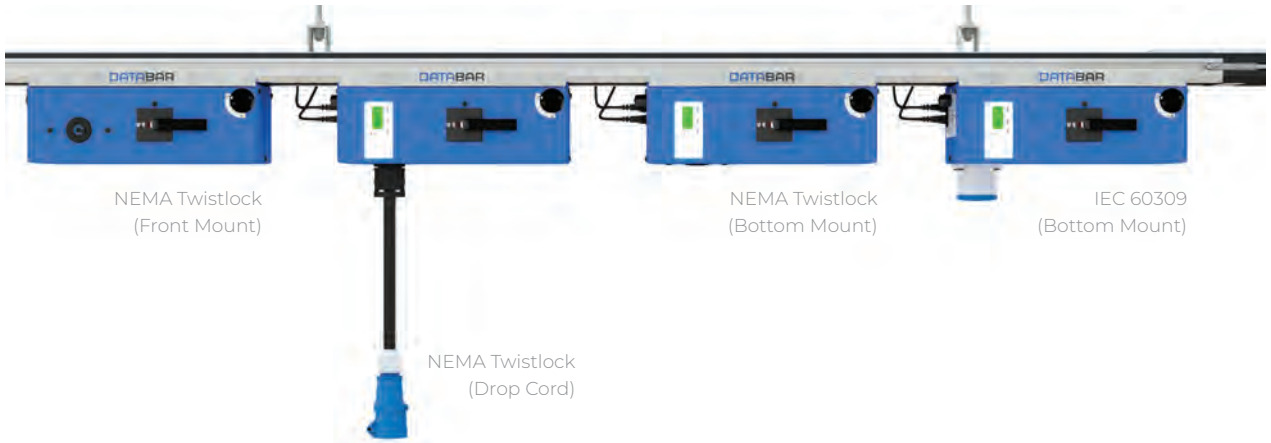

Part numbering

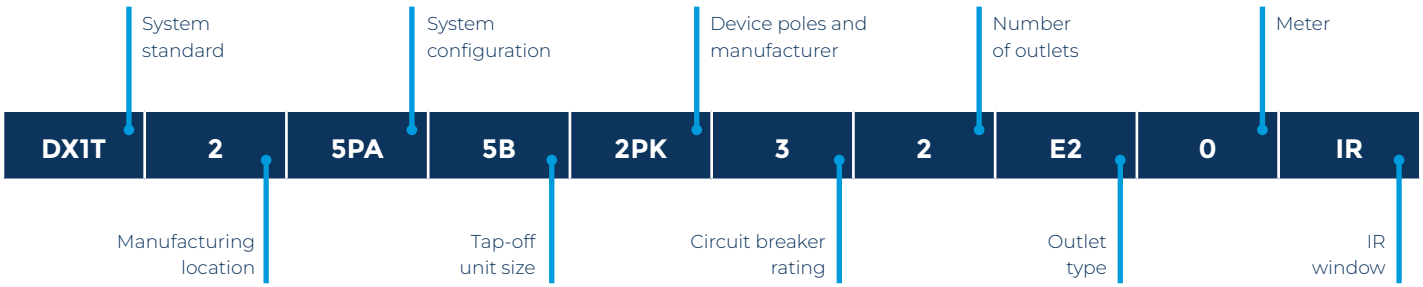


*Illustration only. All designs are bespoke to project specified requirements.

ANORD MARDIX
A Flex Company



ANORD MARDIX
A Flex Company

Anord Mardix, a Flex company, is a leading provider of power distribution and protection equipment to the global market. We are a vendor of choice to many of the world's core markets, from data centers to cloud computing.

With over 100 years of combined expertise we offer clients the most comprehensive product range in the industry. Our ability to customize our product offering to each project, and manufacture on a global scale, ensures reliable and bespoke end-to-end critical power solutions to all our customers, from independent providers to hyperscale leaders.

Find us here:

The information and specifications in this document is believed to be correct at the time of publication.
However, no liability is accepted for inaccuracies, printing errors or for any consequences thereof.
Anord Mardix reserves the right to change the contents of this document at any time without prior notice.