ANORD MARDIX
A Flex Company

Power Distribution Unit (PDU)

CATALOG



MADE IN USA

UL **891**

AMX LOW-VOLTAGE **DISTRIBUTION UNIT**

Why Anord Mardix PDU?

Anord Mardix Power Distribution Units (PDUs) are engineered deliver safe, reliable, and scalable power across modern data centers. Designed to UL 891 standards and compliant with DOE 2016 efficiency requirements, our PDUs combine decades of engineering expertise with a modular architecture, enabling highly configurable solutions that adapt to evolving power and capacity.

Engineered safety by design

Physically segregated power sections minimize exposure risks and enhance serviceability delivering safer operation without compromising accessibility.

Designed for uptime

Proven breaker technology and natural convection design maximize reliability, reduce failure points, and support consistent operation in demanding environments.


Flexible configurations

Modular designs support a wide range of applications, with multiple transformer tap options, custom sub-feeds, and compatibility with raised or slab floors. Optional features include SPD, EPO, IR windows, monitoring, and ERMS.

24/7 Field service support

Anord Mardix's field service team is available around the clock for installation supervision, start-up, commissioning support, training, and preventative maintenance supporting full life cycle of data center equipment.


Smallest footprint
in the industry



ANORD MARDIX
A Flex Company

Benefits of PDUs





Construction

- Fully modular construction provides proven structural robustness and long-term resilience.
- Galvanized steel enclosure rated to NEMA 1 for indoor installation.
- Top, bottom, front, and rear cable access for flexible site integration.
- Optional floor stands and plinths available for raised floor installations.





Safety

- Dead-front construction with touch-safe instrumentation prevents accidental contact with live components.
- Sub-feed distribution breakers are compartmentalized isolating fault energy from the operator.
- Optional ERMS and EPO for user safety.







Reliability

- Natural convection-cooled transformer compartment eliminates dependency on mechanical cooling components.
- Electronic trip breakers come standard, delivering consistent and precise overcurrent protection.

ANORD MARDIX
A Flex Company

Benefits of PDU



Performance

- Multi-tap transformer output accommodates multiple voltage requirements from a single unit.
- Copper or aluminum DOE 2016 compliant isolation transformer.
- Dual electrostatic shield, K-rated transformers
- 200% rated neutral bus.
- Subfeed configuration for 250A – 1200A.





Monitoring and control

- Color touchscreen HMI provides intuitive, real time visibility into unit status and performance.
- Communication via Modbus TCP/IP and Modbus RTU for seamless integration with BMS, EMS, and monitoring systems.
- Status, alarm, and power monitoring features available as standard.
- ERMS integration available to support advanced control requirements.
- Revenue-grade incoming and sub-feed metering 0.5% accuracy.





Compliance

- UL 891 ETL Listed / UL 60950 / CSA C22.2 #60950
- DOE 2016 energy compliant. UL1561 dry-type transformers

ANORD MARDIX
A Flex Company

Technical specifications

Parameter	Specification
Product	Anord Mardix Power Distribution Unit (PDU)
Applicable Standard	UL 891 ETL Listed / UL 60950 / CSA C22.2 #60950
Seismic Qualification	OSHPD compliant configurations available
Quality Management	ISO 9001:2008
Installation Type	Indoor, front-access
Cooling	Natural convection
Electrical	
Operating voltage	Up to 600VAC, 3Ph-3W + ground
KVA rating	300kVA to 1200 kVA
Secondary voltage	3Ph, 4W + ground
Short-circuit current rating	65kAIC at 480V
Construction	
Construction type	Welded frame
Enclosure rating and material	NEMA Type 1, galvanized steel
Supply termination	Top or bottom entry
Branch termination	Top or bottom entry
Features and options	
Device protection	SQD MCCBs
Surge protection device	Optional, 100kA or 200kA
Infrared ports	Optional
Emergency power off	Optional
Metering and communications	
Accuracy	0.5% ANSI
Protocols	Modbus RTU, Modbus TCP/IP, SNMP v2, BACnet IP, REST API
Environmental	
Operating temperature	–5°C to +40°C
Altitude	Up to 2000m without derating
Relative humidity	30% at 40°C to 90% at 20°C

Transformer specifications





Parameter	Specification
Type	Dry type, non-linear, dual electrostatic shields
Material	Copper and aluminum
K rating	K-4, K-9
Temperature rise	115°C or 150°C
Inrush current (maximum)	5x–6x or 10x–11x (up to 600kVA) 8x (800–1200kVA)
Impedance (minimum)	4.5%–5.0% (up to 300kVA) 6%–7% (400–600kVA) 7% (800–1200kVA)
Insulation class	220°C
Thermal alarms	Three alarms at 180°C and 200°C
Neutral bus	200% rated
Compliance	DOE 2016, UL 1561

ANORD MARDIX
A Flex Company

Standard frames

Power Distribution Units are available in a range of standard frame configurations to support varying capacity and footprint requirements across data center applications. Each configuration is engineered to deliver consistent performance, scalable distribution and predictable installation within defined space constraints.

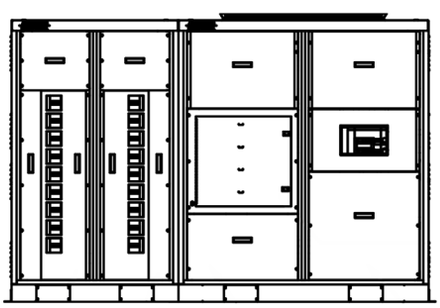Standard frames combine optimized sub-feed capacity, compact enclosure dimensions and a consistent front access design to enable efficient deployment across both new builds and retrofit applications.

Parameter	Up to 300kVA	400kVA–600kVA	600kVA–750kVA	800kVA–1200kVA
Size (W×D×H)	40"×42"×80"	55"×42"×80"	78"×40"×80"	108"×60"×80"
Sub-feeds				
250A frame	6	8	10	16
400A frame	4	6	8	8
600A frame	4	6	8	8
800A frame	—	—	4	6
1200A frame	—	—	4	6

ANORD MARDIX
A Flex Company

Services and lifecycle support

Anord Mardix provides structured services to support PDUs throughout the project lifecycle. Services are delivered by experienced field and engineering teams to ensure correct installation, verified performance, and smooth handover to operations.

1. Project and pre-installation support

Includes technical review against project one-line diagrams and site requirements, installation guidance for layout, clearances, cable entry, and environmental conditions, and provision of drawings, datasheets, and test records for submittal and site use.

2. Testing and verification

Includes verification of protection settings against the approved coordination study, operational checks of circuit breakers, interlocks, and safety features, and validation of Modbus TCP/IP and Modbus RTU communications when provided

3. Commissioning and startup

On-site startup support is provided to verify installation readiness for energization, followed by functional testing of circuit breakers, interlocks, instrumentation, and control circuits, and integrated testing with upstream and downstream systems prior to handover

4. Training and handover

Training covers normal operation, circuit breaker handling, safety features, isolation procedure, and inspection practices, supported by a review of handover documentation for ongoing operation.

5. After sales support

After commissioning, support includes technical assistance for operational questions, guidance on spare parts, and field service support for troubleshooting or modifications as required.

6. Warranty

A standard 12-month defects warranty is provided. Extended warranty options are available subject to scope and agreement.

ANORD MARDIX
A Flex Company

Anord Mardix, a Flex company, is a leading provider of power distribution and protection equipment to the global market. We are a vendor of choice to many of the world's core markets, from data centers to cloud computing.

With over 100 years of combined expertise we offer clients the most comprehensive product range in the industry. Our ability to customize our product offering to each project, and manufacture on a global scale, ensures reliable and bespoke end-to-end critical power solutions to all our customers, from independent providers to hyperscale leaders.

Find us here:

The information and specifications in this document is believed to be correct at the time of publication. However, no liability is accepted for inaccuracies, printing errors or for any consequences thereof. Anord Mardix reserves the right to change the contents of this document at any time without prior notice.

08-2026EN

www.anordmardix.com