




W26


Stars in object detection

SICK
Sensor Intelligence.


Advantages

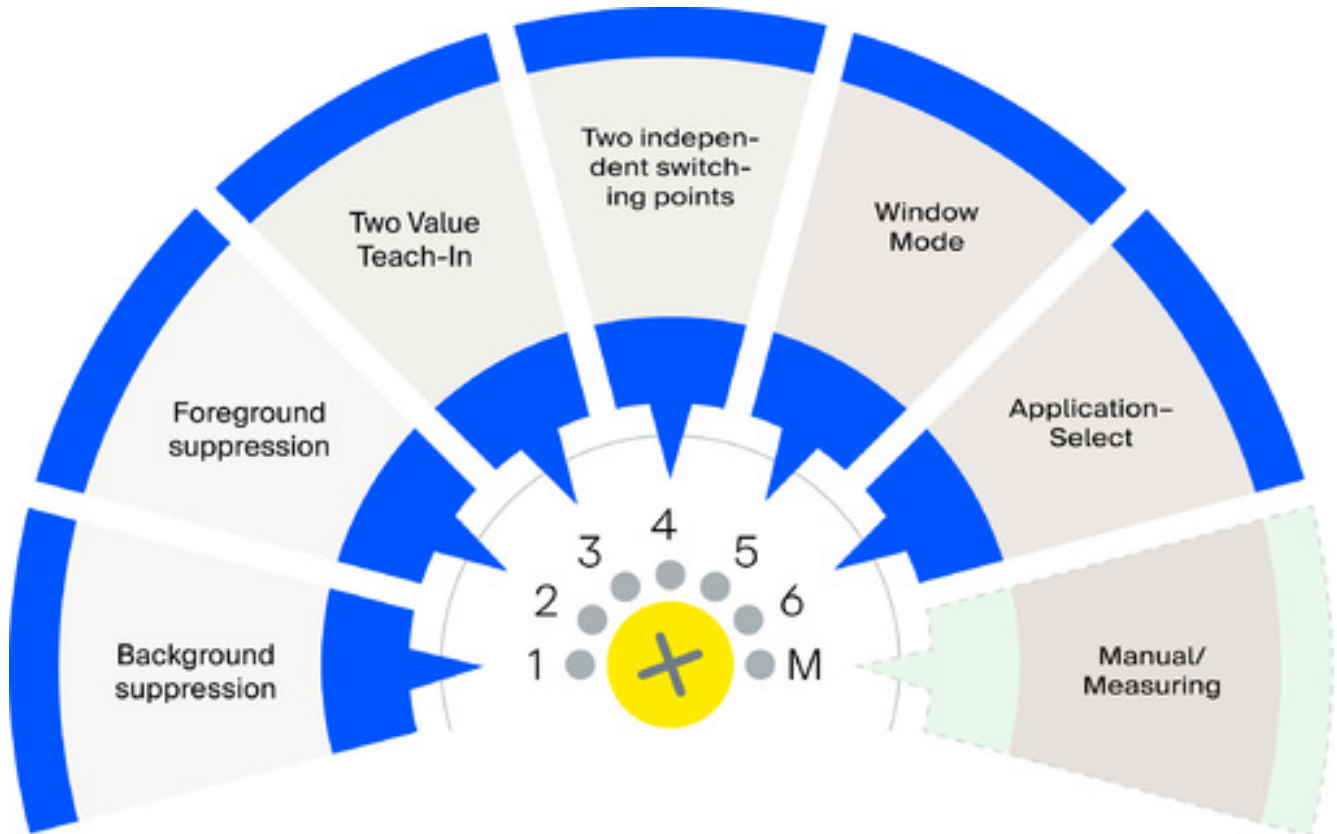

The WTM4FF, WTM4SF, WTM12F, WTM12L, WTM16F, WTM26F variants come with a MultiMode feature: Various operating modes such as background suppression, foreground suppression, Two Value Teach-in, two independent switching points or Window mode can be set directly on the device or via IO-Link. It is also possible to read the distance value from the device. The advantage: The same sensor can meet a wide variety of detection requirements. This means, for example, that the settings can be adjusted with a single action when changing the product. A sensor for almost any challenge – reduces the number of variants and simplifies warehousing.

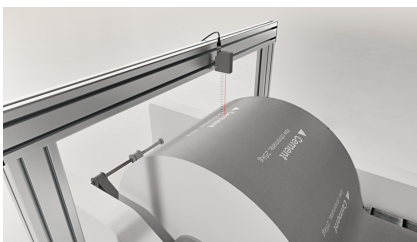


Distance values via IO-Link: the output of precise distance values during detection extends the application possibilities of the photoelectric proximity sensors. The values can, for example, be used for positioning tasks in downstream processes.

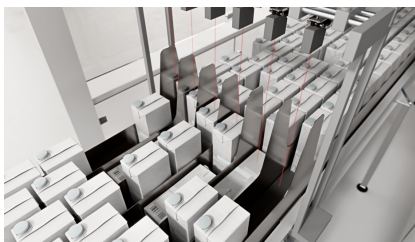


The sensor has two independent switching points that can be taught in separately (e.g. standing or lying object).



Predictive maintenance thanks to alarm function: MultiMode is the first photoelectric proximity sensor with a configurable warning. DustAlert detects critical contamination states early and avoids unplanned plant downtimes.




Thanks to the integrated ApplicationSelect mode, the sensor functions can be adapted to the specific requirements of the application. Even objects in an oblique orientation or with a low remission factor can thereby be reliably detected.




For uneven, shiny, reflective and even jet black objects, TwinEye technology offers a high level of operational safety. Two receivers in one sensor ensure a high detection reliability.

Find out more in the video




Thanks to foreground suppression, the sensors reliably detect very flat, poorly reflecting, reflective, and uneven objects.

Find out more in the video



The sensors can provide the distance value in millimeters and the remission value of the detected object via IO-Link.



Thanks to the VISTAL housing, the sensors can also withstand extreme loads.

Find out more in the video



The devices comply with category 3D / 3G and can be used in "Zone 22: Non-conductive dusts" and "Zone 2" explosion-hazardous areas.

Faster, convenient start-up



Photoelectric proximity switch

- 2 in 1: The combination of teach-in button and potentiometer in one control element enables intuitive fine-tuning in a matter of seconds
- The visual representation of the sensing range allows you to maintain an overview at all times



Photoelectric retro-reflective and through-beam photoelectric sensors

- The blue LED alignment aid speeds up the process of optimally aligning the sensors and reflectors or senders and receivers
- Any changes in the operational safety due to contamination or vibrations can be recognized at a glance




Technical data overview

Dimensions (W x H x D)	24.6 mm x 82.5 mm x 53.3 mm 20 mm x 55.7 mm x 42 mm 31.4 mm x 112.3 mm x 70.4 mm
Sensing range max.	
Light source	PinPoint LED LED PinPoint Pro LED (depends on variant)
Type of light	Visible red light / Infrared light (depends on variant)
Enclosure rating	IP66 IP67 IP69 IP65 (depends on variant)
Housing material	Plastic

Product description

To ensure a reliable object detection, the W26 photoelectric sensors from SICK are equipped with TwinEye or Spot Size Recognition technology, depending on the variant. Thanks to the BluePilot operating and display concept, the sensors are adjusted quickly and easily. They can be configured for the specific application via IO-Link and offer additional diagnostic functions. Well-visible red PinPoint LEDs and infrared LEDs serve as the light source. The W26 sensors deliver reliable detection thereby reducing unplanned machine downtimes. Ready-to-install variants with metal housings are available for explosion-hazardous areas that meet the requirements of device categories 3D and 3G according to ATEX.

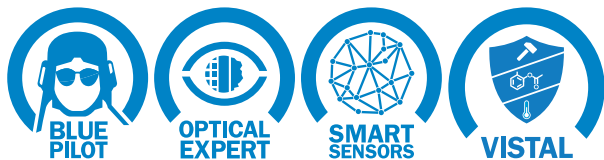

At a glance

- TwinEye, Spot Size Recognition
- Two independent switching points, fast distance value output, DustAlert
- Powerful, highly visible LEDs: PinPoint-Pro, PinPoint, infrared
- Optical alignment aid, Teach-Turn adjustment, IO-Link
- -40 °C ... +60 °C, sensor variants according to category 3D and 3G

Your benefits

- Fault-free system operation thanks to rugged and reliable object detection with Optical Experts
- The all-in-one photoelectric proximity sensor, WTM26F, for various applications reduces storage and handling effort, saves costs and simplifies processes
- Solution for challenging detection tasks thanks to different light sources
- Intuitive and quick commissioning, alignment and adjustment
- Protection from disruptive environmental influences

Fields of application

- Consumer goods
- Automotive and parts suppliers
- Wood
- Storage and conveyor
- Handling and assembly
- Metal and steel
- Stone, ceramic, glass
- Textile

Ordering information

Other models and accessories → www.sick.com/W26

- **Sensing range min. / max.:** 0 m / 60 m
- **Functional principle:** Through-beam photoelectric sensor
- **Switching output:** push-pull: PNP/NPN
- **Housing:** rectangular

Switching mode	Light source	Type of light	Connection type	Type	Part no.
Light switching	PinPoint LED	Visible red light	Male connector M12, 4-pin	WSE26P-24165100A00	1118267
Light/dark switching	LED	Infrared light	Cable with plug, M12, 4-pin, 318 mm	WSE26I-34162100A00	1088333
			Cable, 4-wire, 2 m	WSE26I-1H162100A00	1088334
			Male connector M12, 4-pin	WSE26I-24162100A00	1088332
	PinPoint LED	Visible red light	Cable with Q6 male connector, 6-pin, DC-coded, 298 mm	WSE26P-39112102ZZZ	1102912
			Cable with Q7 male connector, 7-pin, DC-coded, 298 mm	WSE26P-3B112100ZZZ	1102913
			Cable with plug, M12, 4-pin, 318 mm	WSE26P-34162100A00	1088336
			Cable, 4-wire, 10 m	WSE26P-X01	1131860
			Cable, 4-wire, 2 m	WSE26P-1H162100A00	1088337
			Male connector M12, 4-pin	WSE26P-24162100A00	1088335
					1102909

- **Sensing range min. / max.:** 5 m / 120 m
- **Functional principle:** Through-beam photoelectric sensor
- **Switching mode:** Light/dark switching
- **Switching output:** push-pull: PNP/NPN

Light source	Type of light	Connection type	Housing	Type	Part no.
LED	Visible red light	Male connector M12, 4-pin	Rectangular	WSE26G-24162400A00	1127145

- **Sensing range min. / max.:** 0.25 m / 19 m
- **Functional principle:** Photoelectric retro-reflective sensor
- **Functional principle detail:** With minimum distance to reflector (dual lens system)
- **Switching mode:** Light/dark switching
- **Switching output:** push-pull: PNP/NPN
- **Light source:** PinPoint LED
- **Type of light:** visible red light
- **Housing:** rectangular

Connection type	Type	Part no.
Cable with plug, M12, 4-pin, 318 mm	WLD26P-341121A0ZZZ	1221733
Cable, 4-wire, 2 m	WLD26P-1H1121A0ZZZ	1218805
Male connector M12, 4-pin	WLD26P-241121A0ZZZ	1218699

- **Sensing range min. / max.:** 0.25 m / 3 m
- **Functional principle:** Photoelectric retro-reflective sensor
- **Functional principle detail:** With minimum distance to reflector (dual lens system)
- **Switching mode:** Light/dark switching
- **Switching output:** push-pull: PNP/NPN

Light source	Type of light	Connection type	Housing	Type	Part no.
PinPoint LED	Visible red light	Male connector M12, 4-pin	Rectangular	WLD26P-241122A0ZZZ	1113466

- **Sensing range min. / max.:** 10 mm / 1,000 mm
- **Functional principle:** Photoelectric proximity sensor
- **Functional principle detail:** Background suppression, TwinEye technology
- **Switching output:** push-pull: PNP/NPN
- **Housing:** rectangular

Switching mode	Light source	Type of light	Connection type	Type	Part no.
–	PinPoint LED	Visible red light	Male connector M12, 4-pin	WTS26P-24161120A70	1219799
				WTS26P-2416H120A71	1219800
Light/dark switching	LED	Infrared light	Male connector M12, 4-pin	WTS26I-24161120A00	1137249
	PinPoint LED	Visible red light	Cable with plug, M12, 4-pin, 318 mm	WTS26P-34161120A00	1218949
			Cable, 4-wire, 2 m	WTS26P-1H161120A00	1218950
			Male connector M12, 4-pin	WTS26P-24161120A00	1218668
				WTS26P-24162120A00	1221727

- **Sensing range min. / max.:** 10 mm / 500 mm
- **Functional principle:** Photoelectric proximity sensor
- **Functional principle detail:** Background suppression, TwinEye technology
- **Switching mode:** Light/dark switching
- **Switching output:** push-pull: PNP/NPN

Light source	Type of light	Connection type	Housing	Type	Part no.
LED	Visible red light	Male connector M12, 4-pin	Rectangular	WTS26G-24161920A00	1128822

- **Sensing range min. / max.:** 0 m / 18 m
- **Functional principle:** Photoelectric retro-reflective sensor
- **Functional principle detail:** Without reflector minimum distance (autocollimation/coaxial optics)
- **Light source:** PinPoint LED
- **Type of light:** visible red light
- **Housing:** rectangular

Switching mode	Switching output	Connection type	Type	Part no.
Dark switching	Push-pull: PNP/NPN	Male connector M12, 4-pin	WLA26P-24114100ZZZ	1222793
			WLA26P-2416A100A00	1222697

Switching mode	Switching output	Connection type	Type	Part no.
Light switching	Push-pull: PNP/NPN	Male connector M12, 4-pin	WLA26P-24116100ZZZ	1222792
			WLA26P-24165100A00	1147172
Light/dark switching	PNP	Male connector M12, 4-pin	WLA26P-24862130A00	1115760
			WLA26P-39421102ZZZ	1222790
	Push-pull: PNP/NPN	Cable with Q6 male connector, 6-pin, DC-coded, 298 mm	WLA26P-39722102ZZZ	1222819
			WLA26P-3B112100ZZZ	1222791
		Cable with plug, M12, 4-pin, 318 mm	WLA26P-34162100A00	1218823
			WLA26P-X01	1131858
		Cable, 4-wire, 10 m	WLA26P-X02	1131859
		Cable, 4-wire, 2 m	WLA26P-1H162100A00	1218822
		Male connector M12, 4-pin	WLA26P-24161100A00	1221732
			WLA26P-24162100A00	1218664
			WLA26P-24162130A00	1111236
			WLA26P-24162130A00	1111293

- **Sensing range min. / max.:** 30 mm / 1,600 mm
- **Functional principle:** Photoelectric proximity sensor
- **Functional principle detail:** Background suppression
- **Switching mode:** Light/dark switching
- **Light source:** PinPoint LED
- **Type of light:** visible red light
- **Housing:** rectangular

Switching output	Connection type	Type	Part no.
PNP	Male connector M12, 4-pin	WTB26P-24861120A00	1115766
Push-pull: PNP/NPN	Cable with Q6 male connector, 6-pin, DC-coded, 298 mm	WTB26P-39422122ZZZ	1222809
		WTB26P-39721122ZZZ	1222804
	Cable with Q7 male connector, 7-pin, DC-coded, 298 mm	WTB26P-3B111120ZZZ	1222816
	Cable with plug, M12, 4-pin, 318 mm	WTB26P-34161120A00	1218806
		WTB26P-X01	1131855
	Cable, 4-wire, 2 m	WTB26P-1H161120A00	1218824
		WTB26P-1H162120A00	1222744
	Male connector M12, 4-pin	WTB26P-24161120A00	1218666
		WTB26P-24161120A00	1218666

- **Sensing range min. / max.:** 30 mm / 1,600 mm
- **Functional principle:** Photoelectric proximity sensor
- **Functional principle detail:** Background suppression, NarrowBeam
- **Switching output:** push-pull: PNP/NPN
- **Light source:** PinPoint LED
- **Type of light:** visible red light
- **Connection type:** male connector M12, 4-pin
- **Housing:** rectangular

Switching mode	Type	Part no.
Light switching	WTB26P-24113520ZZZ	1222813
Light/dark switching	WTB26P-24161520A00	1222705

- **Sensing range min. / max.:** 30 mm / 3,000 mm
- **Functional principle:** Photoelectric proximity sensor
- **Functional principle detail:** Background suppression
- **Housing:** rectangular

Switching mode	Switching output	Light source	Type of light	Connection type	Type	Part no.
Dark switching	Push-pull: PNP/NPN	PinPoint LED	Visible red light	Male connector M12, 4-pin	WTB26P-24115420ZZZ	1147510
Light switching	Push-pull: PNP/NPN	PinPoint LED	Visible red light	Male connector M12, 4-pin	WTB26P-24113420ZZZ	1140316
Light/dark switching	NPN	LED	Infrared light	Male connector M12, 4-pin	WTB26I-24G11420ZZZ	1124859
						1133143
	PNP	LED	Infrared light	Male connector M12, 4-pin	WTB26I-24861420A00	1123835
					WTB26I-24861421A00	1126768
	Push-pull: PNP/NPN	LED	Infrared light	Cable, 4-wire, 2 m	WTB26I-1H161420A00	1222713
					WTB26I-1H162420A00	1222712
				Male connector M12, 4-pin	WTB26I-24161420A00	1222711
					WTB26I-24161422A00	1109760
					WTB26I-24162420A00	1222675
		PinPoint LED	Visible red light	Cable with plug, M12, 4-pin, 318 mm	WTB26P-34161420A00	1125296
				Male connector M12, 4-pin	WTB26P-24161420A00	1222709

- **Sensing range min. / max.:** 30 mm / 2,000 mm
- **Functional principle:** Photoelectric proximity sensor
- **Functional principle detail:** Background suppression
- **Switching output:** push-pull: PNP/NPN
- **Light source:** LED
- **Type of light:** Infrared light
- **Housing:** rectangular

Switching mode	Connection type	Type	Part no.
Dark switching	Male connector M12, 4-pin	WTB26I-24115120ZZZ	1222815
		WTB26I-24116120ZZZ	1222814

Switching mode	Connection type	Type	Part no.
Light/dark switching	Cable with Q6 male connector, 6-pin, DC-coded, 298 mm	WTB26I-39422122ZZZ	1222810
		WTB26I-39721122ZZZ	1222808
	Cable with Q7 male connector, 7-pin, DC-coded, 298 mm	WTB26I-3B111120ZZZ	1222817
	Cable with plug, M12, 4-pin, 318 mm	WTB26I-34161120A00	1218827
		WTB26I-X03	1131857
	Cable, 4-wire, 10 m	WTB26I-X02	1131856
	Cable, 4-wire, 2 m	WTB26I-1H161120A00	1218825
	Male connector M12, 4-pin	WTB26I-24161120A00	1218667
		WTB26I-24161122A00	1222797
		WTB26I-24162120A00	1221726
		WTB26I-24162122A00	1222796

- **Sensing range min. / max.:** 0 mm / 800 mm
- **Functional principle:** Photoelectric proximity sensor
- **Functional principle detail:** Foreground suppression
- **Switching mode:** Light/dark switching
- **Switching output:** push-pull: PNP/NPN

Light source	Type of light	Connection type	Housing	Type	Part no.
PinPoint LED	Visible red light	Male connector M12, 4-pin	Rectangular	WTF26P-24161420A00	1113470

- **Sensing range min. / max.:** 30 mm / 1,600 mm, 0 mm / 900 mm, 30 mm / 3,000 mm, 0 mm / 1,500 mm
- **Functional principle:** Photoelectric proximity sensor
- **Functional principle detail:** Background suppression, Foreground suppression, MultiMode, distance value
- **Switching mode:** Light/dark switching
- **Switching output:** push-pull: PNP/NPN

Light source	Type of light	Connection type	Housing	Type	Part no.
PinPoint Pro LED	Visible red light	Male connector M12, 4-pin	Rectangular	WTM26F-24161120A00	1157541

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com