

# Lecture Two

## Second Order Differential Equations

### Section 2.1 – Second-Order Linear Differential Equations

A second order linear differential equation is an equation which can be written in the form

$$y'' + p(x)y' + q(x)y = f(x)$$

Where  $p$ ,  $q$ , and  $f$  are continuous functions on some interval  $I$ .

The function  $f(x)$  is called the **forcing function** or the **nonhomogeneous** term.

The equation is said to be **homogeneous** when:

$$y'' + p(t)y' + q(t)y = 0$$

### Second-Order Equations and Planar Systems

$$y'' = f(t, y, y')$$

Let's re-write in first-order system:

$$y' = v$$

$$v' = F(t, y, v)$$

$$y'' + p(t)y' + q(t)y = F(t)$$

$$y'' = F(t) - p(t)y' - q(t)y$$

$$v' = F(t) - p(t)v - q(t)y$$

$$y' = v$$

$$v' = F(t) - p(t)v - q(t)y$$

### Example

Consider a damped unforced spring:  $y'' + 0.4y' + 3y = 0$ ; which satisfies the initial conditions  $y(0) = 2$  and  $v(0) = y'(0) = -1$

### Solution

$$\begin{cases} y' = v \\ v' = -0.4v - 3y \end{cases}$$

$$v' + 0.4v = -3y$$

$$ve^{\int 0.4 dy} = \int -3ye^{\int 0.4 dy} + C$$

$$\begin{aligned} ve^{0.4y} &= -3 \int ye^{0.4y} + C \\ &= -3 \frac{e^{0.4y}}{0.4^2} (0.4y - 1) + C \\ &= -18.75e^{0.4y} (0.4y - 1) + C \end{aligned}$$

$$v = -7.5y + 18.75 + Ce^{-0.4y}$$

$$v(0) = -7.5(0) + 18.75 + Ce^{-0.4(0)}$$

$$-1 = 18.75 + C$$

$$C = -19.75$$


$$v(y) = -7.5y + 18.75 - 19.75e^{-0.4y}$$

$$y' = v = -7.5y + 18.75 - 19.75e^{-0.4y}$$


$$\frac{dy}{dt} = -7.5y + 18.75 - 19.75e^{-0.4y}$$

$$y(t) = -\frac{3\sqrt{74}}{74} e^{-t/5} \sin\left(\frac{\sqrt{74}}{5}t\right) + 2e^{-t/5} \cos\left(\frac{\sqrt{74}}{5}t\right)$$

The **yv**-plane is called the **phase plane**.

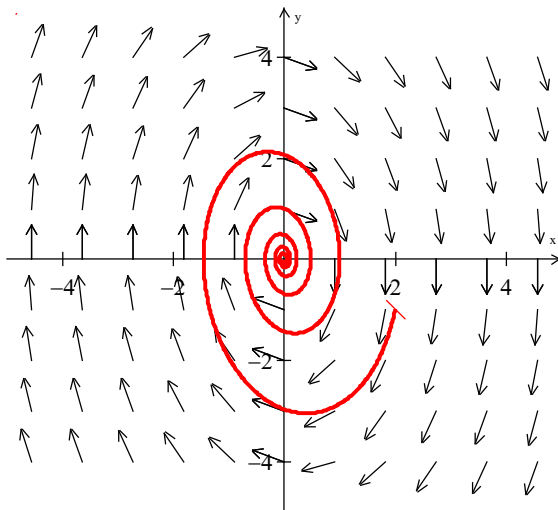

Phase Plane Plot

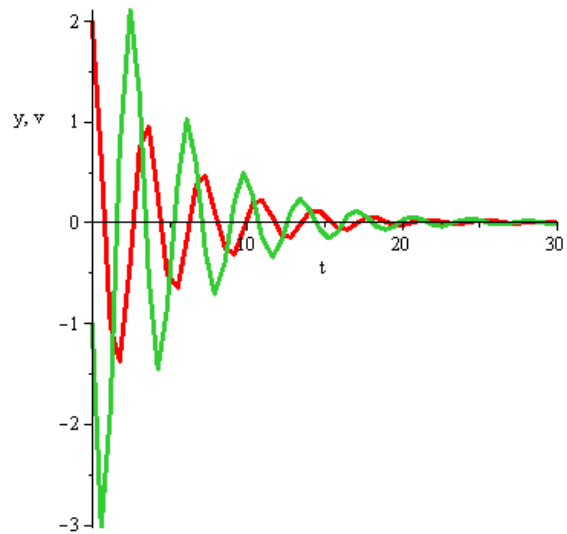

Displacement y and the velocity v

### ***Proposition***

$$y'' + p(t)y' + q(t)y = 0$$

Solutions:  $y = C_1 y_1 + C_2 y_2$

$C_1, C_2$  are any constant.

$y_1(t)$  &  $y_2(t)$  are linearly independent solutions forming a ***fundamental set of solutions***.

### ***Linear***

Set  $L[y] = y'' + p(t)y' + q(t)y$

Then, for any two twice differentiable functions  $y_1(t)$  &  $y_2(t)$ ,

$$\triangleright L[y_1(t) + y_2(t)] = L[y_1(t)] + L[y_2(t)]$$

***Proof***

$$\begin{aligned} L[y_1(t)] + L[y_2(t)] &= y_1'' + py_1' + qy_1 + y_2'' + py_2' + qy_2 \\ &= y_1'' + y_2'' + p(y_1' + y_2') + q(y_1 + y_2) \\ &= (y_1 + y_2)'' + p(y_1 + y_2)' + q(y_1 + y_2) \\ &= L[y_1(t) + y_2(t)] \end{aligned}$$

$$\triangleright L[cy(t)] = cL[y(t)]$$

***Proof***

$$\begin{aligned} L[cy(t)] &= (cy)'' + p(t)(cy)' + q(t)(cy) \\ &= cy'' + cp(t)y' + cq(t)y \\ &= c(y'' + p(t)y' + q(t)y) \\ &= cL[y(t)] \end{aligned}$$

That is,  $L$  is a linear differential operator.

### ***Definition***

A linear combination of the two functions  $u$  &  $v$  is any function of the form

$$w = Au + Bv$$

## Definition

Two functions  $u$  &  $v$  are said to be linearly independent on the interval  $(\alpha, \beta)$ , if neither is a constant multiple of the other on that interval. If one is a constant multiple of the other on  $(\alpha, \beta)$ , they are said to be linearly dependent there.

## Existence and Uniqueness for Linear Equations

### Theorem

Suppose that the functions  $p$ ,  $q$ , and  $f$  are continuous on the open interval  $I$  containing the point  $a$ . Then, given any two numbers  $b_1$  and  $b_2$ , the equation

$$y'' + p(x)y' + q(x)y = f(x)$$

Has a unique solution on the entire interval  $I$  that satisfies the initial conditions

$$y(a) = b_1, \quad y'(a) = b_2$$

### Example

Verify that the functions  $y_1(x) = e^x$  and  $y_2(x) = xe^x$  are solutions of the differential equation  $y'' - 2y' + y = 0$  and then find a solution satisfying the initial conditions  $y(0) = 3$ ,  $y'(0) = 1$

### Solution

$$y(x) = C_1 e^x + C_2 x e^x$$

$$y'(x) = C_1 e^x + C_2 e^x + C_2 x e^x = (C_1 + C_2) e^x + C_2 x e^x$$


$$y(0) = C_1 = 3$$

$$y'(0) = C_1 + C_2 = 1 \Rightarrow C_2 = -2$$

Hence the solution of the original initial value problem is

$$y(x) = 3e^x - 2xe^x$$

The plot shows several additional solutions of  $y'' - 2y' + y = 0$ , all having the same initial value  $y(0) = 3$

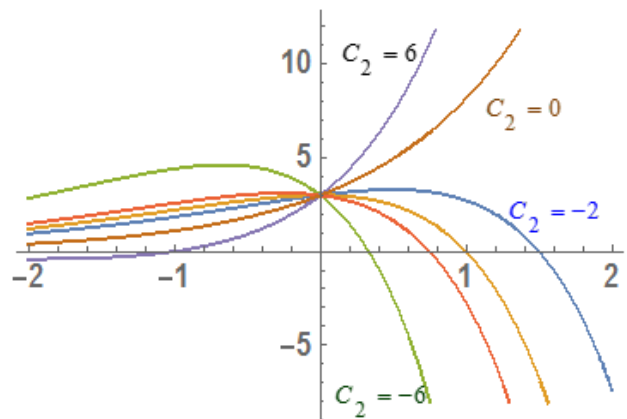

## Linearly Independent (**LI**) Solutions

### *Definition*

Two functions defined on an open interval  $I$  are said to be **linearly independent** on  $I$  provided that neither is a constant multiple of the other.

### *Example*

The following pair functions are linearly independent on the entire real line.

$$f(x) = \sin x \quad \text{and} \quad g(x) = \cos x$$

$$f(x) = e^x \quad \text{and} \quad g(x) = e^{-2x}$$

$$f(x) = x + 1 \quad \text{and} \quad g(x) = x^2$$

Two functions are said to be **linearly dependent** on an open interval provided that they are not linearly independent there; that is, one of them is a constant multiplication of the other.

### *Example*

$$\text{Let } f(x) = \sin 2x \quad \text{and} \quad g(x) = \sin x \cos x$$

Are linearly dependent on any interval because  $f(x) = 2g(x)$ .

## *Wronskian*

The Wronskian is a function named after the Polish mathematician Józef Hoene-Wroński and it is used to determine whether a set of differentiable functions (solutions) is **linearly independent** on a given interval.

$$W(x) = \begin{vmatrix} f_1(x) & f_2(x) & f_n(x) \\ f_1'(x) & f_2'(x) & f_n'(x) \\ f_1^{(n-1)}(x) & f_2^{(n-1)}(x) & f_n^{(n-1)}(x) \end{vmatrix}$$

$$W = \begin{vmatrix} u & v \\ u' & v' \end{vmatrix} = uv' - vu'$$

If  $W = 0 \Rightarrow u$  &  $v$  are linearly dependent.

If  $W \neq 0 \Rightarrow u$  &  $v$  are linearly independent.

### ***Theorem***

Suppose that  $y_1$  and  $y_2$  are two solutions of the homogeneous second-order linear equation

$$y'' + p(x)y' + q(x)y = 0$$

On an open interval  $I$  on which  $p$  and  $q$  are continuous

1. If  $y_1$  and  $y_2$  are linearly dependent, then  $W(y_1, y_2) \equiv 0$  on  $I$ .
2. If  $y_1$  and  $y_2$  are linearly independent, then  $W(y_1, y_2) \neq 0$  at each point of  $I$ .

### ***Example***

Use the Wronskian to show that  $\mathbf{f}_1 = x$ ,  $\mathbf{f}_2 = \sin x$  are linearly independence

#### **Solution**

The Wronskian is

$$W(x) = \begin{vmatrix} x & \sin x \\ 1 & \cos x \end{vmatrix} = x \cos x - \sin x \neq 0$$

This function is not identically zero. Thus, the functions are linearly independent.

### ***Example***

Use the Wronskian to show that  $\mathbf{f}_1 = 1$ ,  $\mathbf{f}_2 = e^x$ ,  $\mathbf{f}_3 = e^{2x}$  are linearly independence

#### **Solution**

The Wronskian is

$$W(x) = \begin{vmatrix} 1 & e^x & e^{2x} \\ 0 & e^x & 2e^{2x} \\ 0 & e^x & 4e^{2x} \end{vmatrix} = e^x 4e^{2x} - 2e^{2x} e^x = 2e^{3x} \neq 0$$

Thus, the functions are linearly independent.

## Exercises Section 2.1 – Second-Order Linear Differential Equations

Use the substitution  $v = y'$  to write each second-order equation as a system of two first-order differential equation.

1.  $y'' + 2y' - 3y = 0$
2.  $y'' + 3y' + 4y = 2\cos 2t$
3.  $y'' + 2y' + 2y = 2\sin 2\pi t$
4.  $y'' + \mu(t^2 - 1)y' + y = 0$
5.  $4y'' + 4y' + y = 0$

1. Show that the functions  $y_1(x) = e^{-3x}$ ,  $y_2(x) = \cos 2x$ ,  $y_3(x) = \sin 2x$  are linearly independent.
2. Determine whether  $\{e^x, xe^x, (x+1)e^x\}$  is a set of linearly independent.

Use the Wronskian to show that are linearly independence

3.  $y_1(x) = e^{-3x}$ ,  $y_2(x) = e^{3x}$
4.  $f_1 = 1$ ,  $f_2 = e^x$ ,  $f_3 = e^{2x}$
5.  $\{e^x, xe^x, (x+1)e^x\}$
6.  $y_1(x) = e^{-3x}$ ,  $y_2(x) = \cos 2x$ ,  $y_3(x) = \sin 2x$
7.  $y_1(x) = e^x$ ,  $y_2(x) = e^{2x}$ ,  $y_3(x) = e^{3x}$
8.  $y_1(x) = \cos^2 x$ ,  $y_2(x) = \sin^2 x$ ,  $y_3(x) = \sec^2 x$ ,  $y_4(x) = \tan^2 x$

Determine whether the functions  $y_1(t)$  and  $y_2(t)$  are linearly dependent on the interval  $(0, 1)$

9.  $y_1(t) = \cos t \sin t$ ,  $y_2(t) = \sin 2t$
10.  $y_1(t) = e^{3t}$ ,  $y_2(t) = e^{-4t}$
11.  $y_1(t) = te^{2t}$ ,  $y_2(t) = e^{2t}$
12.  $y_1(t) = t^2 \cos(\ln t)$ ,  $y_2(t) = t^2 \sin(\ln t)$
13.  $y_1(t) = \tan^2 t - \sec^2 t$ ,  $y_2(t) = 3$
14.  $y_1(t) \equiv 0$ ,  $y_2(t) = e^t$

Find a particular solution satisfying the given initial conditions

15.  $y'' - 4y = 0$ ;  $y_1(t) = e^{2t}$ ,  $y_2(t) = 2e^{-2t}$ ;  $y(0) = 1$ ,  $y'(0) = -2$
16.  $y'' - y = 0$ ;  $y_1(t) = 2e^t$ ,  $y_2(t) = e^{-t+3}$ ;  $y(-1) = 1$ ,  $y'(-1) = 0$
17.  $y'' + y = 0$ ;  $y_1(t) = 0$ ,  $y_2(t) = \sin t$ ;  $y\left(\frac{\pi}{2}\right) = 1$ ,  $y'\left(\frac{\pi}{2}\right) = 1$
18.  $y'' + y = 0$ ;  $y_1(t) = \cos t$ ,  $y_2(t) = \sin t$ ;  $y\left(\frac{\pi}{2}\right) = 1$ ,  $y'\left(\frac{\pi}{2}\right) = 1$

19.  $y'' - 4y' + 4y = 0$  ;  $y_1(t) = e^{2t}$ ,  $y_2(t) = te^{2t}$ ;  $y(0) = 2$ ,  $y'(0) = 0$
20.  $2y'' - y' = 0$  ;  $y_1(t) = 1$ ,  $y_2(t) = e^{t/2}$ ;  $y(2) = 0$ ,  $y'(2) = 2$
21.  $y'' - 3y' + 2y = 0$  ;  $y_1(t) = 2e^t$ ,  $y_2(t) = e^{2t}$ ;  $y(-1) = 1$ ,  $y'(-1) = 0$
22.  $ty'' + y' = 0$  ;  $y_1(t) = \ln t$ ,  $y_2(t) = \ln 3t$ ;  $y(3) = 0$ ,  $y'(3) = 3$
23.  $t^2y'' - ty' - 3y = 0$  ;  $y_1(t) = t^3$ ,  $y_2(t) = -\frac{1}{t}$ ;  $y(-1) = 0$ ,  $y'(-1) = -2$  ( $t < 0$ )
24.  $y'' + \pi^2y = 0$  ;  $y_1(t) = \sin \pi t + \cos \pi t$ ,  $y_2(t) = \sin \pi t - \cos \pi t$ ;  $y\left(\frac{1}{2}\right) = 1$ ,  $y'\left(\frac{1}{2}\right) = 0$
25.  $x^3y^{(3)} - x^2y'' + 2xy' - 2y = 0$   
 $y(1) = 3$ ,  $y'(1) = 2$ ,  $y''(1) = 1$        $y_1(x) = x$ ,  $y_2(x) = x \ln x$ ,  $y_3(x) = x^2$
26.  $y^{(3)} + 2y'' - y' - 2y = 0$   
 $y(0) = 1$ ,  $y'(0) = 2$ ,  $y''(0) = 0$        $y_1(x) = e^x$ ,  $y_2(x) = e^{-x}$ ,  $y_3(x) = e^{-2x}$
27.  $y^{(3)} - 6y'' + 11y' - 6y = 0$   
 $y(0) = 0$ ,  $y'(0) = 0$ ,  $y''(0) = 3$        $y_1(x) = e^x$ ,  $y_2(x) = e^{2x}$ ,  $y_3(x) = e^{3x}$
28.  $y^{(3)} - 3y'' + 3y' - y = 0$   
 $y(0) = 2$ ,  $y'(0) = 0$ ,  $y''(0) = 0$        $y_1(x) = e^x$ ,  $y_2(x) = xe^x$ ,  $y_3(x) = x^2e^x$
29.  $y^{(3)} - 5y'' + 8y' - 4y = 0$   
 $y(0) = 1$ ,  $y'(0) = 4$ ,  $y''(0) = 0$        $y_1(x) = e^x$ ,  $y_2(x) = e^{2x}$ ,  $y_3(x) = xe^{2x}$
30.  $y^{(3)} + 9y'' = 0$   
 $y(0) = 3$ ,  $y'(0) = -1$ ,  $y''(0) = 2$        $y_1(x) = 1$ ,  $y_2(x) = \cos 3x$ ,  $y_3(x) = \sin 3x$
31.  $y^{(3)} - 3y'' + 4y' - 2y = 0$   
 $y(0) = 1$ ,  $y'(0) = 0$ ,  $y''(0) = 0$        $y_1(x) = e^x$ ,  $y_2(x) = e^x \cos x$ ,  $y_3(x) = e^x \sin x$
32.  $x^3y^{(3)} - 3x^2y'' + 6xy' - 6y = 0$   
 $y(1) = 6$ ,  $y'(1) = 14$ ,  $y''(1) = 1$        $y_1(x) = x$ ,  $y_2(x) = x^2$ ,  $y_3(x) = x^3$
33.  $x^3y^{(3)} + 6x^2y'' + 4xy' - 4y = 0$   
 $y(1) = 1$ ,  $y'(1) = 5$ ,  $y''(1) = -11$        $y_1(x) = x$ ,  $y_2(x) = x^{-2}$ ,  $y_3(x) = x^{-2} \ln x$
34. When the values of a solution to a differential equation are specified at two different points, these conditions. (In contrast, initial conditions specify the values of a function and its derivative at the same point). The purpose of this is to show that for boundary value problems there is no existence-uniqueness theorem. Given that every solution to



$$y'' + y = 0 \quad \text{is of the form} \quad y(t) = c_1 \cos t + c_2 \sin t$$

Where  $c_1$  and  $c_2$  are arbitrary constants, show that

- a) There is a unique solution to the given differential equation that satisfies the boundary conditions  $y(0) = 2$  and  $y\left(\frac{\pi}{2}\right) = 0$
- b) There is no solution to given equation that satisfies  $y(2) = 0$  and  $y(\pi) = 0$
- c) There are infinitely many solution to the given DE equation that satisfy  $y(0) = 2$  and  $y(\pi) = -2$

## Section 2.2 – Homogeneous Equations with Constant Coefficients

The homogeneous equations of the form:

$$y'' + py' + qy = 0 \quad (H : \text{Homogeneous})$$

Where  $p$  and  $q$  are continuous functions on some interval  $I$ .

The zero function,  $y(x) = 0$  for all  $x \in I$ , ( $y \equiv 0$ ) is a solution of the equation (given above).

The zero solution is called **trivial solution**. Any other solution is a **nontrivial** solution.

This is a class of equations that we can solve easily.

### Theorem

If  $y = y(x)$  is a solution of  $y'' + py' + qy = 0$  and if  $C$  is any real number, then  $u(x) = Cy(x)$  is also solution of  $y'' + py' + qy = 0$ .

Any constant multiple of a solution of  $y'' + py' + qy = 0$  is also a solution of  $y'' + py' + qy = 0$

### Proof

$$u'(x) = Cy'(x)$$

$$u''(x) = Cy''(x)$$

$$u'' + pu' + qu = 0$$

$$Cy'' + pCy' + qCy = 0$$

$$\Rightarrow C(y'' + py' + qy) = 0$$

### Theorem

If  $y = y_1(x)$  and  $y = y_2(x)$  are any two solutions of  $y'' + py' + qy = 0$  the  $u(x) = y_1(x) + y_2(x)$  is also a solution of  $y'' + py' + qy = 0$ .

Any linear combination of solutions of  $y'' + py' + qy = 0$  is also a solution of  $y'' + py' + qy = 0$ .

### Definition

Let  $f = f(x)$  and  $g = g(x)$  be functions defined on some interval  $I$ , and let  $C_1$  and  $C_2$  be real numbers. The expression

$$C_1 f(x) + C_2 g(x)$$

Is called a linear combination of  $f$  and  $g$ .

### Definition

Let  $y = y_1(x)$  and  $y = y_2(x)$  are any two solutions of  $y'' + py' + qy = 0$  (H). The function  $W$  defined by

$$W[y_1, y_2] = y_1(x)y_2'(x) - y_2(x)y_1'(x)$$

Is called the Wronskian of  $y_1, y_2$

**Determinant notation:**

$$\begin{aligned} W(x) &= y_1(x)y_2'(x) - y_2(x)y_1'(x) \\ &= \begin{vmatrix} y_1(x) & y_2(x) \\ y_1'(x) & y_2'(x) \end{vmatrix} \end{aligned}$$

### Theorem

Let  $y = y_1(x)$  and  $y = y_2(x)$  be solutions of equation (H), and let  $W(x)$  be their Wronskian. Exactly one of the following holds

1.  $W(x) = 0$  for all  $x \in I$  and  $y_1$  is a constant multiple of  $y_2$

**Example:**

$$W(x) = \begin{vmatrix} x^2 & 2x^2 \\ 2x & 4x \end{vmatrix} = 4x^3 - 4x^3 = \underline{0}$$

2.  $W(x) \neq 0$  for all  $x \in I$  and  $y = C_1 y_1(x) + C_2 y_2(x)$  is the general solution of (H)

### Definition Fundamental Set – Solution basis

A pair of solutions  $y = y_1(x)$  and  $y = y_2(x)$  of equation (H) forms a **fundamental set of solutions** (also called a **solution basis**) if  $W(x) \neq 0$  for all  $x \in I$ .

The analogous first-order, linear, homogeneous equation:

$$y' + p(t)y = 0$$

It is separable and easily solved, its general solution is

$$y(t) = Ce^{-Pt}$$

Let look for a solution of the type

$$y(t) = e^{\lambda t}$$

$$y' = \lambda e^{\lambda t}$$

$$y'' = \lambda^2 e^{\lambda t}$$

$$\begin{aligned} y'' + py' + qy &= \lambda^2 e^{\lambda t} + p\lambda e^{\lambda t} + qe^{\lambda t} \\ &= (\lambda^2 + p\lambda + q)e^{\lambda t} \\ &= 0 \end{aligned}$$

$$\lambda^2 + p\lambda + q = 0 \quad \text{This is called the *characteristic equation*}$$

We can rewrite the differential equation and its characteristic equations

$$y'' + py' + qy = 0$$

$$\lambda^2 + p\lambda + q = 0$$

The roots are:  $\lambda_{1,2} = \frac{-p \pm \sqrt{p^2 - 4q}}{2}$

$$\text{If } p^2 - 4q > 0 \Rightarrow \text{Two distinct real roots}$$

$$\text{If } p^2 - 4q < 0 \Rightarrow \text{Two distinct complex roots}$$

$$\text{If } p^2 - 4q = 0 \Rightarrow \text{One repeated real root}$$

### Case 1: Distinct Real Root

If  $\lambda^2 + p\lambda + q = 0$  has two distinct real roots:  $\lambda_{1,2} = \frac{-p \pm \sqrt{p^2 - 4q}}{2}$

Then:

$$y_1 = C_1 e^{\lambda_1 t} \text{ and } y_2 = C_2 e^{\lambda_2 t} \text{ are both solutions.}$$

### Proposition

If the characteristic equation  $\lambda^2 + p\lambda + q = 0$  has two distinct real roots  $\lambda_1$  and  $\lambda_2$ , then the **general solution** to  $y'' + py' + qy = 0$  is

$$y(t) = C_1 e^{\lambda_1 t} + C_2 e^{\lambda_2 t}$$

Where  $C_1$  and  $C_2$  are arbitrary constants.

### Example

Find the general solution to the equation  $y'' - 3y' + 2y = 0$

Find the unique solution corresponding to the initial conditions  $y(0) = 2$  and  $y'(0) = 1$

#### Solution

The characteristic equation:

$$y'' - 3y' + 2y = 0$$

$$\lambda^2 - 3\lambda + 2 = 0$$

The solution:  $\lambda_{1,2} = 1, 2$

The general solution

$$y(t) = C_1 e^t + C_2 e^{2t}$$

$$y' = C_1 e^t + 2C_2 e^{2t}$$

$$y(0) = 2 \quad y(0) = C_1 e^0 + C_2 e^{2(0)}$$

$$2 = C_1 + C_2$$

$$y'(0) = 1 \quad y'(0) = C_1 e^0 + 2C_2 e^{2(0)}$$

$$1 = C_1 + 2C_2$$

$$C_1 + C_2 = 2$$

$$C_1 + 2C_2 = 1 \Rightarrow C_2 = -1 \quad C_1 = 3$$

The unique solution is:  $y(t) = 3e^t - e^{2t}$

## Case 2: Complex Roots

### Proposition

If the characteristic equations  $\lambda^2 + p\lambda + q = 0$  has two complex conjugate roots  $\lambda = a + ib$  and  $\bar{\lambda} = a - ib$ .

1. The functions

$$z = e^{(a+ib)t} \text{ and } \bar{z} = e^{(a-ib)t}$$

So, the general solution is

$$w(t) = C_1 e^{(a+ib)t} + C_2 e^{(a-ib)t}$$

Where  $C_1$  and  $C_2$  are arbitrary complex constants.

2. The functions

$$y_1(t) = e^{at} \cos(bt) \text{ and } y_2(t) = e^{at} \sin(bt)$$

So, the general solution is

$$y(t) = e^{at} (A_1 \cos bt + A_2 \sin bt)$$

Where  $A_1$  and  $A_2$  are constants.

### Example

Find the general solution to the equation  $y'' + 2y' + 2y = 0$

Find the unique solution corresponding to the initial conditions  $y(0) = 2$  and  $y'(0) = 3$

### Solution

The characteristic equation:  $\lambda^2 + 2\lambda + 2 = 0$

The solution:  $\lambda_{1,2} = -1 \pm i = a \pm ib$

$$a = -1; \quad b = 1$$

The general solution

$$y(t) = e^{-t} (C_1 \cos t + C_2 \sin t)$$

$$y(0) = e^{-(0)} (C_1 \cos(0) + C_2 \sin(0))$$

$$2 = 1(C_1 + C_2(0)) \Rightarrow \boxed{C_1 = 2}$$

$$y' = -e^{-t} (C_1 \cos t + C_2 \sin t) + e^{-t} (-C_1 \sin t + C_2 \cos t)$$

$$y'(0) = -e^{-(0)} (C_1 \cos(0) + C_2 \sin(0)) + e^{-(0)} (-C_1 \sin(0) + C_2 \cos(0))$$

$$3 = -(C_1) + (C_2)$$

$$C_2 - C_1 = 3$$

$$C_2 = 3 + 2 = 5$$

$$y(t) = e^{-t} (2 \cos t + 5 \sin t)$$

### ***Example***

Find the general solution to the equation  $y'' - 4y' + 13y = 0$

### **Solution**

The characteristic equation:  $\lambda^2 - 4\lambda + 13 = 0$

The solutions:  $\lambda_{1,2} = \frac{4 \pm \sqrt{16 - 52}}{2} = \frac{4 \pm \sqrt{-36}}{2} = \frac{4 \pm 6i}{2} = 2 \pm 3i$

$a = 2$ ;  $b = 3$

The general solution:  $y(x) = e^{2x} (C_1 \cos 3x + C_2 \sin 3x)$

### Case 3: Repeated Roots

If the roots of the characteristic equations are repeated and the solutions are independent.

$$\lambda^2 + p\lambda + q = 0$$

$$(\lambda - \lambda_1)^2 = 0$$

$$\lambda_{1,2} = \frac{-p \pm \sqrt{p^2 - 4q}}{2}$$

$$p^2 - 4q = 0 \Rightarrow q = \frac{p^2}{4}$$

$$\lambda_{1,2} = -\frac{p}{2}$$

$$\begin{aligned} y_1 &= C_1 e^{\lambda_1 t} \\ &= C_1 e^{-pt/2} \end{aligned}$$

$$\begin{aligned} y_2 &= v(t)y_1(t) \\ &= v(t)e^{-pt/2} \end{aligned}$$

$$y'' + py' + qy = 0$$

$$y'' + py' + \frac{p^2}{4}y = 0$$

$$y_2' = v'e^{-pt/2} - \frac{p}{2}ve^{-pt/2}$$

$$y_2'' = v''e^{-pt/2} - \frac{p}{2}v'e^{-pt/2} - \frac{p}{2}v'e^{-pt/2} + \frac{p^2}{4}ve^{-pt/2}$$

$$v''e^{-pt/2} - \frac{p}{2}v'e^{-pt/2} - \frac{p}{2}v'e^{-pt/2} + \frac{p^2}{4}ve^{-pt/2} + p\left(v'e^{-pt/2} - \frac{p}{2}ve^{-pt/2}\right) + \frac{p^2}{4}ve^{-pt/2} = 0$$

$$v''e^{-pt/2} = 0$$

$$v'' = 0$$

$$\Rightarrow v' = a$$

$$\Rightarrow v = at + b$$

$$v = t$$

$$\underline{y_2 = te^{-pt/2}}$$



### ***Proposition***

If the characteristic equations  $\lambda^2 + p\lambda + q = 0$  has one double root  $\lambda_1$ , then the **general solution** to  $y'' + py' + qy = 0$  is

$$\begin{aligned}y(t) &= C_1 e^{\lambda_1 t} + C_2 t e^{\lambda_1 t} \\&= (C_1 + C_2 t) e^{\lambda_1 t}\end{aligned}$$

Where  $C_1$  and  $C_2$  are arbitrary constants.

### ***Example***

Find the general solution to the equation  $y'' - 2y' + y = 0$

Find the unique solution corresponding to the initial conditions  $y(0) = 2$  and  $y'(0) = -1$

#### **Solution**

The characteristic equation:  $\lambda^2 - 2\lambda + 1 = 0$

The solutions are:  $\lambda_{1,2} = 1$

$$\begin{aligned}y(t) &= C_1 e^{\lambda_1 t} + C_2 t e^{\lambda_1 t} \\&= C_1 e^t + C_2 t e^t\end{aligned}$$

$$y(0) = C_1 e^{(0)} + C_2 (0) e^{(0)} \Rightarrow 2 = C_1$$

$$\begin{aligned}y' &= C_1 e^t + C_2 e^t + C_2 t e^t \\y'(0) &= 2e^{(0)} + C_2 e^{(0)} + C_2 (0) e^{(0)} \\-1 &= 2 + C_2 \Rightarrow C_2 = -3\end{aligned}$$

$$\underline{y(t) = 2e^t - 3te^t}$$

### ***Example***

Find the general solution to the equation  $y'' - 10y' + 25y = 0$

#### **Solution**

The characteristic equation:  $\lambda^2 - 10\lambda + 25 = (\lambda - 5)^2 = 0$

The solutions are:  $\lambda_{1,2} = 5$

The general solution:  $\underline{y(t) = C_1 e^{5t} + C_2 t e^{5t}}$

## Higher-Order Equations

In general, to solve an  $n$ th-order differential equation, we must solve an  $n$ th degree characteristic polynomial equation

$$a_n \lambda^n + a_{n-1} \lambda^{n-1} + \dots + a_2 \lambda^2 + a_1 \lambda + a_0 = 0$$

If all roots are real and distinct, then the general solution is

$$y(x) = C_1 e^{\lambda_1 x} + C_2 e^{\lambda_2 x} + \dots + C_n e^{\lambda_n x}$$

If all roots are equal to  $\lambda$ , then the general solution is

$$y(x) = C_1 e^{\lambda x} + C_2 x e^{\lambda x} + C_3 x^2 e^{\lambda x} + \dots + C_n x^{n-1} e^{\lambda x}$$

### Example

Find the general solution of  $y''' + 3y'' - 4y = 0$

#### Solution

$$\lambda^3 + 3\lambda^2 - 4 = 0 \quad \text{Solve for } \lambda$$

$$\lambda_1 = 1, \quad \lambda_{2,3} = -2$$

$$\underline{y(x) = C_1 e^x + (C_2 + C_3 x) e^{-2x}}$$

$$\text{Rational zero theorem: } \pm \left\{ \frac{4}{1} \right\} = \pm \{1, 2, 4\}$$

$$\lambda_1 = 1, \quad \lambda_2 = -2$$

$$(\lambda - 1)(\lambda + 2)(\lambda - a) = 0$$

$$(-1)(2)(-a) = -4 \Rightarrow a = -2$$

### Example

Find the general solution of  $\lambda^4(\lambda + 1)(\lambda + 2)^2(\lambda^2 + 4) = 0$

#### Solution

$$\lambda^2 + 4 = 0 \Rightarrow \lambda^2 = -4 \rightarrow \lambda = \pm 2i$$

The solution:  $\lambda = 0, 0, 0, 0, -1, -2, -2, \pm 2i$

$$\underline{y(x) = C_1 + C_2 x + C_3 x^2 + C_4 x^3 + C_5 e^{-x} + (C_6 + C_7 x) e^{-2x} + C_8 \cos 2x + C_9 \sin 2x}$$

## Summary

The equation:  $y'' + py' + qy = 0$

The characteristic equations  $\lambda^2 + p\lambda + q = 0$

If $p^2 - 4q > 0$	$y_1(t) = C_1 e^{\lambda_1 t}$ and $y_2(t) = C_2 e^{\lambda_2 t}$	$y(t) = C_1 e^{\lambda_1 t} + C_2 e^{\lambda_2 t}$
If $p^2 - 4q < 0$	$y_1(t) = e^{at} \cos bt$ and $y_2(t) = e^{at} \sin bt$	$y(t) = e^{at} (A_1 \cos bt + A_2 \sin bt)$
If $p^2 - 4q = 0$	$y_1 = e^{\lambda t}$ and $y_2 = te^{\lambda t}$	$y(t) = (C_1 + C_2 t) e^{\lambda_1 t}$

## **Exercises**      **Section 2.2 – Linear, Homogeneous Equations with Constant Coefficients**

(Exercises 1- 4) Decide whether the equation is linear or nonlinear. For the linear equation, state whether the equation is homogenous or inhomogeneous.

35.  $t^2 y'' = 4y' - \sin t$

37.  $t^2 y'' + 4yy' = 0$

36.  $ty'' + (\sin t)y' = 4y - \cos 5t$

38.  $y'' + 4y' + 7y = 3e^{-t} \sin t$

(Exercises 5- 6) Show by direct substitution that the given functions  $y_1(t)$  and  $y_2(t)$  are solutions of the given differential equation. Then verify by direct substitution, that any linear combination  $C_1 y_1(t) + C_2 y_2(t)$  of the 2 given solutions is also a solution.

39.  $y'' + 4y = 0$ ;  $y_1(t) = \cos 2t$   $y_2(t) = \sin 2t$

40.  $y'' - 2y' + 2y = 0$ ;  $y_1(t) = e^t \cos t$   $y_2(t) = e^t \sin t$

41. Explain why  $y_1(t)$  and  $y_2(t)$  are linearly independent solutions. Calculate Wronskian and use it to explain the independence of the given solutions.

$y'' + 9y = 0$ ;  $y_1(t) = \cos 3t$   $y_2(t) = \sin 3t$

42. Show that  $y_1(t) = e^t$  and  $y_2(t) = e^{-3t}$  form a fundamental set of solutions for  $y'' + 2y' - 3y = 0$ , then find a solution satisfying  $y(0) = 1$  and  $y'(0) = -2$ .

Find the general solution of the second order differential equation

43.  $y'' + y' = 0$

56.  $y'' + y' - 6y = 0$

69.  $y'' + 3y' - 4y = 0$

44.  $y'' - 4y = 0$

57.  $y'' - y' - 11y = 0$

70.  $y'' + 4y' - y = 0$

45.  $y'' + 8y = 0$

58.  $y'' - y' - 12y = 0$

71.  $y'' - 4y' + 4y = 0$

46.  $y'' - 36y = 0$

59.  $y'' + 2y' + y = 0$

72.  $y'' + 4y' + 4y = 0$

47.  $y'' + 9y = 0$

60.  $y'' + 2y' + 3y = 0$

73.  $y'' - 4y' + 5y = 0$

48.  $y'' - 9y = 0$

61.  $y'' + 2y' - 3y = 0$

74.  $y'' + 4y' + 5y = 0$

49.  $y'' + 16y = 0$

62.  $y'' - 2y' - 3y = 0$

75.  $y'' + 4y' - 5y = 0$

50.  $y'' + 25y = 0$

63.  $y'' - 2y' + 3y = 0$

76.  $y'' + 4y' + 7y = 0$

51.  $y'' - 64y = 0$

64.  $y'' + 2y' + 4y = 0$

77.  $y'' + 4y' + 9y = 0$

52.  $y'' + y' + y = 0$

65.  $y'' - 2y' + 5y = 0$

78.  $y'' + 5y' = 0$

53.  $y'' + y' - y = 0$

66.  $y'' + 2y' - 15y = 0$

79.  $y'' + 5y' + 6y = 0$

54.  $y'' - y' - 2y = 0$

67.  $y'' + 2y' + 17y = 0$

80.  $y'' + 6y' + 9y = 0$

55.  $y'' - y' - 6y = 0$

68.  $y'' - 3y' + 2y = 0$

81.  $y'' - 6y' + 9y = 0$

- |                            |                              |                              |
|----------------------------|------------------------------|------------------------------|
| 82. $y'' - 6y' + 25y = 0$  | 98. $3y'' + y = 0$           | 114. $6y'' + 13y' - 5y = 0$  |
| 83. $y'' + 8y' + 16y = 0$  | 99. $3y'' - y' = 0$          | 115. $6y'' + 13y' + 7y = 0$  |
| 84. $y'' + 8y' - 16y = 0$  | 100. $3y'' + 2y' + y = 0$    | 116. $6y'' - 13y' + 7y = 0$  |
| 85. $y'' - 9y' + 20y = 0$  | 101. $3y'' + 11y' - 7y = 0$  | 117. $8y'' - 10y' - 3y = 0$  |
| 86. $y'' - 10y' + 25y = 0$ | 102. $3y'' - 20y' + 12y = 0$ | 118. $9y'' - y = 0$          |
| 87. $y'' + 14y' + 49y = 0$ | 103. $4y'' + y' = 0$         | 119. $9y'' + 6y' + y = 0$    |
| 88. $2y'' - y' - 3y = 0$   | 104. $4y'' + 4y' + y = 0$    | 120. $9y'' - 12y' + 4y = 0$  |
| 89. $2y'' + y' - y = 0$    | 105. $4y'' - 4y' + y = 0$    | 121. $9y'' + 24y' + 16y = 0$ |
| 90. $2y'' + 2y' + y = 0$   | 106. $4y'' + 4y' + 2y = 0$   | 122. $12y'' - 5y' - 2y = 0$  |
| 91. $2y'' + 2y' + 3y = 0$  | 107. $4y'' - 4y' + 13y = 0$  | 123. $16y'' - 8y' + 7y = 0$  |
| 92. $2y'' - 3y' - 2y = 0$  | 108. $4y'' - 8y' + 7y = 0$   | 124. $16y'' - 12y' - 4y = 0$ |
| 93. $2y'' - 3y' + 4y = 0$  | 109. $4y'' - 12y' + 9y = 0$  | 125. $16y'' - 24y' + 9y = 0$ |
| 94. $2y'' - 4y' + 8y = 0$  | 110. $4y'' + 20y' + 25y = 0$ | 126. $25y'' + 10y' + y = 0$  |
| 95. $2y'' + 5y' = 0$       | 111. $6y'' + 5y' - 6y = 0$   | 127. $25y'' - 10y' + y = 0$  |
| 96. $2y'' - 5y' - 3y = 0$  | 112. $6y'' + y' - 2y = 0$    | 128. $35y'' - y' - 12y = 0$  |
| 97. $2y'' + 7y' - 4y = 0$  | 113. $6y'' - 7y' - 20y = 0$  |                              |

Find the general solution of the given higher-order differential equation

- |                                       |   |
|---------------------------------------|---|
| 129. $y''' + 3y'' + 3y' + y = 0$      | 149. $y^{(4)} + y''' + y'' = 0$                             |
| 130. $y''' + 3y'' - y' - 3y = 0$      | 150. $y^{(4)} - 2y'' + y = 0$                               |
| 131. $y^{(3)} + 3y'' - 4y = 0$        | 151. $16y^{(4)} + 24y'' + 9y = 0$                           |
| 132. $3y''' - 19y'' + 36y' - 10y = 0$ | 152. $y^{(4)} - 7y'' - 18y = 0$                             |
| 133. $y''' - 6y'' + 12y' - 8y = 0$    | 153. $y^{(4)} + 2y'' + y = 0$                               |
| 134. $y''' + 5y'' + 7y' + 3y = 0$     | 154. $y^{(4)} + y''' + y'' = 0$                             |
| 135. $y^{(3)} + y' - 10y = 0$         | 155. $y^{(4)} + 4y = 0$                                     |
| 136. $y''' + y'' - 6y' + 4y = 0$      | 156. $y^{(4)} + 2y''' + 9y'' - 2y' - 10y = 0$               |
| 137. $y''' - 6y'' - y' + 6y = 0$      | 157. $x^{(4)} - 4x^{(3)} + 7x'' - 4x' + 6x = 0$             |
| 138. $y''' + 2y'' - 4y' - 8y = 0$     | 158. $x^{(4)} + 8x^{(3)} + 24x'' + 32x' + 16x = 0$          |
| 139. $y''' - 7y'' + 7y' + 15y = 0$    | 159. $x^{(4)} - 4x'' + 16x' + 32x = 0$                      |
| 140. $y''' + 3y'' - 4y' - 12y = 0$    | 160. $x^{(4)} + 4x^{(3)} + 6x'' + 4x' + x = 0$              |
| 141. $y''' - 4y'' - 5y' = 0$          | 161. $y^{(4)} - y^{(3)} + y'' - 3y' - 6y = 0$               |
| 142. $y''' - y = 0$                   | 162. $y^{(4)} + y^{(3)} - 3y'' - 5y' - 2y = 0$              |
| 143. $y''' - 5y'' + 3y' + 9y = 0$     | 163. $x^{(5)} - x^{(4)} - 2x^{(3)} + 2x'' + x' - x = 0$     |
| 144. $y''' + 3y'' - 4y' - 12y = 0$    | 164. $x^{(5)} + 5x^{(4)} + 10x^{(3)} + 10x'' + 5x' + x = 0$ |
| 145. $y''' + y'' - 2y = 0$            |   |
| 146. $y''' - y'' - 4y = 0$            |   |
| 147. $y''' + 3y'' + 3y' + y = 0$      |   |
| 148. $y''' - 6y'' + 12y' - 8y = 0$    |   |

$$165. y^{(5)} + 5y^{(4)} - 2y''' - 10y'' + y' + 5y = 0$$

$$166. 2y^{(5)} - 7y^{(4)} + 12y''' + 8y'' = 0$$

$$167. y^{(5)} - 2y^{(4)} + 17y''' = 0$$

$$168. x^{(6)} - 5x^{(4)} + 16x^{(3)} + 36x'' - 16x' - 32x = 0$$

$$169. (D^2 + 6D + 13)^2 y = 0$$

$$170. \lambda^3(\lambda - 1)(\lambda - 2)^3(\lambda^2 + 9) = 0$$

Find the solution of the given initial value problem.

$$171. y'' + y = 0; \quad y\left(\frac{\pi}{3}\right) = 0, \quad y'\left(\frac{\pi}{3}\right) = 2$$

$$172. y'' + y = 0; \quad y(0) = 0, \quad y'\left(\frac{\pi}{2}\right) = 0$$

$$173. y'' + y' = 0; \quad y(0) = 2, \quad y'(0) = 1$$

$$174. y'' - y' - 2y = 0; \quad y(0) = -1, \quad y'(0) = 2$$

$$175. y'' + y' + 2y = 0; \quad y(0) = 0, \quad y'(0) = 0$$

$$176. y'' + 2y' + y = 0; \quad y(0) = 1, \quad y'(0) = -3$$

$$177. y'' - 2y' + y = 0, \quad y(0) = 5, \quad y'(0) = 10$$

$$178. y'' - 2y' - 2y = 0; \quad y(0) = 0, \quad y'(0) = 3$$

$$179. y'' - 2y' + 2y = 0; \quad y(0) = 1, \quad y(\pi) = 1$$

$$180. y'' - 2y' - 3y = 0; \quad y(0) = 2, \quad y'(0) = -3$$

$$181. y'' + 2y' - 8y = 0; \quad y(0) = 3, \quad y'(0) = -12$$

$$182. y'' - 2y' + 17y = 0; \quad y(0) = -2, \quad y'(0) = 3$$

$$183. y'' + 2\sqrt{2}y' + 2y = 0; \quad y(0) = 1, \quad y'(0) = 0$$

$$184. y'' + 3y' - 10y = 0; \quad y(0) = 4, \quad y'(0) = -2$$

$$185. y'' + 4y = 0; \quad y(0) = 0, \quad y(\pi) = 0$$

$$186. y'' + 4y = 0; \quad y\left(\frac{\pi}{4}\right) = -2, \quad y\left(\frac{\pi}{4}\right) = 1$$

$$187. y'' + 4y' + 2y = 0; \quad y(0) = -1, \quad y'(0) = 2$$

$$188. y'' - 4y' + 3y = 0; \quad y(0) = 1, \quad y'(0) = \frac{1}{3}$$

$$189. y'' - 4y' + 4y = 0, \quad y(1) = 1, \quad y'(1) = 1$$

$$190. y'' + 4y' + 4y = 0, \quad y(0) = 1, \quad y'(0) = 3$$

$$191. y'' - 4y' + 5y = 0; \quad y(0) = 1, \quad y'(0) = 5$$

$$192. y'' + 4y' + 5y = 0; \quad y(0) = 1, \quad y'(0) = 0$$

$$193. y'' + 4y' + 5y = 0; \quad y\left(\frac{\pi}{2}\right) = \frac{1}{2}, \quad y'\left(\frac{\pi}{2}\right) = -2$$

$$194. y'' - 4y' - 5y = 0, \quad y(1) = 0, \quad y'(1) = 2$$

$$195. y'' - 4y' - 5y = 0, \quad y(-1) = 3, \quad y'(-1) = 9$$

$$196. y'' - 4y' + 9y = 0, \quad y(0) = 0, \quad y'(0) = -8$$

$$197. y'' - 4y' + 13y = 0; \quad y(0) = -1, \quad y'(0) = 2$$

$$198. y'' - 5y' + 6y = 0; \quad y(1) = e^2, \quad y'(1) = 3e^2$$

$$199. y'' + 6y' + 9y = 0; \quad y(0) = 2, \quad y'(0) = -2$$

$$200. y'' + 6y' + 5y = 0, \quad y(1) = 0, \quad y'(0) = 3$$

$$201. y'' - 6y' + 5y = 0; \quad y(0) = 3, \quad y'(0) = 11$$

$$202. y'' - 6y' + 9y = 0, \quad y(0) = 2, \quad y'(0) = \frac{25}{3}$$

$$203. y'' - 6y' + 9y = 0; \quad y(0) = 0, \quad y'(0) = 5$$

$$204. y'' + 8y' - 9y = 0; \quad y(1) = 2, \quad y'(1) = 0$$

$$205. y'' - 8y' + 17y = 0; \quad y(0) = 4, \quad y'(0) = -1$$

$$206. y'' - 9y = 0, \quad y(0) = 2, \quad y'(0) = -1$$

$$207. y'' - 10y' + 25y = 0, \quad y(0) = 1, \quad y'(1) = 0$$

$$208. y'' + 10y' + 25y = 0; \quad y(0) = 2, \quad y'(0) = -1$$

$$209. y'' + 11y' + 24y = 0; \quad y(0) = 0, \quad y'(0) = -7$$

$$210. y'' + 12y = 0, \quad y(0) = 0, \quad y'(0) = 1$$

$$211. y'' + 16y = 0, \quad y(0) = 2, \quad y'(0) = -2$$

$$212. y'' + 16y = 0, \quad y(\pi) = 2, \quad y'(0) = -2$$

$$213. y'' + 16y = 0, \quad y\left(\frac{\pi}{2}\right) = -10, \quad y'\left(\frac{\pi}{2}\right) = 3$$

$$214. y'' + 25y = 0; \quad y(0) = 1, \quad y'(0) = -1$$

$$215. 2y'' - 2y' + y = 0; \quad y(-\pi) = 1, \quad y'(-\pi) = -1$$

$$216. 3y'' + y' - 14y = 0, \quad y(0) = 2, \quad y'(0) = -1$$

$$217. 3y'' + 2y' - 8y = 0, \quad y(0) = -6, \quad y'(0) = -18$$

$$218. 4y'' - 4y' + y = 0, \quad y(0) = 4, \quad y'(0) = 4$$

$$219. 4y'' - 4y' + y = 0, \quad y(1) = -4, \quad y'(1) = 0$$

220.  $4y'' - 4y' - 3y = 0$ ,  $y(0) = 1$ ,  $y'(0) = 5$       227.  $9y'' + \pi^2 y = 0$ ;  $y(3) = 2$ ,  $y'(3) = -\pi$
221.  $4y'' + 4y' + 5y = 0$ ,  $y(\pi) = 1$ ,  $y'(\pi) = 0$       228.  $9y'' - 6y' + y = 0$ ;  $y(3) = -2$ ,  $y'(3) = -\frac{5}{3}$
222.  $4y'' + 4y' + 17y = 0$ ,  $y(0) = -1$ ,  $y'(0) = 2$       229.  $9y'' + 6y' + 2y = 0$ ;  $y(3\pi) = 0$ ,  $y'(3\pi) = \frac{1}{3}$
223.  $4y'' - 5y' = 0$ ,  $y(-2) = 0$ ,  $y'(-2) = 7$       230.  $9y'' - 12y' + 4y = 0$ ,  $y(0) = -1$ ,  $y'(0) = 1$
224.  $4y'' + 12y' + 9y = 0$ ,  $y(0) = 2$ ,  $y'(0) = 1$       231.  $12y'' + 5y' - 2y = 0$ ,  $y(0) = 1$ ,  $y'(0) = -1$
225.  $4y'' + 24y' + 37y = 0$ ,  $y(\pi) = 1$ ,  $y'(\pi) = 0$       232.  $16y'' - 8y' + y = 0$ ;  $y(0) = -4$ ,  $y'(0) = 3$
226.  $9y'' + y = 0$ ;  $y\left(\frac{\pi}{2}\right) = 4$ ,  $y'\left(\frac{\pi}{2}\right) = 0$
233.  $25y'' + 20y' + 4y = 0$ ;  $y(5) = 4e^{-2}$ ,  $y'(5) = -\frac{3}{5}e^{-2}$
234.  $y''' + 12y'' + 36y' = 0$ ,  $y(0) = 0$ ,  $y'(0) = 1$ ,  $y''(0) = -7$
235.  $y''' + 2y'' - 5y' - 6y = 0$ ,  $y(0) = 0$ ,  $y'(0) = 0$ ,  $y''(0) = 1$

236. The roots of the characteristic equation of a certain differential equation are:

$$3, -5, 0, 0, 0, 0, -5, 2 \pm 3i \text{ and } 2 \pm 3i$$

Write a general solution of this homogeneous differential equation.

237.  $y(x) = C_1 e^{2x} + C_2 e^{-2x} + C_3 \cos 2x + C_4 \sin 2x$  is the general solution of a homogeneous equation. What is the equation?

238. Show that the second differential equation  $y'' + 4y = 0$

a) Has no solution to the boundary value  $y(0) = 0$ ,  $y(\pi) = 1$

b) There are infinitely many solutions to the boundary value  $y(0) = 0$ ,  $y(\pi) = 0$

239. Show that the general solution of the equation

$$y'' + Py' + Qy = 0$$

(where  $P$  and  $Q$  are constant) approaches 0 as  $x \rightarrow \infty$  if and only if  $P$  and  $Q$  are both positive.


## Section 2.3 – Harmonic Motion

### Hooke's Law


**Hooke's Law** says that the force required to hold a stretched or compressed spring  $x$  units from its natural (unstressed) length is proportional to  $x$ . In symbols

$$F = -ky, \quad k > 0 \quad (k : \text{Spring constant})$$

$$F = kx$$



The constant  $k$ , measured in force units per unit length, is a characteristic of the spring, called **the force constant** (or **spring constant**) of the spring.

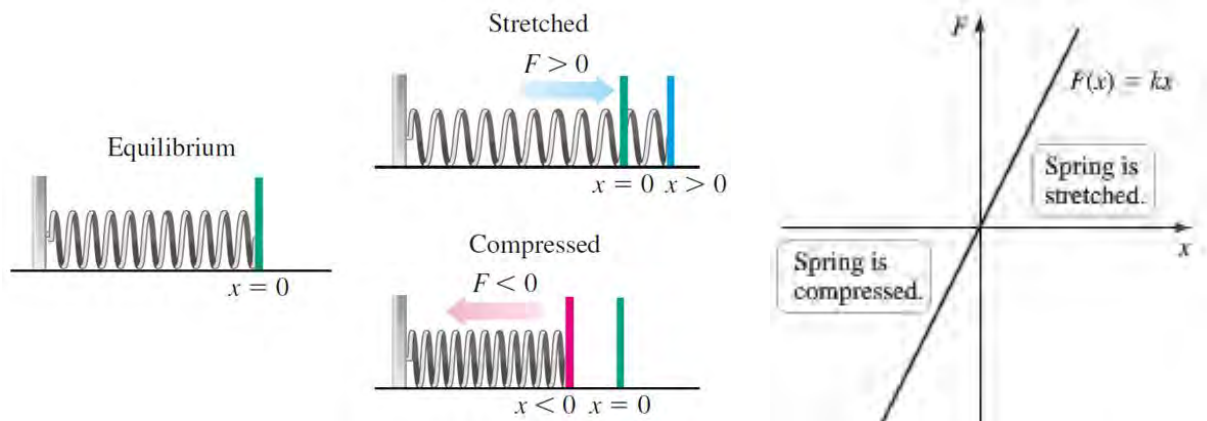

- To stretch the spring to a position  $x > 0$ , a force  $F > 0$  (in the **positive** direction) is required.
- To compress the spring to a position  $x < 0$ , a force  $F < 0$  (in the **negative** direction) is required.

$$1 \text{ kg.m / s}^2 = 1 \text{ N} \quad (\text{Newton})$$

### Newton's Second Law

Force equals mass times acceleration

$$F = ma = m \frac{d^2 y}{dt^2}$$

Mathematical model:  $m \frac{d^2 y}{dt^2} = -ky$

$$m \frac{d^2 y}{dt^2} + ky = 0$$

$$\frac{d^2 y}{dt^2} + \frac{k}{m} y = 0$$



$$\frac{d^2 y}{dt^2} + \omega^2 y = 0; \quad \omega = \sqrt{\frac{k}{m}}$$

$\frac{\omega}{2\pi}$  is called natural frequency of the system

## Damped, Free Vibrations

A resistance force  $R$  (e.g. friction) proportional to the velocity  $v = y'$  and acting in a direction opposite to the motion

$$R = -cy', \quad c > 0$$

Force equation:  $F = -ky(t) - cy'(t)$

Mathematical model:  $my'' = -ky - cy'$

$$y'' + \frac{c}{m}y' + \frac{k}{m}y = 0 \quad (c, m, k \text{ are constants})$$

The equation for the motion of a vibrating spring is given by

$$my'' + \mu y' + ky = F(t)$$

Where the constant coefficients are:

$m$  mass

$\mu$  damping constant

$k$  spring constant

$F(t)$  external force

The differential equation that modeled simple *RLC* circuits is given by

$$L \frac{d^2 I}{dt^2} + R \frac{dI}{dt} + \frac{1}{C} I = \frac{dE}{dt}$$

Comparing the 2 systems are almost identical.

## Example

For a circuit without resistance ( $R = 0$ ) and no source voltage, then the equation simplifies to

$$L \frac{d^2 I}{dt^2} + \frac{1}{C} I = 0 \quad \text{Divide by } L$$

$$\frac{d^2 I}{dt^2} + \frac{1}{LC} I = 0$$

$$\lambda^2 + \frac{1}{LC} = 0$$

$$\lambda^2 = -\frac{1}{LC}$$

$$\lambda = \pm i \frac{1}{\sqrt{LC}} \qquad \lambda = a \pm ib \Rightarrow a = 0; \quad b = \frac{1}{\sqrt{LC}}$$

The general solution:

$$y(t) = e^{at} \left( A_1 \cos bt + A_2 \sin bt \right)$$

$$\underline{I(t) = C_1 \cos\left(\frac{t}{\sqrt{LC}}\right) + C_2 \sin\left(\frac{t}{\sqrt{LC}}\right)}$$

Combine the two systems:

$$y'' + \frac{\mu}{m} y' + \frac{k}{m} y = \frac{1}{m} F(t) \quad (1)$$

$$\frac{d^2 I}{dt^2} + \frac{R}{L} \frac{dI}{dt} + \frac{1}{LC} I = \frac{1}{L} \frac{dE}{dt} \quad (2)$$

If we let:

$$\left\{ \begin{array}{ll} c = \frac{\mu}{2m} & c = \frac{R}{2L} \\ \omega_0 = \sqrt{k/m} & \omega_0 = \sqrt{1/LC} \\ f(t) = \frac{1}{m} F(t) & f(t) = \frac{1}{L} \frac{dE}{dt} \\ x = y & x = I \end{array} \right.$$

$$x'' + 2cx' + \omega_0^2 x = f(t)$$

Where  $c \geq 0$  and  $\omega_0 > 0$  are constants.

This equation called **harmonic motion**.

$c$  **damping** constant

$f$  **forcing term**

## Simple Harmonic Motion

In the special case when there is no damping ( $c = 0$ ) the motion is called *simple harmonic motion*.

$$y'' + \omega_0^2 y = 0$$

The characteristic equation is:

$$\lambda^2 + \omega_0^2 = 0$$

The roots are  $\lambda^2 = -\omega_0^2 \rightarrow \lambda = \pm i\omega_0$

$$x(t) = a \cos \omega_0 t + b \sin \omega_0 t$$

$$\text{If we define } T = \frac{2\pi}{\omega_0} \Rightarrow T\omega_0 = 2\pi$$

Then the periodic of the trigonometry functions implies that  $x(t+T) = x(t)$  for all  $t$ .

Thus, the solution  $x$  is periodic with period  $T$ .

$\omega_0$  is called the *natural frequency*.

## Amplitude and Phase Angle

$$y(t) = a \cos \omega_0 t + b \sin \omega_0 t$$

Consider the point  $(a, b)$ , we can rewrite this in polar coordinates with a length of  $A$ .

$$a = A \cos \phi \quad b = A \sin \phi$$

$$\begin{aligned} y(t) &= a \cos \omega_0 t + b \sin \omega_0 t \\ &= A \cos \phi \cos \omega_0 t + A \sin \phi \sin \omega_0 t \\ &= A \cos(\omega_0 t - \phi) \end{aligned}$$

Where  $A$  **amplitude** of the oscillation  $A = \sqrt{a^2 + b^2}$

$\phi$  **Phase** of the oscillation  $\tan \phi = \frac{b}{a} \quad \left[ -\frac{\pi}{2}, \frac{\pi}{2} \right]$

$$\textbf{Period: } T = \frac{2\pi}{\omega_0}$$

$$\textbf{Frequency: } \nu = \frac{1}{T}$$

$$\textbf{Time lag} \text{ of the motion is: } \delta = \frac{\phi}{\omega_0}$$

### Example

A mass of 4 kg is attached to a spring with a spring constant of  $k = 169 \text{ kg} / \text{s}^2$ . It is then stretched 10 cm from the spring mass equilibrium and set to oscillating with an initial velocity is 130 cm/s. Assuming it oscillates without damping, find the frequency, amplitude, and phase of the vibration.

### Solution

$$my'' + \mu y' + ky = F(t)$$

$$4y'' + 169y = 0 \quad \text{Divide by 4}$$

$$y'' + 42.25y = 0$$

$$\text{The natural frequency: } \omega_0 = \sqrt{42.25} = 6.5$$

$$\begin{aligned} y(t) &= C_1 \cos \omega_0 t + C_2 \sin \omega_0 t \\ &= C_1 \cos 6.5t + C_2 \sin 6.5t \end{aligned}$$

$$\text{Stretched 10 cm} \rightarrow y(0) = 10 \text{ cm} = .1 \text{ m}$$

$$y(0) = C_1 \cos 6.5(0) + C_2 \sin 6.5(0) \Rightarrow \underline{0.1 = C_1}$$

$$\text{Initial velocity is 130 cm/s} \rightarrow y'(0) = 1.3 \text{ m/s}$$

$$y'(t) = -6.5C_1 \sin 6.5t + 6.5C_2 \cos 6.5t$$

$$y'(0) = -6.5C_1 \sin 6.5(0) + 6.5C_2 \cos 6.5(0)$$

$$1.3 = 6.5C_2 \Rightarrow \underline{C_2 = 0.2}$$

$$y(t) = 0.1 \cos 6.5t + 0.2 \sin 6.5t$$

$$A = \sqrt{.1^2 + .2^2} \approx 0.2236 \text{ m} \quad \& \quad \phi = \tan^{-1} \frac{b}{a} = \tan^{-1} \frac{.2}{.1} \approx 1.1071$$

$$\underline{y(t) = 0.2236 \cos(6.5t - 1.1071)}$$

## Damped Harmonic Motion

In this case,  $c > 0$ .

$$x'' + 2cx' + \omega_0^2 x = 0$$

The characteristic equation is:  $\lambda^2 + 2c\lambda + \omega_0^2 = 0$

The roots are  $\lambda = -c \pm \sqrt{c^2 - \omega_0^2}$

There are 3 cases to consider damping and depend on the sign of the discriminant  $c^2 - \omega_0^2$

1.  $c^2 - \omega_0^2 < 0 \Rightarrow c < \omega_0$ . This is the **underdamped** case. The roots are distinct complex numbers.

The general solution is

$$x(t) = e^{-ct} (C_1 \cos \omega t + C_2 \sin \omega t) \quad \text{Where } \omega = \sqrt{\omega_0^2 - c^2}$$

2.  $c^2 - \omega_0^2 > 0 \Rightarrow c > \omega_0$ . This is the **overdamped** case. The roots are distinct and real numbers.

The general solution is


$$x(t) = C_1 e^{\lambda_1 t} + C_2 e^{\lambda_2 t}$$

$$\text{Where } \sqrt{\omega_0^2 - c^2} < \sqrt{c^2} < c \quad \lambda_1 < \lambda_2 < 0$$

3.  $c^2 - \omega_0^2 = 0 \Rightarrow c = \omega_0$ . This is the **damped** case. The root is a double root.

The general solution is

$$x(t) = C_1 e^{-ct} + C_2 t e^{-ct} \quad \text{Where } \lambda = -c$$

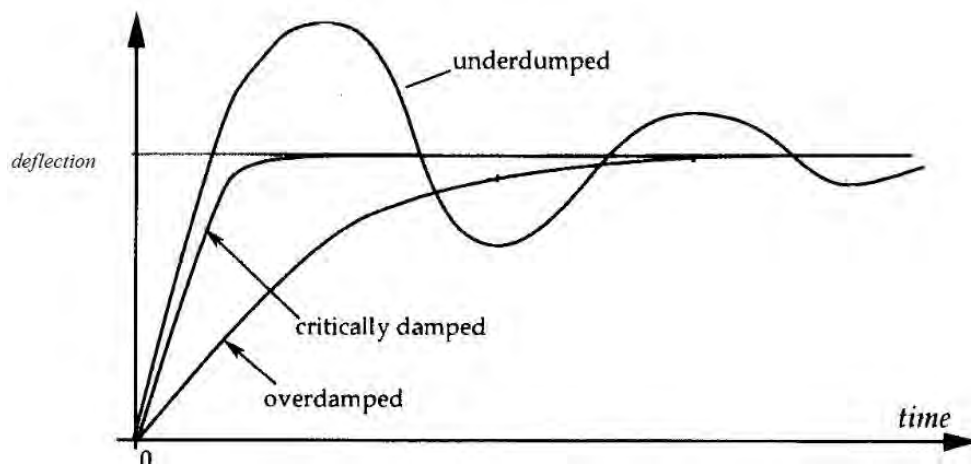

### Example

A mass of 4 kg is attached to a spring with a spring constant of  $k = 169 \text{ kg} / \text{s}^2$  and damping constant  $\mu = 12.8 \text{ kg} / \text{s}$ . With initial values of  $y(0) = 0.1 \text{ m}$  and  $y'(0) = 1.3 \text{ m} / \text{s}$ . Find the frequency, amplitude, and phase of the vibration.

### Solution

$$my'' + \mu y' + ky = F(t)$$

$$4y'' + 12.8y' + 169y = 0$$

$$y'' + 3.2y' + 42.25y = 0$$

$$\lambda^2 + 3.2\lambda + 42.25 = 0$$

$$\lambda = -1.6 \pm 6.3i$$

The general solution:

$$y(t) = e^{-1.6t} (C_1 \cos 6.3t + C_2 \sin 6.3t)$$

$$y(0) = e^{-1.6(0)} (C_1 \cos 6.3(0) + C_2 \sin 6.3(0))$$

$$0.1 = C_1$$

$$y'(t) = -1.6e^{-1.6t} (C_1 \cos 6.3t + C_2 \sin 6.3t) + e^{-1.6t} (-6.3C_1 \sin 6.3t + 6.3C_2 \cos 6.3t)$$

$$y'(0) = -1.6e^{-1.6(0)} (C_1 \cos 6.3(0) + C_2 \sin 6.3(0)) + e^{-1.6(0)} (-6.3C_1 \sin 6.3(0) + 6.3C_2 \cos 6.3(0))$$

$$1.3 = -1.6(0.1 + 0) + (1)(-0 + 6.3C_2)$$

$$1.3 = -0.16 + 6.3C_2$$

$$6.3C_2 = 1.46$$

$$C_2 \approx 0.2317$$

$$y(t) = e^{-1.6t} (0.1 \cos 6.3t + 0.2317 \sin 6.3t)$$

**OR**


$$A = \sqrt{.1^2 + .2317^2} \approx 0.2524 \text{ m}$$

$$\phi = \tan^{-1} \frac{b}{a}$$

$$= \tan^{-1} \frac{.2317}{.1}$$

$$\approx 1.1634$$

$$y(t) = 0.2524 \cos(6.3t - 1.1634)$$

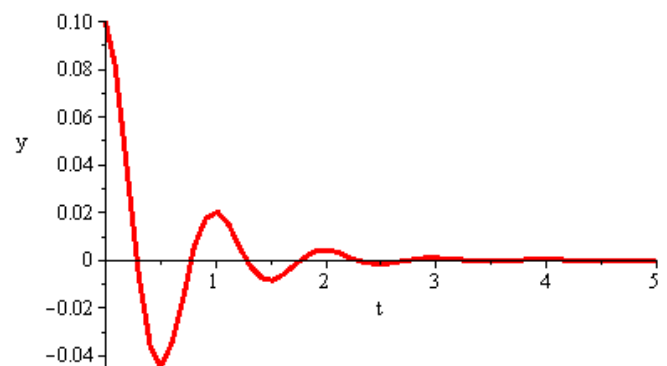

### Example

A mass of 4 kg is attached to a spring with a spring constant of  $k = 169 \text{ kg} / \text{s}^2$  and damping constant  $\mu = 77.6 \text{ kg} / \text{s}$ . With initial values of  $y(0) = 0.1 \text{ m}$  and  $y'(0) = 1.3 \text{ m} / \text{s}$ . Find the general solution.

### Solution

$$my'' + \mu y' + ky = F(t)$$

$$4y'' + 77.6y' + 169y = 0$$

$$y'' + 19.4y' + 42.25y = 0$$

$$\lambda^2 + 19.4\lambda + 42.25 = 0$$

$$\lambda_1 = -16.9, \lambda_2 = -2.5$$

The general solution:

$$y(t) = C_1 e^{-16.9t} + C_2 e^{-2.5t}$$

$$0.1 = C_1 e^{-16.9(0)} + C_2 e^{-2.5(0)}$$

$$0.1 = C_1 + C_2$$


$$y' = -16.9C_1 e^{-16.9t} - 2.5C_2 e^{-2.5t}$$

$$1.3 = -16.9C_1 e^{-16.9(0)} - 2.5C_2 e^{-2.5(0)}$$

$$1.3 = -16.9C_1 - 2.5C_2$$

$$\left. \begin{array}{l} 0.1 = C_1 + C_2 \\ 1.3 = -16.9C_1 - 2.5C_2 \end{array} \right\} \rightarrow C_1 = -\frac{31}{288}, C_2 = \frac{299}{1440}$$

$$y(t) = -\frac{31}{288} e^{-16.9t} + \frac{299}{1440} e^{-2.5t}$$

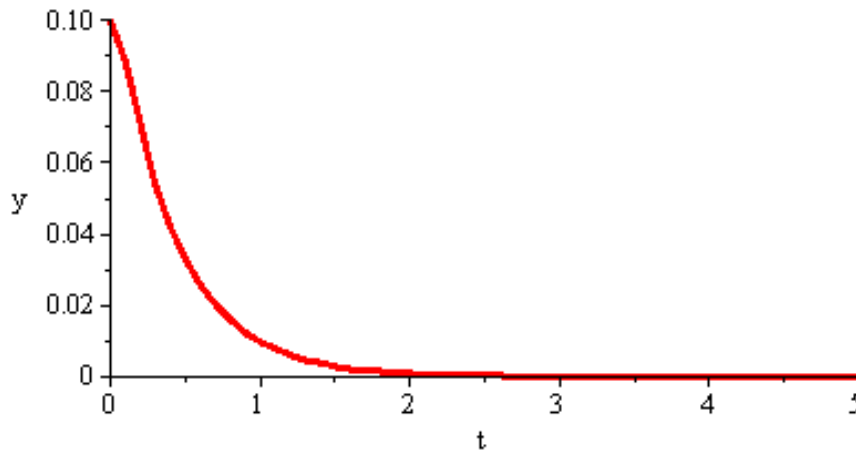

### Example

A mass of 4 kg is attached to a spring with a spring constant of  $k = 169 \text{ kg} / \text{s}^2$ ; with initial values of  $y(0) = 0.1 \text{ m}$  and  $y'(0) = 1.3 \text{ m} / \text{s}$ . Find the damping constant  $\mu$  for which there is critical damping

### Solution

Critical damping occurs when  $c = \omega_0$

$$\text{Since } c = \frac{\mu}{2m} = \omega_0$$

$$\mu = 2m\omega_0$$

$$= 2m\sqrt{\frac{k}{m}}$$

$$= 2(4)\sqrt{\frac{169}{4}}$$

$$= 52 \text{ kg} / \text{s}$$

$$4y'' + 52y' + 169y = 0$$

$$\lambda^2 + 13\lambda + 42.25 = 0$$

$$y(t) = C_1 e^{-6.5t} + C_2 t e^{-6.5t}$$

$$0.1 = C_1$$


$$y' = -6.5C_1 e^{-6.5t} + C_2 e^{-6.5t} - 6.5C_2 t e^{-6.5t}$$

$$1.3 = -6.5C_1 + C_2$$

$$1.3 = -6.5(0.1) + C_2$$

$$C_2 = 1.95$$

$$y(t) = 0.1e^{-6.5t} + 1.95te^{-6.5t}$$

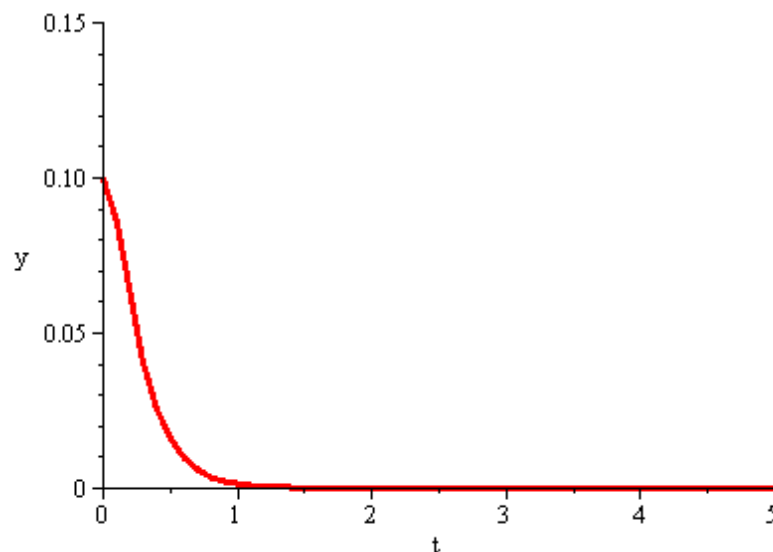



Important facts that the differential equations for electrical and mechanical (Translation and Rotational) are identical in some forms.

**TABLE A:** Relationships between the variables of the analog system components.




<i>Electrical</i>	<i>Mechanical Translation</i>	<i>Mechanical Rotational</i>
$i = C \frac{dv}{dt}$ $= Gv$ $= N\phi$ $= r^2(1 - r^2)$ $= \frac{1}{L} \int v dt$	$f = M \frac{dv}{dt}$ $= Dv$ $= kx$ $= k \int v dt$	$T = J$ $= D\omega$ $= k\theta$ $= k \int \omega dt$

Engineers sometimes utilize the similarity by determining the properties of a proposed mechanical system with a simple electrical analog.

**TABLE B:** Analogous between electrical and mechanical systems.


<i>Electrical</i>	<i>Mechanical Translation</i>	<i>Mechanical Rotational</i>
Current, <i>i</i>	Force, <i>f</i> N, lb	Torque, <i>T</i> N-m, lb-ft
Voltage, <i>V</i>	Velocity, <i>v</i>	Angular velocity, <i>ω</i>
Flux linkages	Displacement	Angular displacement, <i>Nφ, xh</i> or <i>θ rad</i>
Capacitance, <i>C</i>	Mass, <i>M</i> kg, slug	Moment of inertia, <i>J</i> kg-m <sup>2</sup> , lb-ft/sec <sup>2</sup> .
Conductance <i>G</i> = 1/ <i>R</i>	Damping coefficient (of dash pot) <i>D</i> or <i>B</i> N/m/sec, lb/ft/sec	Rotational damping Coefficient friction: <i>D</i> or <i>B</i>
Inductance, <i>L</i>	Compliance $\tau = \frac{1}{k}$ of spring	Torsional compliance $\tau = \frac{1}{k}$ of spring <i>k</i> → N · m / rad

### Summary

	<i>Abv.</i>		<i>Unit</i>
Capacitor	<i>C</i>		Farad ( <b>F</b> )
Current	<i>I</i>		Ampere ( <b>A</b> )
Electric Charge	<i>q</i>		Coulomb ( <b>C</b> )
Electromotive Force	<i>emf</i>		<b>Emf</b>
Inductor	<i>L</i>		Henry ( <b>H</b> )
Resistor	<i>R</i>		Ohm ( <b>Ω</b> )
Time	<i>t</i>		Second ( <b>s</b> )
Voltage	<i>V</i>		Volt ( <b>V</b> )

## Pendulum

A simple Pendulum consists of a mass  $m$  swinging back and forth on the end of a string of length  $L$ .

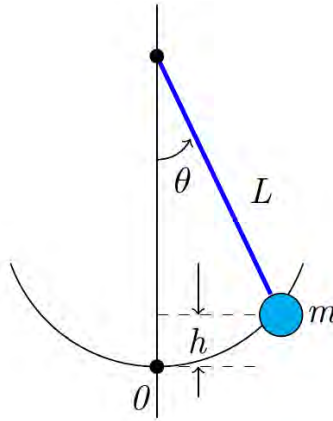

We specify the position of the mass at time  $t$  by giving the counterclockwise angle  $\theta = \theta(t)$  that the string or rod makes with the vertical at time  $t$ . To analyze the motion of the mass  $m$ , we apply the law of the conservation of mechanical energy, according to which the sum of the kinetic energy and the potential energy of  $m$  remains constant.

The distance along the circular arc from 0 to  $m$  is  $s = L\theta$ , so the velocity of the mass is

$$v = \frac{ds}{dt} = L \frac{d\theta}{dt}$$

Therefore, its kinetic energy is

$$T = \frac{1}{2}mv^2 = \frac{1}{2}m\left(\frac{ds}{dt}\right)^2 = \frac{1}{2}mL^2\left(\frac{d\theta}{dt}\right)^2$$

Then its potential energy  $V$  is the product of its weight  $mg$  and its vertical height  $h = L(1 - \cos\theta)$  above O, so

$$V = mgL(1 - \cos\theta)$$

The sum of  $T$  and  $V$  is constant  $C$ , therefore

$$\frac{1}{2}mL^2\left(\frac{d\theta}{dt}\right)^2 + mgL(1 - \cos\theta) = C$$

$$\frac{d}{dt}\left(\frac{1}{2}mL^2\left(\frac{d\theta}{dt}\right)^2 + mgL(1 - \cos\theta)\right) = 0$$

$$mL^2\left(\frac{d\theta}{dt}\right)\frac{d^2\theta}{dt^2} + mgL\sin\theta\frac{d\theta}{dt} = 0$$

$$mL^2\frac{d^2\theta}{dt^2} + mgL\sin\theta = 0$$

$$\frac{d^2\theta}{dt^2} + \frac{g}{L}\sin\theta = 0$$


## Exercises Section 2.3 – Harmonic Motion

(Exercises 1 - 2)

- i. Plot the function
  - ii. Place the solution in the form  $y = A \cos(\omega_0 t - \phi)$  and compare the graph with the plot in (i)
1.  $y = \cos 2t + \sin 2t$
  2.  $y = \cos 4t + \sqrt{3} \sin 4t$
- 
3. A 1-kg mass, when attached to a large spring, stretches the spring a distance of 4.9 m.
    - a) Calculate the spring constant.
    - b) The system is placed in a viscous medium that supplies a damping constant  $\mu = 3 \text{ kg} / \text{s}$ . The system is allowed to come to rest. Then the mass is displaced 1 m in the downward direction and given a sharp tap, imparting an instantaneous velocity of 1 m/s in the downward direction. Find the position of the mass as a function of time and plot the solution.
  4. The undamped system
$$\frac{2}{5}x'' + kx = 0, \quad x(0) = 2 \quad x'(0) = v_0$$
is observed to have period  $\frac{\pi}{2}$  and amplitude 2. Find  $k$  and  $v_0$
  5. A body with mass  $m = 0.5 \text{ kg}$  is attached to the end of a spring that is stretched 2 m by a force of 100 N. It is set in motion with initial position  $x_0 = 1 \text{ m}$  and initial velocity  $v_0 = -5 \text{ m} / \text{s}$ . (Note that these initial conditions indicate that the body is displaced to the right and is moving to the left at time  $t = 0$ .) Find the position function of the body as well as the amplitude, frequency, period of oscillation, and time lag of its motion.


Given the mass, damping, and spring constants of an undriven spring-mass system  $my'' + \mu y' + ky = 0$

- a) Provide separate plots of the position versus time ( $y$  vs.  $t$ ) and the velocity versus time ( $v$  vs.  $t$ )
  - b) Provide a combined plot of both position and velocity versus time
  - c) Provide a plot of the velocity versus position ( $v$  vs.  $y$ ) in the  $yv$  phase plane.
6.  $m = 1 \text{ kg}, \quad \mu = 0 \text{ kg} / \text{s}, \quad k = 4 \text{ kg} / \text{s}^2, \quad y(0) = -2 \text{ m}, \quad y'(0) = -2 \text{ m} / \text{s}$
  7.  $m = 1 \text{ kg}, \quad \mu = 2 \text{ kg} / \text{s}, \quad k = 1 \text{ kg} / \text{s}^2, \quad y(0) = -3 \text{ m}, \quad y'(0) = -2 \text{ m} / \text{s}$
  8. A  $\frac{1}{4}$ -kg mass is attached to a spring with a stiffness 4 N/m. The damping constant 1 N - sec / m. If the mass is displaced  $x_0 = \frac{1}{2} \text{ m}$  to the left and given an initial velocity of 1 m/s to the left.

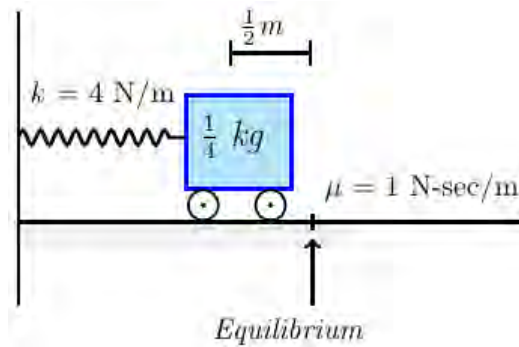


- Find the equation of motion.
- What is the maximum displacement that the mass will attain?

9. A  $2\text{-kg}$  mass is attached to a spring with a stiffness  $k = 50 \text{ N/m}$ . The mass is displaced  $\frac{1}{4} \text{ m}$  to the left of the equilibrium point and given a velocity of  $1 \text{ m/s}$  to the left. Neglecting the damping,

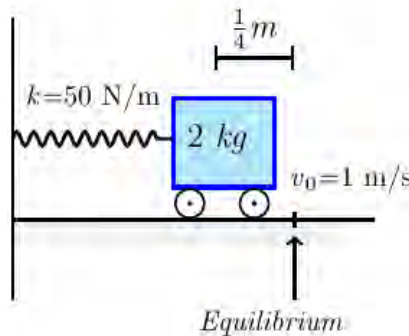

- Find the equation of motion of the mass along with the amplitude, period, and frequency.
- How long after release does the mass pass through the equilibrium position?

10. A  $3\text{-kg}$  mass is attached to a spring with a stiffness  $k = 48 \text{ N/m}$ . The mass is displaced  $\frac{1}{2} \text{ m}$  to the left of the equilibrium point and given a velocity of  $2 \text{ m/s}$  to the left. Neglecting the damping.

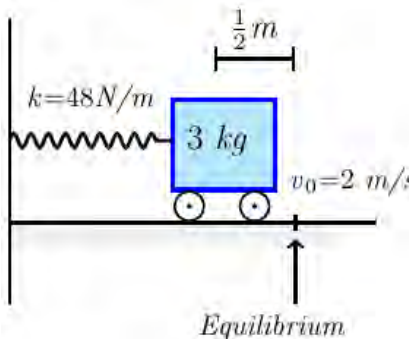

- Find the equation of motion of the mass
- Find the amplitude, period, and frequency.
- How long after release does the mass pass through the equilibrium position?

11. A  $20\text{-kg}$  mass is attached to a spring with a stiffness  $k = 200 \text{ N/m}$ . The damping constant  $\mu = 140 \text{ N-sec/m}$ . If the mass is pulled  $25 \text{ cm}$  to the right of the equilibrium point and given an initial velocity of  $1 \text{ m/s}$ . Neglecting the damping,

- a) Find the equation of motion.  
b) When will it first return to its equilibrium position?
12. A  $\frac{1}{4}$ -kg mass is attached to a spring with a stiffness  $k = 8 \text{ N/m}$ . The damping constant  $\mu = \frac{1}{4} \text{ N} \cdot \text{sec} / \text{m}$ . If the mass is displaced  $x_0 = 1 \text{ m}$  to the left of equilibrium and released, what is the maximum displacement to the right that the mass will attain?
13. A  $\frac{1}{4}$ -kg mass is attached to a spring with a stiffness  $k = 8 \text{ N/m}$ . The damping constant  $\mu = 2 \text{ N} \cdot \text{sec} / \text{m}$ . If the mass is pushed  $50 \text{ cm}$  to the left of equilibrium and given a leftward velocity of  $2 \text{ m/sec}$ , when will the mass attain its maximum displacement to the left?
14. A  $8\text{-lb}$  mass weight stretches a spring  $2 \text{ feet}$ . Assuming that a damping force numerically equal to 2 times the instantaneous velocity acts on the system, determine the equation of motion if the mass released from the equilibrium position with an upward velocity of  $3 \text{ ft/s}$
15. A  $8\text{-lb}$  mass weight is attached to the end of a spring, causing the spring to stretch a spring  $6 \text{ in.}$  beyond its natural length. The block is then pulled down  $3 \text{ in.}$  and released. Determine the motion of the block, assuming there are no damping or external applied force.
16. A  $8\text{-lb}$  mass weight is attached to the end of a spring, causing the spring to stretch a spring  $6 \text{ in.}$  beyond its natural length. The block is then pulled down  $3 \text{ in.}$  and released. Determine the motion of the block, assuming there damping is present and that the damping coefficient is  $\mu = 1 \text{ lb} \cdot \text{sec/ft}$  and external applied force.
17. A  $16\text{-lb}$  mass weight is attached to a  $5\text{-foot}$  spring. At equilibrium, the spring measures  $5.2 \text{ feet}$ . If the mass is initially released from rest at a point  $x_0 = 2 \text{ ft}$  above the equilibrium position, find the displacements  $x(t)$  if it is further known that the surrounding medium offers a resistance numerically equal to the instantaneous velocity.
18. A  $16\text{-lb}$  mass weight is attached to a spring, stretches  $\frac{8}{9} \text{ ft}$  by itself. There is no damping and no external forces acting on the system. The spring is initially displaced  $6 \text{ inches}$  upwards from its equilibrium position and given an initial velocity of  $1 \text{ ft/sec}$  downward. Find the displacement  $y(t)$  at any time  $t$ .
19. A  $16\text{-lb}$  mass weight is attached to a spring, stretches  $\frac{8}{9} \text{ ft}$  by itself. A damper to the mass that will exert of  $12 \text{ lbs.}$  when the velocity is  $2 \text{ ft/sec}$ . The spring is initially displaced  $6 \text{ inches}$  upwards from its equilibrium position and given an initial velocity of  $1 \text{ ft/sec}$  downward. Find the displacement  $y(t)$  at any time  $t$ .

20. A 16-*lb* mass weight is attached to a spring, stretches  $\frac{8}{9}$  *ft* by itself. A damper to the mass that will exert of 5 *lbs*. when the velocity is 2 *ft/sec* . The spring is initially displaced 6 *inches* upwards from its equilibrium position and given an initial velocity of 1 *ft/sec* downward. Find the displacement  $y(t)$  at any time  $t$ .
21. A mass weighing 4-*lb* is attached to a spring whose spring constant is 16 *lb/ft*.
- Find the equation of motion.
  - What is the period of simple harmonic motion?
22. A 20-*kg* mass is attached to a spring. If the frequency of simple harmonic motion is  $\frac{2}{\pi}$  *cycles/s* .
- What is the spring constant  $k$ ?
  - Find the equation of motion.
  - What is the frequency of simple harmonic motion if the original mass is replaced with an 80-*kg* mass.?
23. A 24-*lb* mass weight is attached to the end of a spring, stretches it 4 *inches*. Initially, the mass is released from rest from a point 3 *inches* above the equilibrium position.
- Find the equation of the motion.
  - If the mass is initially released from the equilibrium position with a downward velocity of 2 *ft/s*
24. The motion of a mass-spring system with damping is given by:
- $$y'' + 4y' + ky = 0 ; \quad y(0) = 1, \quad y'(0) = 0$$
- Find the equation of motion and sketch its graph for  $k = 2, 4, 6, \text{ and } 8$  .
25. A 10-*lb* mass weight is attached to the end of a spring, stretches it 3 *inches*. This mass is removed and replaced with a mass of 1.6 *slugs*, which initially released from a point 4 *inches* above the equilibrium position with a downward velocity of  $\frac{5}{4}$  *ft/s*
- Find the equation of the motion.
  - Find the amplitude, phase angle, period and the frequency.
  - Express the motion equation in amplitude and phase angle form.
  - Determine the times the mass attains a displacement below the equilibrium position numerically equal to  $\frac{1}{2}$  the amplitude of motion.
26. A 64-*lb* mass weight is attached to the end of a spring, stretches it 0.32 *foot*. This mass is initially released from a point 8 *inches* above the equilibrium position with a downward velocity of 5 *ft/s* .
- Find the equation of the motion.
  - Find the amplitude, phase angle, period and the frequency.
  - Write the motion equation with phase angle form.
  - How many complete cycles will the mass have completed at the end of  $3\pi$  *sec* .
  - At what time does the mass pass through the equilibrium position heading downward for the second time?

- f) At what times does the mass attain its extreme displacements on either side of the equilibrium position?
- g) What is the position of the mass at  $t = 3 \text{ sec}$ ?
- h) What is the instantaneous velocity at  $t = 3 \text{ sec}$ ?
- i) What is the acceleration at  $t = 3 \text{ sec}$ ?
- j) What is the instantaneous velocity at the times when the mass passes through the equilibrium position?
- k) At what times is the mass 5 inches below the equilibrium position?
- l) At what times is the mass 5 inches below the equilibrium position heading in the upward direction?

If it is underdamped, write the position function in the form  $x(t) = C_1 e^{-pt} \cos(\omega_1 t - \alpha_1)$ .


Also, find the undamped position function  $u(t) = C_0 \cos(\omega_0 t - \alpha_0)$  that would result if the mass on the spring were set in motion with the same initial position and velocity, but with the dashpot disconnected (so  $c = 0$ ). Then, construct a figure that illustrates the effect of damping by comparing the graphs of  $x(t)$  and  $u(t)$

- |   |   |
|---|---|
| 27. $m = \frac{1}{2}, c = 3, k = 4; x_0 = 2, v_0 = 0$ | 31. $m = 2, c = 16, k = 40; x_0 = 5, v_0 = 4$   |
| 28. $m = 1, c = 8, k = 16; x_0 = 5, v_0 = -10$        | 32. $m = 3, c = 30, k = 63; x_0 = 2, v_0 = 2$   |
| 29. $m = 1, c = 10, k = 125; x_0 = 6, v_0 = 50$       | 33. $m = 4, c = 20, k = 169; x_0 = 4, v_0 = 16$ |
| 30. $m = 2, c = 12, k = 50; x_0 = 0, v_0 = -8$        |   |

34. Suppose that the mass in a mass–spring–dashpot system with  $m = 10$ ,  $c = 9$ , and  $k = 2$  is set in motion with  $x(0) = 0$  and  $x'(0) = 5$
- a) Find the position function  $x(t)$  and graph the function
  - b) Find how far the mass moves to the right before starting back toward the origin.
35. Suppose that the mass in a mass–spring–dashpot system with  $m = 25$ ,  $c = 10$ , and  $k = 226$  is set in motion with  $x(0) = 20$  and  $x'(0) = 41$
- a) Find the position function  $x(t)$  and graph the function
  - b) Find the pseudoperiod of the oscillations and the equations of the “envelope curves” that are dashed.
36. A mass of 1 *slug* is suspended from a spring, the spring constant is 9 *lb/ft*. The mass is initially released from a point 1 *foot* above the equilibrium position with an upward velocity of  $\sqrt{3} \text{ ft/s}$ . Find the times at which the mass is heading downward at a velocity of 3 *ft/s*

37. Two parallel springs, with constants  $k_1$  and  $k_2$ , support a single mass, the effective spring constant of the system is given by  $k = \frac{4k_1 k_2}{k_1 + k_2}$ .

A mass weight 20 *pounds* stretches one spring 6 *inches* and another spring 2 *inches*. The springs are attached to a common rigid support and then to a metal plate. The mass is attached to the center of the plate in the double-spring constant arrangement.



- Determine the effective spring constant of this system.
  - Find the equation of motion if the mass is initially released from the equilibrium position with a downward velocity of 2 *ft/s*.
38. A 12-*lb* weight is attached both to a vertically suspended spring that it stretches 6 *in.* and to a dashpot that provides 3 *lb.* of resistance for every foot per second of velocity.
- If the weight is pulled down 1 *foot.* below its static equilibrium position and then released from rest at time  $t = 0$ , find its position function  $x(t)$ .
  - Find the frequency, time-varying amplitude, and phase angle of the motion.
39. A  $\frac{1}{8}$ -*kg* mass is attached to a spring with a spring constant  $k = 16$  *N/m*. The mass is displaced  $\frac{1}{2}$  *m* to the right of the equilibrium point and given an outward velocity (to the right) of  $\sqrt{2}$  *m/sec*. Neglecting any damping or external forces that may be present,
- Determine the equation of motion of the mass
  - Determine the equation of motion amplitude, period, and natural frequency.
  - How long after release does the mass pass through the equilibrium position?
40. A 3-*kg* mass is attached to a spring with a spring constant 75 *N/m*. The mass is displaced  $\frac{1}{4}$  *m* to the left and given a velocity of 1 *m/sec* to the right. The damping force is negligible.
- Determine the equation of motion of the mass
  - Determine the equation of motion amplitude, period, and natural frequency.
  - How long after release does the mass pass through the equilibrium position?
41. A 3-*kg* mass is attached to a spring with a spring constant 300 *N/m*. The mass is pulled down 10 *cm* and released with downward velocity of 1 *m/sec*. The damping force is negligible.
- Determine the equation of motion of the mass
  - Solve the equation to find the time when the maximum downward displacement of the mass from its equilibrium position is first achieved.



- c) What is the maximum downward displacement?
42. A 10- $kg$  mass is attached to the end of a spring hanging vertically, stretches the spring 0.03  $m$ . The mass is pulled down another 7  $cm$  and released (with no initial velocity).
- Determine the spring constant  $k$ .
  - Determine the equation of motion of the mass
43. A 10- $kg$  mass is attached to a spring with spring constant  $k = 300 \text{ N/m}$ . At time  $t = 0$ , the mass is pulled down another 10  $cm$  and released with a downward velocity of 100  $cm/sec$ .
- Determine the equation of motion.
  - What is the maximum downward displacement?
44. A 10- $kg$  mass is attached to the end of a spring hanging vertically at rest. The mass is pulled down another 7  $cm$  and released (with no initial velocity).
- Determine the spring constant  $k$ .
  - Determine the equation of motion of the mass
45. A 10- $kg$  mass is attached to the end of a spring hanging vertically, stretches the spring 0.7  $m$ . The mass is started in motion from the equilibrium position with an initial velocity 1  $m/sec$  in the upward direction. IF the force due to air resistance is  $-90y' \text{ N}$
- Determine the spring constant  $k$ .
  - Determine the equation of motion of the mass
46. A  $\frac{1}{4}$ - $slug$  mass is attached to the end of a spring hanging vertically, stretches the spring 1.28  $ft$ . The mass is started in motion from the equilibrium position with an initial velocity 4  $ft/sec$  in the downward direction. If the force due to air resistance is  $-2y' \text{ lb}$
- Determine the spring constant  $k$ .
  - Determine the equation of motion of the mass
47. A 20- $kg$  mass is attached to the end of a spring hanging vertically at rest. When given an initial downward velocity of 2  $m/s$  from its equilibrium position the mass was observed to attain a maximum displacement of 0.2  $m$  from its equilibrium position.
- Determine the spring constant  $k$ .
  - Determine the equation of motion of the mass
48. A steel ball weighing 128- $lb$  is attached to the end of a spring, stretches 2  $ft$  from its natural length. The ball is started in motion with no initial velocity by displacing it 6  $in$  above the equilibrium position. Assuming no air resistance.
- Determine the spring constant  $k$ .
  - Find the equation of the ball position at time  $t$ .
  - Find the position of the ball at  $t = \frac{\pi}{12} \text{ sec}$

49. A 9-*lb* mass is attached to the end of a spring hanging vertically with spring constant  $k = 32$  *lb/ft*, is perturbed from its equilibrium position with a certain upward initial velocity. The amplitude of the resulting vibrations is observed to be 4 *in*.
- Determine the equation of motion.
  - What is the initial velocity?
  - Determine the period and frequency of the vibrations?
50. A 2-*kg* mass is suspended from a spring with a spring constant of 10 *N/m*. The mass is started in motion from the equilibrium position with an initial velocity 1.5 *m/sec*. Assuming no air resistance
- Determine the equation of motion of the mass.
  - Determine the circular frequency, natural frequency, and period.
51. A  $\frac{1}{4}$ -*slug* mass is attached to a spring having a spring constant of 1 *lb/ft*. The mass is started in motion initially displacing it 2 *ft* in the downward direction with an initial velocity 2 *ft/sec* in the upward direction. If the force due to air resistance is  $-1x'$  *lb*. Find the subsequent motion of the mass
52. A spring with a mass of 2-*kg* has natural length 0.5 *m*. A force of 25.6 *N* is required to maintain it stretched to a length of 0.7 *m*. If the spring is stretched to a length of 0.7 *m* and then released with initial velocity zero. Find the position of the mass at any time  $t$ .
53. A spring with a mass of 2-*kg* has natural length 0.5 *m*. A force of 25.6 *N* is required to maintain it stretched to a length of 0.7 *m*. The spring is immersed in a fluid with damping constant  $c = 40$ . If the spring is started from the equilibrium position and is given a push to start it with initial velocity 0.6 *m/s*. Find the position of the mass at any time  $t$ .
54. A spring with a mass of 3-*kg* is held stretched 0.6 *m* beyond its natural length by a force of 20 *N*. If the spring begins at its equilibrium and with initial velocity 1.2 *m/s*. Find the position of the mass at any time  $t$ .
55. A spring with a mass of 2-*kg* is held stretched 0.5 *m*, has damping constant 14, and a force of 6 *N*. If the spring is stretched 1 *m* beyond at its equilibrium and with no initial velocity.
- Find the position of the mass at any time  $t$ .
  - Find the mass that would produce critical damping.
56. A spring has a mass of 1-*kg* and its spring constant  $k = 100$ . The spring is released at a point 0.1 *m* above its equilibrium position. Graph the position function for the following values of damping constant  $c$ : 10, 15, 20, 25, 30. What type of damping occurs each case
57. A 4-*kg* mass is attached to a spring and set in motion. A record of the displacements was made and found to be described by  $y(t) = 25\cos\left(2t - \frac{\pi}{6}\right)$ , with displacement measured in centimeters and time in seconds.

- a) Determine the displacement  $y_0$ .
- b) Determine the initial velocity  $y'_0$ ?
- c) Determine the spring constant  $k$ .
- d) Determine the period and frequency of the vibrations?
58. A 10- $kg$  mass is attached to a spring with a spring constant  $k = 100 \text{ N/m}$ ; the dashpot has damping constant  $7 \text{ kg/sec}$ . At time  $t = 0$ , the system is set into motion by pulling the mass down  $0.5 \text{ m}$  from its equilibrium rest position while simultaneously giving it an initial downward velocity of  $1 \text{ m/s}$
- a) Solve the equation of motion.
- b) What is the  $\lim_{t \rightarrow \infty} y(t)$
- c) Plot the solution.
- d) How long it takes for the magnitude of the vibrations to be reduced to  $0.1 \text{ m}$ .  
(Estimate the smallest time,  $\tau$ , for which  $|y(t)| \leq 0.1 \text{ m}$ ,  $\tau \leq t < \infty$ )
59. A spring and dashpot system is to be designed for a 32- $lb$  weight so that the overall system is critically damped
- a) How must the damping constant  $c$  and the spring constant  $k$  be related?
- b) Assume the system is to be designed so that the mass, when given initial velocity of  $4 \text{ ft/sec}$  from its rest position, will have a maximum displacement of  $6 \text{ in}$ . What values of damping constant  $c$  and spring constant  $k$  are required?
- c) It is observed that the time interval between successive zero crossing is 20% larger for the damped vibration displacement than for the undamped vibration displacement. What is the damping constant  $c$ ? (Spring constant  $k$  remains same from part (b)).
60. Find the charge  $q(t)$  on the capacitor in an  $LRC$ -series circuit when  $L = 0.25 \text{ H}$ ,  $R = 10 \text{ } \Omega$ ,  $C = 0.001 \text{ F}$ ,  $E(t) = 0$ ,  $q(0) = q_0 \text{ C}$ , and  $i(0) = 0$ .
61. Find the charge  $q(t)$  on the capacitor in an  $LRC$ -series circuit at  $t = 0.01 \text{ sec}$  when  $L = 0.05 \text{ h}$ ,  $R = 2 \text{ } \Omega$ ,  $C = 0.01 \text{ f}$ ,  $E(t) = 0$ ,  $q(0) = 5 \text{ C}$ , and  $i(0) = 0 \text{ A}$ . Determine the first time at which the charge on the capacitor is equal to zero.
62. Find the charge  $q(t)$  on the capacitor in an  $LRC$ -series circuit when  $L = 0.25 \text{ h}$ ,  $R = 20 \text{ } \Omega$ ,  $C = \frac{1}{300} \text{ f}$ ,  $E(t) = 0$ ,  $q(0) = 4 \text{ C}$ , and  $i(0) = 0 \text{ A}$ . Is the charge on the capacitor ever equal to zero?
63. Find the charge  $q(t)$  on the capacitor in an  $LRC$ -series circuit when  $L = \frac{5}{3} \text{ h}$ ,  $R = 10 \text{ } \Omega$ ,  $C = \frac{1}{30} \text{ f}$ ,  $E(t) = 0$ ,  $q(0) = 0 \text{ C}$ , and  $i(0) = 0 \text{ A}$ .

## Section 2.4 – Nonhomogeneous Equations; Method of undetermined Coefficients

The second order **nonhomogeneous** equation is given by:  $y'' + p(x)y' + q(x)y = f(x)$  (N)

The corresponding **homogeneous** equation:  $y'' + p(x)y' + q(x)y = 0$  (H)

### Theorem

Suppose that  $y_p$  is a particular solution to the nonhomogeneous (or inhomogeneous) equation

$y'' + py' + qy = f$  and that  $y_1$  and  $y_2$  form a fundamental set of solutions to the homogeneous equation  $y'' + py' + qy = 0$ . Then the general solution to the inhomogeneous equation is given by

$$y = y_p + C_1 y_1 + C_2 y_2$$

$C_1$  and  $C_2$  are arbitrary constants.

### Theorem

Let  $y = y_1(x)$  and  $y = y_2(x)$  be **linearly independent** ( $W(x) \neq 0$ ) solutions of the reduced equation (H) and let  $y_p(x)$  be a **particular solution** of (N). Then the general solution of (N) consists of the general solution of the reduced equation (H) **plus** a particular solution of (N):

$$y(x) = \underbrace{y_p(x)}_{\text{a Particular Solution}} + \underbrace{C_1 y_1(x) + C_2 y_2(x)}_{\text{General Solution}}$$

### Forcing Term

If the forcing term  $f$  has a form that is replicated under differentiation, then look for a solution with the same general form as the forcing term.

### Example

Find a particular solution to the equation  $y'' - y' - 2y = 2e^{-2t}$

### Solution

The forcing term  $f(t) = 2e^{-2t} \Rightarrow$  the particular solution  $y = ae^{-2t}$

$$y' = -2ae^{-2t}$$

$$y'' = 4ae^{-2t}$$

$$4ae^{-2t} + 2ae^{-2t} - 2ae^{-2t} = 2e^{-2t}$$

$$4ae^{-2t} = 2e^{-2t}$$

$$4a = 2$$

$$a = \frac{1}{2}$$

$$\underline{y(t) = \frac{1}{2}e^{-2t}}$$

## Trigonometric Forcing Term

$$f(t) = A \cos \omega t + B \sin \omega t$$

The general solution:  $y(t) = a \cos \omega t + b \sin \omega t$

### Example

Find a particular solution to the equation  $y'' + 2y' - 3y = 5 \sin 3t$

### Solution

The particular solution:  $y(t) = a \cos 3t + b \sin 3t$

$$y' = -3a \sin 3t + 3b \cos 3t$$

$$y'' = -9a \cos 3t - 9b \sin 3t$$

$$\begin{aligned} y'' + 2y' - 3y &= -9a \cos 3t - 9b \sin 3t + 2(-3a \sin 3t + 3b \cos 3t) - 3(a \cos 3t + b \sin 3t) \\ &= -9a \cos 3t - 9b \sin 3t - 6a \sin 3t + 6b \cos 3t - 3a \cos 3t - 3b \sin 3t \\ &= (-12a + 6b) \cos 3t - (6a + 12b) \sin 3t \\ &= 5 \sin 3t \end{aligned}$$

$$\begin{cases} -12a + 6b = 0 \\ -(6a + 12b) = 5 \end{cases} \Rightarrow a = -\frac{1}{6}, b = -\frac{1}{3}$$

$$\underline{y(t) = -\frac{1}{6} \cos 3t - \frac{1}{3} \sin 3t}$$

## The Complex Method

### Example

Find a particular solution to the equation  $y'' + 2y' - 3y = 5\sin 3t$

### Solution

$$5e^{3it} = 5\cos 3t + 5i\sin 3t = 5cis3t$$

$$z'' + 2z' - 3z = 5e^{3it}$$

The particular solution:  $z(t) = x(t) + i y(t)$

$$\begin{aligned} z'' + 2z' - 3z &= (x + iy)'' + 2(x + iy)' - 3(x + iy) \\ &= (x'' + 2x' - 3x) + i(y'' + 2y' - 3y) \\ &= 5\cos 3t + i 5\sin 3t \end{aligned}$$

$$x'' + 2x' - 3x = 5\cos 3t$$

$$z(t) = ae^{3it}$$

$$z' = 3iae^{3it}$$

$$z'' = 9i^2ae^{3it} = -9ae^{3it}$$

$$\begin{aligned} z'' + 2z' - 3z &= -9ae^{3it} + 2(3i)ae^{3it} - 3ae^{3it} \\ &= -12ae^{3it} + 6iae^{3it} \\ &= -6(2 - i)ae^{3it} \\ &= 5e^{3it} \end{aligned}$$

$$-6(2 - i)a = 5$$

$$\begin{aligned} a &= -\frac{5}{6(2 - i)} \frac{2 + i}{2 + i} \\ &= -\frac{5(2 + i)}{6(4 + 1)} \\ &= -\frac{2 + i}{6} \end{aligned}$$

$$\begin{aligned} z(t) &= -\frac{1}{6}(2 + i)e^{3it} \\ &= -\frac{1}{6}(2 + i)(\cos 3t + i\sin 3t) \\ &= -\frac{1}{6}[(2\cos 3t - \sin 3t) + i(\cos 3t + 2\sin 3t)] \end{aligned}$$

$$\underline{y(t) = -\frac{1}{6}(\cos 3t + 2\sin 3t)}$$

## Polynomial Forcing Term

$$f(t) = a_0 t^n + a_1 t^{n-1} + \dots + a_{n-1} t + a_n$$

### *Example*

Find a particular solution to the equation  $y'' + 2y' - 3y = 3t + 4$

### *Solution*

The right-hand side is a polynomial of degree 1.

The particular solution:  $y(t) = at + b$

$$y' = a$$

$$y'' = 0$$

$$y'' + 2y' - 3y = 0 + 2a - 3(at + b)$$

$$= 2a - 3b - 3at$$

$$= 3t + 4$$

$$\rightarrow \begin{cases} -3a = 3 \\ 2a - 3b = 4 \end{cases} \Rightarrow a = -1; b = -2$$

$$\underline{y(t) = -t - 2}$$

## Exceptional Cases

### Example

Find a particular solution to the equation  $y'' - y' - 2y = 3e^{-t}$

### Solution

The particular solution  $y = ae^{-t}$

$$\begin{aligned}y'' - y' - 2y &= ae^{-t} + ae^{-t} - 2ae^{-t} \\&= 0\end{aligned}$$

The particular solution  $y = ate^{-t}$  or  $y = at^2e^{-t}$

$$y' = ae^{-t} - ate^{-t} = ae^{-t}(1 - t)$$

$$\begin{aligned}y'' &= -ae^{-t} - ae^{-t} + ate^{-t} \\&= ate^{-t} - 2ae^{-t}\end{aligned}$$

$$\begin{aligned}y'' - y' - 2y &= ate^{-t} - 2ae^{-t} - ae^{-t} + ate^{-t} - 2ate^{-t} \\&= -3ae^{-t}\end{aligned}$$

$$-3ae^{-t} = 3e^{-t}$$

$$a = -1$$

The particular solution  $y = -te^{-t}$

## Summary

$f(t)$	$y_p$
Any Constant	$A$
$at + b$	$At + B$
$at^2 + c$	$At^2 + Bt + C$
$at^3 + \dots + b$	$At^3 + Bt^3 + Ct + E$
$\sin at$ or $\cos at$	$A \cos at + B \sin at$
$e^{at}$	$Ae^{at}$
$(at + b)e^{at}$	$(At + B)e^{at}$
$t^2e^{at}$	$(At^2 + Bt + C)e^{at}$
$e^{at} \sin bt$	$e^{at}(A \cos bt + B \sin bt)$
$t^2 \sin bt$	$(At^2 + Bt + C) \cos bt + (Et^2 + Ft + G) \sin bt$
$te^{at} \cos bt$	$(At + B) \cos bt + (Ct + E) \sin bt$



## Exercises      Section 2.4 – Nonhomogeneous Equations; Method of undetermined Coefficients

1. Show that the 3 solutions  $y_1 = x$ ,  $y_2 = x \ln x$ ,  $y_3 = x^2$  of the 3<sup>rd</sup> order equation  $x^3 y''' - x^2 y'' + 2xy' - 2y = 0$  are linearly independent on an open interval  $x > 0$ . Then find a particular solution that satisfies the initial conditions  $y(1) = 3$ ,  $y'(1) = 2$ ,  $y''(1) = 1$

Find the particular solution for the given differential equation

- |                                 |  |
|---------------------------------|--|
| 2. $y'' + 3y' + 2y = 4e^{-3t}$  | 9. $y'' + 6y' + 8y = 2t - 3$                             |
| 3. $y'' + 6y' + 8y = -3e^{-t}$  | 10. $y'' + 3y' + 4y = t^3$                               |
| 4. $y'' + 2y' + 5y = 12e^{-t}$  | 11. $y'' + 2y' + 2y = 2 + \cos 2t$                       |
| 5. $y'' + 3y' - 18y = 18e^{2t}$ | 12. $y'' - y = t - e^{-t}$                               |
| 6. $y'' + 4y = \cos 3t$         | 13. $y'' - 2y' + y = 10e^{-2t} \cos t$                   |
| 7. $y'' + 7y' + 6y = 3 \sin 2t$ | 14. $y''' - 4y'' + 4y' = 5t^2 - 6t + 4t^2 e^t + 3e^{5t}$ |
| 8. $y'' + 5y' + 4y = 2 + 3t$    |  |

Use the **complex method** to find the particular solution for

- |  |                          |
|--|--------------------------|
| 15. $y'' + 4y' + 3y = \cos 2t + 3 \sin 2t$ | 16. $y'' + 4y = \cos 3t$ |
|--|--------------------------|

Find the general solution for the given differential equation

- |                                   |   |
|-----------------------------------|---|
| 17. $y'' + y = 2 \cos x$          | 32. $y'' - y' + \frac{1}{4}y = 3 + e^{x/2}$                 |
| 18. $y'' + y = \cos 3x$           | 33. $y'' + y' + \frac{1}{4}y = e^x (\sin 3x - \cos 3x)$     |
| 19. $y'' + y = 2x \sin x$         | 34. $y'' - y' - 2y = e^{3x}$                                |
| 20. $y'' - y = x^2 e^x + 5$       | 35. $y'' - y' - 6y = 20e^{-2x}$                             |
| 21. $y'' - y' = -3$               | 36. $y'' + y' - 6y = 2x$                                    |
| 22. $y'' - y' = 2 \sin x$         | 37. $y'' - y' - 6y = e^{-x} - 7 \cos x$                     |
| 23. $y'' - y' = \sin x$           | 38. $y'' + y' + 8y = x \cos 3x + (10x^2 + 21x + 9) \sin 3x$ |
| 24. $y'' - y' = -8x + 3$          | 39. $y'' - y' - 12y = e^{4x}$                               |
| 25. $y'' + y = 2x + 3e^x$         | 40. $y'' + 2y' = 2x + 5 - e^{-2x}$                          |
| 26. $y'' - y = x^2 + e^x$         | 41. $y'' - 2y' = 12x - 10$                                  |
| 27. $y'' + y' = 10x^4 + 2$        | 42. $y'' + 2y' + y = \sin x + 3 \cos 2x$                    |
| 28. $y'' - y' = 5e^x - \sin 2x$   | 43. $y'' - 2y' + y = 6e^x$                                  |
| 29. $y'' + y = x \cos x - \cos x$ | 44. $y'' + 2y' + y = x^2$                                   |
| 30. $y'' + y = e^x \sin x$        |   |
| 31. $y'' - y' - 2y = 20 \cos x$   |   |

45.  $y'' + 2y' + y = x^2 e^{-x}$
46.  $y'' - 2y' + y = x^3 + 4x$
47.  $y'' + 2y' + y = 6\sin 2x$
48.  $y'' - 2y' + y = (x^2 - 1)e^{2x} + (3x + 4)e^x$
49.  $y'' + 2y' + 2y = 5e^{6x}$
50.  $y'' + 2y' + 2y = x^3$
51.  $y'' + 2y' + 2y = \cos x + e^{-x}$
52.  $y'' - 2y' + 2y = e^x \sin x$
53.  $y'' - 2y' + 2y = e^{2x}(\cos x - 3\sin x)$
54.  $y'' - 2y' - 3y = 1 - x^2$
55.  $y'' - 2y' - 3y = 4e^x - 9$
56.  $y'' - 2y' - 3y = 2e^{-x} \cos x + x^2 + xe^{3x}$
57.  $y'' - 2y' + 5y = 25x^2 + 12$
58.  $y'' - 2y' + 5y = e^x \cos 2x$
59.  $y'' - 2y' + 5y = e^x \sin x$
60.  $y'' + 2y' - 24y = 16 - (x + 2)e^{4x}$
61.  $y'' + 3y = -48x^2 e^{3x}$
62.  $y'' - 3y' = e^{3x} - 12x$
63.  $y'' + 3y' = 4x - 5$
64.  $y'' - 3y' = 8e^{3x} + 4\sin x$
65.  $y'' + 3y' + 2y = 6$
66.  $y'' + 3y' + 2y = 4x^2$
67.  $y'' - 3y' + 2y = 5e^x$
68.  $y'' - 3y' + 2y = 2x^2 + e^x + 2xe^x + 4e^{3x}$
69.  $y'' - 3y' + 2y = 14\sin 2x - 18\cos 2x$
70.  $y'' + 3y' + 2y = e^{-x} + e^{-2x} - x$
71.  $y''' - 3y'' + 3y' - y = 3e^x$
72.  $y'' - 3y' - 10y = -3$
73.  $y'' - 3y' - 10y = 2x - 3$
74.  $y'' + 3y' - 10y = 6e^{4x}$
75.  $y'' + 3y' - 10y = x(e^x + 1)$
76.  $y'' - 4y = 4x^2$
77.  $y'' + 4y = 3x^3$
78.  $y'' + 4y = 3\sin x$
79.  $y'' + 4y = 3\sin 2x$
80.  $y'' + 4y = 4\cos x + 3\sin x - 8$
81.  $y'' - 4y = (x^2 - 3)\sin 2x$
82.  $y'' + 4y' + 4y = 2x + 6$
83.  $y'' + 4y' + 5y = 5x + e^{-x}$
84.  $y'' + 4y' + 5y = 2e^{-2x} + \cos x$
85.  $y'' + 5y' = 15x^2$
86.  $y'' - 5y' = 2x^3 - 4x^2 - x + 6$
87.  $y'' + 6y' + 8y = 3e^{-2x} + 2x$
88.  $y'' - 6y' + 9y = e^{3x}$
89.  $y'' + 6y' + 9y = -xe^{4x}$
90.  $y'' + 6y' + 13y = e^{-3x} \cos 2x$
91.  $y'' - 7y' = -3$
92.  $y'' + 7y' = 42x^2 + 5x + 1$
93.  $y'' + 8y = 5x + 2e^{-x}$
94.  $y'' - 8y' + 20y = 100x^2 - 26xe^x$
95.  $y'' - 9y = 54$
96.  $y'' + 9y = x^2 \cos 3x + 4\sin x$
97.  $y'' + 10y' + 25y = 14e^{-5x}$
98.  $y'' - 10y' + 25y = 30x + 3$
99.  $y'' - 16y = 2e^{4x}$
100.  $y'' + 25y = 6\sin x$
101.  $y'' + 25y = 20\sin 5x$
102.  $\frac{1}{4}y'' + y' + y = x^2 - 2x$
103.  $2y'' - 5y' + 2y = -6e^{x/2}$
104.  $2y'' - 7y' + 5y = -29$
105.  $4y'' + 9y = 15$
106.  $4y'' - 4y' - 3y = \cos 2x$
107.  $9y'' - 6y' + y = 9xe^{x/3}$

108.  $y^{(3)} + y'' = 8x^2$
109.  $y^{(3)} - y'' - 4y' + 4y = 5 - e^x + e^{2x}$
110.  $y^{(3)} + y'' = 3e^x + 4x^2$
111.  $y^{(3)} + 2y'' + y' = 10$
112.  $y^{(3)} - 2y'' - 4y' + 8y = 6xe^{2x}$
113.  $y^{(3)} - 3y'' + 3y' - y = x - 4e^x$
114.  $y^{(3)} - 4y'' + y' + 6y = 4\sin 2x$
115.  $y^{(3)} - 3y'' + 3y' - y = e^x - x + 16$
116.  $y^{(3)} - 6y'' = 3 - \cos x$
117.  $y^{(3)} - 6y'' + 11y' - 6y = 2xe^{-x}$
118.  $y^{(3)} + 8y'' = -6x^2 + 9x + 2$
119.  $y^{(4)} + y'' = 3x^2 + 4\sin x - 2\cos x$
120.  $y^{(4)} + 2y'' + y = (x-2)^2$
121.  $y^{(4)} - y'' = 4x + 2xe^{-x}$
122.  $(D^2 + D - 2)y = 2x - 40\cos 2x$
123.  $(D^2 - 3D + 2)y = 2\sin x$
124.  $(D - 2)^3(D^2 + 9)y = x^2e^{2x} + x\sin 3x$

Find the general solution that satisfy the given initial conditions

125.  $y'' + y = \cos x$ ;  $y(0) = 1$ ,  $y'(0) = -1$
126.  $y'' + y' = x$ ;  $y(1) = 0$ ,  $y'(1) = 1$
127.  $y'' + y' = -x$ ;  $y(0) = 1$ ,  $y'(0) = 0$
128.  $y'' + y = 8\cos 2t - 4\sin t$   $y\left(\frac{\pi}{2}\right) = -1$ ,  $y'\left(\frac{\pi}{2}\right) = 0$
129.  $y'' - y' - 2y = 4x^2$ ;  $y(0) = 1$ ,  $y'(0) = 4$
130.  $y'' - y' - 2y = e^{3x}$ ;  $y(1) = 2$ ,  $y'(1) = 1$
131.  $y'' - y' - 2y = e^{3x}$ ;  $y(0) = 1$ ,  $y'(0) = 2$
132.  $y'' - y' - 2y = e^{3x}$ ;  $y(0) = 2$ ,  $y'(0) = 1$
133.  $y'' + 2y' + y = 2\cos t$ ;  $y(0) = 3$ ,  $y'(0) = 0$
134.  $y'' - 2y' + y = t^3$ ;  $y(0) = 1$ ,  $y'(0) = 0$
135.  $y'' - 2y' + y = -3 - x + x^2$ ;  $y(0) = -2$ ,  $y'(0) = 1$
136.  $y'' - 2y' + 2y = x + 1$ ;  $y(0) = 3$ ,  $y'(0) = 0$
137.  $y'' + 2y' + 2y = \sin 3x$ ;  $y(0) = 2$ ,  $y'(0) = 0$
138.  $y'' + 2y' + 2y = 2\cos 2t$ ;  $y(0) = -2$ ,  $y'(0) = 0$
139.  $y'' - 2y' - 3y = 2e^x - 10\sin x$ ;  $y(0) = 2$ ,  $y'(0) = 4$
140.  $y'' + 2y' + 10y = 4 + 26x + 6x^2 + 10x^3$ ;  $y(0) = 2$ ,  $y'(0) = 9$
141.  $y'' - 2y' + 10y = 6\cos 3t - \sin 3t$ ;  $y(0) = 2$ ,  $y'(0) = -8$
142.  $y'' + 3y' + 2y = e^x$ ;  $y(0) = 0$ ,  $y'(0) = 3$
143.  $y'' - 3y' + 2y = 3e^{-x} - 10\cos 3x$   $y(0) = 1$   $y'(0) = 2$

144.  $y'' + 4y = -2$ ;  $y\left(\frac{\pi}{8}\right) = \frac{1}{2}$ ,  $y'\left(\frac{\pi}{8}\right) = 2$
145.  $y'' + 4y = 2x$ ;  $y(0) = 1$ ,  $y'(0) = 2$
146.  $y'' + 4y = \sin^2 2t$ ;  $x\left(\frac{\pi}{8}\right) = 0$ ,  $x'\left(\frac{\pi}{8}\right) = 0$
147.  $y'' - 4y' + 8y = x^3$ ;  $y(0) = 2$ ,  $y'(0) = 4$
148.  $y'' + 4y' + 4y = (3+x)e^{-2x}$ ;  $y(0) = 2$ ,  $y'(0) = 5$
149.  $y'' + 4y' + 4y = 4 - t$ ;  $y(0) = -1$ ,  $y'(0) = 0$
150.  $y'' - 4y' + 4y = e^x$ ;  $y(0) = 2$ ,  $y'(0) = 0$
151.  $y'' - 4y' - 5y = 4e^{-2t}$ ;  $y(0) = 0$ ,  $y'(0) = -1$
152.  $y'' + 4y' + 5y = 35e^{-4x}$ ;  $y(0) = -3$ ,  $y'(0) = 1$
153.  $y'' + 4y' + 8y = \sin t$ ;  $y(0) = 1$ ,  $y'(0) = 0$
154.  $y'' - 4y' - 12y = 3e^{5t}$ ;  $y(0) = \frac{18}{7}$ ,  $y'(0) = -\frac{1}{7}$
155.  $y'' - 4y' - 12y = \sin 2t$ ;  $y(0) = 0$ ,  $y'(0) = 0$
156.  $y'' - 5y' = t - 2$ ;  $y(0) = 0$ ,  $y'(0) = 2$
157.  $y'' + 5y' - 6y = 10e^{2x}$ ;  $y(0) = 1$ ,  $y'(0) = 1$
158.  $y'' + 6y' + 10y = 22 + 20x$ ;  $y(0) = 2$ ,  $y'(0) = -2$
159.  $y'' + 7y' + 12y = -2\cos 2x + 36\sin 2x$ ;  $y(0) = -3$ ,  $y'(0) = 3$
160.  $y'' + 8y' + 7y = 10e^{-2x}$ ;  $y(0) = -2$ ,  $y'(0) = 10$
161.  $y'' + 9y = \sin 2x$ ;  $y(0) = 1$ ,  $y'(0) = 0$
162.  $y'' - 64y = 16$ ;  $y(0) = 1$ ,  $y'(0) = 0$
163.  $2y'' + 3y' - 2y = 14x^2 - 4x + 11$ ;  $y(0) = 0$ ,  $y'(0) = 0$
164.  $5y'' + y' = -6x$ ;  $y(0) = 0$ ,  $y'(0) = -10$
165.  $x'' + 9x = 10\cos 2t$ ;  $x(0) = x'(0) = 0$
166.  $x'' + 4x = 5\sin 3t$ ;  $x(0) = x'(0) = 0$
167.  $x'' + 100x = 225\cos 5t + 300\sin 5t$ ;  $x(0) = 375$ ,  $x'(0) = 0$
168.  $x'' + 25x = 90\cos 4t$ ;  $x(0) = 0$ ,  $x'(0) = 90$
169.  $y^{(3)} - y' = 4e^{-x} + 3e^{2x}$ ;  $y(0) = 0$ ,  $y'(0) = -1$ ,  $y''(0) = 2$
170.  $y^{(3)} + y'' = x + e^{-x}$ ;  $y(0) = 1$ ,  $y'(0) = 0$ ,  $y''(0) = 1$
171.  $y^{(3)} - 2y'' + y' = 1 + xe^x$ ;  $y(0) = y'(0) = 0$ ,  $y''(0) = 1$
172.  $y^{(4)} - 4y'' = x^2$ ;  $y(0) = y'(0) = 1$ ,  $y''(0) = y^{(3)}(0) = -1$
173.  $y^{(4)} - y = 5$ ;  $y(0) = y'(0) = y''(0) = y^{(3)}(0) = 0$

174.  $y^{(4)} - y''' = x + e^x$ ;  $y(0) = y'(0) = y''(0) = y^{(3)}(0) = 0$

175. If  $k$  and  $b$  are positive constants, then find the general solution of  $y'' + k^2y = \sin bx$

## Section 2.5 – Variation Parameters

In this section, we will introduce a technique called *variation of parameters*.

The inhomogeneous equation is given by:  $y'' + p(t)y' + q(t)y = g(t)$

A fundamental set of solutions  $y_1$  and  $y_2$  to associated homogeneous equation  $y'' + py' + qy = 0$ .

Then the general solution to the inhomogeneous equation is given by

$$y_k = C_1 y_1 + C_2 y_2$$

$C_1$  and  $C_2$  are arbitrary constants.

### General Case

A differential system can be written in a form:

$$\begin{pmatrix} y_1 & y_2 \\ y_1' & y_2' \end{pmatrix}$$

$y_1$  and  $y_2$  fundamental set of solution to the homogenous equation, they are linearly independent Then the determinant will be recognized as the Wronskian:

$$W(x) = \begin{vmatrix} y_1 & y_2 \\ y_1' & y_2' \end{vmatrix} \neq 0$$

Which we can obtain:

$$v_1' = -\frac{y_2 g(t)}{y_1 y_2' - y_1' y_2} = -\frac{y_2}{W} g(t) \quad \Rightarrow \quad v_1(t) = -\int \frac{y_2 g(t)}{W} dt$$

$$v_2' = \frac{y_1 g(t)}{y_1 y_2' - y_1' y_2} = \frac{y_1}{W} g(t) \quad \Rightarrow \quad v_2(t) = \int \frac{y_1 g(t)}{W} dt$$

$$\boxed{y_p = v_1 y_1 + v_2 y_2}$$

### Example

$\{y_1(x) = x^4, y_2(x) = x^2\}$  is a fundamental set of solutions of  $y'' - \frac{5}{x}y' + \frac{8}{x^2}y = 4x^3$ .

Find a particular solution of the equation?

### Solution

$$W = \begin{vmatrix} x^4 & x^2 \\ 4x^3 & 2x \end{vmatrix} = -2x^5 \neq 0$$

$$v_1(x) = - \int \frac{x^2(4x^3)}{-2x^5} dx = \int 2dx = 2x$$

$$v_1(x) = - \int \frac{y_2 g(x)}{W} dx$$

$$v_2(x) = \int \frac{x^4(4x^3)}{-2x^5} dx = -2 \int x^2 dx = -\frac{2}{3}x^3$$

$$v_2(x) = \int \frac{y_1 g(x)}{W} dx$$

The particular solution:

$$\begin{aligned} y_p &= v_1 y_1 + v_2 y_2 \\ &= (2x)(x^4) - \frac{2}{3}x^3(x^2) \\ &= \frac{4}{3}x^5 \end{aligned}$$

The general solution:  $y(x) = C_1 x^4 + C_2 x^2 + \frac{4}{3}x^5$

### Example

$\{y_1(x) = e^{2x}, y_2(x) = xe^{2x}\}$  is a fundamental set of solutions of  $y'' - 4y' + 4y = \frac{2x}{x}$ .

Find a particular solution of the equation?

### Solution

$$W = \begin{vmatrix} e^{2x} & xe^{2x} \\ 2e^{2x} & e^{2x} + 2xe^{2x} \end{vmatrix} = e^{4x} + 2xe^{4x} - 2xe^{4x} = e^{4x} \neq 0$$

$$v_1(x) = - \int \frac{xe^{2x}}{e^{4x}} \frac{e^{2x}}{x} dx = - \int dx = -x$$

$$v_1(x) = - \int \frac{y_2 g(x)}{W} dx$$

$$v_2(x) = \int \frac{e^{2x}}{e^{4x}} \frac{e^{2x}}{x} dx = \int \frac{1}{x} dx = \ln|x|$$

$$v_2(x) = \int \frac{y_1 g(x)}{W} dx$$

The particular solution:

$$\begin{aligned}
 y_p &= v_1 y_1 + v_2 y_2 \\
 &= -xe^{2x} + \ln|x| (xe^{2x})
 \end{aligned}$$

The general solution:

$$\begin{aligned}
 y(x) &= C_1 e^{2x} + C_2 x e^{2x} - x e^{2x} + x e^{2x} \ln|x| \\
 &= C_1 e^{2x} + (C_2 - 1) x e^{2x} + x e^{2x} \ln|x| \\
 &= \underline{C_1 e^{2x} + C_3 x e^{2x} + x e^{2x} \ln|x|}
 \end{aligned}$$

### Example

Find the particular solution for  $y'' + y = \tan t$

### Solution

The homogeneous equation for the differential equation  $\lambda^2 + 1 = 0 \Rightarrow \lambda_{1,2} = \pm i$

Therefore;  $y_1 = \cos t$  and  $y_2 = \sin t$

$$W = \begin{vmatrix} \cos t & \sin t \\ -\sin t & \cos t \end{vmatrix} = \cos^2 t + \sin^2 t = 1 \neq 0$$

The system has a solution

$$v_1' = \sin t \tan t = \frac{\sin^2 t}{\cos t}$$

$$\begin{aligned}
 \underline{v_1} &= \int \frac{\sin^2 t}{\cos t} dt \\
 &= \underline{-\ln|\sec t + \tan t| + \sin t}
 \end{aligned}$$

$$v_2' = \cos t \tan t = \sin t$$

$$\begin{aligned}
 \underline{v_2} &= \int \sin t dt \\
 &= \underline{-\cos t}
 \end{aligned}$$

$$\begin{aligned}
 y_p &= v_1 \cos t + v_2 \sin t \\
 &= (-\ln|\sec t + \tan t| + \sin t) \cos t + (-\cos t) \sin t \\
 &= -\cos t \ln|\sec t + \tan t| + \sin t \cos t - \cos t \sin t \\
 &= \underline{-(\cos t) \ln|\sec t + \tan t|}
 \end{aligned}$$



## Higher-Order Equations

The nonhomogeneous higher-order equation is given by:

$$y^{(n)} + p_{n-1}(t)y^{(n-1)} + \dots + p_1(t)y' + p_0(t)y = g(t)$$

A fundamental set of solutions  $y_1, y_2, \dots, y_n$  to associated homogeneous equation

$$y_h = c_1 y_1 + c_2 y_2 + \dots + c_n y_n$$

Then the particular solution is  $y_p = u_1 y_1 + u_2 y_2 + \dots + u_n y_n$

Where  $u'_k$ ,  $k=1,2,\dots,n$  are determined by the  $n$  equations:

$$\begin{array}{ccccccc} u'_1 y_1 & + & u'_2 y_2 & + \dots + & u'_n y_n & = & 0 \\ u'_1 y'_1 & + & u'_2 y'_2 & + \dots + & u'_n y'_n & = & 0 \\ \vdots & & \vdots & & \vdots & & \vdots \\ u'_1 y_1^{(n-1)} & + & u'_2 y_2^{(n-1)} & + \dots + & u'_n y_n^{(n-1)} & = & g(t) \end{array}$$

Using Cramer's Rule give:  $u'_k = \frac{W_k}{W}$

For the 3<sup>rd</sup>-order differential equation:

$$W = \begin{vmatrix} y_1 & y_2 & y_3 \\ y'_1 & y'_2 & y'_3 \\ y''_1 & y''_2 & y''_3 \end{vmatrix} \quad W_1 = \begin{vmatrix} 0 & y_2 & y_3 \\ 0 & y'_2 & y'_3 \\ g(t) & y''_2 & y''_3 \end{vmatrix} \quad W_2 = \begin{vmatrix} y_1 & 0 & y_3 \\ y'_1 & 0 & y'_3 \\ y''_1 & g(t) & y''_3 \end{vmatrix} \quad W_3 = \begin{vmatrix} y_1 & y_2 & 0 \\ y'_1 & y'_2 & 0 \\ y''_1 & y''_2 & g(t) \end{vmatrix}$$

$$u_1 = \int \frac{W_1}{W} \quad u_2 = \int \frac{W_2}{W} \quad u_3 = \int \frac{W_3}{W}$$

## Exercises      Section 2.5 – Variation Parameters

1.  $\{y_1(x) = e^{2x}, y_2(x) = e^{-3x}\}$  is a fundamental set of solutions of  $y'' + y' - 6y = 3e^{2x}$ .

Find a particular solution of the equation?

Find a particular solution to the given second-order differential equation (Use *variation of parameters*):

- |                              |                                   |
|------------------------------|-----------------------------------|
| 2. $y'' - y = t + 3$         | 6. $y'' + 25y = -2 \tan(5x)$      |
| 3. $y'' - 2y' + y = e^t$     | 7. $y'' - 6y' + 9y = 5e^{3x}$     |
| 4. $x'' - 4x' + 4x = e^{2t}$ | 8. $y'' + 4y = 2 \cos 2x$         |
| 5. $x'' + x = \tan^2 t$      | 9. $y'' - 5y' + 6y = 4e^{2x} + 3$ |

10. Verify that  $y_1(t) = t$  and  $y_2(t) = t^{-3}$  are solution to the homogenous equation

$$t^2 y''(t) + 3ty'(t) - 3y(t) = 0$$

Use variation of parameters to find the general solution to

$$t^2 y''(t) + 3ty'(t) - 3y(t) = \frac{1}{t}$$

Find the general solution to the given differential equation (Use *variation of parameters*).

- |                               |   |
|-------------------------------|---|
| 11. $y'' - y = \frac{1}{x}$   | 28. $y'' + y' - 2y = e^{3x}$            |
| 12. $y'' - y = \sinh 2x$      | 29. $y'' + 2y' + y = e^{-x} \ln x$      |
| 13. $y'' - y = x$             | 30. $y'' - 2y' + y = \frac{e^x}{1+x^2}$ |
| 14. $y'' - y = \cosh x$       | 31. $y'' + 2y' + y = e^{-x}$            |
| 15. $y'' - y = \sin x$        | 32. $y'' - 2y' - 8y = 3e^{-2x}$         |
| 16. $y'' - y = e^x$           | 33. $y'' + 3y' + 2y = \sin e^x$         |
| 17. $y'' + y = \sec x$        | 34. $y'' + 3y' + 2y = 4e^x$             |
| 18. $y'' + y = \tan x$        | 35. $y'' + 3y' + 2y = \frac{1}{1+e^x}$  |
| 19. $y'' + y = \sin x$        | 36. $y'' - 4y = \sinh 2x$               |
| 20. $y'' + y = \csc x$        | 37. $y'' + 4y = \sec 2x$                |
| 21. $y'' + y = \cos^2 x$      | 38. $y'' + 4y = \cos 3x$                |
| 22. $y'' + y = \csc^2 x$      | 39. $y'' + 4y = \sin^2 x$               |
| 23. $y'' + y = \sec^2 x$      | 40. $y'' + 4y = \sin^2 2t$              |
| 24. $y'' + y = \sec x \tan x$ |   |
| 25. $y'' + y' = x$            |   |
| 26. $y'' - y' = e^x \cos x$   |   |

$$27. \quad y'' + y' - 2y = xe^{-x}$$

$$42. \quad y'' - 4y = xe^x$$

$$43. \quad y'' - 4y' + 4y = 2e^{2x}$$

$$44. \quad y'' - 4y' + 4y = (x+1)e^{2x}$$

$$45. \quad y'' + 4y' + 5y = 10$$

$$46. \quad y'' - 9y = \frac{9x}{e^{3x}}$$

$$47. \quad y'' + 9y = \csc 3x$$

$$48. \quad y'' + 9y = 3 \tan 3t$$

$$49. \quad y'' + 9y = \sin 3x$$

$$50. \quad y'' + 9y = 2 \sec 3x$$

$$41. \quad y'' - 4y = \frac{e^x}{x}$$

$$51. \quad 4y'' + 36y = \csc 3x$$

$$52. \quad (D^2 + 5D + 6)y = x^2 + 2x$$

$$53. \quad (D^2 - 3D + 2)y = \frac{1}{1 + e^{-x}}$$

$$54. \quad y''' + y' = \sec x$$

$$55. \quad y''' - 3y'' + 2y' = \frac{e^x}{1 + e^{-x}}$$

$$56. \quad y''' - 6y'' + 11y' - 6y = e^x$$

$$57. \quad x^3 y^{(3)} - 4x^2 y'' + 8xy' - 8y = 4 \ln x$$

Find the general solution by to **variation of parameters** with the given initial conditions.

$$58. \quad y'' + y = \sec t ; \quad y(0) = 1, \quad y'(0) = 2$$

$$59. \quad y'' + y = \sec^3 t ; \quad y(0) = 1, \quad y'(0) = \frac{1}{2}$$

$$60. \quad y'' - y = t + \sin t ; \quad y(0) = 2, \quad y'(0) = 3$$

$$61. \quad y'' - 2y' + y = \frac{e^x}{x}; \quad y(0) = 1, \quad y'(0) = 0$$

$$62. \quad y'' + 2y' - 8y = 2e^{-2x} - e^{-x} ; \quad y(0) = 1, \quad y'(0) = 0$$

$$63. \quad y'' - 3y' + 2y = 3e^{-x} - 10 \cos 3x ; \quad y(0) = 1, \quad y'(0) = 2$$

$$64. \quad y'' + 4y = \sin^2 2t ; \quad y\left(\frac{\pi}{8}\right) = 0, \quad y'\left(\frac{\pi}{8}\right) = 0$$

$$65. \quad y'' + 4y = \sin^2 2t ; \quad y(0) = 0, \quad y'(0) = 0$$

$$66. \quad y'' - 4y' + 4y = (12x^2 - 6x)e^{2x} ; \quad y(0) = 1, \quad y'(0) = 0$$

$$67. \quad 2y'' + y' - y = x + 1 ; \quad y(0) = 1, \quad y'(0) = 0$$

$$68. \quad 4y'' - y = xe^{x/2}; \quad y(0) = 1, \quad y'(0) = 0$$

$$69. \quad t^2 y'' - ty' + y = t ; \quad y(1) = 1, \quad y'(1) = 4$$

## Section 2.6 – Mechanical systems

A sinusoidal forcing is giving by the model:

$$x'' + 2cx' + \omega_0^2 x = A \cos \omega t$$

$A$ : Amplitude if the driving force (constant)

$\omega$ : driving frequency.

$c$ : damping constant.

$\omega_0$ : natural frequency.

### Forced undamped harmonic motion

The undamped equation has  $c = 0$  or

$$x'' + \omega_0^2 x = A \cos \omega t$$

The homogeneous equation is:  $x'' + \omega_0^2 x = 0$

With general solution:  $x_h = C_1 \cos \omega_0 t + C_2 \sin \omega_0 t$

#### Case 1 $\omega \neq \omega_0$

The particular solution is given by the form:  $x_p = a \cos \omega t + b \sin \omega t$

$$x'_p = -a\omega \sin \omega t + b\omega \cos \omega t$$

$$x''_p = -a\omega^2 \cos \omega t - b\omega^2 \sin \omega t$$

$$\begin{aligned} x''_p + \omega_0^2 x_p &= -a\omega^2 \cos \omega t - b\omega^2 \sin \omega t + \omega_0^2 (a \cos \omega t + b \sin \omega t) \\ &= -a\omega^2 \cos \omega t - b\omega^2 \sin \omega t + \omega_0^2 a \cos \omega t + \omega_0^2 b \sin \omega t \\ &= a(\omega_0^2 - \omega^2) \cos \omega t + b(\omega_0^2 - \omega^2) \sin \omega t \\ &= A \cos \omega t \end{aligned}$$

$$A = a(\omega_0^2 - \omega^2) \quad b(\omega_0^2 - \omega^2) = 0$$

$$a = \frac{A}{(\omega_0^2 - \omega^2)} \quad b = 0 \quad \text{since } \omega_0^2 - \omega^2 \neq 0$$

$$x_p = \frac{A}{(\omega_0^2 - \omega^2)} \cos \omega t$$

$$\begin{aligned}
 x(t) &= x_h(t) + x_p(t) \\
 &= C_1 \cos \omega_0 t + C_2 \sin \omega_0 t + \frac{A}{(\omega_0^2 - \omega^2)} \cos \omega t
 \end{aligned}$$

When the motion starts at equilibrium; this means  $x(0) = x'(0) = 0$

$$C_1 + \frac{A}{(\omega_0^2 - \omega^2)} = 0 \Rightarrow C_1 = -\frac{A}{(\omega_0^2 - \omega^2)}$$

$$x' = -C_1 \omega_0 \sin \omega_0 t + C_2 \omega_0 \cos \omega_0 t - \frac{A}{(\omega_0^2 - \omega^2)} \omega \sin \omega t$$

$$x'(0) = C_2 \omega_0 = 0 \Rightarrow C_2 = 0$$

$$x(t) = -\frac{A}{(\omega_0^2 - \omega^2)} \cos \omega_0 t + \frac{A}{(\omega_0^2 - \omega^2)} \cos \omega t$$

$$x(t) = \frac{A}{(\omega_0^2 - \omega^2)} (\cos \omega t - \cos \omega_0 t)$$


### Example

Suppose  $F_0 = 23$ ,  $\omega_0 = 11$ ,  $\omega = 12$  with these values of the parameters the solution becomes.

$F_0$  : Amplitude if the driving force (constant)

### Solution

$$\begin{aligned}
 x(t) &= \frac{F_0}{(\omega_0^2 - \omega^2)} (\cos \omega t - \cos \omega_0 t) \\
 &= \frac{23}{(11^2 - 12^2)} (\cos 12t - \cos 11t) \\
 &= -(\cos 12t - \cos 11t) \\
 &= \cos 11t - \cos 12t
 \end{aligned}$$

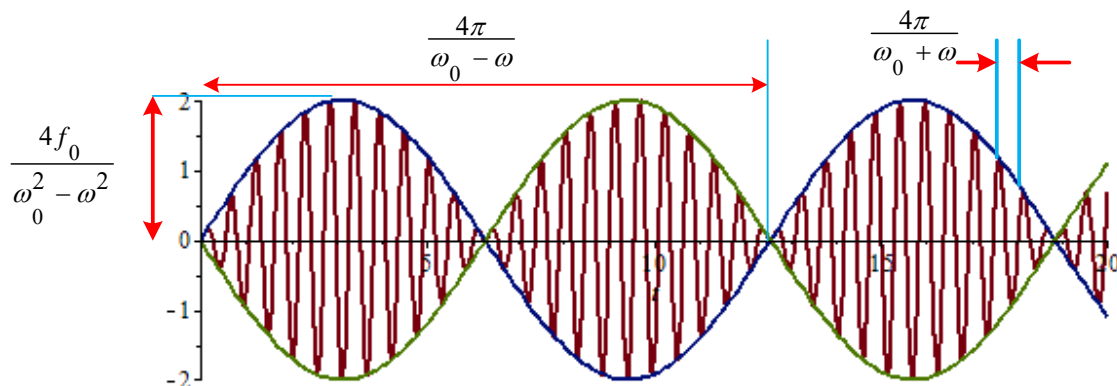

**Mean frequency:**  $\bar{\omega} = \frac{\omega_0 + \omega}{2}$

**Half difference:**  $\delta = \frac{\omega_0 - \omega}{2}$

## Case 2 $\omega = \omega_0$

The particular solution is given by the form:  $x_p = t(a \cos \omega_0 t + b \sin \omega_0 t)$

$$x'_p = a \cos \omega_0 t + b \sin \omega_0 t - at\omega_0 \sin \omega_0 t + bt\omega_0 \cos \omega_0 t$$

$$\begin{aligned} x''_p &= -a\omega_0 \sin \omega_0 t + b\omega_0 \cos \omega_0 t - a\omega_0 \sin \omega_0 t + b\omega_0 \cos \omega_0 t - at\omega_0^2 \cos \omega_0 t - bt\omega_0^2 \sin \omega_0 t \\ &= -2\omega_0 (a \sin \omega_0 t - b \cos \omega_0 t) - t\omega_0^2 (a \cos \omega_0 t + b \sin \omega_0 t) \end{aligned}$$

$$\begin{aligned} x''_p + \omega_0^2 x_p &= -2\omega_0 (a \sin \omega_0 t - b \cos \omega_0 t) - t\omega_0^2 (a \cos \omega_0 t + b \sin \omega_0 t) + t\omega_0^2 (a \cos \omega_0 t + b \sin \omega_0 t) \\ &= -2\omega_0 (a \sin \omega_0 t - b \cos \omega_0 t) \end{aligned}$$

$$= F_0 \cos \omega t$$

$F_0$  : Amplitude if the driving force (*constant*)

$$F_0 = 2b\omega_0 \quad a = 0$$

$$b = \frac{F_0}{2\omega_0}$$


$$x_p = \frac{F_0}{2\omega_0} t \sin \omega_0 t$$

$$x(t) = x_h(t) + x_p(t)$$

$$= C_1 \cos \omega_0 t + C_2 \sin \omega_0 t + \frac{F_0}{2\omega_0} t \sin \omega_0 t$$

$$x(0) = C_1 = 0, \quad x'(0) = C_2 = 0, \quad A = 8, \quad \omega_0 = 4$$

$$x(t) = t \sin 4t$$

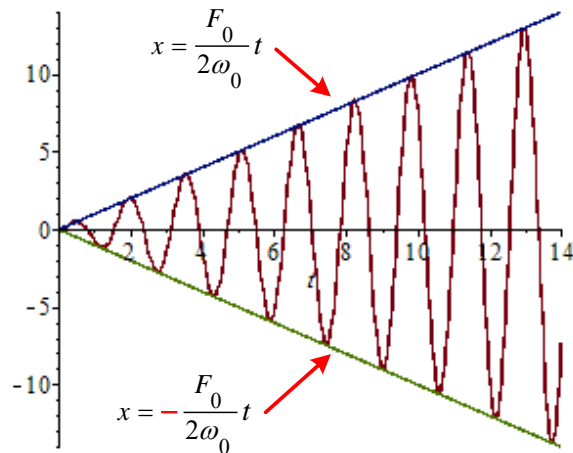

## Forced Damped Harmonic Motion

In real physical systems, there is always some damping, from frictional effects if nothing else. Let's add damping to the system

$$mx'' + cx' + kx = F_0 \cos \omega t \quad x'' + 2cx' + \omega_0^2 x = F_0 \cos \omega t$$

The homogeneous equation (**transient solution**) is:

$$\begin{aligned} mx'' + cx' + kx &= 0 & x'' + 2cx' + \omega_0^2 x &= 0 \\ m\lambda^2 + c\lambda + k &= 0 & \lambda^2 + 2c\lambda + \omega_0^2 &= 0 \\ \lambda_{1,2} &= \frac{-c \pm \sqrt{c^2 - 4mk}}{2m} & \lambda_{1,2} &= -c \pm \sqrt{c^2 - \omega_0^2} \end{aligned}$$

The particular solution is:  $x_p = A \cos \omega t + B \sin \omega t$

$$x'(t) = -A\omega \sin \omega t + B\omega \cos \omega t$$

$$x''(t) = -A\omega^2 \cos \omega t - B\omega^2 \sin \omega t$$

$$-Am\omega^2 \cos \omega t - Bm\omega^2 \sin \omega t - Ac\omega \sin \omega t + Bc\omega \cos \omega t + Ak \cos \omega t + Bk \sin \omega t = F_0 \cos \omega t$$

$$\begin{cases} -Am\omega^2 + Bc\omega + Ak = F_0 \\ -Bm\omega^2 - Ac\omega + Bk = 0 \end{cases} \rightarrow \begin{cases} (k - m\omega^2)A + c\omega B = F_0 \\ -c\omega A + (k - m\omega^2)B = 0 \end{cases}$$

$$D = \begin{vmatrix} k - m\omega^2 & c\omega \\ -c\omega & k - m\omega^2 \end{vmatrix} = (k - m\omega^2)^2 + (c\omega)^2$$

$$D_A = \begin{vmatrix} F_0 & -c\omega \\ 0 & k - m\omega^2 \end{vmatrix} = F_0 (k - m\omega^2) \quad D_B = \begin{vmatrix} k - m\omega^2 & F_0 \\ -c\omega & 0 \end{vmatrix} = c\omega F_0$$

$$A = \frac{(k - m\omega^2)F_0}{(k - m\omega^2)^2 + (c\omega)^2} \quad B = \frac{c\omega F_0}{(k - m\omega^2)^2 + (c\omega)^2}$$

The amplitude:  $C = \sqrt{A^2 + B^2}$

$$\begin{aligned} &= \sqrt{\frac{(k - m\omega^2)^2 F_0^2}{\left((k - m\omega^2)^2 + (c\omega)^2\right)^2} + \frac{(c\omega)^2 F_0^2}{\left((k - m\omega^2)^2 + (c\omega)^2\right)^2}} \\ &= F_0 \sqrt{\frac{(k - m\omega^2)^2 + (c\omega)^2}{\left((k - m\omega^2)^2 + (c\omega)^2\right)^2}} \end{aligned}$$

$$= \frac{F_0}{\sqrt{(k - m\omega^2)^2 + (c\omega)^2}}$$

The phase shift:  $\varphi = \tan^{-1} \frac{B}{A} = \tan^{-1} \frac{c\omega}{k - m\omega^2}$

$$\begin{cases} \varphi = \tan^{-1} \frac{c\omega}{k - m\omega^2} & \text{if } k > m\omega^2 \\ \varphi = \pi + \tan^{-1} \frac{c\omega}{k - m\omega^2} & \text{if } k < m\omega^2 \end{cases}$$

**Underdamped Case:**  $c < \omega_0$

$$x_h = e^{-ct} \left( C_1 \cos \eta t + C_2 \sin \eta t \right) \quad \text{Where } \eta = \sqrt{\omega_0^2 - c^2}$$

To determine the inhomogeneous equation, it is better to use complex method.

$$z'' + 2cz' + \omega_0^2 z = Ae^{i\omega t}$$

However,  $x(t) = \text{Re}(z)$

The particular solution:  $z(t) = ae^{i\omega t}$

$$\begin{aligned} z'' + 2cz' + \omega_0^2 z &= (i\omega)^2 ae^{i\omega t} + 2c(i\omega)ae^{i\omega t} + \omega_0^2 ae^{i\omega t} \\ &= \left( (i\omega)^2 + 2c(i\omega) + \omega_0^2 \right) ae^{i\omega t} \end{aligned}$$

$$P(i\omega) = (i\omega)^2 + 2c(i\omega) + \omega_0^2$$

$$P(i\omega)ae^{i\omega t} = Ae^{i\omega t}$$

$$\Rightarrow a = \frac{A}{P(i\omega)}$$

$$z(t) = \frac{A}{P(i\omega)} e^{i\omega t}$$

$$= H(i\omega)e^{i\omega t} \quad H(i\omega) \text{ is called the } \textit{transfer function}.$$

$$P(i\omega) = -\omega^2 + 2ic\omega + \omega_0^2 = \omega_0^2 - \omega^2 + 2ic\omega$$

$$P(i\omega) = Re^{i\phi}$$

$$= R(\cos \phi + i \sin \phi)$$

$$\text{Polar Coordinates:} \quad R \cos \phi = \omega_0^2 - \omega^2 \quad R \sin \phi = 2c\omega$$

$$R = \sqrt{(\omega_0^2 - \omega^2)^2 + 4c^2\omega^2}$$



$$\cos \phi = \frac{\omega_0^2 - \omega^2}{\sqrt{(\omega_0^2 - \omega^2)^2 + 4c^2\omega^2}} \quad \sin \phi = \frac{2c\omega}{\sqrt{(\omega_0^2 - \omega^2)^2 + 4c^2\omega^2}}$$

$$\cot \phi = \frac{\omega_0^2 - \omega^2}{2c\omega} \Rightarrow \phi(\omega) = \arccot \left( \frac{\omega_0^2 - \omega^2}{2c\omega} \right) \quad 0 < \phi < \pi$$

$$H(i\omega) = \frac{1}{P(i\omega)} = \frac{1}{R} e^{-i\phi}$$

We will define the **gain**  $G$  by:  $G(\omega) = \frac{1}{R} = \frac{1}{\sqrt{(\omega_0^2 - \omega^2)^2 + 4c^2\omega^2}} \quad H(i\omega) = G(\omega)e^{-i\phi}$

The solution:  $z(t) = H(i\omega)Ae^{i\omega t} = G(\omega)Ae^{i(\omega t - \phi)}$

$$x_p(t) = \operatorname{Re} z(t) = G(\omega)A \cos(\omega t - \phi)$$

$$x(t) = e^{-ct} \left( C_1 \cos \eta t + C_2 \sin \eta t \right) + G(\omega)A \cos(\omega t - \phi)$$

$e^{-ct}$  : **transient** term.


$$T_c = \frac{1}{c} : \text{time constant.}$$

## Transient and Steady-State

A motion or current is **transient** solution if the solution approaches zero as  $t \rightarrow \infty$ .

A **steady-state** motion or current is one that is not transient and does not become unbounded.

Free damped systems always yield transient motions, while forced damped systems (assuming the external force to be sinusoidal) yield both transient and steady-state motions.

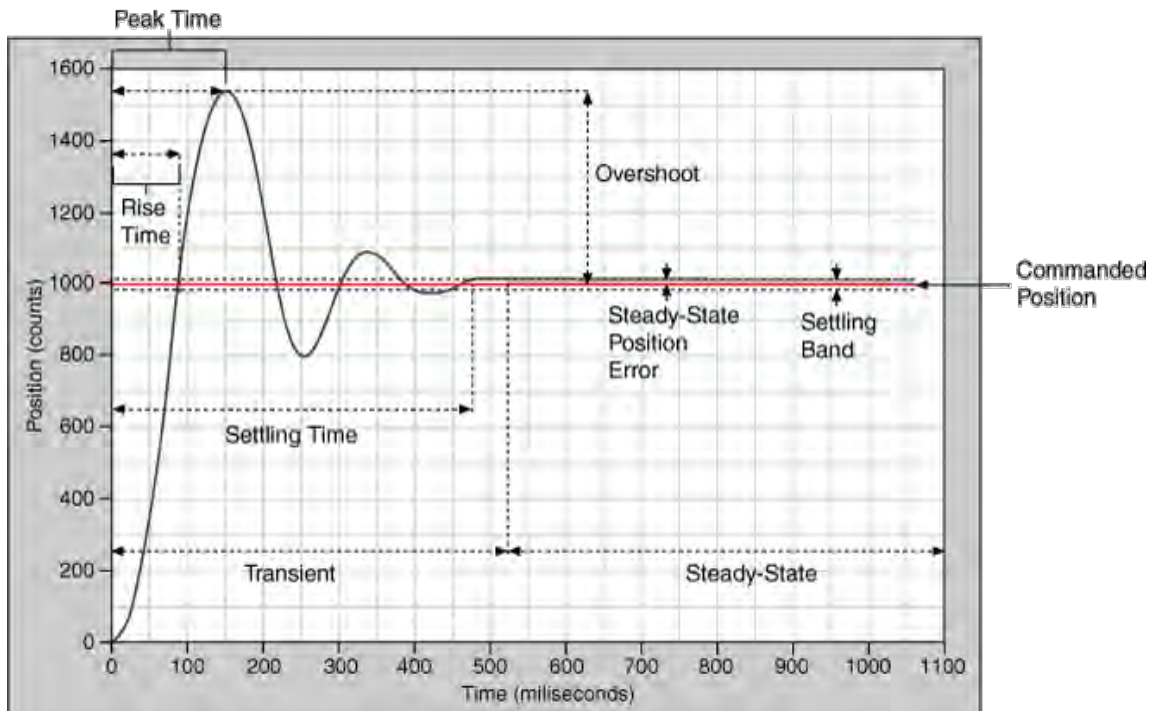

### Example

Determine the transient and steady-state to:  $x'' + 2x' + 2x = 4\cos t + 2\sin t$ ;  $x(0) = 0$ ,  $x'(0) = v_0$

### Solution

$$\lambda^2 + 2\lambda + 2 = 0 \rightarrow \lambda_{1,2} = \frac{-2 \pm 2i}{2} = -1 \pm i$$

$$x_h = e^{-t} (C_1 \cos t + C_2 \sin t)$$

$$x_p = A \cos t + B \sin t$$

$$x'_p = -A \sin t + B \cos t$$

$$x''_p = -A \cos t - B \sin t$$

$$x'' + 2x' + 2x = 4\cos t + 2\sin t$$

$$-A \cos t - B \sin t - 2A \sin t + 2B \cos t + 2A \cos t + 2B \sin t = 4\cos t + 2\sin t$$

$$\begin{cases} \cos t & A + 2B = 4 \\ \sin t & -2A + B = 2 \end{cases} \rightarrow \underline{B = 2, A = 0}$$

$$x_p = 2 \sin t$$


$$x(t) = e^{-t} (C_1 \cos t + C_2 \sin t) + 2 \sin t$$

$$x(0) = 0 \rightarrow \underline{C_1 = 0}$$

$$x'(t) = e^{-t} (-C_1 \cos t - C_2 \sin t - C_1 \sin t + C_2 \cos t) + 2 \cos t$$

$$x'(0) = v_0 \rightarrow C_1 + C_2 + 2 = v_0 \Rightarrow \underline{C_2 = v_0 - 2}$$

$$x(t) = (v_0 - 2) \underbrace{e^{-t} \sin t}_{\text{transient}} + \underbrace{2 \sin t}_{\text{steady-state}}$$

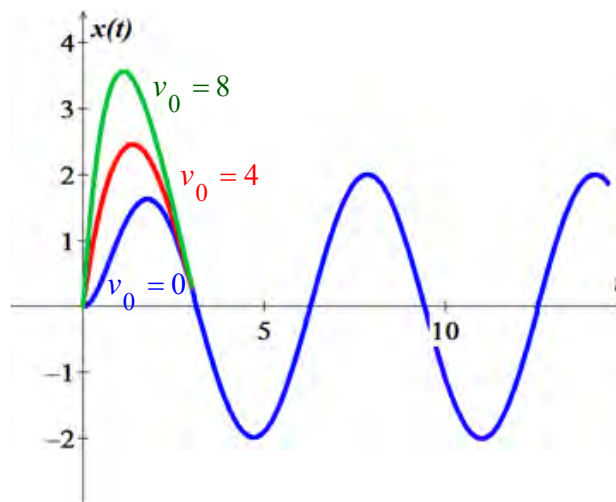

## Exercises      Section 2.6 – Mechanical Systems

1. A 1-kg mass is attached to a spring  $k = 4 \text{ kg} / \text{s}^2$  and the system is allowed to come to rest. The spring-mass system is attached to a machine that supplies external driving force  $f(t) = 4 \cos \omega t$  *Newtons*. The system is started from equilibrium; the mass is having no initial displacement or velocity. Ignore any damping forces.
  - a) Find the position of the mass as a function of time
  - b) Place your answer in the form  $s(t) = A \sin \delta t \sin \bar{\omega} t$ . Select an  $\omega$  near the natural frequency of the system to demonstrate the "beating" of the system. Sketch a plot showing the "beats" and include the envelope of the beating motion in your plot.

Find a particular solution to the differential equation using undetermined coefficients. Find and plot the solution of the initial value problem. Superimpose the plots of the transient response and the steady state solution.

2.  $x'' + 7x' + 10x = 3 \cos 3t$   $x(0) = -1$ ,  $x'(0) = 0$
3.  $x'' + 4x' + 5x = 3 \sin t$   $x(0) = 0$ ,  $x'(0) = -3$
4. Find a particular solution of  $y'' - 2y' + 5y = 2 \cos 3x - 4 \sin 3x + e^{2x}$  given the set  $y_p = A \cos 3x + B \sin 3x + C e^{2x}$  where  $A$ ,  $B$ ,  $C$  are to be determined

Find the general solution

1.  $m x'' + kx = F_0 \cos \omega t$ ;  $x(0) = x_0$ ,  $x'(0) = 0$  ( $\omega \neq \omega_0$ )
2.  $m x'' + kx = F_0 \cos \omega t$ ;  $x(0) = 0$ ,  $x'(0) = v_0$  ( $\omega = \omega_0$ )
3.  $x'' + \omega_0^2 x = F_0 \sin \omega t$ ;  $x(0) = 0$ ,  $x'(0) = 0$  ( $\omega \neq \omega_0$ )
4. A forced mass–spring–dashpot system with equation  $m x'' + c x' + kx = F_0 \cos \omega t$ . Investigate the possibility of practical resonance of this system. In particular, find the amplitude  $C(\omega)$  of steady state periodic forced oscillations with frequency  $\omega$ . Sketch the graph  $C(\omega)$  and find the practical resonance frequency  $\omega$  (if any).
 


a) $m = 1$ , $c = 2$ , $k = 2$ , $F_0 = 2$	c) $m = 1$ , $c = 6$ , $k = 45$ , $F_0 = 50$
b) $m = 1$ , $c = 4$ , $k = 5$ , $F_0 = 10$	d) $m = 1$ , $c = 10$ , $k = 650$ , $F_0 = 100$
5. A mass weighing 100 lb. (mass  $m = 3.125$  slugs in fps units) is attached to the end of a spring that is stretched 1 in. by a force of 100 lb. A force  $F_0 \cos \omega t$  acts on the mass. At what frequency (in hertz) will resonance oscillation occur? Neglect damping.

6. A mass weighing 16 *pounds* stretches a spring  $\frac{8}{3}$  *ft*. The mass is initially released from rest from a point 2 *ft* below the equilibrium position, and the subsequent motion takes place in a medium that offers a damping force that is numerically equal to  $\frac{1}{2}$  the instantaneous velocity. Find the equation of motion if the mass is driven by an external force equal to  $f(t) = 10\cos 3t$
7. A mass of 32 *pounds* is attached to a spring with a constant spring 5 *lb/ft*. Initially, the mass is released 1 foot below the equilibrium position with a downward velocity of 5 *ft/s*, and the subsequent motion takes is numerically equal to 2 times the instantaneous velocity.
- Find the equation of motion if the mass is driven by an external force equal to  $f(t) = 12\cos 2t + 3\sin 2t$ .
  - Graph the transient, steady-state, and the equation of motion solutions on the same coordinate axes.
8. A mass of 32 *pounds* is attached to a spring and stretched it 2 *feet* and then comes to rest in the equilibrium position. The surrounding medium offers a damping force that is numerically equal to 8 times the instantaneous velocity
- Find the equation of motion if the mass is driven by an external force equal to  $f(t) = 8\sin 4t$ .
  - Graph the transient, steady-state, and the equation of motion solutions on the same coordinate axes.
9. A mass of 32 *pounds* is attached to a spring and stretched it 2 *feet* and then comes to rest in the equilibrium position. The surrounding medium offers a damping force that is numerically equal to 8 times the instantaneous velocity
- Find the equation of motion with a starting external force equal to  $f(t) = e^{-t} \sin 4t$  at  $t = 0$
  - Graph the transient, steady-state, and the equation of motion solutions on the same coordinate axes.
10. A mass of 64 *pounds* is attached to a spring with a spring constant 32 *lb/ft* and then comes to rest in the equilibrium position.
- Find the equation of motion with a starting external force equal to  $f(t) = 68e^{-2t} \cos 4t$
  - Graph the transient, steady-state, and the equation of motion solutions on the same coordinate axes.
11. A 3-*kg* object is attached to a spring and stretches the spring 392 *mm* by itself. There is no damping in the system and a forcing function of the form  $F(t) = 10\cos \omega t$  is attached to the object and the system will experience resonance. If the object is initially displaced 20 *cm* downward from its equilibrium position and given a velocity of 10 *cm/sec* upward find the displacement  $y(t)$  at any time  $t$ .


12. A 8- $kg$  mass is attached to a spring hanging vertically, thereby causing the spring to stretch 1.96  $m$  upon coming to rest at equilibrium. The damping constant is given by 3  $N\text{-sec}/m$ .
- Find the equation of motion if the mass is driven by an external force equal to  $f(t) = \cos 2t$   $N$ .
  - Determine the transient, steady-state solution of the motion
13. A 2- $kg$  mass is attached to a spring hanging vertically, thereby causing the spring to stretch 0.2  $m$  upon coming to rest at equilibrium. At  $t = 0$ , the mass is displaced 5  $cm$  below the equilibrium position and released. The damping constant is given by 5  $N\text{-sec}/m$ .
- Find the equation of motion if the mass is driven by an external force equal to  $f(t) = 0.3 \cos t$   $N$ .
  - Determine the transient, steady-state solution of the motion.
14. A 8- $kg$  mass is attached to a spring hanging vertically and come to rest at equilibrium. The damping constant is given by 3  $N\text{-sec}/m$  and the spring constant is 40  $N/m$ . Find steady-state solution if the mass is driven by an external force equal to  $f(t) = 2 \sin\left(2t + \frac{\pi}{4}\right)$   $N$ .
15. A 32- $lb$  mass weight is attached to a spring hanging vertically and come to rest at equilibrium. The damping constant is given by 2  $lb\text{-sec}/ft$  and the spring constant is 5  $lb/ft$ . If the mass is driven by an external force equal to  $f(t) = 3 \cos 4t$   $lb$  at time  $t = 0$ .
- Find steady-state solution.
  - Determine the amplitude and frequency
16. A 8- $kg$  mass is attached to a spring hanging vertically and come to rest at equilibrium. The damping constant is given by 3  $N\text{-sec}/m$  and the spring constant is 40  $N/m$ . If the mass is driven by an external force equal to  $f(t) = 2 \sin 2t \cos 2t$   $N$ .
- Find steady-state solution.
  - Determine the amplitude, phase angle, period and frequency
17. A 10- $kg$  mass is attached to a spring hanging vertically stretches the spring 0.098  $m$  from its equilibrium rest position, measured positive in the downward direction. At time  $t = 0$ , the resulting spring-mass system is disturbed from its rest state by the force  $F(t) = 20 \cos 10t$   $N$ . ( $t$  in seconds)
- Determine the spring constant  $k$ .
  - Find the equation of motion.
  - Plot the equation of motion.
  - Determine the maximum excursion from equilibrium made of the object on the  $t$ -interval  $0 \leq t < \infty$
18. A 10- $kg$  mass is attached to a spring hanging vertically stretches the spring 0.098  $m$  from its equilibrium rest position, measured positive in the downward direction. At time  $t = 0$ , the resulting spring-mass system is disturbed from its rest state by the force  $F(t) = 20 \cos 8t$   $N$ . ( $t$  in seconds)

- a) Determine the spring constant  $k$ .  
 b) Find the equation of motion.  
 c) Plot the equation of motion.  
 d) Determine the maximum excursion from equilibrium made of the object on the  $t$ -interval  $0 \leq t < \infty$
19. A 10- $kg$  mass is attached to a spring hanging vertically stretches the spring  $0.098\text{ m}$  from its equilibrium rest position, measured positive in the downward direction. At time  $t = 0$ , the resulting spring-mass system is disturbed from its rest state by the force  $F(t) = 20e^{-t}\text{ N}$ . ( $t$  in seconds)
- a) Determine the spring constant  $k$ .  
 b) Find the equation of motion.  
 c) Plot the equation of motion.  
 d) Determine the maximum excursion from equilibrium made of the object on the  $t$ -interval  $0 \leq t < \infty$
20. A 2- $kg$  mass is attached to a spring hanging vertically and come to rest at equilibrium. The damping constant is given by  $c = 8\text{ kg/sec}$  and the spring constant is  $k = 80\text{ N/m}$ . At time  $t = 0$ , the resulting spring-mass system is disturbed from its rest state by the force  $F(t) = 20\cos 8t\text{ N}$ . ( $t$  in seconds)
- a) Find the equation of motion.  
 b) Plot the equation of motion.  
 c) Determine the long-time behavior of the system, as  $t \rightarrow \infty$
21. A 2- $kg$  mass is attached to a spring hanging vertically and come to rest at equilibrium. The damping constant is given by  $c = 8\text{ kg/sec}$  and the spring constant is  $k = 80\text{ N/m}$ . At time  $t = 0$ , the resulting spring-mass system is disturbed from its rest state by the force  $F(t) = 20\sin 6t\text{ N}$ . ( $t$  in seconds)
- a) Find the equation of motion.  
 b) Plot the equation of motion.  
 c) Determine the long-time behavior of the system, as  $t \rightarrow \infty$
22. A 2- $kg$  mass is attached to a spring hanging vertically and come to rest at equilibrium. The damping constant is given by  $c = 8\text{ kg/sec}$  and the spring constant is  $k = 80\text{ N/m}$ . At time  $t = 0$ , the resulting spring-mass system is disturbed from its rest state by the force  $F(t) = 20e^{-t}\text{ N}$ . ( $t$  in seconds)
- a) Find the equation of motion.  
 b) Plot the equation of motion.  
 c) Determine the long-time behavior of the system, as  $t \rightarrow \infty$
23. A 10- $kg$  mass is attached to a spring having a spring constant of  $140\text{ N/m}$ . The mass is started in motion initially from the equilibrium position with an initial velocity  $1\text{ m/sec}$  in the upward direction and with an applied external force  $F(t) = 5\sin t$ . If the force due to air resistance is  $-90y'\text{ N}$ .
- a) Find the subsequent motion of the mass.  
 b) Plot the motion.


24. A 10-*kg* mass is attached to a spring having a spring constant of 140 *N/m*. The mass is started in motion initially from the equilibrium position with an initial velocity 1 *m/sec* in the upward direction and with an applied external force  $F(t) = 5 \sin t$ . If the force due to air resistance is  $-90y' \text{ N}$ .
- Find the equation motion of the mass.
  - Plot the motion.
  - Determine the motion of the solution.
25. A 128-*lb* weight is attached to a spring having a spring constant of 64 *lb/ft*. The weight is started in motion initially by displacing it 6 *in* above the equilibrium position with no initial velocity and with an applied external force  $F(t) = 8 \sin 4t$ . Assume no air resistance.
- Find the equation motion of the mass.
  - Plot the motion.
  - Determine the motion of the solution.
26. A 3-*kg* object is attached to spring and stretches the spring 39.2 *cm* by itself. There is no damping in the system and a forcing function is given by  $F(t) = 10 \cos \omega t$  is attached to the object and the system will experience resonance. If the object is initially displaced 20 *cm* downward from its equilibrium position and given a velocity of 10 *cm/sec* upward.
- Find the spring constant  $k$ .
  - Find the natural frequency  $\omega$ .
  - Find the displacement at any time  $t$ .
  - Sketch the displacement function.
27. Find the transient motion and steady periodic oscillations of a damped mass-and-spring system with  $m = 1$ ,  $c = 2$ , and  $k = 26$  under the influence of an external force  $F(t) = 82 \cos 4t$  with  $x(0) = 6$  and  $x'(0) = 0$ . Also, investigate the possibility of practical resonance for this system.
28. A mass  $m$  is attached to the end of a spring with a spring constant  $k$ . After the mass reaches equilibrium, its support begins to oscillate vertically about a horizontal line  $L$  according to a formula  $h(t)$ . The value of  $h$  represents the distance in feet measured from  $L$ .
- Determine the differential equation of motion if the entire system moves through a medium offering a damping force that is numerically equal to  $\mu \frac{dx}{dt}$
  - Solve the differential equation in part (a) if the spring is stretched 4 *feet* by a mass weighing 16 *pounds* and  $\mu = 2$ ,  $h(t) = 5 \cos t$ ,  $x(0) = x'(0) = 0$
29. A mass  $m$  on the end of a pendulum (of length  $L$ ) also attached to a horizontal spring (with constant  $k$ ). Assume small oscillations of  $m$  so that the spring remains essentially horizontal and neglect




damping. Find the natural circular frequency  $\omega_0$  of motion of the mass in terms of  $L$ ,  $k$ ,  $m$ , and the gravitational constant  $g$ .



30. A mass  $m$  hangs on the end of a cord around a pulley of radius  $a$  and moment of inertia  $I$ . The rim of the pulley is attached to a spring (with constant  $k$ ). Assume small oscillations so that the spring remains essentially and neglect friction. Find the natural circular frequency in terms of  $m$ ,  $a$ ,  $k$ ,  $I$ , and  $g$ .




31. Consider a floating cylindrical buoy with radius  $r$ , height  $h$ , and uniform density  $\rho \leq 0.5$  (recall that the density of water is  $1 \text{ g/cm}^3$ ). The buoy is initially suspended at rest with its bottom at the top surface of the water and is released at time  $t = 0$ . Thereafter it is acted on by two forces: a downward gravitational force equal to its weight  $mg = \pi r^2 h g$  and (by Archmedes' principle of buoyancy) an upward force equal to the weight  $\pi r^2 x g$  of water displaced, where  $x = x(t)$  is the depth of the bottom of the buoy beneath the surface at time  $t$ . Conclude that the buoy undergoes simple harmonic motion around its equilibrium position  $x_e = \rho h$  with period  $p = 2\pi \sqrt{\frac{\rho h}{g}}$ .

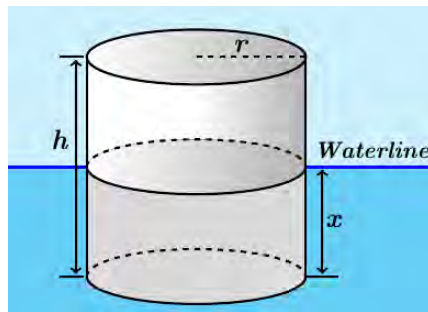

- Compute  $p$  and the amplitude of the motion if  $\rho = 0.5 \text{ g/cm}^3$ ,  $h = 200 \text{ cm}$ , and  $g = 980 \text{ cm/s}^2$
- If the cylindrical buoy weighting  $100 \text{ lb}$  floats in water with its axis vertical. When depressed slightly and released, it oscillates up and down four times every  $10 \text{ sec}$ . assume that friction is negligible. Find the radius of the buoy.




32. Assume that the earth is a solid sphere of uniform density, with mass  $M$  and radius  $R = 3960$  (mi). For a particle of mass  $m$  within the earth at distance  $r$  from the center of the earth, the gravitational force attracting  $m$  toward the center is  $F_r = -\frac{GM_r m}{r^2}$ , where  $M_r$  is the mass of the part of the earth within a sphere of radius  $r$ .

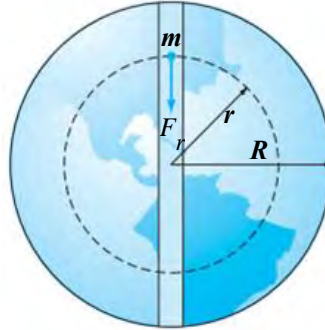


- Show that  $F_r = -\frac{GMmr}{R^3}$
- Now suppose that a small hole is drilled straight through the center of the earth, thus connecting two antipodal points on its surface. Let a particle of mass  $m$  be dropped at time  $t = 0$  into this hole with initial speed zero, and let  $r(t)$  be its distance from the center of the earth at time  $t$ . conclude from Newton's second law and part (a) that  $r''(t) = -k^2 r(t)$ , where  $k^2 = \frac{GM}{R^3} = \frac{g}{R}$ .
- Take  $g = 32.2 \text{ ft/s}^2$ , and conclude from part (b) that the particle undergoes simple harmonic motion back and forth between the ends of the hole, with a period of about 84 min.
- Look up (or derive) the period of a satellite that just skims the surface of the earth; compare with the result in part (c). How do you explain the coincidence? Or is it a coincidence?
- With what speed (in miles per hours) does the particle pass through the center of the earth?
- Look up (or derive) the orbital velocity of a satellite that just skims the surface of the earth; compare with the result in part (e). How do you explain the coincidence? Or is it a coincidence?

Express the given circuit in the second-order differential equation

33.

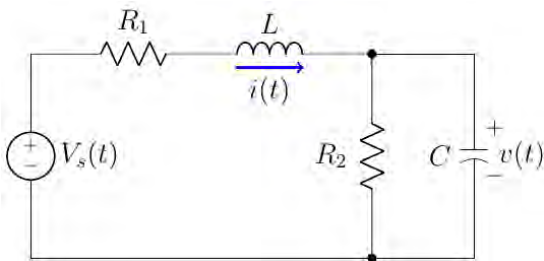

34.

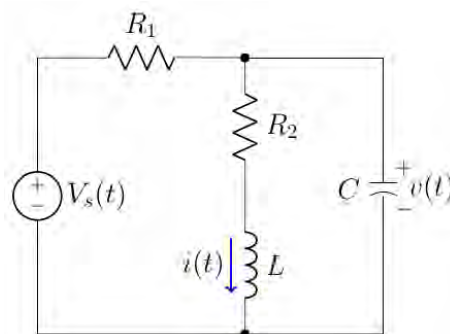

35. Find the steady-state solution  $q_p(t)$  and the steady-state current in and  $LRC$ -series circuit when the source voltage is  $E(t) = E_0 \sin \omega t$

36. Find the charge  $q(t)$  on the capacitor in an  $LRC$ -series circuit when  $L = \frac{5}{3} \text{ h}$ ,  $R = 10 \text{ } \Omega$ ,  $C = \frac{1}{30} \text{ f}$ ,  $E(t) = 300 \text{ V}$ ,  $q(0) = 0 \text{ C}$ , and  $i(0) = 0 \text{ A}$ . Find the maximum charge on the capacitor
37. Find the charge  $q(t)$  on the capacitor in an  $LRC$ -series circuit when  $L = 1 \text{ h}$ ,  $R = 100 \text{ } \Omega$ ,  $C = 0.0004 \text{ f}$ ,  $E(t) = 30 \text{ V}$ ,  $q(0) = 0 \text{ C}$ , and  $i(0) = 2 \text{ A}$ . Find the maximum charge on the capacitor.
38. Find the charge  $q(t)$  and  $i(t)$  on the capacitor in an  $LRC$ -series circuit when  $L = \frac{1}{2} \text{ h}$ ,  $R = 10 \text{ } \Omega$ ,  $C = 0.01 \text{ f}$ , and  $E(t) = 150 \text{ V}$ ,  $q(0) = 1 \text{ C}$ , and  $i(0) = 0 \text{ A}$ . What is the charge on the capacitor after a long time?
39. Find the charge  $q(t)$  and  $i(t)$  on the capacitor in an  $LRC$ -series circuit when  $L = 1 \text{ h}$ ,  $R = 50 \text{ } \Omega$ ,  $C = 0.0002 \text{ f}$ ,  $E(t) = 50 \text{ V}$ ,  $q(0) = 0 \text{ C}$ , and  $i(0) = 0 \text{ A}$ .


Find the steady-state charge and the steady-state current in an  $LRC$ -series circuit when

40.  $L = 1 \text{ h}$ ,  $R = 2 \text{ } \Omega$ ,  $C = 0.25 \text{ f}$ ,  $E(t) = 50 \cos t \text{ V}$
41.  $L = \frac{1}{2} \text{ h}$ ,  $R = 20 \text{ } \Omega$ ,  $C = 0.001 \text{ f}$ ,  $E(t) = 100 \sin 60t \text{ V}$
42.  $L = \frac{1}{2} \text{ h}$ ,  $R = 20 \text{ } \Omega$ ,  $C = 0.001 \text{ f}$ ,  $E(t) = 100 \sin 60t + 200 \cos 40t \text{ V}$

Find the charge  $q(t)$  and  $i(t)$  on the capacitor in an  $LC$ -series circuit when

43.  $E(t) = E_0 \sin \omega t \text{ V}$ ,  $q(0) = q_0 \text{ C}$ , and  $i(0) = i_0 \text{ A}$
44.  $E(t) = E_0 \cos \omega t \text{ V}$ ,  $q(0) = q_0 \text{ C}$ , and  $i(0) = i_0 \text{ A}$
45.  $L = 0.1 \text{ h}$ ,  $C = 0.1 \text{ f}$ ,  $E(t) = 100 \sin \omega t \text{ V}$ ,  $q(0) = 0 \text{ C}$ , and  $i(0) = 0 \text{ A}$
46.  $L = 1 \text{ H}$ ,  $C = 4 \text{ } \mu\text{F}$ ,  $E(t) = 3 \sin 3t \text{ V}$ ,  $q(0) = 0 \text{ C}$ , and  $i(0) = 0 \text{ A}$
47.  $L = 1 \text{ H}$ ,  $C = 4 \text{ } \mu\text{F}$ ,  $E(t) = 10te^{-t} \text{ V}$ ,  $q(0) = 0 \text{ C}$ , and  $i(0) = 0 \text{ A}$


Consider the parallel  $RLC$  network. Assume that at time  $t = 0$ , the voltage  $V(t)$  and its time rate of change are both zero. Determine the voltage  $V(t)$  for

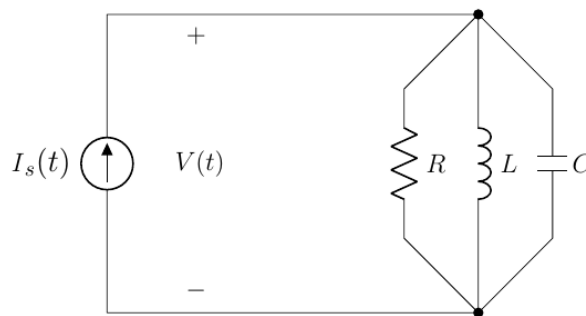

48.  $R = 1\text{ k}\Omega$ ,  $L = 1\text{ H}$ ,  $C = \frac{1}{2}\text{ }\mu\text{F}$ ,  $I_s(t) = 1 - e^{-t}\text{ mA}$
49.  $R = 1\text{ k}\Omega$ ,  $L = 1\text{ H}$ ,  $C = \frac{1}{2}\text{ }\mu\text{F}$ ,  $I_s(t) = 5\sin t\text{ mA}$
50.  $R = 1\text{ k}\Omega$ ,  $L = 1\text{ H}$ ,  $C = \frac{1}{2}\text{ }\mu\text{F}$ ,  $I_s(t) = 5\cos t\text{ mA}$
51.  $R = 2\text{ k}\Omega$ ,  $L = 1\text{ H}$ ,  $C = \frac{1}{4}\text{ }\mu\text{F}$ ,  $I_s(t) = e^{-t}\text{ mA}$
52. An  $RCL$  circuit connected in series has  $R = 180\text{ }\Omega$ ,  $C = \frac{1}{280}\text{ F}$ ,  $L = 20\text{ H}$ , and applied voltage  $E(t) = 10\sin t\text{ V}$ . Assuming no initial charge on the capacitor, but an initial current of  $1\text{ A}$  at  $t = 0$  when the voltage is first applied.
- Find the subsequent charge on the capacitor.
  - Plot the *transient*, *steady-state*, and the charge on the capacitor.
  - Find the current on the capacitor.
53. An  $RCL$  circuit connected in series has  $R = 10\text{ }\Omega$ ,  $C = 10^{-2}\text{ F}$ ,  $L = \frac{1}{2}\text{ H}$ , and applied voltage  $E(t) = 12\text{ V}$ . Assuming no initial charge and no initial current at  $t = 0$  when the voltage is first applied.
- Find the subsequent charge on the capacitor.
  - Plot the *transient*, *steady-state*, and the charge on the capacitor.
  - Find the current on the capacitor.
54. An  $RCL$  circuit connected in series has  $R = 5\text{ }\Omega$ ,  $C = 4 \times 10^{-4}\text{ F}$ ,  $L = 0.05\text{ H}$ , and applied voltage  $E(t) = 200\cos 100t\text{ V}$ . Assuming no initial charge and no initial current at  $t = 0$  when the voltage is first applied.
- Find the subsequent charge on the capacitor.
  - Plot the *transient*, *steady-state*, and the charge on the capacitor.
  - Find the current flowing through this circuit.
55. An  $RCL$  circuit connected in series has  $R = 40\text{ }\Omega$ ,  $C = 16 \times 10^{-4}\text{ F}$ ,  $L = 1\text{ H}$ , and applied voltage  $E(t) = 100\cos 10t\text{ V}$ . Assuming no initial charge and no initial current at  $t = 0$  when the voltage is first applied.
- Find the charge in the circuit at time  $t$ .
  - Find the current flowing through this circuit.
  - Find the limit of the charge as  $t \rightarrow \infty$
56. A series circuit consists of a resistor with  $R = 20\text{ }\Omega$ , an inductor with  $L = 1\text{ H}$ , a capacitor with  $C = 0.002\text{ F}$ , and a  $12\text{-V}$  battery. If the initial charge and current are both  $0$ , find the charge and current at time  $t$ .

57. A series circuit consists of a resistor with  $R = 20\ \Omega$ , an inductor with  $L = 1\ H$ , a capacitor with  $C = 0.002\ F$ , and  $E(t) = 12\sin 10t$ . If the initial charge and current are both 0, find the charge and current at time  $t$ .


58. Consider the given circuit. Assuming that the voltage source changes from 10 to 25 V at time  $t = 0$ ,  $v_s = 10 + 15u(t)$  V, where  $u(t)$  is a unit step function.

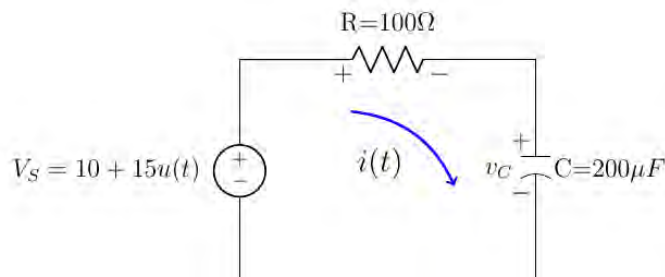

Find the expressions that describe the voltage drop across the resistor across the capacitor and the current in the loop for  $t > 0$

59. Find the steady-state solution  $q_p(t)$  and the steady-state current in and  $LRC$ -series circuit when the source voltage is  $E(t) = E_0 \sin \omega t$

60. Consider the given  $RC$ -circuit with impressed  $emf$  is  $E = E_0 \sin \omega t$  V. If no initial current is flowing at  $t = 0$ , find the current  $i(t)$  for all  $t > 0$ .

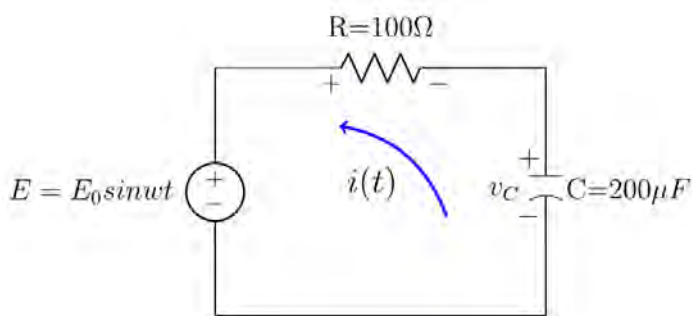

# The Laplace Transform

## Section 2.7 – Definition of Laplace Transform


### Definition

Suppose  $f(t)$  is a function of  $t$  defined for  $0 < t < \infty$ . The **Laplace transform** of  $f$  is the function

$$\mathcal{L}[(f)(s)] = F(s) = \int_0^{\infty} f(t)e^{-st} dt$$

The integral of the Laplace transform is an improper integral because the upper limit is  $\infty$ .

$$F(s) = \int_0^{\infty} f(t)e^{-st} dt = \lim_{T \rightarrow \infty} \int_0^T f(t)e^{-st} dt$$



(1749 – 1827)

The domain of  $F$  is the set of real number  $s$  for which the improper integral converges.

### Example

Assume  $f(t) = e^{at}$

### Solution

$$\begin{aligned} F(s) &= \int_0^{\infty} e^{at} e^{-st} dt \\ &= \int_0^{\infty} e^{-(s-a)t} dt \end{aligned}$$

$$F(s) = \lim_{T \rightarrow \infty} \int_0^T e^{-(s-a)t} dt$$

$$= \lim_{T \rightarrow \infty} \left. \frac{-e^{-(s-a)t}}{s-a} \right|_0^T$$

$$= \lim_{T \rightarrow \infty} \left( \frac{-e^{-(s-a)T}}{s-a} + \frac{1}{s-a} \right)$$

$$= \frac{1}{s-a}$$

$$e^{-(s-a)0} = 1$$

$$e^{-(s-a)\infty} = \frac{1}{e^{\infty}} = 0$$

$$\mathcal{L}(e^{at})(s) = F(s) = \underline{\frac{1}{s-a}} \quad \text{for } s > a$$

### Example

Assume  $f(t) = t$

### Solution

$$F(s) = \int_0^{\infty} te^{-st} dt$$

$$\begin{aligned} u &= t & dv &= \int e^{-st} dt \\ du &= dt & v &= -\frac{1}{s}e^{-st} \end{aligned}$$

$$\begin{aligned} \int te^{-st} dt &= -\frac{1}{s}te^{-st} - \int \left(-\frac{1}{s}\right)e^{-st} dt \\ &= -\frac{1}{s}te^{-st} + \frac{1}{s} \int e^{-st} dt \\ &= -\frac{1}{s}te^{-st} + \frac{1}{s} \left(-\frac{1}{s}\right)e^{-st} \\ &= -\frac{1}{s}te^{-st} - \frac{1}{s^2}e^{-st} \end{aligned}$$

$$F(s) = \lim_{T \rightarrow \infty} \left( -\frac{1}{s}te^{-st} - \frac{1}{s^2}e^{-st} \right)_{t=0}^T$$

$$= \lim_{T \rightarrow \infty} \left( -\frac{1}{s}Te^{-sT} - \frac{1}{s^2}e^{-sT} + \frac{1}{s^2} \right)$$

$$\underline{= \frac{1}{s^2}}$$

$$\lim_{T \rightarrow \infty} \left( e^{-sT} \right) = 0$$

*Laplace transform to any power  $t^n$*

$$\mathcal{L}(t^n)(s) = \frac{n!}{s^{n+1}}$$

### Example

Assume  $f(t) = \sin at$

### Solution

$$F(s) = \int_0^{\infty} e^{-st} \sin at \, dt$$

$$u = e^{-st} \quad dv = \int \sin at \, dt$$

$$du = -se^{-st} dt \quad v = -\frac{1}{a} \cos at$$

$$\begin{aligned} \int e^{-st} \sin at \, dt &= -\frac{1}{a} e^{-st} \cos at - \int \left( -\frac{1}{a} \cos at \right) \left( -se^{-st} \right) dt \\ &= -\frac{1}{a} e^{-st} \cos at - \frac{s}{a} \int \left( e^{-st} \cos at \right) dt \end{aligned}$$

$$\begin{aligned} \int \left( e^{-st} \cos at \right) dt \quad u &= e^{-st} \quad dv = \int \cos at \, dt \\ du &= -se^{-st} dt \quad v = \frac{1}{a} \sin at \end{aligned}$$

$$\int e^{-st} \sin at \, dt = -\frac{1}{a} e^{-st} \cos at - \frac{s}{a} \left[ \frac{1}{a} e^{-st} \sin at - \frac{1}{a} \int \left( -se^{-st} \right) (\sin at) \, dt \right]$$

$$\int e^{-st} \sin at \, dt = -\frac{1}{a} e^{-st} \cos at - \frac{s}{a^2} e^{-st} \sin at - \frac{s^2}{a^2} \int e^{-st} \sin at \, dt$$

$$\int e^{-st} \sin at \, dt + \frac{s^2}{a^2} \int e^{-st} \sin at \, dt = -\frac{1}{a} e^{-st} \cos at - \frac{s}{a^2} e^{-st} \sin at$$

$$\frac{a^2 + s^2}{a^2} \int e^{-st} \sin at \, dt = -\frac{1}{a} e^{-st} \cos at - \frac{s}{a^2} e^{-st} \sin at$$

$$\int e^{-st} \sin at \, dt = -\frac{ae^{-st}}{a^2 + s^2} \cos at - \frac{se^{-st}}{a^2 + s^2} \sin at$$

$$F(s) = \lim_{T \rightarrow \infty} \int_0^T e^{-st} \sin at \, dt$$

$$= \lim_{T \rightarrow \infty} \left( \left( -\frac{ae^{-sT}}{a^2 + s^2} \cos aT - \frac{se^{-sT}}{a^2 + s^2} \sin aT \right) - \left( -\frac{ae^{-s(0)}}{a^2 + s^2} \cos a(0) - \frac{se^{-s(0)}}{a^2 + s^2} \sin a(0) \right) \right)$$

$$= \lim_{T \rightarrow \infty} \left( \left( -\frac{ae^{-sT}}{a^2 + s^2} \cos aT - \frac{se^{-sT}}{a^2 + s^2} \sin aT \right) - \left( -\frac{a}{a^2 + s^2} \right) \right)$$

$$= \lim_{T \rightarrow \infty} \left( -\frac{ae^{-sT}}{a^2 + s^2} \cos aT - \frac{se^{-sT}}{a^2 + s^2} \sin aT \right) + \frac{a}{a^2 + s^2}$$

$$\lim_{T \rightarrow \infty} \left( e^{-sT} \right) = 0$$

$$= \frac{a}{a^2 + s^2}$$

### ***Definition***

$f$  is of exponential order  $\lambda$  if there exists a positive number  $M$  and a nonnegative number  $A$  such that

$$|f(x)| \leq Me^{\lambda x} \quad \text{on } [A, \infty)$$

### ***Theorem***

Let  $f$  be a continuous function on  $[0, \infty)$ . If  $f$  is of exponential order  $\lambda$ , then the Laplace transform

$$\mathcal{L}[f(x)] = F(s) \text{ exists for } s > \lambda.$$



## **Exercises**      **Section 2.7 – Definition of Laplace Transform**

Use Definition of Laplace transform to find the Laplace transform of:

- |                            |                          |                             |
|----------------------------|--------------------------|-----------------------------|
| 1. $f(t) = 3$              | 9. $f(t) = \sin 3t$      | 17. $f(t) = e^{-t} \sin t$  |
| 2. $f(t) = t$              | 10. $f(t) = \sin 2t$     | 18. $f(t) = e^{2t} \cos 3t$ |
| 3. $f(t) = t^2$            | 11. $f(t) = \cos 2t$     | 19. $f(t) = e^{-t} \sin 2t$ |
| 4. $f(t) = e^{6t}$         | 12. $f(t) = \cos bt$     | 20. $f(t) = t \sin t$       |
| 5. $f(t) = e^{-2t}$        | 13. $f(t) = e^{t+7}$     | 21. $f(t) = t \cos t$       |
| 6. $f(t) = te^{-3t}$       | 14. $f(t) = e^{-2t-5}$   | 22. $f(t) = 2t^4$           |
| 7. $f(t) = te^{3t}$        | 15. $f(t) = te^{4t}$     |                             |
| 8. $f(t) = e^{2t} \cos 3t$ | 16. $f(t) = t^2 e^{-2t}$ |                             |

Use Definition of Laplace transform to show the Laplace transform of

23.  $f(t) = \cos \omega t$  is  $F(s) = \frac{s}{s^2 + \omega^2}$

## Section 2.8 – Basic Properties of the Laplace Transform

### The Laplace Transform of Derivatives

#### Proposition

Suppose  $y$  is a piecewise differentiable function of exponential order. Suppose also that  $y'$  is of the exponential order.

$$\begin{aligned}\mathcal{L}(y')(s) &= s \cdot \mathcal{L}(y)(s) - y(0) \\ &= sY(s) - y(0)\end{aligned}$$

#### Proof

$$\begin{aligned}\mathcal{L}(y')(s) &= \int_0^{\infty} y'(t)e^{-st} dt \\ &= \lim_{T \rightarrow \infty} \int_0^T y'(t)e^{-st} dt \\ &= \lim_{T \rightarrow \infty} \left[ e^{-st} y(t) \Big|_{t=0}^T + s \int_0^T y(t)e^{-st} dt \right] \\ &= \lim_{T \rightarrow \infty} e^{-sT} y(T) - y(0) + s \cdot \mathcal{L}(y)(s)\end{aligned}$$

Let:  $|y(t)| \leq Ce^{at}$

$$e^{-sT} |y(T)| \leq Ce^{aT} e^{-sT}$$

$e^{-sT} |y(T)| \leq Ce^{-(s-a)T}$  ; which converges to 0 for  $s > a$  as  $T \rightarrow \infty$ . Therefore,

$$\mathcal{L}(y')(s) = s \cdot \mathcal{L}(y)(s) - y(0)$$

#### Proposition

$$\begin{aligned}\mathcal{L}(y'')(s) &= s^2 \cdot \mathcal{L}(y)(s) - sy(0) - y'(0) \\ &= s^2 Y(s) - sy(0) - y'(0)\end{aligned}$$

#### Proposition

$$\begin{aligned}\mathcal{L}(y^{(k)})(s) &= s^k \cdot \mathcal{L}(y)(s) - s^{k-1}y(0) - \dots - sy^{(k-2)}(0) - y^{(k-1)}(0) \\ &= s^k Y(s) - s^{k-1}y(0) - \dots - sy^{(k-2)}(0) - y^{(k-1)}(0)\end{aligned}$$

## Laplace Transform Linear

$$\mathcal{L}[\alpha f(t) + \beta g(t)](s) = \alpha \mathcal{L}[f(t)](s) + \beta \mathcal{L}[g(t)](s)$$

### Example

Find the Laplace transform of  $f(t) = 3\sin 2t - 4t + 5e^{3t}$

### Solution

$$\begin{aligned}\mathcal{L}[3\sin 2t - 4t + 5e^{3t}](s) &= 3\mathcal{L}[\sin 2t](s) - 4\mathcal{L}[t](s) + 5\mathcal{L}[e^{3t}](s) \\ &= 3\left(\frac{2}{4 + s^2}\right) - 4\left(\frac{1}{s^2}\right) + 5\left(\frac{1}{s - 3}\right)\end{aligned}$$

### Example

Transform the initial value problem into an algebraic equation involving  $\mathcal{L}(y)$ . Solve the resulting equation for the Laplace transform of  $y$ .

$$y'' - y = e^{2t} \quad \text{with} \quad y(0) = 0 \quad \text{and} \quad y'(0) = 1$$

### Solution

For the right-hand side

$$\mathcal{L}(e^{2t})(s) = \frac{1}{s - 2}$$

$$\begin{aligned}\mathcal{L}\{y'' - y\}(s) &= \mathcal{L}\{y''\}(s) - \mathcal{L}\{y\}(s) \\ &= s^2 \cdot \mathcal{L}(y)(s) - sy(0) - y'(0) - \mathcal{L}(y)(s) \\ &= s^2 Y(s) - sy(0) - y'(0) - Y(s) && y(0) = 0 \quad \text{and} \quad y'(0) = 1 \\ &= s^2 Y(s) - 1 - Y(s)\end{aligned}$$

$$s^2 Y(s) - Y(s) - 1 = \frac{1}{s - 2}$$

$$Y(s)(s^2 - 1) = \frac{1}{s - 2} + 1$$

$$\begin{aligned}Y(s) &= \frac{1}{s^2 - 1} \left[ \frac{1}{s - 2} + 1 \right] \\ &= \frac{1}{(s - 1)(s + 1)} \left[ \frac{s - 1}{s - 2} \right] \\ &= \frac{1}{(s - 2)(s + 1)}\end{aligned}$$

## Laplace Transform of the Product of an Exponential with a Function

The result is a translation in the Laplace transform

$$\mathcal{L}\left(e^{ct} f(t)\right)(s) = F(s - c)$$

### Example

Compute the Laplace transform of the function  $g(t) = e^{2t} \sin 3t$

### Solution

$$\text{Let } f(t) = \sin 3t \rightarrow F(s) = \frac{3}{s^2 + 9}$$

With  $c = 2$

$$\begin{aligned}\mathcal{L}\left(e^{2t} f(t)\right)(s) &= F(s - c) \\ &= \frac{3}{(s - 2)^2 + 9} \\ &= \frac{3}{s^2 - 4s + 13}\end{aligned}$$

### Proposition: Derivative of a Laplace Transform

$$\mathcal{L}(s) = -F'(s)$$

$$\mathcal{L}\left[t^n \cdot f(t)\right](s) = (-1)^n F^{(n)}(s)$$

### Example

Compute the Laplace transform of  $t^2 e^{3t}$

### Solution

$$f(t) = e^{3t} \Rightarrow F(s) = \frac{1}{s - 3}$$

$$F'(s) = \frac{-1}{(s - 3)^2}$$

$$F''(s) = \frac{2}{(s - 3)^3}$$

$$\begin{aligned}\mathcal{L}\left[t^2 e^{3t}\right](s) &= (-1)^2 F''(s) \\ &= \frac{2}{(s - 3)^3}\end{aligned}$$

## Exercises      Section 2.8 – Basic Properties of the Laplace Transform

Find the Laplace transform and defined the time domain of

1.  $y(t) = t^2 + 4t + 5$
2.  $y(t) = -2\cos t + 4\sin 3t$
3.  $y(t) = 2\sin 3t + 3\cos 5t$

Transform the initial value problem into an algebraic equation involving  $\mathcal{L}(y)$ . Solve the resulting equation for the Laplace transform of  $y$ .

4.  $y' - 5y = e^{-2t}$ , with  $y(0) = 1$
5.  $y' - 4y = \cos 2t$ , with  $y(0) = -2$
6.  $y'' + 2y' + 2y = \cos 2t$ ; with  $y(0) = 1$  and  $y'(0) = 0$
7.  $y'' + 3y' + 5y = t + e^{-t}$ ; with  $y(0) = -1$  and  $y'(0) = 0$

Find the Laplace transform of  $\mathcal{L}\{f(t)\}$

- |                                      |   |
|--------------------------------------|---|
| 8. $f(t) = 2t^4$                     | 23. $f(t) = e^{-2t}(2t + 3)$              |
| 9. $f(t) = t^5$                      | 24. $f(t) = e^{-t}(t^2 + 3t + 4)$         |
| 10. $f(t) = 4t - 10$                 | 25. $f(t) = 1 + e^{4t}$                   |
| 11. $f(t) = 7t + 3$                  | 26. $f(t) = e^{2t} \cos 2t$               |
| 12. $f(t) = 3t^4 - 2t^2 + 1$         | 27. $f(t) = t^3 - te^t + e^{4t} \cos t$   |
| 13. $f(t) = (t + 1)^3$               | 28. $f(t) = t^2 - 3t - 2e^{-t} \sin 3t$   |
| 14. $f(t) = (2t - 1)^3$              | 29. $f(t) = \sin^2 t$                     |
| 15. $f(t) = (t - 1)^4$               | 30. $f(t) = e^{7t} \sin^2 t$              |
| 16. $f(t) = t^2 + 6t - 3$            | 31. $f(t) = t \sin^2 t$                   |
| 17. $f(t) = -4t^2 + 16t + 9$         | 32. $f(t) = \cos^3 t$                     |
| 18. $f(t) = 3t^2 - e^{2t}$           | 33. $f(t) = te^{-t} \sin 2t$              |
| 19. $f(t) = t^2 - e^{-9t} + 9$       | 34. $f(t) = te^{2t} \cos 5t$              |
| 20. $f(t) = 6e^{-3t} - t^2 + 2t - 8$ | 35. $f(t) = t^2 + e^t \sin 2t$            |
| 21. $f(t) = 5 - e^{2t} + 6t^2$       | 36. $f(t) = e^{-t} \cos 3t + e^{6t} - 1$  |
| 22. $f(t) = t^2 e^{2t}$              | 37. $f(t) = e^{-2t} \sin 2t + t^2 e^{3t}$ |

38.  $f(t) = 2t^2 e^{-2t} - t + \cos 4t$
39.  $f(t) = t \sin 3t$
40.  $f(t) = t^2 \cos 2t$
41.  $f(t) = (1 + e^{-t})^2$
42.  $f(t) = (1 + e^{2t})^2$
43.  $f(t) = (e^t - e^{-t})^2$
44.  $f(t) = 4t^2 - 5 \sin 3t$
45.  $f(t) = \cos 5t + \sin 2t$
46.  $f(t) = e^{3t} \sin 6t - t^3 + e^t$
47.  $f(t) = t^4 + t^2 - t + \sin \sqrt{2}t$
48.  $f(t) = t^4 e^{5t} - e^t \cos \sqrt{7}t$
49.  $f(t) = e^{-2t} \cos \sqrt{3}t - t^2 e^{-2t}$
50.  $f(t) = 6e^{-5t} + e^{3t} + 5t^3 - 9$
51.  $f(t) = 4 \cos 4t - 9 \sin 4t + 2 \cos 10t$
52.  $f(t) = 3 \sinh 2t + 3 \sin 2t$
53.  $f(t) = e^{3t} + \cos 6t - e^{3t} \cos 6t$
54.  $f(t) = t \cosh 3t$
55.  $f(t) = t^2 \sin 2t$
56.  $f(t) = \sinh kt$
57.  $f(t) = \cosh kt$
58.  $f(t) = e^t \sinh kt$
59.  $f(t) = e^{-t} \cosh kt$

Transform the initial value problem into an algebraic equation involving  $\mathcal{L}(y)$ . Solve the resulting equation for the Laplace transform of  $y$ .

60.  $y' + 2y = t \sin t$ , with  $y(0) = 1$
61.  $y' + 2y = t^2 e^{-2t}$ , with  $y(0) = 0$
62.  $y'' + y' + 2y = e^{-t} \cos 2t$ , with  $y(0) = 1$  and  $y'(0) = -1$
63.  $y' - 5y = e^{-2t}$ , with  $y(0) = 1$
64.  $y' - 4y = \cos 2t$ , with  $y(0) = -2$
65.  $y'' + 2y' + 2y = \cos 2t$ ; with  $y(0) = 1$  and  $y'(0) = 0$
66.  $y'' + 3y' + 5y = t + e^{-t}$ ; with  $y(0) = -1$  and  $y'(0) = 0$


## Section 2.9 – Inverse Laplace Transform

### Definition

If  $f$  is a continuous function of exponential order and  $\mathcal{L}(f)(s) = F(s)$ , then we call  $f$  the inverse Laplace transform of  $F$ ,

$$f(t) = \mathcal{L}^{-1}(F(s))$$

$$F(s) = \mathcal{L}(f(t)) \Leftrightarrow f(t) = \mathcal{L}^{-1}(F(s))$$

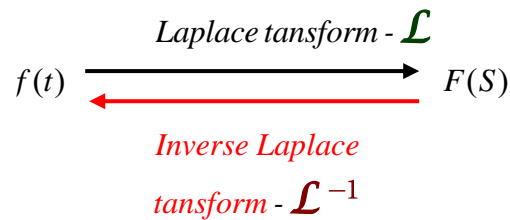

Note: Inverse transforms are not unique. If  $f_1$  and  $f_2$  are identical except at a discrete set of points, then  $\mathcal{L}(f_1(t)) = \mathcal{L}(f_2(t))$ . However, there is at most one continuous function  $f$  satisfying  $\mathcal{L}\{f(t)\} = F(s)$

### Laplace Transform Linear

#### Proposition

$$\begin{aligned} \mathcal{L}^{-1}[aF(s) + bG(s)] &= a.\mathcal{L}^{-1}(F(s)) + b.\mathcal{L}^{-1}(G(s)) \\ &= af(t) + bg(t) \end{aligned}$$

### Example

Compute the inverse Laplace transform of  $F(s) = \frac{1}{s-2} - \frac{16}{s^2+4}$

#### Solution

$$\mathcal{L}^{-1}\left\{\frac{1}{s-2}\right\} = e^{2t}$$

$$\mathcal{L}^{-1}\left\{\frac{2}{s^2+4}\right\} = \sin 2t$$

$$\mathcal{L}^{-1}\left\{\frac{1}{s-2} - 8\frac{2}{s^2+4}\right\} = \underline{e^{2t} - 8\sin 2t}$$

### Example

Compute the inverse Laplace transform of  $F(s) = \frac{1}{s^2 - 2s - 3}$  ;  $s > 3$

### Solution

$$\begin{aligned}\frac{1}{s^2 - 2s - 3} &= \frac{A}{s-3} + \frac{B}{s+1} \\ &= \frac{As + A + Bs - 3B}{(s-3)(s+1)} \\ &= \frac{(A+B)s + A - 3B}{(s-3)(s+1)} &= \frac{A(s+1) + B(s-3)}{(s-3)(s+1)}\end{aligned}$$

$$\begin{cases} A+B=0 \\ A-3B=1 \end{cases} \rightarrow A = \frac{1}{4} \quad B = -\frac{1}{4}$$
$$\begin{cases} s=3 \Rightarrow 1=4A & A = \frac{1}{4} \\ s=1 \Rightarrow 1=-4A & B = -\frac{1}{4} \end{cases}$$

$$\frac{1}{s^2 - 2s - 3} = \frac{1}{4} \left( \frac{1}{s-3} - \frac{1}{s+1} \right)$$

$$\begin{aligned}\mathcal{L}^{-1}\{F(s)\} &= \frac{1}{4} \mathcal{L}^{-1}\left\{ \frac{1}{s-3} - \frac{1}{s+1} \right\} \\ &= \frac{1}{4} \left( e^{3t} - e^{-t} \right)\end{aligned}$$

### Example

Compute the inverse Laplace transform of  $F(s) = \frac{1}{s^2 + 4s + 13}$

### Solution

$$\begin{aligned}s^2 + 4s + 13 &= s^2 + 4s + 4 + 9 \\ &= (s+2)^2 + 3^2\end{aligned}$$

$$\mathcal{L}^{-1}\left\{ \frac{1}{3} \frac{3}{(s+2)^2 + 3^2} \right\} = \frac{1}{3} e^{-2t} \sin 3t$$



### Example

Find the inverse Laplace transform of  $F(s) = \frac{2s^2 + s + 13}{(s-1)((s+1)^2 + 4)}$

### Solution

$$\begin{aligned}\frac{2s^2 + s + 13}{(s-1)((s+1)^2 + 4)} &= \frac{A}{(s-1)} + \frac{Bs + C}{(s+1)^2 + 4} \\&= \frac{As^2 + 2As + 5A + Bs^2 + (C-B)s - C}{(s-1)(s^2 + 2s + 5)} \\&= \frac{(A+B)s^2 + (2A+C-B)s + 5A-C}{(s-1)(s^2 + 2s + 5)} \\&\quad \begin{cases} A+B=2 & \rightarrow B=2-A \\ 2A-B+C=1 & 2A-2+A+5A-13=1 \Rightarrow A=2 \\ 5A-C=13 & \rightarrow C=5A-13 \end{cases} \\&\quad \begin{cases} B=2-2=0 \\ C=5(2)-13=-3 \end{cases}\end{aligned}$$

$$F(s) = \frac{2}{(s-1)} - \frac{3}{(s+1)^2 + 4}$$

$$\begin{aligned}f(t) &= \mathcal{L}^{-1} \left\{ \frac{2}{(s-1)} - \frac{3}{(s+1)^2 + 4} \right\} \\&= 2\mathcal{L}^{-1} \left\{ \frac{1}{(s-1)} \right\} - 3\frac{1}{2}\mathcal{L}^{-1} \left\{ \frac{2}{(s+1)^2 + 4} \right\} \\&= \underline{2e^{-t} - \frac{3}{2}e^{-t} \sin 2t}\end{aligned}$$

## Exercises      Section 2.9 – Inverse Laplace Transform

Find the inverse Laplace transform of

1.  $Y(s) = \frac{1}{3s+2}$

2.  $Y(s) = \frac{2}{3-5s}$

3.  $Y(s) = \frac{1}{s^2+4}$

4.  $Y(s) = \frac{3}{s^2}$

5.  $Y(s) = \frac{3s+2}{s^2+25}$

6.  $Y(s) = \frac{2-5s}{s^2+9}$

7.  $Y(s) = \frac{5}{(s+2)^3}$

8.  $Y(s) = \frac{1}{(s-1)^6}$

9.  $Y(s) = \frac{4(s-1)}{(s-1)^2+4}$

10.  $Y(s) = \frac{2s-3}{(s-1)^2+5}$

11.  $Y(s) = \frac{2s-1}{(s+1)(s-2)}$

12.  $Y(s) = \frac{2s-2}{(s-4)(s+2)}$

13.  $Y(s) = \frac{7s^2+3s+16}{(s+1)(s^2+4)}$

14.  $Y(s) = \frac{1}{(s+2)^2(s^2+9)}$

15.  $Y(s) = \frac{s}{(s+2)^2(s^2+9)}$

16.  $Y(s) = \frac{1}{(s+1)^2(s^2-4)}$

17.  $Y(s) = \frac{7s^2+20s+53}{(s-1)(s^2+2s+5)}$

18.  $F(s) = \frac{1}{s^3}$

19.  $F(s) = \frac{1}{s^4}$

20.  $F(s) = \frac{1}{s^2} - \frac{48}{s^5}$

21.  $F(s) = \frac{1}{s^2} - \frac{1}{s} + \frac{1}{s-2}$

22.  $F(s) = \frac{4}{s} + \frac{4}{s^5} + \frac{1}{s-8}$

23.  $F(s) = \frac{1}{4s+1}$

24.  $F(s) = \frac{1}{5s-2}$

25.  $F(s) = \frac{s+1}{s^2+2}$

26.  $F(s) = \frac{2s-6}{s^2+9}$

27.  $F(s) = \frac{10s}{s^2+16}$

28.  $F(s) = \left( \frac{2}{s} - \frac{1}{s^3} \right)^2$

29.  $F(s) = \frac{(s+1)^3}{s^4}$

30.  $F(s) = \frac{(s+2)^2}{s^3}$

31.  $F(s) = \frac{1}{s^4-9}$

32.  $F(s) = \frac{1}{s^3+5s}$

33.  $F(s) = \frac{5}{s^2+36}$

34.  $F(s) = \frac{10s}{s^2+16}$

35.  $F(s) = \frac{4s}{4s^2+1}$

36.  $F(s) = \frac{1}{4s^2+1}$

37.  $F(s) = \frac{1}{s^2 + 3s}$
38.  $F(s) = \frac{s+1}{s^2 - 4s}$
39.  $F(s) = \frac{1}{s^3 + 5s}$
40.  $F(s) = \frac{3}{s^2 + 9}$
41.  $F(s) = \frac{2}{s^2 + 4}$
42.  $F(s) = \frac{3}{(2s+5)^3}$
43.  $F(s) = \frac{6}{(s-1)^4}$
44.  $F(s) = \frac{5}{(s+2)^4}$
45.  $F(s) = \frac{s-1}{s^2 - 2s + 5}$
46.  $F(s) = \frac{3s+2}{s^2 + 2s + 10}$
47.  $F(s) = \frac{s}{s^2 + 2s - 3}$
48.  $F(s) = \frac{1}{s^2 + 2s - 20}$
49.  $F(s) = \frac{s+1}{s^2 + 2s + 10}$
50.  $F(s) = \frac{1}{s^2 + 4s + 8}$
51.  $F(s) = \frac{2s+16}{s^2 + 4s + 13}$
52.  $F(s) = \frac{2s+16}{s^2 + 4s + 13}$
53.  $F(s) = \frac{s-1}{2s^2 + s + 6}$
54.  $F(s) = \frac{s^2 + 1}{s^3 - 2s^2 - 8s}$
55.  $F(s) = \frac{6s+3}{s^4 + 5s^2 + 4}$
56.  $F(s) = \frac{s-3}{(s-\sqrt{3})(s+\sqrt{3})}$
57.  $F(s) = \frac{1}{(s^2 + 1)(s^2 + 4)}$
58.  $F(s) = \frac{2s-4}{(s^2 + s)(s^2 + 1)}$
59.  $F(s) = \frac{s}{(s+2)(s^2 + 4)}$
60.  $F(s) = \frac{s^2 + 1}{s(s-1)(s+1)(s-2)}$
61.  $F(s) = \frac{s}{(s-2)(s-3)(s-6)}$
62.  $F(s) = \frac{7s-1}{(s+1)(s+2)(s-3)}$
63.  $F(s) = \frac{s^2 + 9s + 2}{(s-1)^2(s+3)}$
64.  $F(s) = \frac{2s^2 + 10s}{(s^2 - 2s + 5)(s+1)}$
65.  $F(s) = \frac{s^2 - 26s - 47}{(s-1)(s+2)(s+5)}$
66.  $F(s) = \frac{-s-7}{(s-1)(s+2)}$
67.  $F(s) = \frac{-8s^2 - 5s + 9}{(s^2 - 3s + 2)(s+1)}$
68.  $F(s) = \frac{-2s^2 + 8s - 14}{(s+1)(s^2 - 2s + 5)}$
69.  $F(s) = \frac{-5s-36}{(s+2)(s^2 + 9)}$
70.  $F(s) = \frac{3s^2 + 5s + 3}{s^4 + s^3}$
71.  $F(s) = \frac{7s^3 - 2s^2 - 3s + 6}{s^3(s-2)}$
72.  $F(s) = \frac{7s^2 - 41s + 84}{(s-1)(s^2 - 4s + 13)}$
73.  $F(s) = \frac{6s-5}{s^2 + 7}$

$$74. \quad F(s) = \frac{1-3s}{s^2+8s+21}$$

$$75. \quad F(s) = \frac{3s-2}{2s^2-6s-2}$$

$$76. \quad F(s) = \frac{s+7}{s^2-3s-10}$$

$$77. \quad F(s) = \frac{86s-78}{(s+3)(s-4)(5s-1)}$$

$$78. \quad F(s) = \frac{2-5s}{(s-6)(s^2+11)}$$

$$79. \quad F(s) = \frac{25}{s^3(s^2+4s+5)}$$

$$80. \quad F(s) = \frac{5e^{-6s}-3e^{-11s}}{(s+2)(s^2+9)}$$

## Section 2.10 – Applications

### Example

Use Laplace transform to find the solution to the initial value problem

$$y'' - y = e^{2t} \quad y(0) = 0 \quad \text{and} \quad y'(0) = 1$$

### Solution

$$\mathcal{L}\{y'' - y\} = \mathcal{L}\{e^{2t}\}$$

$$\mathcal{L}\{y''\} - \mathcal{L}\{y\} = \mathcal{L}\{e^{2t}\}$$

$$(s^2 Y(s) - sy(0) - y'(0)) - Y(s) = \frac{1}{s-2}$$

$$(s^2 - 1)Y(s) - 1 = \frac{1}{s-2}$$

$$(s^2 - 1)Y(s) = \frac{1}{s-2} + 1$$

$$(s-1)(s+1)Y(s) = \frac{s-1}{s-2}$$

$$Y(s) = \frac{1}{(s+1)(s-2)}$$

$$= \frac{A}{(s+1)} + \frac{B}{(s-2)}$$

$$= \frac{(A+B)s + B - 2A}{(s+1)(s-2)}$$

$$\begin{cases} A+B=0 \\ -2A+B=1 \end{cases} \Rightarrow A = -\frac{1}{3}; B = \frac{1}{3}$$

$$Y(s) = \frac{1}{3} \left[ -\frac{1}{(s+1)} + \frac{1}{(s-2)} \right]$$

$$y(t) = \mathcal{L}^{-1}[Y(s)]$$


$$= \frac{1}{3} \mathcal{L}^{-1} \left\{ \frac{1}{(s-2)} - \frac{1}{(s+1)} \right\}$$

$$= \frac{1}{3} (e^{2t} - e^{-t})$$

### Example

Solve the initial value problem  $x'' + 4x = \sin 3t$ ;  $x(0) = x'(0) = 0$ .

Such problem arises in the motion of a mass-and-spring system with external force as shown below.

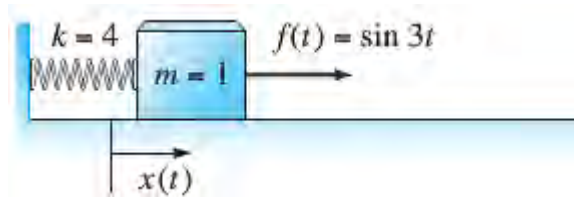

### Solution

$$\mathcal{L}\{x'' + 4x\} = \mathcal{L}\{\sin 3t\}$$

$$\mathcal{L}\{x''\} - \mathcal{L}\{4x\} = \mathcal{L}\{\sin 3t\}$$

$$(s^2 X(s) - sx(0) - x'(0)) + 4X(s) = \frac{3}{s^2 + 9}$$

$$(s^2 + 4)X(s) = \frac{3}{s^2 + 9}$$

$$X(s) = \frac{3}{(s^2 + 4)(s^2 + 9)} = \frac{As + B}{s^2 + 4} + \frac{Cs + D}{s^2 + 9}$$

$$3 = (As + B)(s^2 + 9) + (Cs + D)(s^2 + 4)$$

$$3 = (A + C)s^3 + (B + D)s^2 + (9A + 4C)s + 9B + 4D$$


$$\begin{cases} A + C = 0 \\ B + D = 0 \\ 9A + 4C = 0 \\ 9B + 4D = 3 \end{cases} \Rightarrow \begin{cases} A = C = 0 \\ B = \frac{3}{5}; D = -\frac{3}{5} \end{cases}$$


$$X(s) = \frac{3}{5} \frac{1}{s^2 + 4} - \frac{3}{5} \frac{1}{s^2 + 9} = \frac{3}{10} \frac{2}{s^2 + 4} - \frac{1}{5} \frac{3}{s^2 + 9}$$

$$x(t) = \mathcal{L}^{-1}[X(s)]$$

$$= \frac{3}{10} \mathcal{L}^{-1}\left\{\frac{2}{s^2 + 4}\right\} - \frac{1}{5} \mathcal{L}^{-1}\left\{\frac{3}{s^2 + 9}\right\}$$

$$= \frac{3}{10} \sin 2t - \frac{1}{5} \sin 3t$$

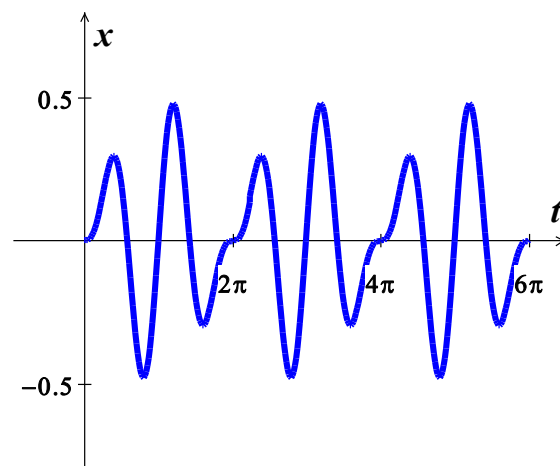

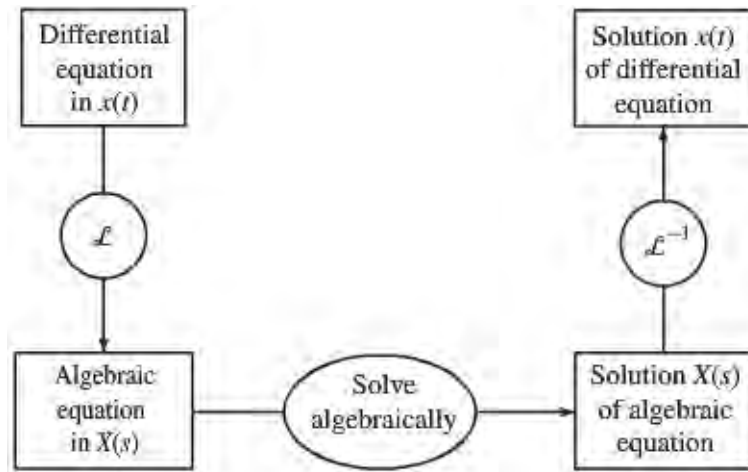

## Linear Systems


Laplace transforms are used frequently in engineering problems to solve linear system in which the coefficients are all constants. When initial conditions are specified, the Laplace transform reduces such a linear system of differential equations to a linear system of algebraic equations in which the unknowns are the transforms of the solution functions. The technique for a system is essentially the same as for a single linear differential equation with constant coefficients.

### Example

Solve the system 
$$\begin{cases} 2x'' = -6x + 2y \\ y'' = 2x - 2y + 40\sin 3t \end{cases}$$

Subject to the initial conditions  $x(0) = x'(0) = y(0) = y'(0) = 0$

Thus the force  $f(t) = 40\sin 3t$  is applied to the second mass as shown below, beginning at time  $t = 0$  when the system is at rest in its equilibrium position.



### Solution

Let  $X(s) = \mathcal{L}\{x(t)\}$  and  $Y(s) = \mathcal{L}\{y(t)\}$

$$\begin{cases} \mathcal{L}\{2x''\} = \mathcal{L}\{-6x + 2y\} \\ \mathcal{L}\{y''\} = \mathcal{L}\{2x - 2y + 40\sin 3t\} \end{cases}$$

$$\begin{cases} 2(s^2 X(s) - sx(0) - x'(0)) = -6X(s) + 2Y(s) \\ s^2 Y(s) - sy(0) - y'(0) = 2X(s) - 2Y(s) + 40 \frac{3}{s^2 + 9} \end{cases} \rightarrow \begin{cases} (s^2 + 3)X(s) - Y(s) = 0 \\ -2X(s) + (s^2 + 2)Y(s) = \frac{120}{s^2 + 9} \end{cases}$$

Solve the system using Cramer's rule

$$D = \begin{vmatrix} s^2+3 & -1 \\ -2 & s^2+2 \end{vmatrix} = s^4 + 5s^2 + 4 = (s^2+1)(s^2+4)$$

$$D_X = \begin{vmatrix} 0 & -1 \\ \frac{120}{s^2+9} & s^2+2 \end{vmatrix} = \frac{120}{s^2+9} \Rightarrow X(s) = \frac{120}{(s^2+1)(s^2+4)(s^2+9)}$$

$$D_Y = \begin{vmatrix} s^2+3 & 0 \\ -2 & \frac{120}{s^2+9} \end{vmatrix} = \frac{120(s^2+3)}{s^2+9} \Rightarrow Y(s) = \frac{120(s^2+3)}{(s^2+1)(s^2+4)(s^2+9)}$$

$$X(s) = \frac{120}{(s^2+1)(s^2+4)(s^2+9)} = \frac{A}{s^2+1} + \frac{B}{s^2+4} + \frac{C}{s^2+9}$$

(Nothing that the denominator factors are linear in  $s^2$ )

$$120 = A(s^2+4)(s^2+9) + B(s^2+1)(s^2+9) + C(s^2+1)(s^2+4)$$

$$= (A+B+C)s^4 + (13A+10B+5C)s^2 + 36A+9B+4C$$

$$\begin{cases} A+B+C=0 & A=5 \\ 13A+10B+5C=0 & \Rightarrow B=-8 \\ 36A+9B+4C=120 & C=3 \end{cases}$$

$$X(s) = \frac{5}{s^2+1} - 4\frac{2}{s^2+4} + \frac{3}{s^2+9} \Rightarrow \underline{x(t) = 5\sin t - 4\sin 2t + \sin 3t}$$

$$Y(s) = \frac{120s^2+360}{(s^2+9)(s^2+1)(s^2+4)} = \frac{A}{s^2+1} + \frac{B}{s^2+4} + \frac{C}{s^2+9}$$


$$120s^2 + 360 = A(s^2+4)(s^2+9) + B(s^2+1)(s^2+9) + C(s^2+1)(s^2+4)$$

$$= (A+B+C)s^4 + (13A+10B+5C)s^2 + 36A+9B+4C$$

$$\begin{cases} A+B+C=0 & A=10 \\ 13A+10B+5C=120 & \Rightarrow B=8 \\ 36A+9B+4C=360 & C=-18 \end{cases}$$

$$Y(s) = 10\frac{1}{s^2+1} + 4\frac{1}{s^2+4} - 6\frac{3}{s^2+9}$$

$$\Rightarrow \underline{y(t) = 10\sin t + 4\sin 2t - 6\sin 3t}$$

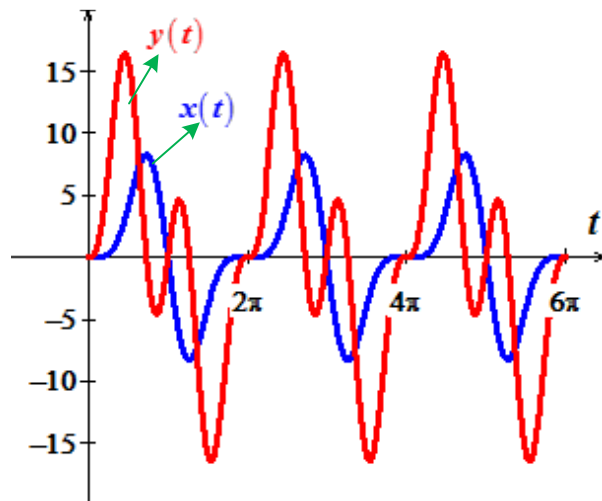




## The transform Perspective

Consider the general constant-coefficient second-order equation as the equation of motion

$$mx'' + cx' + kx = f(t)$$

Of the familiar mass-spring-dashpot system

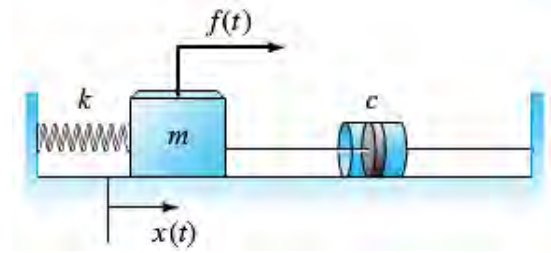

Then the transformed equation is

$$m[s^2 X(s) - sx(0) - x'(0)] + c[sX(s) - x(0)] + kX(s) = F(s)$$

This is an algebraic equation, in the unknown  $X(s)$ . This is the source of the power of the Laplace transform method:

- Linear **differential** equations are transformed into readily solved **algebraic** equations.

### Example

Show that  $\mathcal{L}\{te^{at}\} = \frac{1}{(s-a)^2}$

### Solution

If  $f(t) = te^{at}$ , then  $f(0) = 0$  and  $f'(t) = e^{at} + te^{at}$

$$\begin{aligned}\mathcal{L}\{e^{at} + te^{at}\} &= \mathcal{L}\{f'(t)\} \\ &= s\mathcal{L}\{f(t)\} \\ &= s\mathcal{L}\{te^{at}\}\end{aligned}$$

It follows from the linearity of the transform that

$$\mathcal{L}\{e^{at}\} + a\mathcal{L}\{te^{at}\} = s\mathcal{L}\{te^{at}\}$$

$$\mathcal{L}\{e^{at}\} = (s-a)\mathcal{L}\{te^{at}\}$$

$$\mathcal{L}\{te^{at}\} = \frac{\mathcal{L}\{e^{at}\}}{s-a} = \frac{1}{(s-a)^2}$$

$$\mathcal{L}\{e^{at}\} = \frac{1}{s-a}$$

### Example

Find  $\mathcal{L}\{t \sin at\}$

### Solution

If  $f(t) = t \sin at$ , then  $f(0) = 0$

Then  $f'(t) = \sin at + at \cos at \Rightarrow f'(0) = 0$

$$f''(t) = a \cos at + a \cos at - a^2 t \sin at = 2a \cos at - a^2 t \sin at$$

$$\mathcal{L}\{f''(t)\} = s^2 \mathcal{L}\{f(t)\}$$

$$\mathcal{L}\{f''(t)\} = 2a \mathcal{L}\{\cos at\} - a^2 \mathcal{L}\{t \sin at\} = s^2 \mathcal{L}\{f(t)\}$$

$$2a \mathcal{L}\{\cos at\} = (s^2 + a^2) \mathcal{L}\{t \sin at\}$$

$$\begin{aligned} \mathcal{L}\{t \sin at\} &= \frac{2a}{s^2 + a^2} \mathcal{L}\{\cos at\} & \mathcal{L}\{\cos at\} &= \frac{s}{s^2 + a^2} \\ &= \frac{2a}{s^2 + a^2} \frac{s}{s^2 + a^2} \\ &= \frac{2as}{(s^2 + a^2)^2} \end{aligned}$$

### Theorem

If  $F(s) = \mathcal{L}\{f(t)\}$  exists for  $s > c$ , then  $\mathcal{L}\{e^{at} f(t)\}$  exists for  $s > a + c$ , and

$$\mathcal{L}\{e^{at} f(t)\} = F(s-a) \Leftrightarrow \mathcal{L}^{-1}\{F(s-a)\} = e^{at} f(t)$$

Thus, the translation  $s \rightarrow s-a$  in the transform corresponds to multiplication of the original function of  $t$  by  $e^{at}$

$f(t)$	$F(s)$
$e^{at} t^n$	$\frac{n!}{(s-a)^{n+1}} \quad (s > a)$
$e^{at} \cos \omega t$	$\frac{s-a}{(s-a)^2 + \omega^2} \quad (s > a)$
$e^{at} \sin \omega t$	$\frac{\omega}{(s-a)^2 + \omega^2} \quad (s > a)$

## Resonance and Repeated Quadratic Factors

The following two inverse Laplace transforms are useful in inverting partial fractions that correspond to the case of repeated quadratic factors:

$$\mathcal{L}^{-1} \left\{ \frac{s}{(s^2 + \omega^2)^2} \right\} = \frac{1}{2\omega} t \sin \omega t$$

$$\mathcal{L}^{-1} \left\{ \frac{1}{(s^2 + \omega^2)^2} \right\} = \frac{1}{2\omega^3} (\sin \omega t - \omega t \cos \omega t)$$

### Example

Use the Laplace transforms to solve the initial value problem

$$x'' + \omega_0^2 x = F_0 \sin \omega t; \quad x(0) = x'(0) = 0$$

That determines the undamped forced oscillations of a mass on a spring

### Solution

$$\mathcal{L} \{ x'' + \omega_0^2 x \} = \{ F_0 \sin \omega t \}$$

$$s^2 X(s) + \omega_0^2 X(s) = \frac{F_0 \omega}{s^2 + \omega^2}$$

If  $\omega \neq \omega_0$

$$X(s) = \frac{F_0 \omega}{(s^2 + \omega_0^2)(s^2 + \omega^2)} = F_0 \omega \left( \frac{As + B}{s^2 + \omega_0^2} + \frac{Cs + D}{s^2 + \omega^2} \right)$$

$$(As + B)(s^2 + \omega^2) + (Cs + D)(s^2 + \omega_0^2) = 1$$

$$As^3 + A\omega^2 s + Bs^2 + B\omega^2 + Cs^3 + C\omega_0^2 s + Ds^2 + D\omega_0^2 = 1$$

$$\begin{cases} A + C = 0 \\ B + D = 0 \\ \omega^2 A + \omega_0^2 C = 0 \\ \omega^2 B + \omega_0^2 D = 1 \end{cases} \rightarrow \begin{cases} A = C = 0 \\ B = \frac{1}{\omega^2 - \omega_0^2} = -D \end{cases}$$

$$X(s) = \frac{F_0 \omega}{\omega^2 - \omega_0^2} \left( \frac{1}{s^2 + \omega_0^2} - \frac{1}{s^2 + \omega^2} \right)$$

$$\Rightarrow x(t) = \frac{F_0 \omega}{\omega^2 - \omega_0^2} \left( \frac{1}{\omega_0} \sin \omega_0 t - \frac{1}{\omega} \sin \omega t \right)$$


---

If  $\omega = \omega_0 \Rightarrow X(s) = \frac{F_0 \omega}{(s^2 + \omega^2)^2}$

$$\Rightarrow x(t) = \frac{F_0 \omega}{2\omega_0^2} (\sin \omega_0 t - \omega_0 t \cos \omega_0 t)$$


---

$$\mathcal{L}^{-1} \frac{1}{(s^2 + k^2)^2} = \frac{1}{2k^3} (\sin kt - kt \cos kt)$$

## Exercises      Section 2.10 – Applications

Solve using the Laplace transform:

1.  $y' + y = te^t, \quad y(0) = -2$
2.  $y' - y = 2 \cos 5t, \quad y(0) = 0$
3.  $y' - y = 1 + te^t, \quad y(0) = 0$
4.  $y' + 3y = e^{2t}, \quad y(0) = -1$
5.  $y' + 4y = \cos t, \quad y(0) = 0$
6.  $y' + 4y = e^{-4t}, \quad y(0) = 2$
7.  $y' - 4y = t^2 e^{-2t}, \quad y(0) = 1$
8.  $y' + 9y = e^{-t}, \quad y(0) = 0$
9.  $y' + 16y = \sin 3t, \quad y(0) = 1$
10.  $y'' - y = e^{2t}; \quad y(0) = 0, \quad y'(0) = 1$
11.  $y'' - y = 2t; \quad y(0) = 0, \quad y'(0) = -1$
12.  $y'' - y = t - 2; \quad y(2) = 3, \quad y'(2) = 0$
13.  $y'' + y = t; \quad y(\pi) = y'(\pi) = 0$
14.  $y'' - 2y' + 5y = -8e^{\pi-t}; \quad y(\pi) = 2, \quad y'(\pi) = 12$
15.  $y'' + y = t^2 + 2; \quad y(0) = 1, \quad y'(0) = -1$
16.  $y'' + y = \sqrt{2} \sin \sqrt{2}t; \quad y(0) = 10, \quad y'(0) = 0$
17.  $y'' + y = -2 \cos 2t; \quad y(0) = 1, \quad y'(0) = -1$
18.  $y'' - y' = e^t \cos t; \quad y(0) = 0, \quad y'(0) = 0$
19.  $y'' + y' - y = t^3; \quad y(0) = 1, \quad y'(0) = 0$
20.  $y'' - y' - 2y = 4t^2, \quad y(0) = 1, \quad y'(0) = 4$
21.  $y'' - y' - 2y = e^{2t}; \quad y(0) = -1, \quad y'(0) = 0$
22.  $y'' - y' - 2y = 0, \quad y(0) = -2, \quad y'(0) = 5$
23.  $y'' - y' - 2y = -8 \cos t - 2 \sin t; \quad y\left(\frac{\pi}{2}\right) = 1, \quad y'\left(\frac{\pi}{2}\right) = 0$
24.  $x'' - x' - 6x = 0; \quad x(0) = 2, \quad x'(0) = -1$
25.  $y'' + 2y' + y = 0, \quad y(0) = 1, \quad y'(0) = 1$
26.  $y'' + 2y' + y = t, \quad y(0) = -3, \quad y(1) = -1$
27.  $y'' - 2y' - y = e^{2t} - e^t; \quad y(0) = 1, \quad y'(0) = 3$
28.  $y'' - 2y' + y = 6t - 2; \quad y(-1) = 3, \quad y'(-1) = 7$
29.  $y'' - 2y' + y = \cos t - \sin t; \quad y(0) = 1, \quad y'(0) = 3$
30.  $y'' - 2y' + 5y = 0, \quad y(0) = 2, \quad y'(0) = 4$
31.  $y'' - 2y' + 5y = 1 + t, \quad y(0) = 0, \quad y'(0) = 0$
32.  $y'' + 3y' = -3t; \quad y(0) = -1, \quad y'(0) = 1$

33.  $y'' + 3y' = t^3$  ;  $y(0) = 0$ ,  $y'(0) = 0$
34.  $y'' - 3y' + 2y = e^{-t}$  ,  $y(1) = 0$ ,  $y'(1) = 0$
35.  $y'' - 3y' + 2y = \cos t$  ;  $y(0) = 0$ ,  $y'(0) = -1$
36.  $y'' - 4y' + 4y = t^3 e^{2t}$  ,  $y(0) = 0$ ,  $y'(0) = 0$
37.  $y'' - 4y' + 4y = t^3$  ,  $y(0) = 1$ ,  $y'(0) = 0$
38.  $y'' - 4y = e^{-t}$  ;  $y(0) = -1$ ,  $y'(0) = 0$
39.  $y'' - 4y' = 6e^{3t} - 3e^{-t}$  ;  $y(0) = 1$ ,  $y'(0) = -1$
40.  $x'' + 4x' + 4x = t^2$  ;  $x(0) = x'(0) = 0$
41.  $y'' + 4y = 4t^2 - 4t + 10$  ;  $y(0) = 0$ ,  $y'(0) = 3$
42.  $y'' - 4y = 4t - 8e^{-2t}$  ;  $y(0) = 0$ ,  $y'(0) = 5$
43.  $y'' + 4y' = \cos(t - 3) + 4t$  ,  $y(3) = 0$ ,  $y'(3) = 7$
44.  $y'' + 4y' + 8y = \sin t$  ,  $y(0) = 1$ ,  $y'(0) = 0$
45.  $y'' + 5y' - y = e^t - 1$  ;  $y(0) = 1$ ,  $y'(0) = 1$
46.  $y'' + 5y' - 6y = 21e^{t-1}$   $y(1) = -1$ ,  $y'(1) = 9$
47.  $y'' + 5y' + 4y = 0$  ;  $y(0) = 1$ ,  $y'(0) = 0$
48.  $y'' + 6y = t^2 - 1$  ;  $y(0) = 0$ ,  $y'(0) = -1$
49.  $y'' - 6y' + 9y = t$  ,  $y(0) = 0$ ,  $y'(0) = 1$
50.  $y'' - 6y' + 13y = 0$  ,  $y(0) = 0$ ,  $y'(0) = -3$
51.  $y'' - 6y' + 15y = 2\sin 3t$  ,  $y(0) = -1$ ,  $y'(0) = -4$
52.  $y'' + 6y' + 9y = 0$  ,  $y(0) = -1$ ,  $y'(0) = 6$
53.  $y'' + 6y' + 5y = 12e^t$  ,  $y(0) = -1$ ,  $y'(0) = 7$
54.  $y'' - 7y' + 10y = 9\cos t + 7\sin t$  ;  $y(0) = 5$ ,  $y'(0) = -4$
55.  $y'' + 8y' + 25y = 0$  ,  $y(\pi) = 0$ ,  $y'(\pi) = 6$
56.  $y'' + 9y = 2\sin 2t$  ;  $y(0) = 0$ ,  $y'(0) = -1$
57.  $y'' + 9y = 3\sin 2t$  ;  $y(0) = 0$ ,  $y'(0) = -1$
58.  $y'' - 10y' + 9y = 5t$  ;  $y(0) = -1$ ,  $y'(0) = 2$
59.  $y'' + 16y = 2\sin 4t$  ;  $y(0) = -\frac{1}{2}$ ,  $y'(0) = 0$
60.  $2y'' + 3y' - 2y = te^{-2t}$  ,  $y(0) = 0$ ,  $y'(0) = -2$
61.  $2y'' + 20y' + 51y = 0$  ,  $y(0) = 2$ ,  $y'(0) = 0$
62.  $y^{(3)} + y' = e^t$  ,  $y(0) = y'(0) = y''(0) = 0$

63.  $2y^{(3)} + 3y'' - 3y' - 2y = e^{-t}$ ;  $y(0) = 0$ ,  $y'(0) = 0$ ,  $y''(0) = 1$
64.  $y^{(3)} + 2y'' - y' - 2y = \sin 3t$ ;  $y(0) = 0$ ,  $y'(0) = 0$ ,  $y''(0) = 1$
65.  $y^{(3)} - y'' + y' - y = 0$ ;  $y(0) = 1$ ,  $y'(0) = 1$ ,  $y''(0) = 3$
66.  $y^{(3)} + 4y'' + y' - 6y = -12$ ;  $y(0) = 1$ ,  $y'(0) = 4$ ,  $y''(0) = -2$
67.  $y^{(3)} + 3y'' + 3y' + y = 0$ ;  $y(0) = -4$ ,  $y'(0) = 4$ ,  $y''(0) = -2$
68.  $y^{(3)} - 3y'' + 3y' - y = t^2 e^t$ ,  $y(0) = 1$ ,  $y'(0) = 2$ ,  $y''(0) = 3$
69.  $y^{(3)} + y'' + 3y' - 5y = 16e^{-t}$ ;  $y(0) = 0$ ,  $y'(0) = 2$ ,  $y''(0) = -4$
70.  $y''' + 4y'' + 5y' + 2y = 10 \cos t$ ,  $y(0) = y'(0) = 0$ ,  $y''(0) = 3$
71.  $y^{(4)} + 2y'' + y = 4te^t$ ;  $y(0) = y'(0) = y''(0) = y^{(3)}(0) = 0$
72.  $y^{(4)} - y = 0$ ;  $y(0) = 1$ ,  $y'(0) = 0$ ,  $y''(0) = 0$ ,  $y^{(3)}(0) = 0$
73.  $y^{(4)} - 4y = 0$ ;  $y(0) = 1$ ,  $y'(0) = 0$ ,  $y''(0) = -2$ ,  $y^{(3)}(0) = 0$
74.  $y^{(4)} - 4y^{(3)} + 6y'' - 4y' + y = 0$ ;  $y(0) = 0$ ,  $y'(0) = 1$ ,  $y''(0) = 0$ ,  $y^{(3)}(0) = 1$


75. Given:  $y'' - 4y' + 3y = 0$ ,  $y(0) = 1$ ,  $y'(0) = -1$

a) Show that the general solution is:  $y(t) = C_1 e^{3t} + C_2 e^t$  and find  $C_1$  and  $C_2$

b) Use Laplace transform to solve the system

76. Solve the initial value problem  $x'' + 4x = \sin 3t$ ;  $x(0) = x'(0) = 0$ .


Such problem arises in the motion of a mass-and-spring system with external force as shown below.

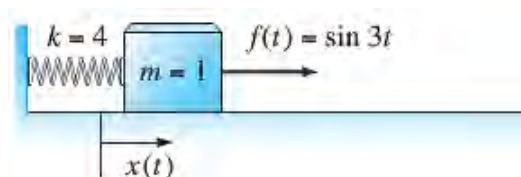


77. Solve the system 
$$\begin{cases} 2x'' = -6x + 2y \\ y'' = 2x - 2y + 40 \sin 3t \end{cases}$$

Subject to the initial conditions  $x(0) = x'(0) = y(0) = y'(0) = 0$

Thus the force  $f(t) = 40 \sin 3t$  is applied to the second mass as shown below, beginning at time  $t = 0$  when the system is at rest in its equilibrium position.

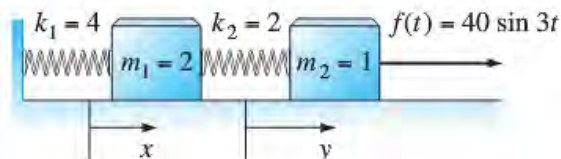

78. Consider a mass-spring system with  $m = \frac{1}{2}$ ,  $k = 17$ , and  $c = 3$ .

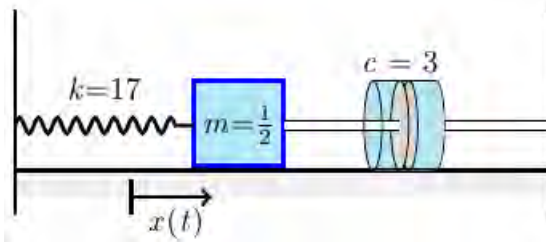


Let  $x(t)$  be the displacement of the mass  $m$  from its equilibrium position. If the mass is set in motion with  $x(0) = 3$  and  $x'(0) = 1$ , find  $x(t)$  for the resulting damped free oscillations.

79. A  $4\text{-lb}$  weight stretches a spring  $2\text{ feet}$ . The weight is released from rest  $18\text{ inches}$  above the equilibrium position, and the resulting motion takes place in a medium offering a damping force numerically equal to  $\frac{7}{8}$  times the instantaneous velocity. Use the Laplace transform to find the equation of motion  $x(t)$ .
80. Consider a mass-spring-dashpot system with  $m = \frac{1}{2}$ ,  $k = 17$ ,  $c = 3$ , and  $f(t) = 15\sin 2t$  with initial conditions  $x(0) = x'(0) = 0$ . Let  $x(t)$  be the displacement of the mass  $m$  from its equilibrium position. Find the resulting transient motion and steady periodic motion of the mass.
81. A  $8\text{-kg}$  mass is attached to a spring hanging vertically and come to rest at equilibrium. The damping constant is given by  $3\text{ N-sec/m}$  and the spring constant is  $40\text{ N/m}$ . If the mass is driven by an external force equal to  $f(t) = 2\sin 2t \cos 2t\text{ N}$ . Find the solution.
82. A  $2\text{-kg}$  mass is attached to a spring hanging vertically and come to rest at equilibrium. The damping constant is given by  $c = 8\text{ kg/sec}$  and the spring constant is  $k = 80\text{ N/m}$ . At time  $t = 0$ , the resulting spring-mass system is disturbed from its rest state by the force  $F(t) = 20e^{-t}\text{ N}$ . ( $t$  in seconds). Find the equation of motion.
83. A  $10\text{-kg}$  mass is attached to a spring having a spring constant of  $140\text{ N/m}$ . The mass is started in motion initially from the equilibrium position with an initial velocity  $1\text{ m/sec}$  in the upward direction and with an applied external force  $F(t) = 5\sin t$ . If the force due to air resistance is  $-90y'\text{ N}$ . Find the equation motion of the mass.
84. A  $128\text{-lb}$  weight is attached to a spring having a spring constant of  $64\text{ lb/ft}$ . The weight is started in motion initially by displacing it  $6\text{ in}$  above the equilibrium position with no initial velocity and with an applied external force  $F(t) = 8\sin 4t$ . Assume no air resistance. Find the equation motion of the mass.



85. Find the motion of a damped mass-and-spring system with  $m = 1$ ,  $c = 2$ , and  $k = 26$  under the influence of an external force  $F(t) = 82 \cos 4t$  with  $x(0) = 6$  and  $x'(0) = 0$ .
86. A spring with a mass of  $2\text{-kg}$  has natural length  $0.5\text{ m}$ . A force of  $25.6\text{ N}$  is required to maintain it stretched to a length of  $0.7\text{ m}$ . The spring is immersed in a fluid with damping constant  $c = 40$ . If the spring is started from the equilibrium position and is given a push to start it with initial velocity  $0.6\text{ m/s}$ . Find the position of the mass at any time  $t$ .
87. A spring with a mass of  $3\text{-kg}$  is held stretched  $0.6\text{ m}$  beyond its natural length by a force of  $20\text{ N}$ . If the spring begins at its equilibrium and with initial velocity  $1.2\text{ m/s}$ . Find the position of the mass.
88. A spring with a mass of  $2\text{-kg}$  is held stretched  $0.5\text{ m}$ , has damping constant  $14$ , and a force of  $6\text{ N}$ . If the spring is stretched  $1\text{ m}$  beyond at its equilibrium and with no initial velocity. Find the position of the mass at any time  $t$ .
89. When a uniform beam is supported by an elastic foundation, the differential equation for its deflection  $y(x)$  is

$$EI \frac{d^4 y}{dx^4} + ky = w(x)$$

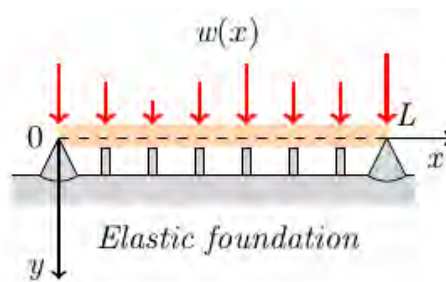

Where  $k$  is the modulus of the foundation and  $-ky$  is the restoring force of the foundation that acts in the direction opposite to that of the load  $w(x)$ . For algebraic convenience suppose that the differential equation is written as


$$\frac{d^4 y}{dx^4} + 4a^4 y = \frac{w(x)}{EI}$$

Where  $a = \left(\frac{k}{4EI}\right)^{1/4}$ . Assume  $L = \pi$  and  $a = 1$ . Find the deflection  $y(x)$  of a beam that is supported on an elastic foundation when

- The beam is simply supported at both ends and a constant load  $w_0$  is uniformly distributed along its length,
- The beam is embedded at both ends and  $w(x)$  is concentrated load  $w_0$  applied at  $x = \frac{\pi}{2}$

90. Suppose two identical pendulums are coupled by means of a spring with constant  $k$ . when the displacement angles  $\theta_1(t)$  and  $\theta_2(t)$  are small, the system of linear differential equations describing the motion is

$$\begin{cases} \theta_1'' + \frac{g}{l}\theta_1 = -\frac{k}{m}(\theta_1 - \theta_2) \\ \theta_2'' + \frac{g}{l}\theta_2 = \frac{k}{m}(\theta_1 - \theta_2) \end{cases}$$

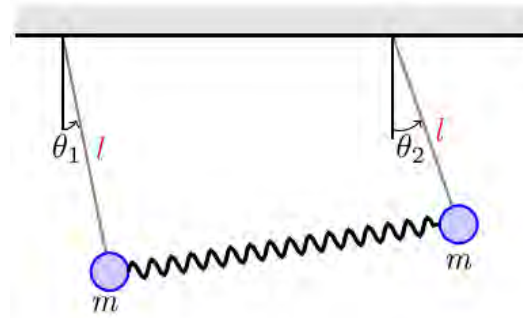


- a) Use Laplace transform to solve the system when

$$\theta_1'(0) = 0 \quad \theta_1(0) = \theta_0 \quad \theta_2'(0) = 0 \quad \theta_2(0) = \psi_0$$

Where  $\theta_0$  and  $\psi_0$  constants. Let  $\omega^2 = \frac{g}{l}$ ,  $K = \frac{k}{m}$

- b) Use the solution in part (a) to discuss the motion of the coupled pendulums in the special case when the initial conditions are  $\theta_1'(0) = 0$ ,  $\theta_1(0) = \theta_0$ ,  $\theta_2'(0) = \theta_0$ ,  $\theta_2(0) = 0$
- c) Use the solution in part (a) to discuss the motion of the coupled pendulums in the special case when the initial conditions are  $\theta_1'(0) = 0$ ,  $\theta_1(0) = \theta_0$ ,  $\theta_2'(0) = -\theta_0$ ,  $\theta_2(0) = 0$

91. A projectile, such as the canon ball, has weight  $w = mg$  and initial velocity  $\mathbf{v}_0$  that is tangent to its path of motion.

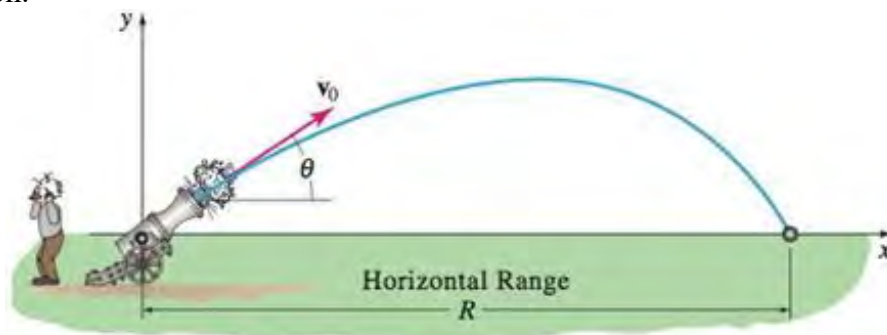

If air resistance and all other forces except its weight are ignored, that motion of the projectile is describe by the system of linear differential equations:

$$\begin{cases} m \frac{d^2 x}{dt^2} = 0 \\ m \frac{d^2 y}{dt^2} = -mg \end{cases}$$

- a) Use Laplace transform to solve the system when

$$x(0) = 0 \quad x'(0) = v_0 \cos \theta \quad y(0) = 0 \quad y'(0) = v_0 \sin \theta$$

Where  $v_0 = |\mathbf{v}|$  is constant and  $\theta$  is the constant angle of elevation.

The solutions  $x(t)$  and  $y(t)$  are parametric equations of the trajectory of the projectile.

- b) Use  $x(t)$  in part (a) to eliminate the parameter  $t$  in  $y(t)$ . Use the resulting equation for  $y$  to show that the horizontal range  $R$  of the projectile is given by

$$R = \frac{v_0^2}{g} \sin 2\theta$$

- c) From the formula in part (b), we see that  $R$  is a maximum when  $\sin 2\theta = 1$  or when  $\theta = \frac{\pi}{4}$ .


Show that the same range – less than the maximum – can be obtained by firing the gun at either of two complementary angles  $\theta$  and  $\frac{\pi}{2} - \theta$ . The only difference is that the smaller angle results in a low trajectory whereas the larger angle gives a high trajectory.

- d) Suppose  $g = 32 \text{ ft/s}^2$ ,  $\theta = 30^\circ$ , and  $v_0 = 300 \text{ ft/s}$ . Use part (b) to find the horizontal range of the projectile.
- e) Find the time when the projectile hits the ground.
- f) Use the parametric equations  $x(t)$  and  $y(t)$  in part (a) along with the numerical data in part (d) to plot the ballistic curve of the projectile.
- g) Repeat with  $\theta = 52^\circ$  and  $v_0 = 300 \text{ ft/s}$ .
- h) Superimpose both curves part (f) & (g) on the same coordinate system.

92. Derive the system of differential equations describing the straight-line vertical motion of the coupled springs. Use the Laplace transform to solve the system when

$$k_1 = 1, k_2 = 1, k_3 = 1, m_1 = 1, m_2 = 1 \text{ and}$$

$$x_1(0) = 0, x_1'(0) = -1, x_2(0) = 0, x_2'(0) = 1$$

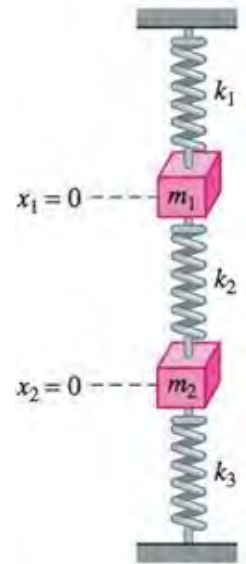

## Section 2.11 – Piecewise Continuous with Nonhomogeneous Terms

Mathematical models of mechanical or electrical systems often involve functions with discontinuities corresponding to external forces that are turned abruptly on or off. One such simple on-off function is the unit step function.

### Definition

Let the function  $f = f(x)$  be defined on an interval  $I$  and continuous except at a point  $c \in I$ .

If  $\lim_{x \rightarrow c^-} f(x)$  and  $\lim_{x \rightarrow c^+} f(x)$  exist, but  $\lim_{x \rightarrow c^-} f(x) \neq \lim_{x \rightarrow c^+} f(x)$ , then  $f$  is said to have a **jump** (or finite) **discontinuity** at  $c$ .

### Definition


A function  $f$  defined on an interval  $I$  is **piecewise continuous** on  $I$  if it is continuous on  $I$  except for at most a finite number of points  $c_1, c_2, \dots, c_n$  of  $I$  at which it has jump discontinuities.

### Theorem

If the function  $f$  is piecewise continuous on  $[0, \infty)$ , and of exponential order  $\lambda$ , then the Laplace transform  $\mathcal{L}\{f(x)\}$  exists for  $s > \lambda$ .

## Unit Step Functions

The function  $u(x) = \begin{cases} 0 & x < 0 \\ 1 & x \geq 0 \end{cases}$  is called the **Heaviside function**.

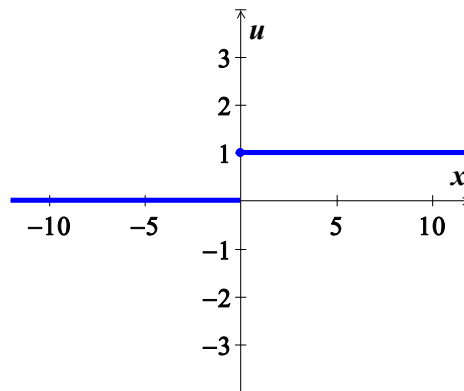


The **unit step function** at  $t = a$  is defined by

$$u_a(t) = u(t-a) = \begin{cases} 0 & \text{if } t < a \\ 1 & \text{if } t \geq a \end{cases}$$

The notation  $u_a(t)$  indicates succinctly where the unit upward step in value takes place whereas  $u(t-a)$  connotes the sometimes-useful idea of a “time delay”  $a$  before the step is made.

***a***

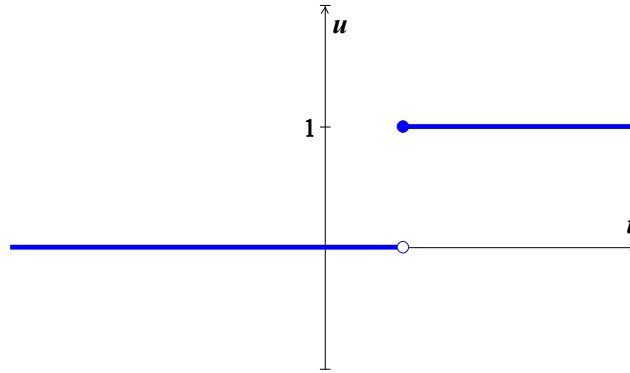

If  $a \geq 0$ , then the Laplace transform of a unit step function is given by:

$$\mathcal{L}\{u(t-a)\} = \frac{e^{-as}}{s}$$

### ***Theorem***

If  $\mathcal{L}\{f(t)\}$  exists for  $s > c$ , then


$$\mathcal{L}\{u(t-a)f(t-a)\} = e^{-as}F(s)$$

$$\text{and } \mathcal{L}^{-1}\{e^{-as}F(s)\} = u(t-a)f(t-a)$$

For  $s > c+a$

Then the translation of  $f$  is

$$f(t-a)u(t-a) = \begin{cases} 0 & \text{if } t < a \\ f(t-a) & \text{if } t \geq a \end{cases}$$

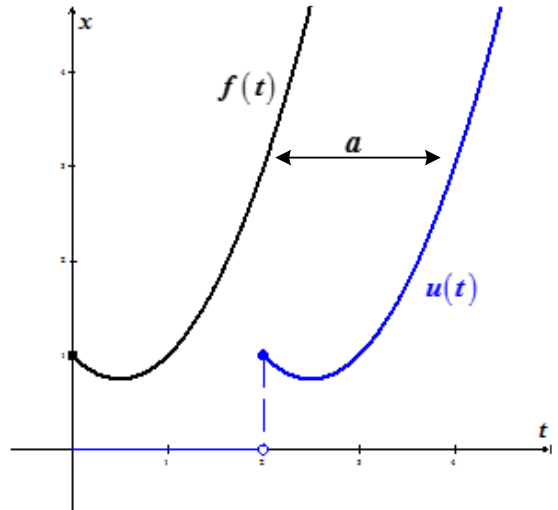

### ***Proof***

From the definition of  $\mathcal{L}\{f(t)\}$ , we get

$$e^{-as}F(s) = e^{-as} \int_0^{\infty} e^{-s\tau} f(\tau) d\tau = \int_0^{\infty} e^{-s(\tau+a)} f(\tau) d\tau$$

The substitution  $t = \tau + a$


$$\begin{aligned}
 e^{-as}F(s) &= \int_a^{\infty} e^{-st} f(t-a) dt \\
 &= \int_0^{\infty} e^{-st} u(t-a) f(t-a) dt \\
 &= \mathcal{L}\{u(t-a)f(t-a)\}
 \end{aligned}$$

Because  $u(t-a)f(t-a) = 0$  for  $t < a$ . This completes the proof.

### Example

With  $f(t) = \frac{1}{2}t^2$ , then

$$\begin{aligned}
 \mathcal{L}^{-1}\left\{\frac{e^{-as}}{s^3}\right\} &= u(t-a)\frac{1}{2}(t-a)^2 \\
 &= \begin{cases} 0 & \text{if } t < a \\ \frac{1}{2}(t-a)^2 & \text{if } t \geq a \end{cases}
 \end{aligned}$$

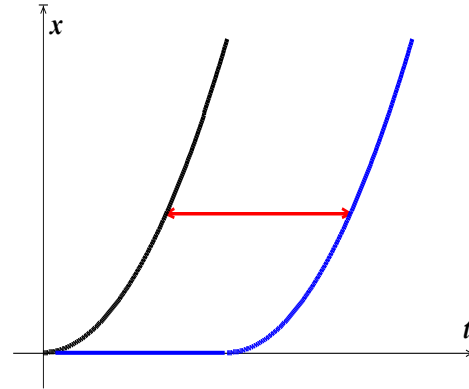

### Example

Find  $\mathcal{L}\{g(t)\}$  if  $g(t) = \begin{cases} 0 & \text{if } t < 3 \\ t^2 & \text{if } t \geq 3 \end{cases}$

### Solution

When  $t \geq 3 \rightarrow g(t) = t^2$  then  $f(t) = (t+3)^2 \Rightarrow f(t-3) = t^2$

$$f(t) = (t+3)^2 = t^2 + 6t + 9$$


$$F(s) = \mathcal{L}\{t^2 + 6t + 9\}$$

$$= \frac{2}{s^3} + \frac{6}{s^2} + \frac{9}{s}$$

$$\mathcal{L}\{g(t)\} = \mathcal{L}\{u(t-3)f(t-3)\}$$

$$= e^{-3s}F(s)$$

$$= e^{-3s}\left(\frac{2}{s^3} + \frac{6}{s^2} + \frac{9}{s}\right)$$

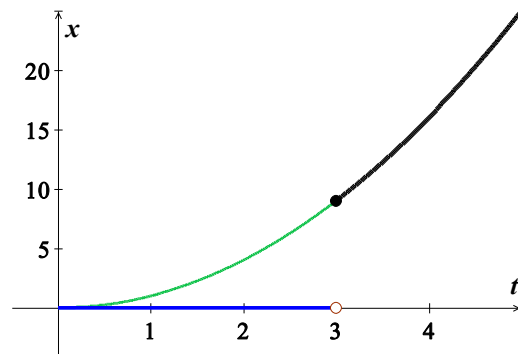

### Example

Find  $\mathcal{L}\{f(t)\}$  if  $f(t) = \begin{cases} \cos 2t & \text{if } 0 \leq t < 2\pi \\ 0 & \text{if } t \geq 2\pi \end{cases}$

### Solution


$$\begin{aligned} f(t) &= [1 - u(t - 2\pi)] \cos 2t \\ &= \cos 2t - u(t - 2\pi) \cos 2(t - 2\pi) \end{aligned}$$

$$\begin{aligned} \mathcal{L}\{f(t)\} &= \mathcal{L}\{\cos 2t\} - e^{-2\pi s} \mathcal{L}\{\cos 2t\} \\ &= (1 - e^{-2\pi s}) \mathcal{L}\{\cos 2t\} \end{aligned}$$

$$= (1 - e^{-2\pi s}) \frac{s}{s^2 + 4}$$

$$\mathcal{L}\{\cos 2t\} = \frac{s}{s^2 + 4}$$

$$= \frac{s(1 - e^{-2\pi s})}{s^2 + 4}$$

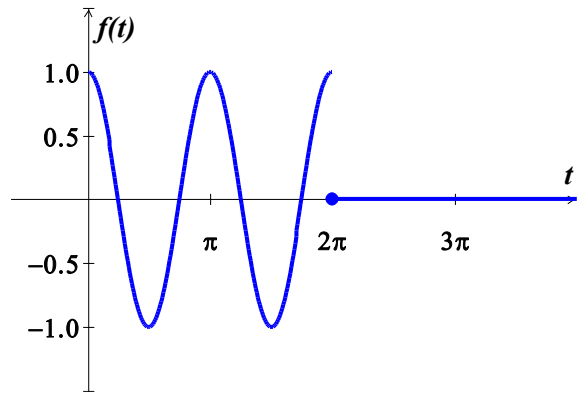

### Example

Find  $F(s)$  if  $f(x) = \begin{cases} 2x & \text{if } 0 \leq x < 3 \\ 3 & \text{if } x \geq 3 \end{cases}$

### Solution

$$u(x-3) = \begin{cases} 0 & \text{if } 0 \leq x < 3 \\ 1 & \text{if } x \geq 3 \end{cases}$$

For  $x \geq 3$ ,  $f(x) = 3u(x-3)$


For  $0 \leq x < 3$ ,  $f(x) = 2x - 2x \cdot u(x-3)$

$$f(x) = 2x - 2x(x-3)u(x-3) + 3u(x-3)$$

$$\mathcal{L}\{f(x)\} = 2\mathcal{L}\{x\} - 2\mathcal{L}\{(x-3)u(x-3)\} + 3\mathcal{L}\{u(x-3)\}$$

$$F(s) = \frac{2}{s^2} - 2e^{-3s} \frac{1}{s^2} - 3e^{-3s} \frac{1}{s}$$

$$= \frac{2}{s^2} - \frac{2e^{-3s}}{s^2} - \frac{3e^{-3s}}{s}$$

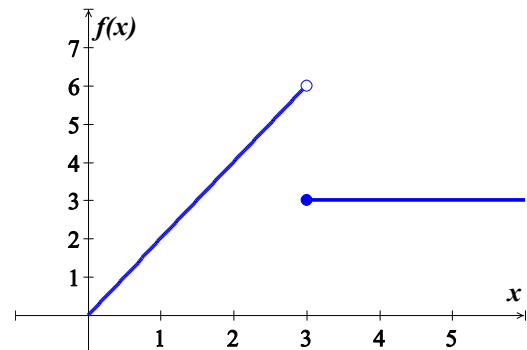

### Example

A mass that weighs 32 lb (mass  $m = 1$  slug) is attached to the free end of a long light spring that is stretched 1 ft by a force of 4 lb ( $k = 4$  lb/ft). The mass is initially at rest in its equilibrium position. Beginning at time  $t = 0$  sec, an external force  $F(t) = \cos 2t$  is applied to the mass, but at time  $t = 2\pi$  this force is turned off (abruptly discontinued) and the mass is allowed to continue its motion unimpeded. Find the resulting position function  $x(t)$  of the mass.

### Solution

The initial value problem is

$$x'' + 4x = f(t); \quad x(0) = x'(0) = 0$$

$$\mathcal{L}\{x'' + 4x\} = \mathcal{L}\{\cos 2t\}$$

$$\left(s^2 X(s) - sx(0) - x'(0)\right) + 4X(s) = \frac{s(1 - e^{-2\pi s})}{s^2 + 4}$$

$$\mathcal{L}\{\cos 2t\} = \frac{s(1 - e^{-2\pi s})}{s^2 + 4}$$

$$(s^2 + 4)X(s) = \frac{s - se^{-2\pi s}}{s^2 + 4}$$

$$X(s) = \frac{s}{(s^2 + 4)^2} - e^{-2\pi s} \frac{s}{(s^2 + 4)^2}$$

$$\mathcal{L}^{-1}\left\{\frac{s}{(s^2 + 4)^2}\right\} = \frac{1}{4}t \sin 2t$$

$$x(t) = \mathcal{L}^{-1}\{X(s)\}$$

$$= \frac{1}{4}t \sin 2t - u(t - 2\pi) \cdot \frac{1}{4}(t - 2\pi) \sin 2(t - 2\pi)$$


$$= \frac{1}{4}t \sin 2t - \frac{1}{4}u(t - 2\pi) \cdot (t - 2\pi) \sin 2t$$

$$\begin{aligned} \frac{1}{4}t \sin 2t - \frac{1}{4}u(t - 2\pi) \cdot (t - 2\pi) \sin 2t &= \frac{1}{4}t \sin 2t - \frac{1}{4}t \sin 2t + \frac{1}{4}2\pi \sin 2t \\ &= \frac{1}{2}\pi \sin 2t \end{aligned}$$

$$x(t) = \begin{cases} \frac{1}{4}t \sin 2t & \text{if } t < 2\pi \\ \frac{1}{2}\pi \sin 2t & \text{if } t \geq 2\pi \end{cases}$$

The mass oscillates with circular frequency  $\omega = 2$  and with linearly increasing amplitude until the force is removed at time  $t = 2\pi$ . Thereafter, the mass continues to oscillate with the same frequency but with constant amplitude  $\frac{\pi}{2}$ .

The force  $F(t) = \cos 2t$  would produce pure resonance if continued indefinitely.

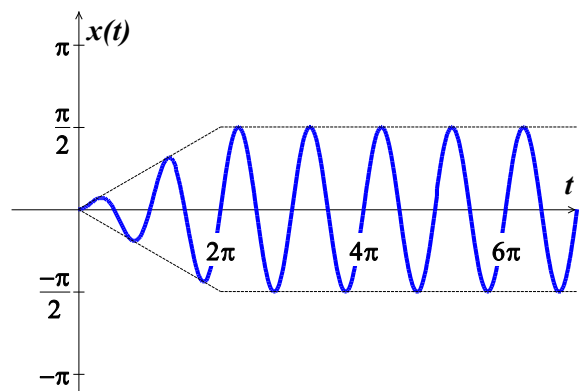



## Exercises    Section 2.11 – Piecewise Continuous with Nonhomogeneous Terms

Find the inverse Laplace transform  $f(t)$  of each function given:

1.  $F(s) = \frac{e^{-3s}}{s^2}$

5.  $F(s) = \frac{e^{-\pi s}}{s^2 + 1}$

2.  $F(s) = \frac{e^{-s} - e^{-3s}}{s^2}$

6.  $F(s) = \frac{1 - e^{-2\pi s}}{s^2 + 1}$

3.  $F(s) = \frac{e^{-s}}{s + 2}$

7.  $F(s) = \frac{2s(e^{-\pi s} - e^{-2\pi s})}{s^2 + 4}$

4.  $F(s) = \frac{e^{-s} - e^{2-2s}}{s - 1}$

Find the Laplace transforms of the given functions

8.  $f(t) = \begin{cases} 2 & \text{if } 0 \leq t < 3 \\ 0 & \text{if } t \geq 3 \end{cases}$

11.  $f(t) = \begin{cases} \cos \pi t & \text{if } 0 \leq t \leq 2 \\ 0 & \text{if } t > 2 \end{cases}$

9.  $f(t) = \begin{cases} 1 & \text{if } 1 \leq t \leq 4 \\ 0 & \text{if } t < 1, \text{ or } t > 4 \end{cases}$

12.  $f(t) = \begin{cases} \sin 2t & \text{if } \pi \leq t \leq 2\pi \\ 0 & \text{if } t < \pi \text{ or } t > 2\pi \end{cases}$

10.  $f(t) = \begin{cases} \sin t & \text{if } 0 \leq t \leq 2\pi \\ 0 & \text{if } t > 2\pi \end{cases}$

Use the Laplace transform method to solve the initial-value problem

13.  $y' + 2y = f(x); \quad y(0) = 1 \quad \text{where} \quad f(x) = \begin{cases} x & \text{if } 0 \leq x < 3 \\ 1 & \text{if } x \geq 3 \end{cases}$

14.  $y'' + 2y' + y = f(x); \quad y(0) = y'(0) = 0 \quad \text{where} \quad f(x) = \begin{cases} 1 & \text{if } 0 \leq x < 2 \\ x + 1 & \text{if } x \geq 2 \end{cases}$

The values of mass  $m$ , spring constant  $k$ , dashpot resistance  $c$ , and force  $f(t)$  are given for a mass-spring-dashpot system with external forcing function. Solve the initial value problem, and construct the graph position  $x(t)$

$$mx'' + cx' + kx = f(t); \quad x(0) = x'(0) = 0$$

15.  $m = 1, \quad k = 4, \quad c = 0, \quad f(t) = \begin{cases} 1 & 0 \leq t < \pi \\ 0 & t \geq \pi \end{cases}$

16.  $m = 1, \quad k = 4, \quad c = 5, \quad f(t) = \begin{cases} 1 & 0 \leq t < 2 \\ 0 & t \geq 2 \end{cases}$

**17.**  $m=1, \quad k=9, \quad c=0, \quad f(t)=\begin{cases} \sin t & 0 \leq t \leq 2\pi \\ 0 & t > 2\pi \end{cases}$

**18.**  $m=1, \quad k=4, \quad c=4, \quad f(t)=\begin{cases} t & 0 \leq t \leq 2 \\ 0 & t > 2 \end{cases}$