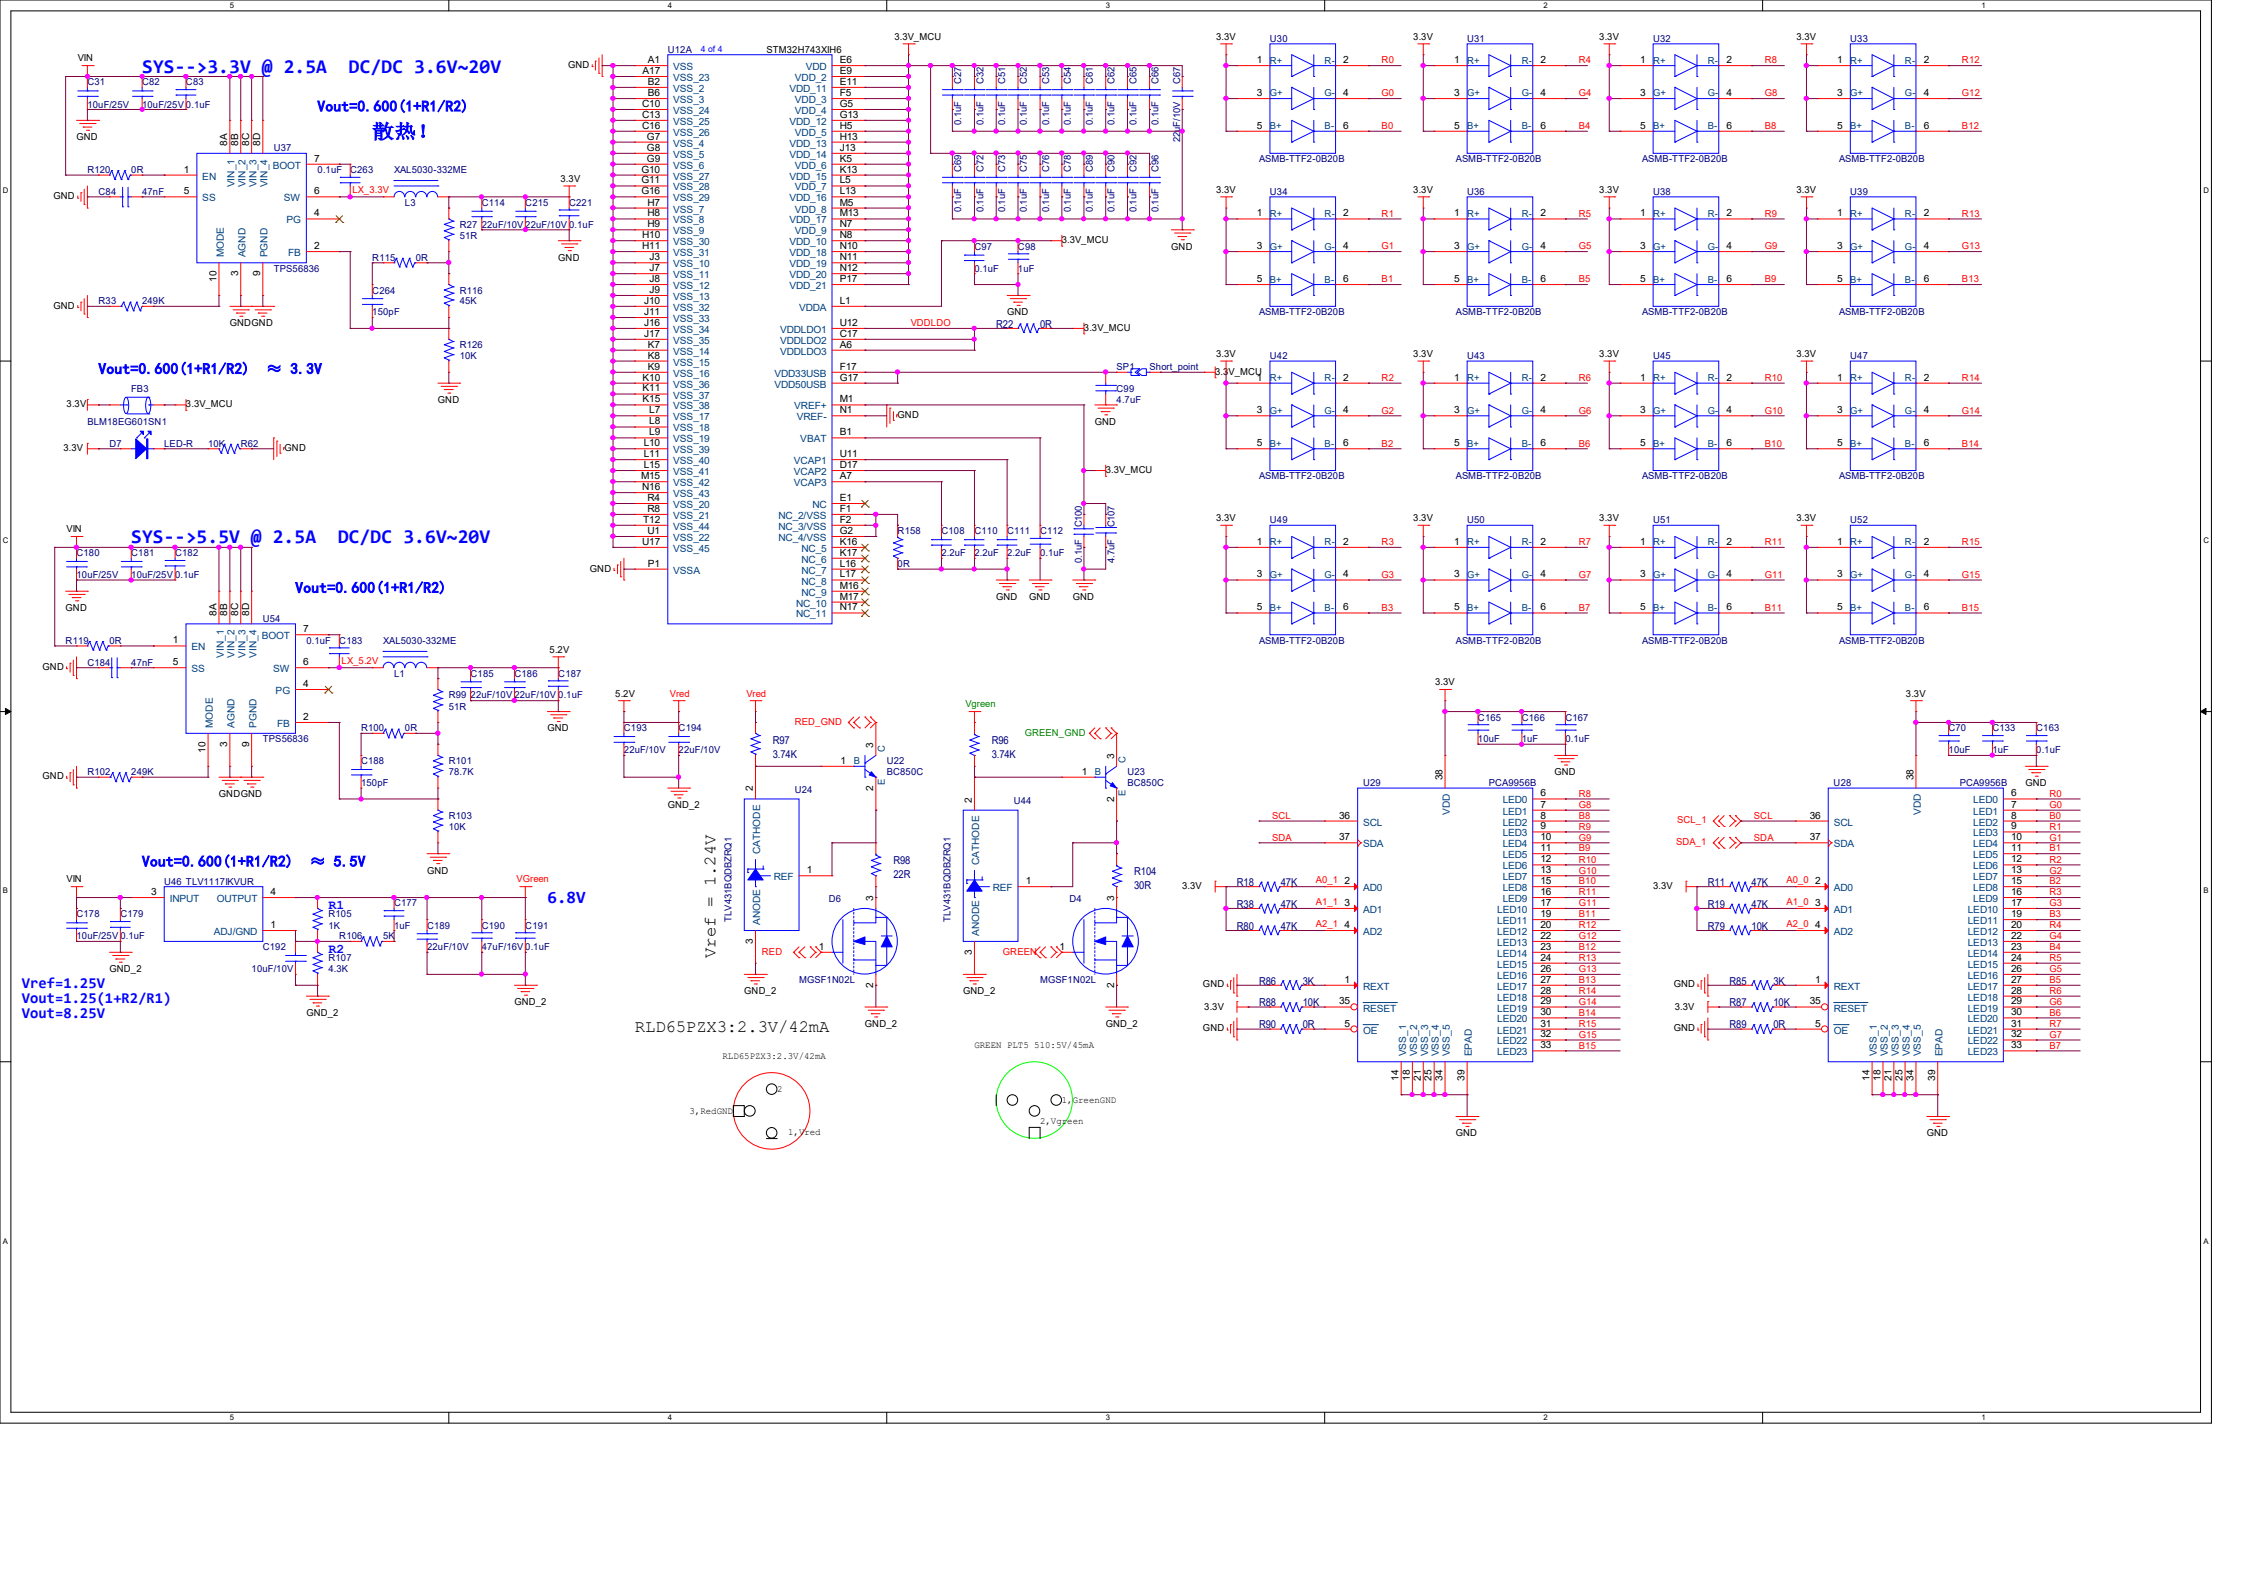
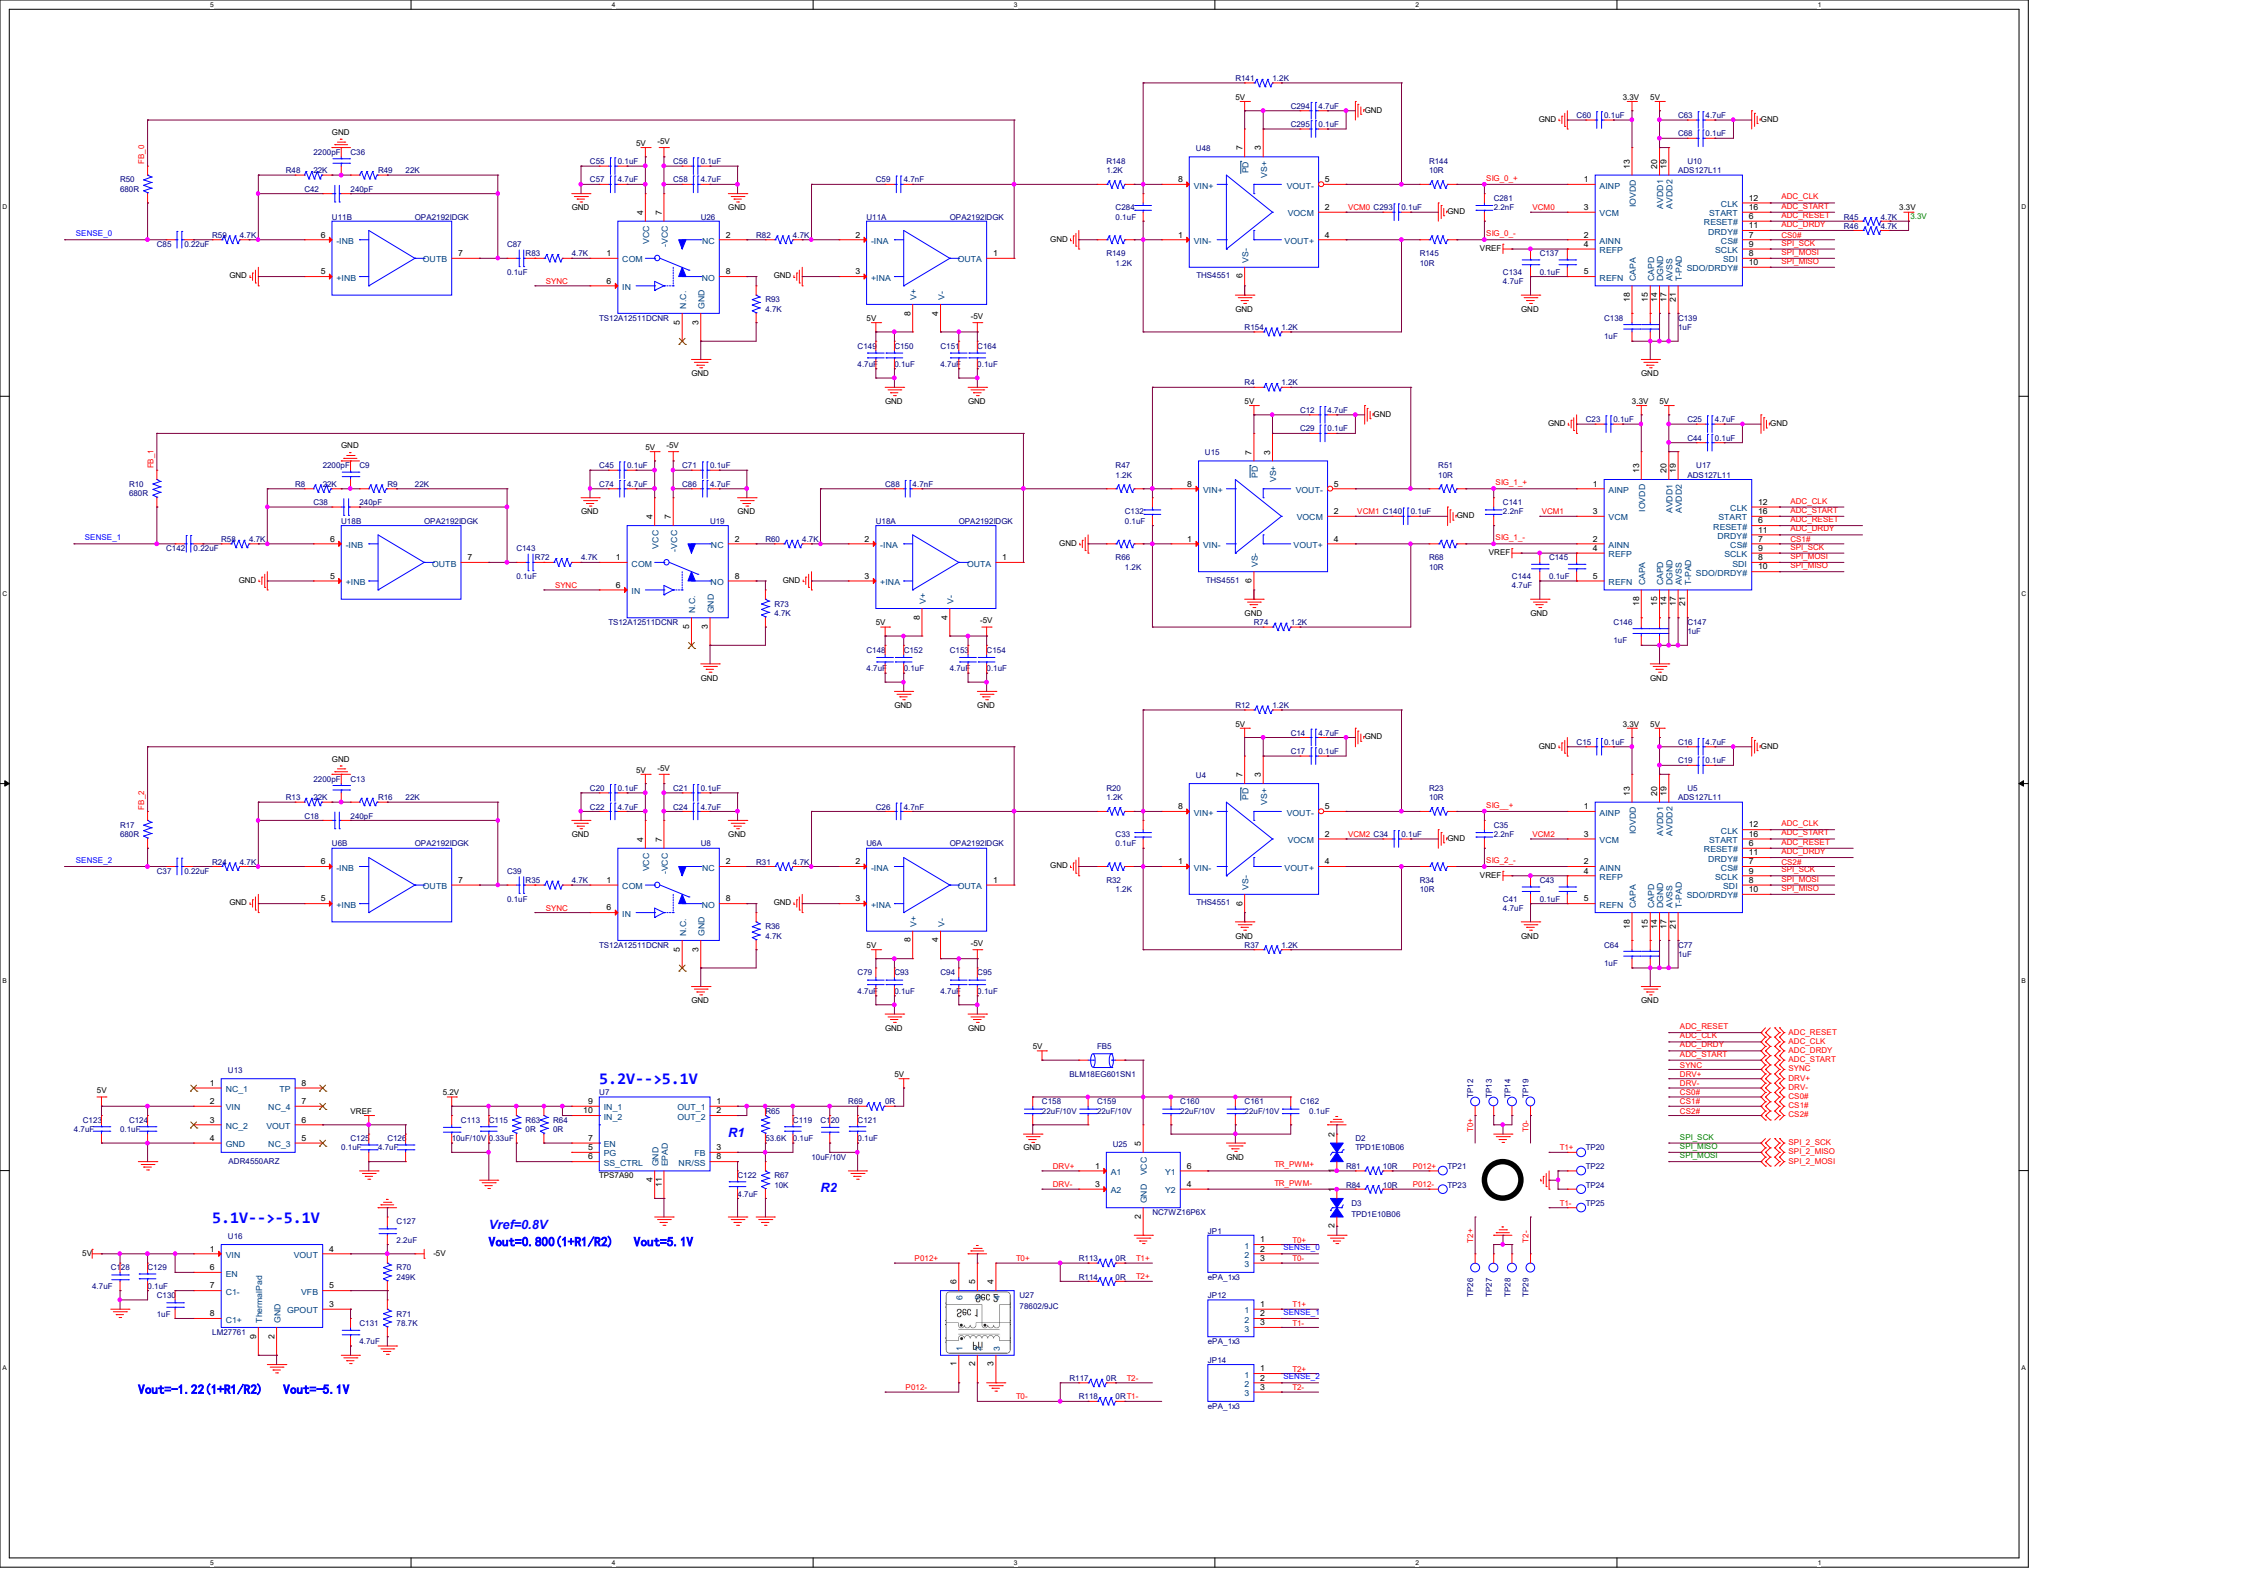
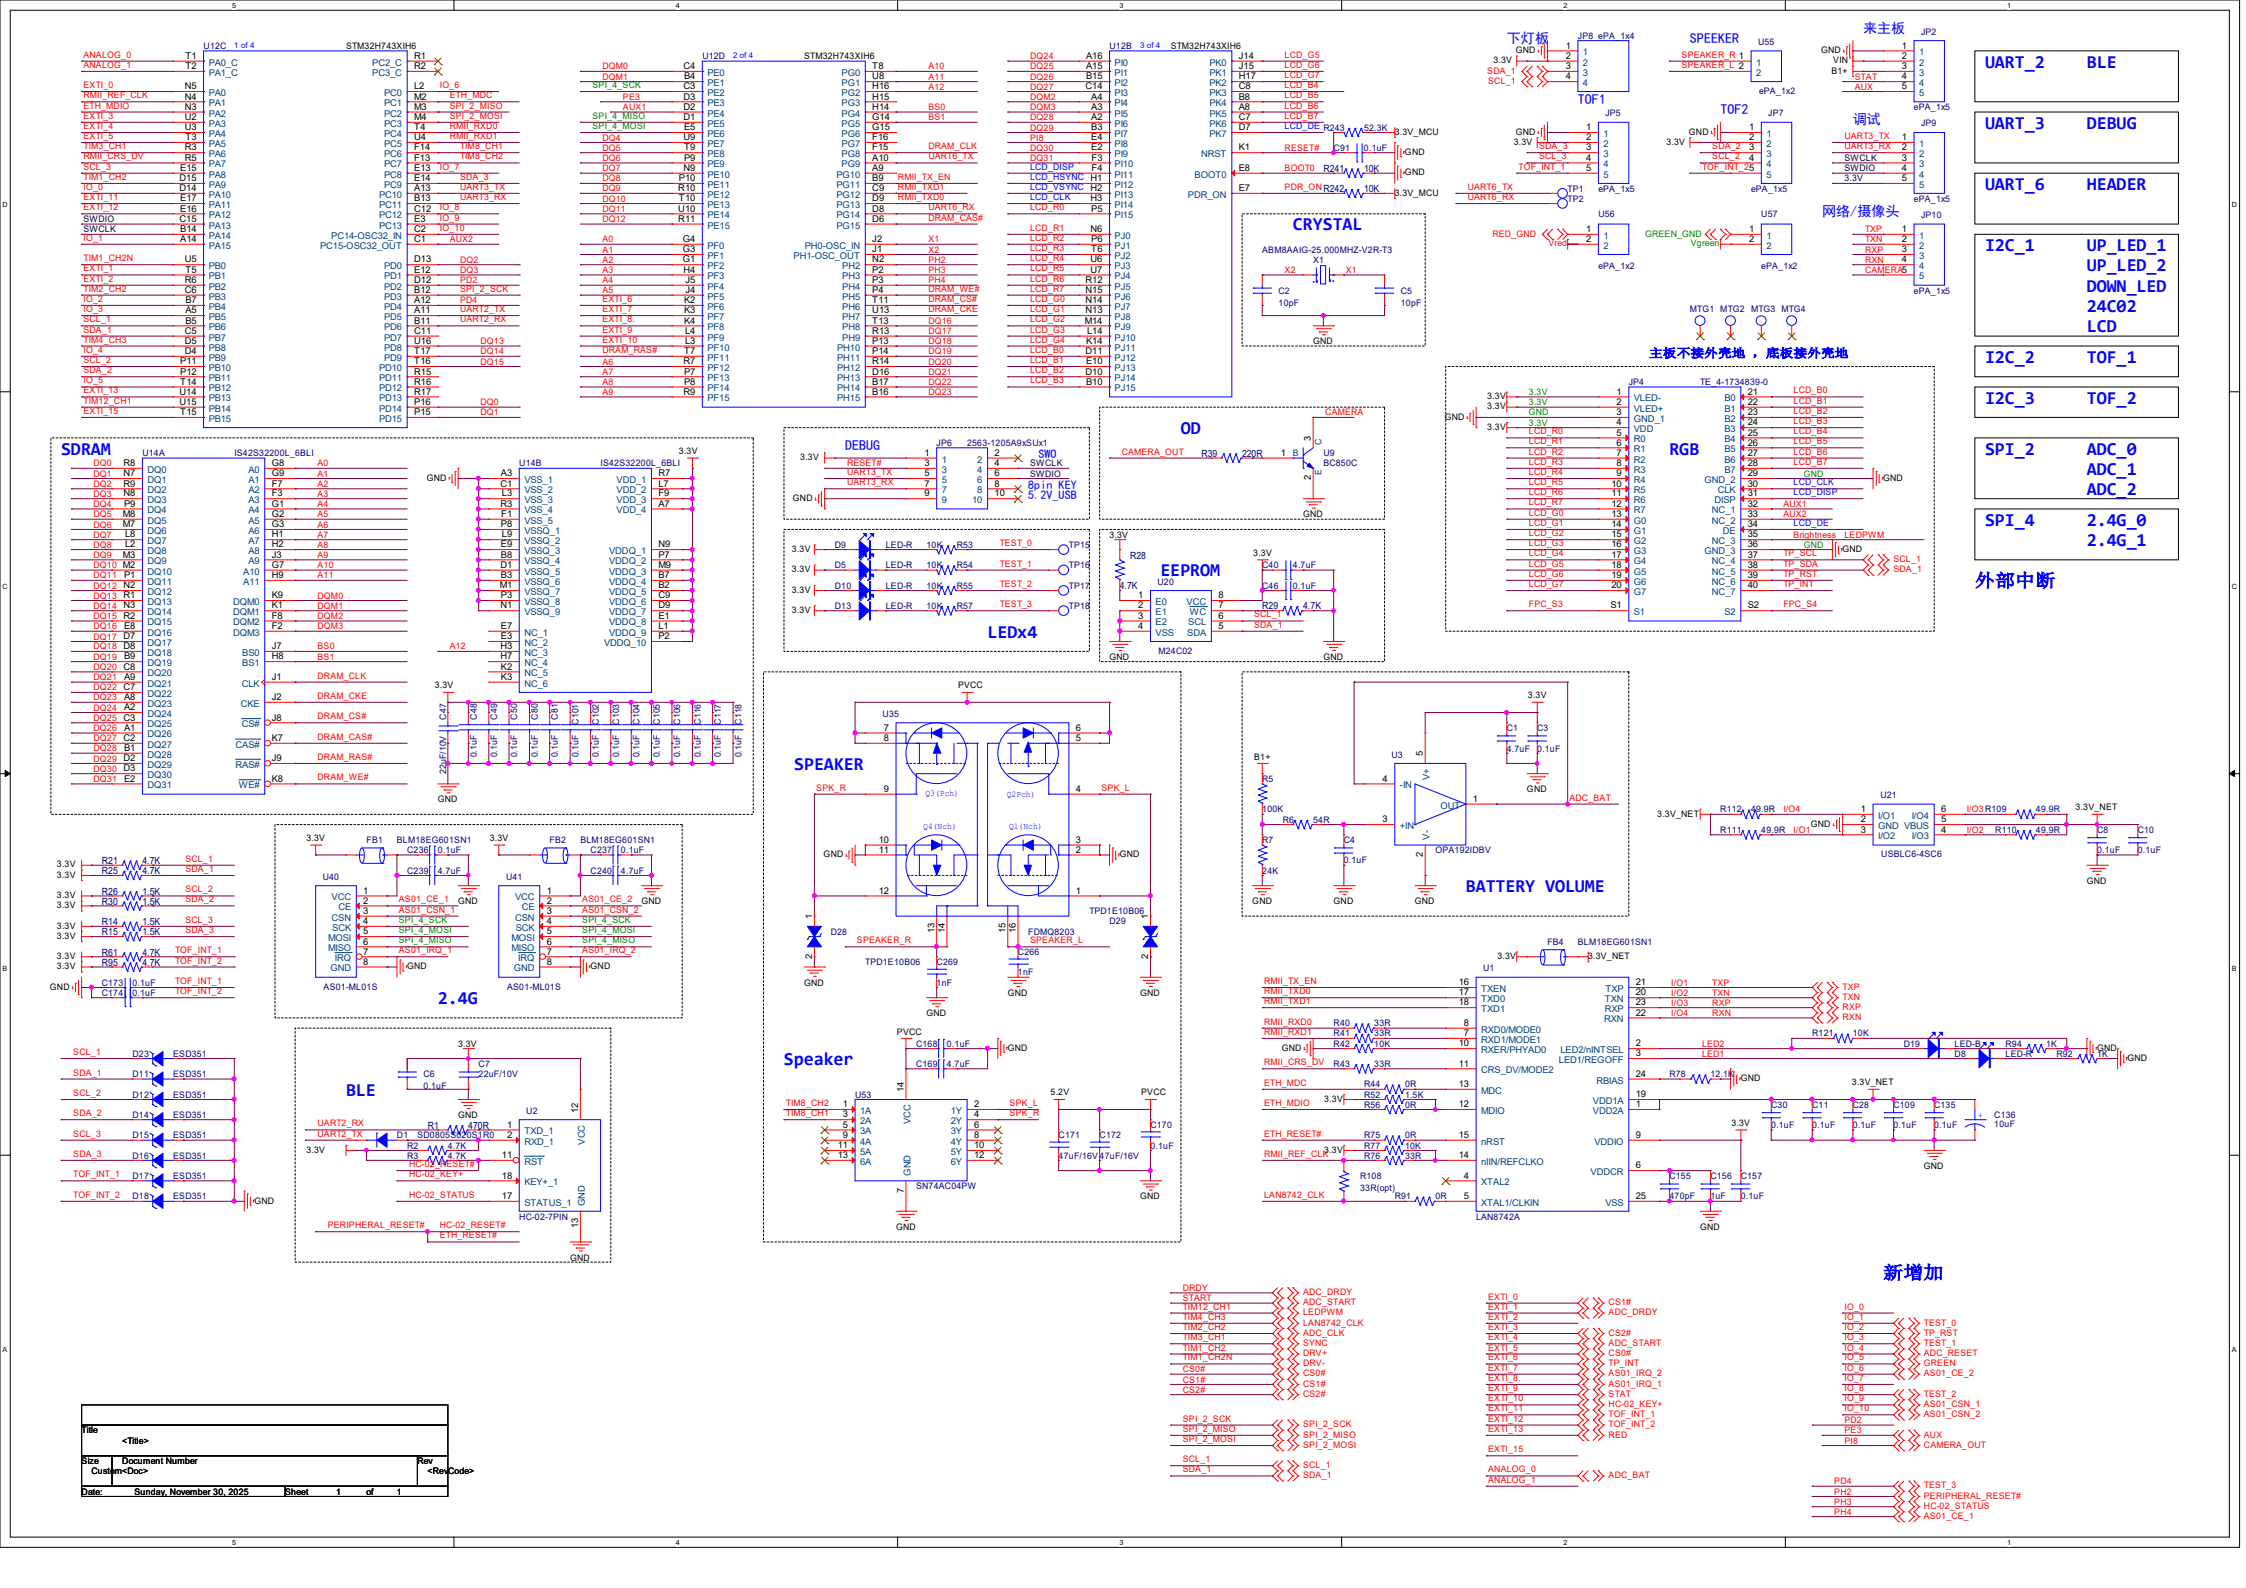

SYS-->3.3V @ 2.5A DC/DC 3.6V~20V
Vout=0.600(1+R1/R2)
散热！
Vout=0.600(1+R1/R2) ≈ 3.3V
SYS-->5.5V @ 2.5A DC/DC 3.6V~20V
Vout=0.600(1+R1/R2)
Vout=0.600(1+R1/R2) ≈ 5.5V
Vref=1.25V
Vout=1.25(1+R2/R1)
Vout=8.25V
STM32H743XIH6
TPS56836
XAL5030-332ME
ASMB-TTF2-0B20B
PCA9956B
TLV431BQDBZRQ1
BC850C
MGSF1N02L
RLD65PZX3:2.3V/42mA
GREEN PLT5 510:5V/45mA


SENSE_0
SENSE_1
SENSE_2
OPA2192IDGK
TS12A12511DCNR
THS4551
ADS127L11
ADR4550ARZ
TPS7A90
LM27761
NC7WZ16P6X
BLM18EG601SN1
TPD1E10B06
78602/9JC
5.2V-->5.1V
5.1V-->-5.1V
Vref=0.8V
Vout=0.800(1+R1/R2)
Vout=5.1V
Vout=-1.22(1+R1/R2)
Vout=-5.1V
ADC_CLK
ADC_START
ADC_RESET
ADC_DRDY
CS0#
CS1#
CS2#
SPI_SCK
SPI_MOSI
SPI_MISO
SPI_2_SCK
SPI_2_MISO
SPI_2_MOSI
SYNC
TR_PWM+
TR_PWM-


SDRAM
U14A
IS42S32200L_6BLI
U14B
IS42S32200L_6BLI
DEBUG
JP6
2563-1205A9xSUx1
SWO
SWCLK
SWDIO
8pin KEY
5. 2V_USB
OD
CAMERA_OUT
R39
220R
U9
BC850C
CAMERA
EEPROM
U20
M24C02
LEDx4
TEST_0
TEST_1
TEST_2
TEST_3
SPEAKER
SPK_R
SPK_L
Q3 (Pch)
Q2(Pch)
Q4 (Nch)
Q1 (Nch)
D28
D29
SPEAKER_R
SPEAKER_L
FDMQ8203
TPD1E10B06
C269
C266
1nF
Speaker
U53
SN74AC04PW
BATTERY VOLUME
U3
OPA192IDBV
ADC_BAT
2.4G
FB1
FB2
BLM18EG601SN1
U40
U41
AS01-ML01S
BLE
U2
HC-02-7PIN
HC-02_STATUS
HC-02_RESET#
ETH_RESET#
PERIPHERAL_RESET#
ESD351
RGB
JP4
TE_4-1734839-0
LCD_B0
LCD_B1
LCD_B2
LCD_B3
LCD_B4
LCD_B5
LCD_B6
LCD_B7
LCD_CLK
LCD_DISP
LCD_DE
TP_SCL
TP_SDA
TP_RST
TP_INT
AUX1
AUX2
Brightness
LEDPWM
SCL_1
SDA_1
FPC_S3
FPC_S4
下灯板
JP8_ePA_1x4
TOF1
JP5
SPEEKER
U55
SPEAKER_R_1
SPEAKER_L_2
TOF2
JP7
来主板
JP2
调试
JP9
网络/摄像头
JP10
U56
U57
RED_GND
GREEN_GND
MTG1
MTG2
MTG3
MTG4
主板不接外壳地 ， 底板接外壳地
UART_2 BLE
UART_3 DEBUG
UART_6 HEADER
I2C_1 UP_LED_1 UP_LED_2 DOWN_LED 24C02 LCD
I2C_2 TOF_1
I2C_3 TOF_2
SPI_2 ADC_0 ADC_1 ADC_2
SPI_4 2.4G_0 2.4G_1
外部中断
新增加
Title
<Title>
Size
Document Number
Custom<Doc>
Rev
<RevCode>
Date: Sunday, November 30, 2025
Sheet 1 of 1