


DISPLAY — ILI9488 4.0in 320x480

8-bit 8080 parallel interface (mandatory for SNES emulation speed)

Control signals:


GPIO12 / FPC9
GPIO13 / FPC15
GPIO14 / FPC10
GPIO46 / FPC11
+3V3 (FPC12, R0)
+3V3 (FPC33, BL)

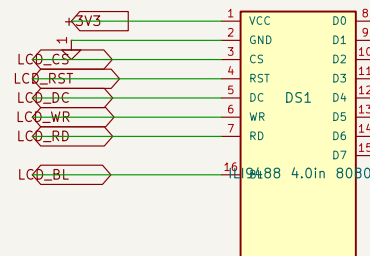

8-bit data bus:

GPIO4 (FPC17)
GPIO5 (FPC18)
GPIO6 (FPC19)
GPIO7 (FPC20)
GPIO8 (FPC21)
GPIO9 (FPC22)
GPIO10 (FPC23)
GPIO11 (FPC24)

FPC RIBBON CONNECTOR (J4)

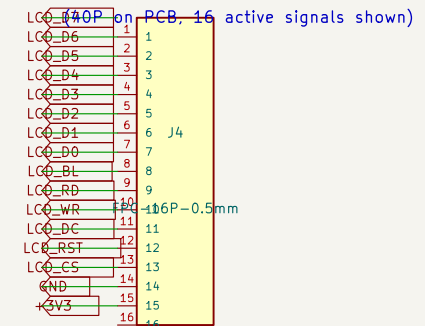

ILI9488 Panel FPC-40P Pin Mapping (source: components.md):

Panel 6,7=VDDI/VDDA(+3V3) 9=CS 10=DC 11=WR 12=RD 15=RESET

Panel 17-24=DB0-DB7 33=LED-A(BL) 34-36=LED-K(GND) 38,39=IM0,IM1(+3V3) 40=IM2(GND)

Interface mode: IM2=0 IM1=1 IM0=1 = 8080 8-bit parallel

– GPIO4-11 form contiguous 8-bit bus for efficient register-level DMA