



POWER SUPPLY

USB-C -> IP5306 SOP-8 (charge + boost) -> AMS1117-3.3 -> 3.3V rail

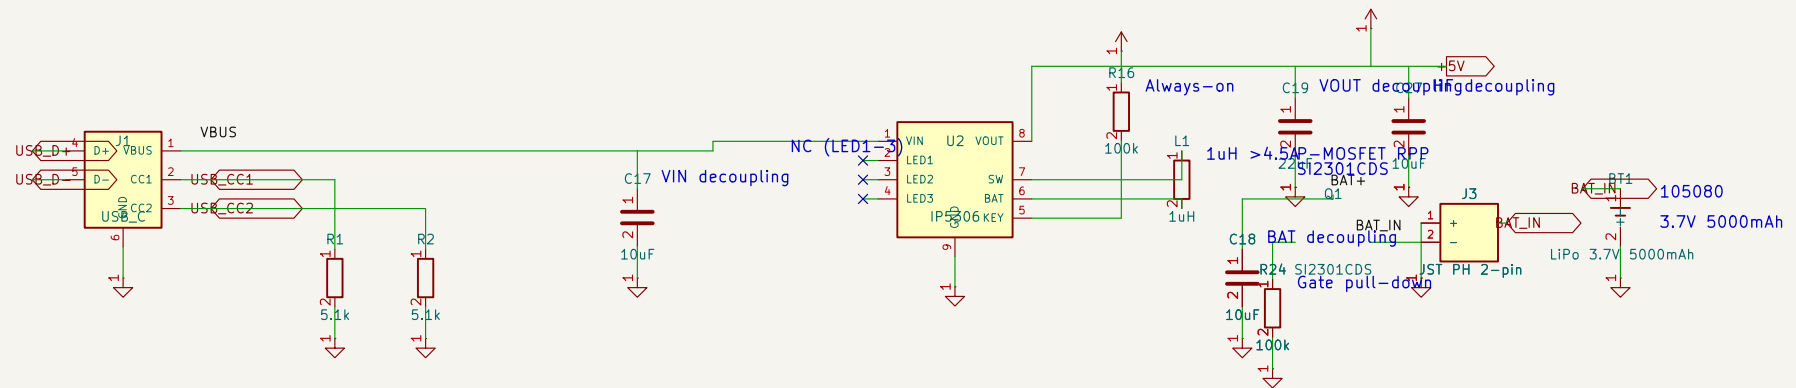


CHARGING INDICATOR LEDs



VOLTAGE REGULATOR

5V -> AMS1117-3.3 -> 3.3V (800mA max)

POWER SWITCH

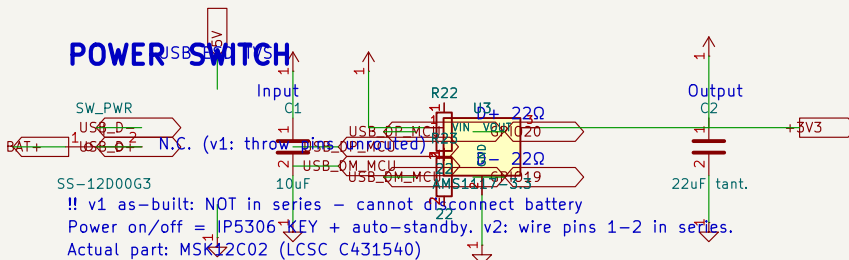

Design Notes:

- IP5306 eSOP-8: integrated charger + synchronous boost (no ext. Schottky)
- 1uH inductor: BAT -> L1 -> SW (>4.5A saturation, shielded)

Generated by scripts/generate_schematics
ESP32 Emu Turbo - Handheld Retro Console

Sheet: /
File: 01-power-supply.kicad_sch

Title: Power Supply

Size: A4 Date: / /
KiCad E.D.A. 10.0.0-rc1.1-513-g294bfe097a

Rev:
Id: 1/1