


DISPLAY – ILI9488 4.0in 320x480

8-bit 8080 parallel interface (mandatory for SNES emulation speed)

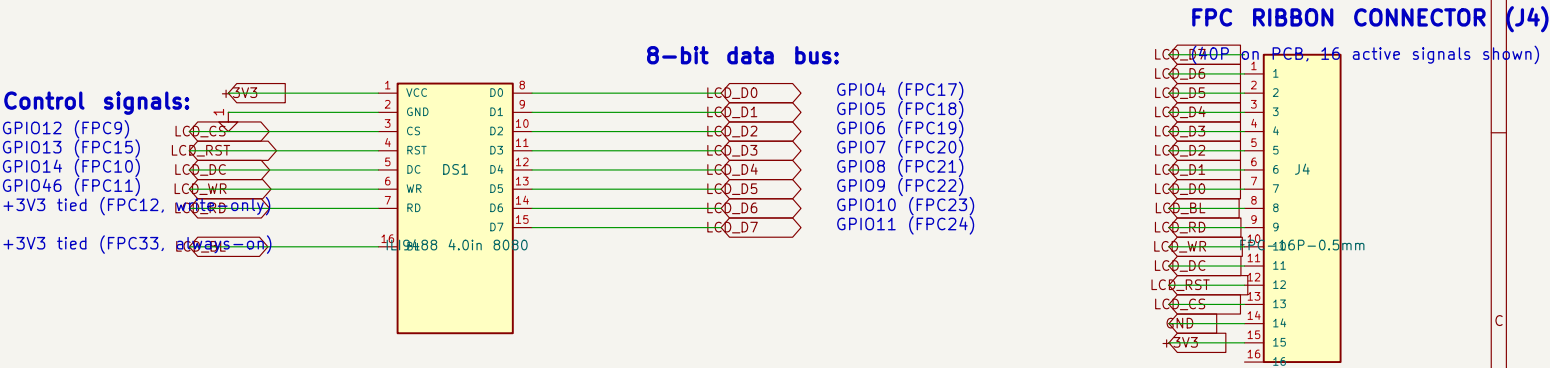

ILI9488 Panel FPC-40P Pin Mapping (source: components.md):

Panel 6,7=VDDI/VDDA(+3V3) 9=CS 10=DC 11=WR 12=RD 15=RESET

Panel 17-24=DB0-DB7 33=LED-A(BL) 34-36=LED-K(GND) 38,39=IM0,IM1

Interface mode: IM2=0 IM1=1 IM0=1 = 8080 8-bit parallel

– GPIO4-11 form contiguous 8-bit bus for efficient register-level DMA

Generated by scripts/generate_schematics
ESP32 Emu Turbo – Handheld Retro Console

Sheet: /
File: 03-display.kicad_sch

Title: Display – ILI9488 4.0in 8080 Parallel

Id: 44 Date: 2024-09-01

KiCad E.D.A. 10.0.0-rc1.1-513-g294bfe097a

Rev:
Id: 3/1