

AUDIO OUTPUT

I2S DAC -> PAM8403 Class-D Amplifier -> 28mm 8ohm Speaker

I2S Bus (PDM TX mode - DOUT only):

I2S_BCLK


GPIO15 - Bit Clock (UNUSED - PDM mode, v2 free)

I2S_LRCK

GPIO16 - L/R Word Select (UNUSED - PDM mode, v2 free)

I2S_DOUT

GPIO17 - PDM sigma-delta out @ 32kHz -> C22 -> PAM_IN_AC

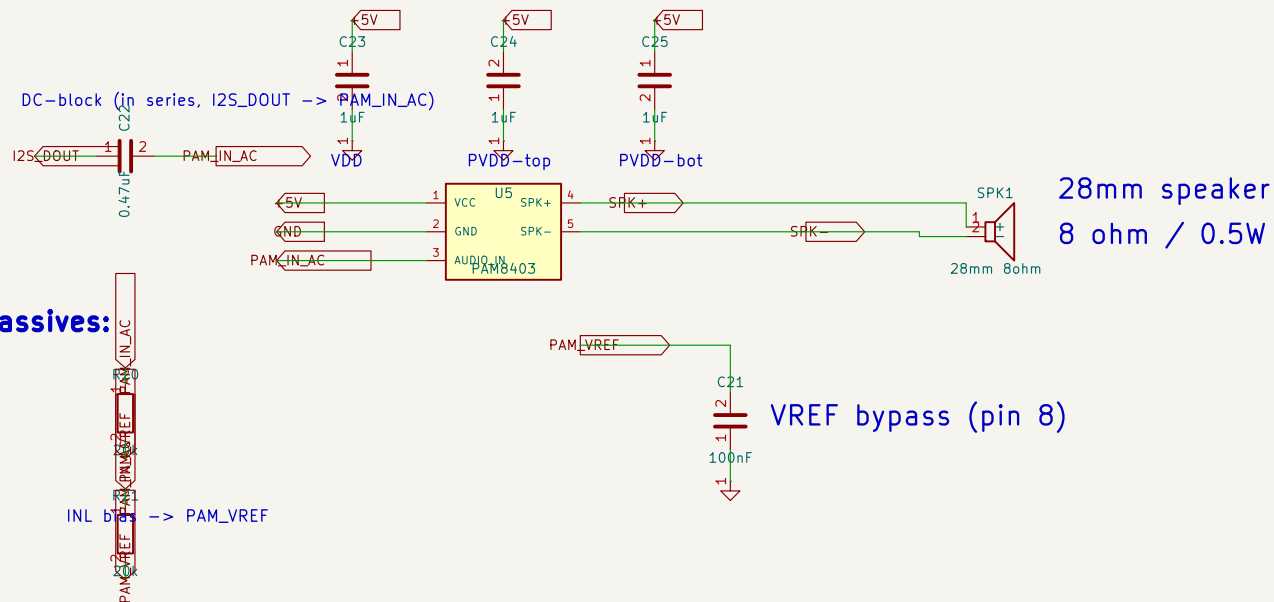

PAM8403 Passives:

INL bias -> PAM_VREF

INR bias -> PAM_VREF

R20/R21 bias the amplifier inputs to PAM_VREF (R4-HIGH-3).

AS-BUILT v1: the board ties them to GND instead - see _T4-STRUCTURAL_EXCEPTIONS in scripts/verify_netlist_diff.py.

Design Notes:

- PAM8403: filterless Class-D stereo amplifier (3W per channel max)
- Only one channel used for mono audio
- No external DAC needed: ESP32-S3 has built-in I2S with DMA
- Powered from +5V rail for max headroom (3.3V limits volume)
- DMA-driven audio streaming for low CPU overhead

Generated by scripts/generate_schematics
ESP32 Emu Turbo - Handheld Retro Console

Sheet: /
File: 04-audio.kicad_sch

Title: Audio - I2S -> PAM8403 -> Speaker

Size: A4 Date:
KiCad E.D.A. 10.0.0-rc1.1-513-g294bfe097a

Rev:
Id: 4/1