
TEMPLATE

McKinney TA714/TA314


4 1/2" Standard Weight Full Mortise Template
QC* x MM Hinge (2 to 8 Wires)

McKinney
ASSA ABLOY
Experience a safer and more open world

DO NOT SCALE
DIMENSIONS: INCHES (MM)

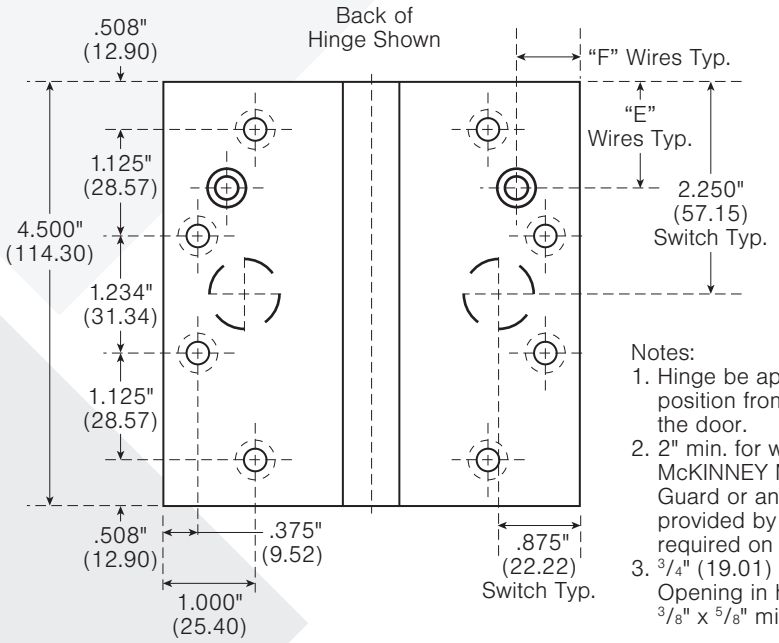

Notes:
1. Hinge be applied at second position from the bottom on the door.
2. 2" min. for wood frames. McKINNEY MG-16 Mortar Guard or an equivalent provided by frame manufacturer required on steel frames.
3. 3/4" (19.01) recommended. Opening in hinge reinforcing 3/8" x 5/8" min.

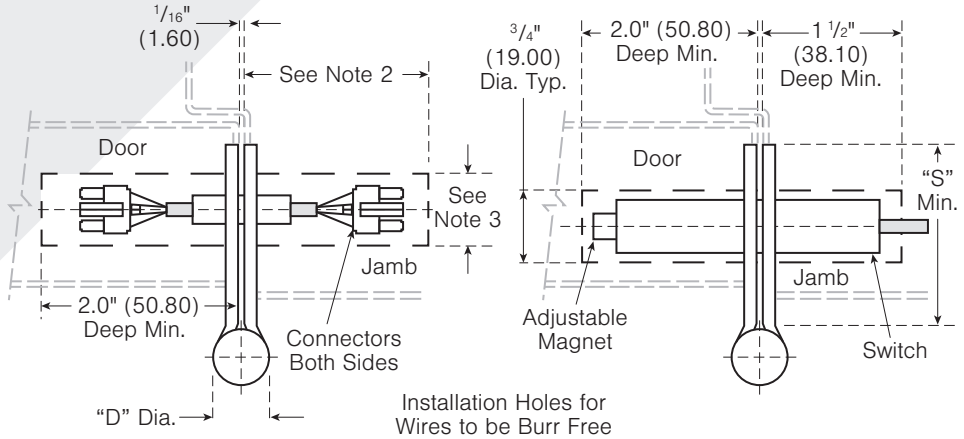

Top View Section through Wires (Hinge in Closed Position)

Top View Section through Switch (Hinge in Closed Position)

CATALOG NUMBER		GAUGE OF METAL	"D" OUTSIDE DIA.	"E" WIRE LOC.	"F" WIRE LOC.	"S" (SWAGE LINE) HINGE WIDTH	
STEEL HINGES	**NON-FERROUS HINGES					4" (101.60)	4 1/2" (114.30)
TA714xQCxMM	TA314xQCxMM	.134" (3.40)	.585" (14.86)	1.125" (28.57)	.812" (20.64)	1 21/32" (42.10)	1 29/32" (48.40)

TEMPLATE 55448

EFFECTIVE DATE:
September 1, 2023

SUPERSEDES:
All Previous

McKinney Template Hinges of the Catalog Numbers are made to conform to ANSI/BHMA 156.7 for Screw Hole Location and Gauge of Metal. Switch size, wire location and hole size conforms to this drawing.

MACHINE SCREW SIZE:
1/2 x 12-24 F.H.

WOOD SCREW SIZE:
1 1/4 x 12 F.H.

*Connector system utilizes wire colors & locations compatible with doors & hardware from other ASSA ABLOY Group Companies.

**Check Catalog for Metals.

McKinney
Berlin Operations
225 Episcopal Road
Berlin, CT 06037
www.mckinneyhinge.com

Copyright © 2018, 2023, ASSA ABLOY Accessories and Door Controls Group, Inc. All rights reserved. Reproduction in whole or in part without the express written permission of ASSA ABLOY Accessories and Door Controls Group, Inc. is prohibited. Printed in the U.S.A. 55448 12/23