EX: 9 CISCO PACKET TRACER - 1

Aim:

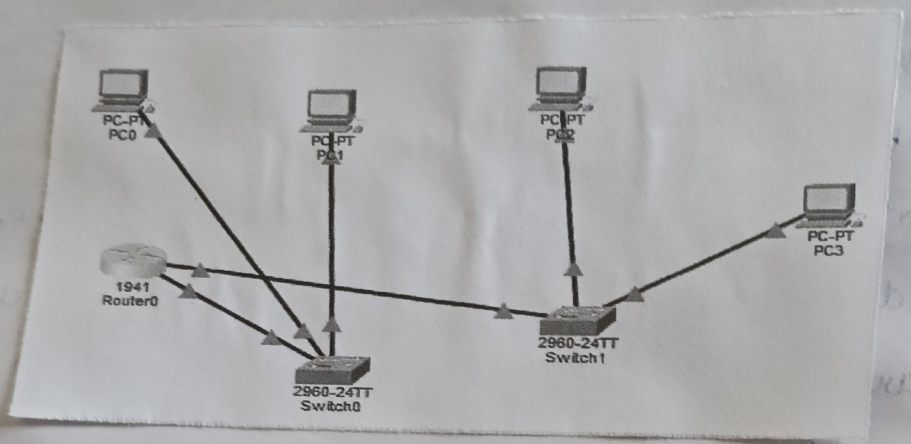
To design & configure a simple network topology consisting of one Router, two switches & four PC with cisco packet tracer.

Procedure:

1. Open cisco packet tracer.
2. Add devices : 1 Router (cisco 194 (2911)
   2 Switches (cisco 2960)
   4 PC's
3. Connect the devices with a copper - straight through cable.
4. Open Router CLI & configure (configure G0/0, G0/1 & save configuration.
5. Open PC0 - desktop - IP configuration then configure IP address, subnet mask & default gateway.
6. Similarly configure PC1, PC2 & PC3
7. Test connectivity PC0 - PC1
   PC0 - command prompt - Ping 192.168.1.3

Result:

Thus, the simple network topology with cisco packet tracer has been implemented & verified successfully.


PC-PT
PC0
PC-PT
PC1
PC-PT
PC2
PC-PT
PC3
1941
Router0
2960-24TT
Switch0
2960-24TT
Switch1