



Customer

API Specification

for WeBeHome

DOCUMENT HISTORY

Version:	Date:	Comments:
1.0	31/01/2011	Release of first version
1.1	09/02/2011	Updated with more information, some corrections and an example
1.2	27/04/2011	Added the HtmlTable option for the WebAPI and the section about Excel Import
1.3	21/06/2011	Small general improvements of the documentation
1.4	10/07/2012	Added Headings to all WebAPI calls and added SubUnitID and Minimize to GetSubUnitStatus
1.5	22/04/2014	Change to WeBeHome
1.6	15/05/2014	Update info about URL auto logon
1.7	20/05/2014	Improved Excel example.
1.8	11/09/2014	Correction of 5.2, arm → away
1.9	2015-11-06	Minor corrections and improvements + added statusdetailed in URL action
1.10	2016-01-18	Added startscene in URL action



CONTENTS

1. INTRODUCTION.....	3
2. GENERAL INFORMATION	3
2.1. Contact Details	3
2.2. Background and Context	3
3. WORKFLOW	4
3.1. To get basic Customer configuration.....	4
3.2. To get Event Data	4
4. IMPORT INTO EXCEL USING WEB API	5
4.1. Test in a browser	5
4.2. Import into Excel 2010	5
5. WEB API.....	8
5.1. Introduction	8
5.2. Login automatically using LoginName and Password.....	8
5.3. Take action using URL	8
5.4. ChartImage.....	9
5.5. Get customer configuration	12
5.6. Get base unit configuration	13
5.7. Get event data	14
5.8. Get status	15
5.9. Get measurement data	16
5.10. Get reference list of Events	17
5.11. Example	18
6. WEBSERVICE API	20
6.1. Introduction	20
6.2. Get customer configuration	21
6.3. Get base unit configuration	22
6.4. Get event data	23
6.5. GetReferenceEvents	24



1. INTRODUCTION

This API is for WeBeHome customers that have **BASIC** or **PREMIUM** subscription.

The API gives access to WeBeHome and to the information stored to give you more advantages if our solution and give even more control over your home, company or cottage.

2. GENERAL INFORMATION

2.1. Contact Details

Company Name	WeBeHome AB
Tel:	+46 8 410 221 40
Email:	support@webehome.com

2.2. Background and Context



3. WORKFLOW

3.1. To get basic Customer configuration

Step 1: call GetCustomerConfig to get all of the customers BaseUnits. Remember the BaseUnitID

Step 2: call GetBaseUnitConfig for each BaseUnit using the BaseUnitID to get a list of the devices that are connected and active for the BaseUnit.

3.2. To get Event Data

First time per BaseUnit, call GetEventData with LastDataID=0
That will return all events for the last 24 hours

Save the last DataID that is received in the list of Events returned

All other times, call GetEventData and set the LastDataID to the last DataID that was retrieved from that BaseUnit.

4. IMPORT INTO EXCEL USING WEB API

4.1. Test in a browser


First test the URL in a browser to make sure you receive the values you like
For example:

<https://Webehome.com/API/WebAPI.aspx?Function=GetSubUnitStatus&LoginName=john@gmail.com&Password=myspassword&HtmlTable=yes>


Notice: When using Excel, it is important to include "HtmlTable=yes" in the URL

4.2. Import into Excel 2010


Example using Excel 2010 for Windows: From the menu, select Data → From Web

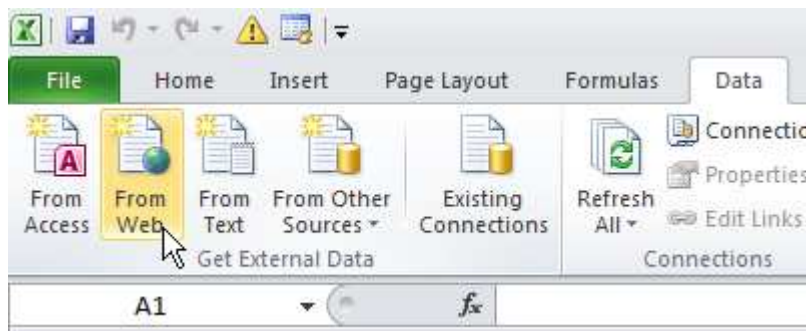


Paste the URL from 4.1 in the address field and then click the Go button

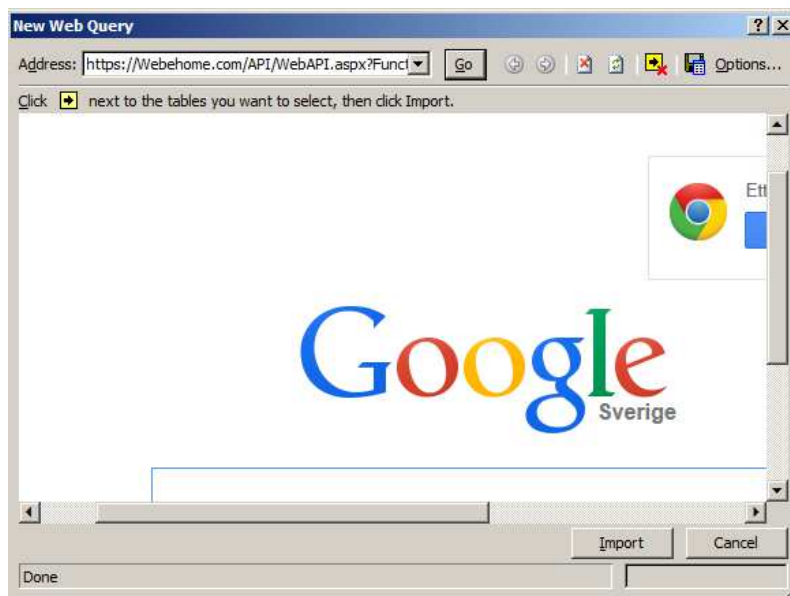


When the data is shown, click on the second yellow arrow to select the data, and then the Import button

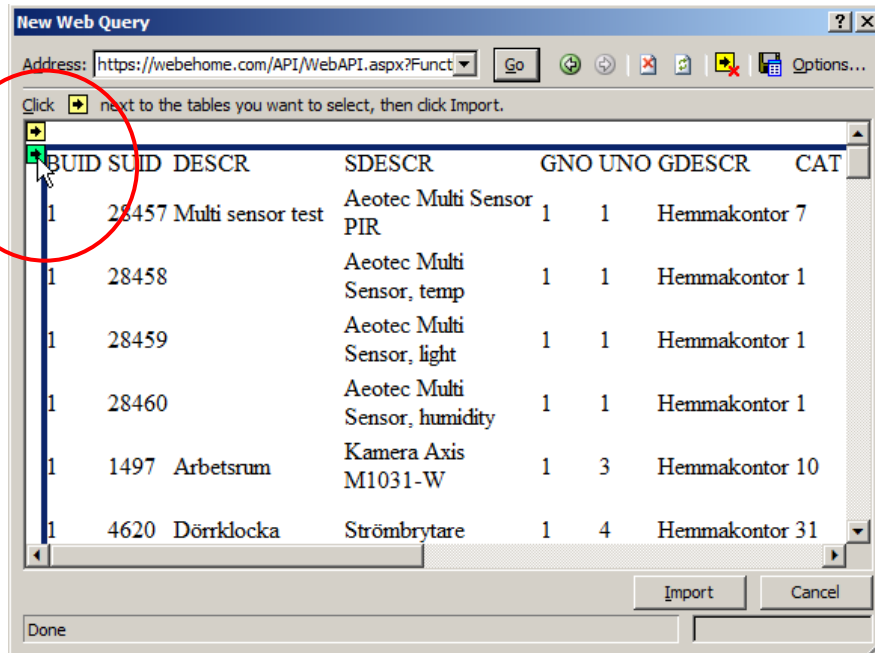


Answer OK on the questions that comes up

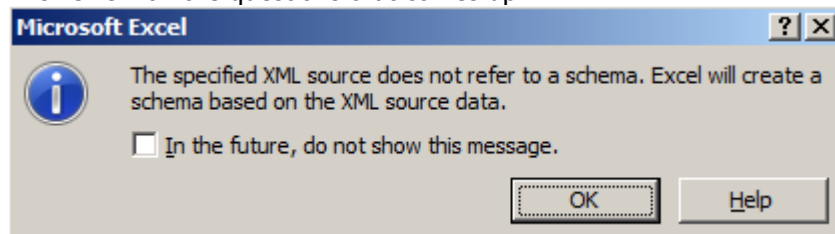

Press OK

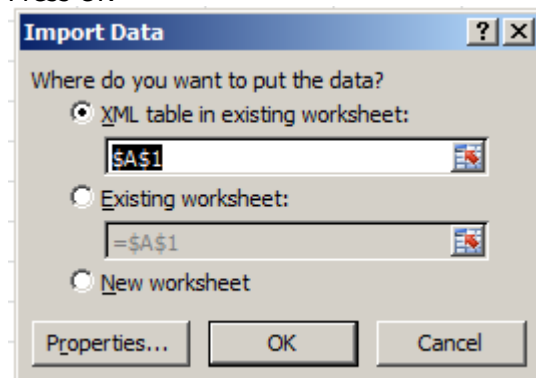

Now your data should be imported to Excel.

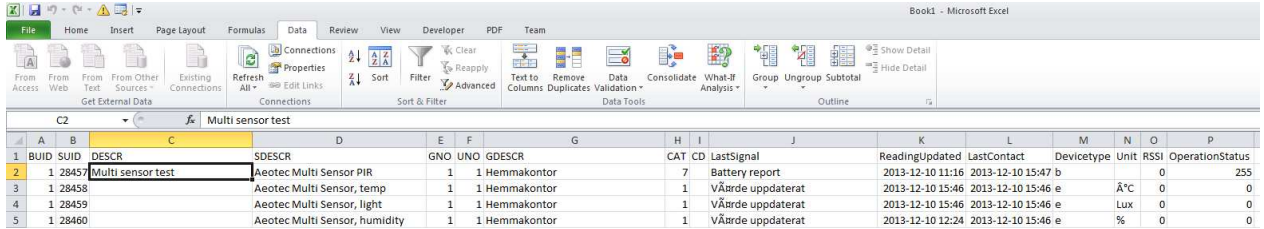

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
1	BUID	SUID	DESCR	SDESCR	GNO	UNO	GDESCR	CAT	CD	LastSignal	ReadingUpdated	LastContact	Devicetype	Unit	RSI	OperationStatus
2	1	28457	Multi sensor test	Aeotec Multi Sensor PIR	1	1	Hemmakontor	7		Battery report	2013-12-10 11:16	2013-12-10 15:47	b		0	255
3	1	28458		Aeotec Multi Sensor, temp	1	1	Hemmakontor	1		V��rde uppdaterat	2013-12-10 15:46	2013-12-10 15:46	e	��C	0	0
4	1	28459		Aeotec Multi Sensor, light	1	1	Hemmakontor	1		V��rde uppdaterat	2013-12-10 15:46	2013-12-10 15:46	e	Lux	0	0
5	1	28460		Aeotec Multi Sensor, humidity	1	1	Hemmakontor	1		V��rde uppdaterat	2013-12-10 12:24	2013-12-10 15:46	e	%	0	0

It is possible to refresh the data by having the cursor on any cell in the data imported and then press the Refresh All button.





5. WEB API

5.1. Introduction

The WEB API is very easy to use by anyone from any Web browser. Just type/part the URL in your Web browser according to the description.

Functions that return data are formatted in a | delimited text.

5.2. Login automatically using LoginName and Password

Example

<https://Webehome.com/Public/login.aspx?LoginName=<LoginName>&Password=<Password>>

The user will then be logged in directly to their start page in WeBeHome.

5.3. Take action or get status using URL

<https://Webehome.com/Public/login.aspx?LoginName=<LoginName>&Password=<Password>&Action=home>

This will change the system to be in home mode.

Possible arguments to Action is	disarm	
	home	
	away	
	status	Only when ActionOnly=yes
	statusdetailed	Only when ActionOnly=yes
	startscene&no=X	Starta Scenario X

Optional arguments

LocationID=<id of the location>	For those who has multi locations
ActionOnly=yes	Only perform action, no login

Example to check status. LocationID is only necessary if user have access to more than one Location

<https://Webehome.com/Public/login.aspx?LoginName=<LoginName>&Password=<Password>&LocationID=<1235>&Action=status&ActionOnly=yes>

statusdetailed returns:

Operation mode in numeric code, 0=disarmed, 1=home, 2=away,8=monitor

Description of Location

Operation mode in text

Operation mode changed by

Operation mode change date/time


No of alarm and important events

startscene

Only works when ActionOnly=yes, Start the Scenarion No given in no=

Example:

<https://Webehome.com/Public/login.aspx?LoginName=<LoginName>&Password=<Password>&LocationID=<1235>&Action=startscene&no=3&ActionOnly=yes>

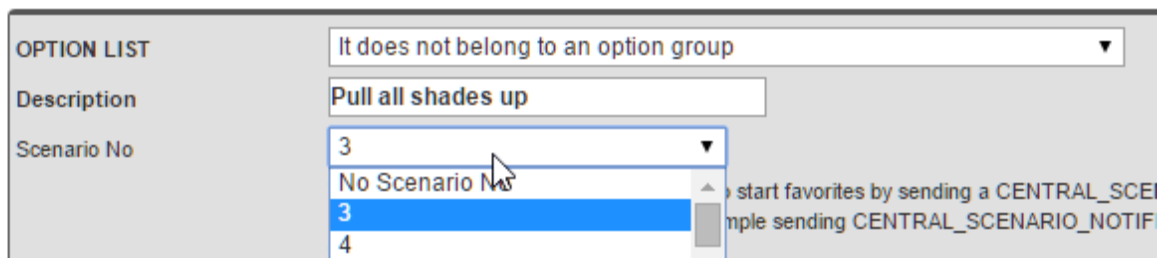

5.4. Chart Image

Get a chart as a jpg image.

<https://Webehome.com/API/GraphImage.ashx?>

LoginName= The users login name
 Password= The users password
 SessionID= SessionID could be used instead of password
 SUID1= ID of the sensor which values should be shown

OPTIONAL:

SUID2=
 ...
 SUID8=



Customer API

toDT=	To date time, default = now, format = yyyy-mm-dd_hhQmm
BaseUnitID=	Id of Base Unit, if given, then it takes first 8 devices from the BaseUnit
LanguageID=	1=Swedish, 2=English, 3=Thai, 5=Spanish, 6=German, default=2
Period=	No of days, possible values = 1, 3, 7, 14, 31, 62, default = 7
Width=	Width in pixels, default 600
Height=	Height in pixels, default 300
Group=	XXX

Example

<https://Webehome.com/API/GraphImage.ashx?LoginName=<loginname>&Password=<password>&SUID1=1230&SUID2=794&Width=1400&Height=700>



5.5. Create Event (test phase)

Create an event in the event log and update information on the device.

<https://webehome.com/API/EventAPI.aspx?>

SUID = SubUnit ID
EID = Event ID
UN = Login name
PW = Password

Event ID:

20019 = Start/open,
20020 = Stop/close
20021 = Tamper
20010 = Supervision

Example:

https://webehome.com/API/EventAPI.aspx?SUID=1234_EID=20019_UN=testuser_PW=secret

IMPORTANT: The arguments for this function should be separated by _ instead of & since not some devices can't handle a string separated with &.

The API accepts both http and https calls. http should be avoided if possible since it is a security risk.



5.6. Get customer configuration

Returns basic information about Customer and Base Unit.

If the customer has more than one Base Unit, a <table> is return for each Base Unit and customer information is the same.

Name of function GetCustomerConfig

Input LoginName
 Password
 HtmlTable (optional) values: yes, no Default = No
 Heading (optional) Include headings: yes, no Default = Yes
es, no

Output

Tag/Heading	Field	Type	
CID	CustomerID	int	
CN	CustomerName	nchar(100)	
LID	LanguageID	int	
TZ	TimeZone	int	
CoID	CountryID	int	
BUID	BaseUnitID	int	
DESCR	Descr	nchar(50)	
RIP	RemoteIP	char(15)	IP of last connection
CDT	ConnectionDT	datetime	Last time a connction was done
DDT	DisconnectionDT	datetime	When disconnection was done
CRDT	CreationDT	datetime	When it was created

ConnectionDT and DisconnectionDT returns 2000-01-01 when no date stored

Example:

To display with | as field separator

<https://Webehome.com/API/WebAPI.aspx?Function=GetCustomerConfig&LoginName=<loginname>&Password=<password>>

To display in HTML table

<https://Webehome.com/API/WebAPI.aspx?Function=GetCustomerConfig&LoginName=<loginname>&Password=<password>&HtmlTable=yes>



5.7. Get base unit configuration

Returns a list of a the Sub Units that is attached to the Base Unit.

Name of function GetBaseUnitConfig

Input

LoginName	
Password	
BaseUnitID	Give ID of Base Unit or leave empty
HtmlTable (optional)	values: yes, no Default = No
Heading (optional)	Include headings: yes, no Default = Yes

Output

Tag/Header	Field	Type	
BUID	BaseUnitID	int	
SUID	SubUnitID	int	
SUTID	SubUnitTypeID	int	
SDESCR	SensorDescr	char(200)	Standard desc of the type of device
CAT	Category	int	
DESCR	Descr	char(50)	Customers name/descr of unit
GNO	GroupNo	smallint	
UNO	UnitUno	smallint	
GDESCR	Group Description	char(30)	

Example:

<https://Webehome.com/API/WebAPI.aspx?Function=GetBaseUnitConfig&LoginName=<loginname>&Password=<password>>



5.8. Get event data

Returns a list of all event data since the LastDataID. Max 5000 rows are returned.

Name of function GetEventData

Input	LoginName	
	Password	
	BaseUnitID	Give ID of Base Unit or leave empty
	LastDataID	From which ID to start, if empty then it takes last 24 hours
	HtmITable (optional)	values: yes, no Default = No
	Heading (optional)	Include headings: yes, no Default = Yes

Output

Tag/Header	Field	Type	
BUID	BaseUnitID	int	
SUID	SubUnitID	int	
DID	DataID	int	
UID	UserID	int	
DT	ReceivedDT	datetime	Local datetime of event
EID	EventID	int	
OS	OperationStatus	smallint	For readings etc

Example:

<https://Webehome.com/API/WebAPI.aspx?Function=GetEventData&LoginName=<name>&Password=<password>&LastDataID=1504320>



5.9. Get status

Returns a list of a Base Units all Sub Units (devices)

Name of function GetSubUnitStatus

Input	LoginName	
	Password	
	BaseUnitID	Give ID of Base Unit or leave empty
	SubUnitID (optional)	Give ID of single Sub Unit or leave empty
	HtmlTable (optional)	values: yes, no Default = No
	Heading (optional)	Include headings: yes, no Default = Yes
	Minimize (optional)	Minimize columns: yes, no Default = No

Output

Tag/Header	Field	Type	
BUID	BaseUnitID	int	
SUID	SubUnitID	int	
DESCR	Descr	char(50)	Customers name/descr of unit
SDESCR	SensorDescr	char(200)	Standard desc of the type of device
GNO	GroupNo	smallint	
UNO	UnitUno	smallint	
GDESCR	Group Description	char(30)	
CAT	Category	int	
CD	Current data	int	
LastSignal		varchar	
ReadingUpdated		datetime	
LastContact		datetime	
DeviceType		varchar	
Unit		varchar	
RSSI		int	
OperationStatus		int	
DataValue		float	
Unit		varchar	

Example:

<https://Webehome.com/API/WebAPI.aspx?Function=GetSubUnitStatus&LoginName=<loginname>&Password=<password>&BaseUnitID=<baseunitid>>



5.10. Get measurement data

Returns a list of selected measurement data. Max 5000 rows are returned.

Name of function GetMeasurementData

Input	LoginName	
	Password	
	BaseUnitID	Give ID of Base Unit or leave empty
	SubUnitID	Give ID, a comma separated list of ID or leave empty
	FromDT	From date yyyy-mm-dd, empty = last 7 days
	HtmlTable (optional)	values: yes, no Default = No
	Heading (optional)	Include headings: yes, no Default = Yes

Output			
Tag/Header	Field	Type	
BUID	BaseUnitID	int	
SUID	SubUnitID	int	
DID	DataID	int	
DT	ReceivedDT	datetime	Local datetime of event
VAL	Value	smallint	

Example:

<https://Webehome.com/API/WebAPI.aspx?Function=GetMeasurementData&LoginName=<yourLoginName>&Password=<yourPassword>&BaseUnitID=1234&FromDT=2015-11-04>



5.11. Get reference list of Events

Returns a reference list of all EventIDs and the description in the language that is set on the customer that the user belongs to.

Name of function GetReferenceEvents

Input

LoginName	
Password	
HtmlTable (optional)	values: yes, no Default = No
Heading (optional)	Include headings: yes, no Default = Yes

Output

Tag/Header	Field	Type
EID	EventID	int
EDESCR	Event Descr	char(100)
LEC1	Look event code	char(10)

<https://Webehome.com/API/WebAPI.aspx?Function=GetReferenceEvents&LoginName=<loginname>&Password=<password>>

5.12. Example

This is an example on how to get information of ID for temperature sensors that can be used to get display measurements in the graph.

First get the ID of the temperature sensors by getting information about all of our base units, paste the following URL in your web browser replacing the login name and password with your information:

<https://Webehome.com/API/WebAPI.aspx?Function=GetBaseUnitConfig&LoginName=<loginname>&Password=<password>>

The output should be similar to:


```
BUID|SUID|SUTID|SDESCR|CAT|DESCR|GNO|UNO|GDESCR|
1|13|3|Rörelse|7|Källare.|1|2|Källare
1|22|14|Temp|1|Källare temp|1|4|Källare
1|16|2|Magnet|2|Källardörren|1|10|Källare
1|1270|1|Rök|0|Källare|1|10|Källare
1|1497|48|Kamera Axis M1031-W|10|Källaren (Axis)|1|10|Källare
1|1608|49|X.10 Strömbrytare|30|Lampa vid ingången|1|20|Källare
1|15|12|Översv.|20|Diskmaskin|2|1|Bottenvåning
1|2207|56|Kamera (Vivotek IP7330)|10|Ytterdörr (Vivotek IP7330)|2|1|Bottenvåning
1|798|1|Rök|0|Brandvarnare kök|2|2|Bottenvåning
1|1230|14|Temp|1|Vardagsrum|2|2|Bottenvåning
1|1783|3|Rörelse|7|Glasveranda|2|6|Bottenvåning
1|1981|2|Magnet|2|Dörr glasveranda|2|8|Bottenvåning
1|1092|3|Rörelse|7|Bottenvåning.|2|10|Bottenvåning
1|2161|43|Magnet|2|Ytterdörr|2|11|Bottenvåning
1|17|1|Rök|0|Brandlarm Övervåning|3|4|Ovanvåning
1|1093|3|Rörelse|7|Sovrum med balkong|3|5|Ovanvåning
1|14|14|Temp|1|Vind temp.|4|1|Vind
1|18|13|L.fukt|1|Vind fukt|4|2|Vind
1|1268|14|Temp|1|Ute temp|10|6|Utomhus
```

Column 2, SUID contains the ID of each sensor. This is the ID that is used in the Graph. In this case three sensors have been selected, (ID marked with bold) the temp and humidity on the attic and the outside temp.

Use these values and make the second URL to get a Graph

<https://Webehome.com/API/GraphImage.ashx?LoginName=<loginname>&Password=<password>&SUID1=14&SUID2=18&SUID3=1268&Width=1400&Height=700>

The URL will return a nice graph of the sensors selected into the browser window. (the picture below is a minimized copy of the output)

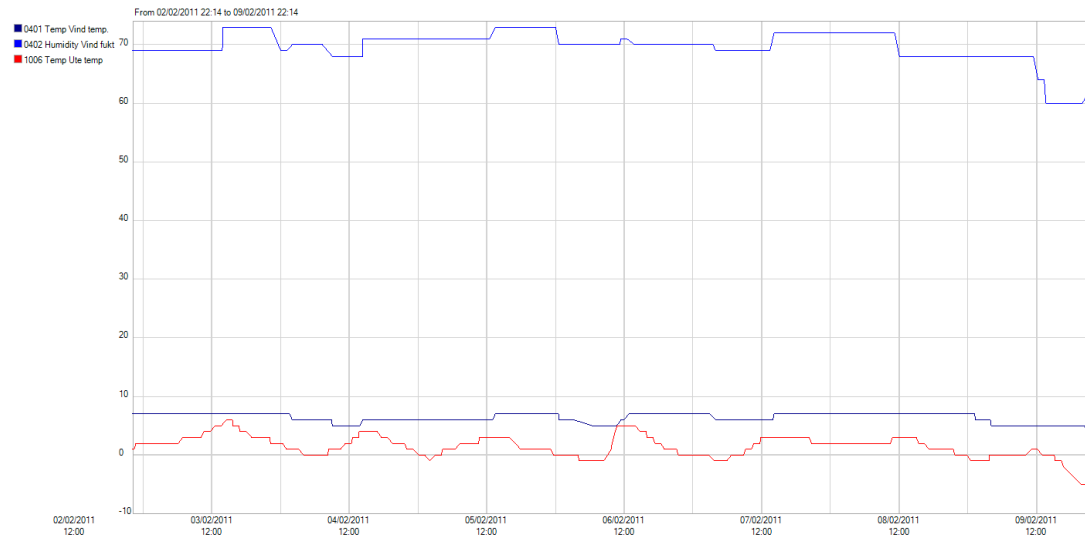



6. WEBSERVICE API

6.1. Introduction

The WebserviceAPI is for customer who want to get data into their own solutions directly from WeBeHome. It is good for program to program communication.

The API is found at <https://Webehome.com/API/WebServiceAPI.asmx>

All data is returned wrapped into XML tags.

Datetime are formatted like yyyy-mm-dd hh:mi:ss

All date and times are local time based on which TimeZone is set on the customer

6.2. Get customer configuration

Returns basic information about Customer and Base Unit.

If the customer have more than one Base Unit, a <table> is return for each Base Unit and customer information is the same.

Name of function GetCustomerConfig

Input	CustomerID	char(8000)	***
	LoginName	char(50)	If Admin, this is Admin credentials
	Password	char(30)	If Admin, this is Admin credentials

Three different ways to use CustomerID

- 1) The ID of the customer that is wanted
- 2) 0 → Returns all customer and base units that the user belongs to
- 3) Comma separated list of CustomerIDs

Output

Tag	Field	Type	
CID	CustomerID	int	
CN	CustomerName	nchar(100)	
LID	LanguageID	int	
TZ	TimeZone	int	
CoID	CountryID	int	
BUID	BaseUnitID	int	
DESCR	Descr	nchar(50)	
RIP	RemoteIP	char(15)	IP of last connection
CDT	ConnectionDT	datetime	Last time a connction was done
DDT	DisconnectionDT	datetime	When disconnection was done
CRDT	CreationDT	datetime	When it was created

ConnectionDT and DisconnectionDT returns 2000-01-01 when no date stored

Example of return value:

```
<NewDataSet> <Table> <CID>1</CID> <CN>ABELL</CN> <LID>2</LID> <TZ>110</TZ> <CoID>123</CoID>
<BUID>1</BUID> <DESCR>Hemma</DESCR> <RIP>81.232.69.251</RIP> <CDT>2010-08-27 06:20:43</CDT>
<DDT>2000-01-01 00:00:00</DDT> <CRDT>2000-01-01 00:00:00</CRDT> </Table> <Table> <CID>1</CID>
<CN>ABELL</CN> <LID>2</LID> <TZ>110</TZ> <CoID>123</CoID> <BUID>4</BUID> <DESCR>Kontor (4)</DESCR>
<RIP>90.233.128.125</RIP> <CDT>2010-08-28 16:48:55</CDT> <DDT>2000-01-01 00:00:00</DDT> <CRDT>2008-11-07
10:11:55</CRDT> </Table> <Table> <CID>1</CID> <CN>ABELL</CN> <LID>2</LID> <TZ>110</TZ> <CoID>123</CoID>
<BUID>1063</BUID> <DESCR>HEMMA2</DESCR> <RIP>83.178.32.52</RIP> <CDT>2010-08-25 05:14:15</CDT>
<DDT>2000-01-01 00:00:00</DDT> <CRDT>2010-06-17 10:52:16</CRDT> </Table> </NewDataSet>
```

6.3. Get base unit configuration

Returns a list of a the Sub Units that is attached to the Base Unit.

Name of function GetBaseUnitConfig

Input	BaseUnitID	int	
	LoginName	char(50)	If Admin, this is Admin credentials
	Password	char(30)	If Admin, this is Admin credentials

Output	Tag	Field	Type	
	BUID	BaseUnitID	int	
	SUID	SubUnitID	int	
	SUTID	SubUnitTypeID	int	
	SDESCR	SensorDescr	char(200)	Standard desc of the type of device
	CAT	Category	int	
	DESCR	Descr	char(50)	Customers name/descr of unit
	GNO	GroupNo	smallint	
	UNO	UnitUno	smallint	
	GDESCR	Group Description	char(30)	

```
<NewDataSet> <Table> <BUID>4</BUID> <SUID>792</SUID> <SUTID>13</SUTID> <SDESCR>Humidity</SDESCR>
<CAT>1</CAT> <DESCR>Lager</DESCR> <GNO>91</GNO> <UNO>1</UNO> <GDESCR>Datarum</GDESCR>
</Table> <Table> <BUID>4</BUID> <SUID>793</SUID> <SUTID>14</SUTID> <SDESCR>Temp</SDESCR>
<CAT>1</CAT> <DESCR>Lager</DESCR> <GNO>91</GNO> <UNO>2</UNO> <GDESCR>Datarum</GDESCR>
</Table> <Table> <BUID>4</BUID> <SUID>865</SUID> <SUTID>2</SUTID> <SDESCR>Magnetic</SDESCR>
<CAT>2</CAT> <DESCR>Kontorsdörr</DESCR> <GNO>1</GNO> <UNO>5</UNO> <GDESCR>Källare</GDESCR>
</Table> <Table> <BUID>4</BUID> <SUID>873</SUID> <SUTID>5</SUTID> <SDESCR>Glass</SDESCR>
<CAT>0</CAT> <DESCR>Glass/Vib sensor</DESCR> <GNO>7</GNO> <UNO>1</UNO>
<GDESCR>Kontoret</GDESCR> </Table> <Table> <BUID>4</BUID> <SUID>884</SUID> <SUTID>5</SUTID>
<SDESCR>Glass</SDESCR> <CAT>0</CAT> <DESCR>Stora fönstret</DESCR> <GNO>7</GNO> <UNO>4</UNO>
<GDESCR>Kontoret</GDESCR> </Table> <Table> <BUID>4</BUID> <SUID>915</SUID> <SUTID>9</SUTID>
<SDESCR>Emergency button</SDESCR> <CAT>0</CAT> <DESCR>Larmknappen</DESCR> <GNO>7</GNO>
<UNO>1</UNO> <GDESCR>Kontoret</GDESCR> </Table> <Table> <BUID>4</BUID> <SUID>1094</SUID>
<SUTID>6</SUTID> <SDESCR>Gas</SDESCR> <CAT>0</CAT> <DESCR>Office</DESCR> <GNO>1</GNO>
<UNO>1</UNO> <GDESCR>Källare</GDESCR> </Table> <Table> <BUID>4</BUID> <SUID>1233</SUID>
<SUTID>29</SUTID> <SDESCR>Siren</SDESCR> <CAT>0</CAT> <DESCR>Utomhus siren</DESCR>
<GNO>10</GNO> <UNO>1</UNO> <GDESCR>Utomhus</GDESCR> </Table> <Table> <BUID>4</BUID>
<SUID>1269</SUID> <SUTID>1</SUTID> <SDESCR>Smoke</SDESCR> <CAT>0</CAT> <DESCR>Kontoret</DESCR>
<GNO>7</GNO> <UNO>2</UNO> <GDESCR>Kontoret</GDESCR> </Table> <Table> <BUID>4</BUID>
<SUID>1564</SUID> <SUTID>6</SUTID> <SDESCR>Gas</SDESCR> <CAT>0</CAT> <DESCR>Gas</DESCR>
<GNO>7</GNO> <UNO>1</UNO> <GDESCR>Kontoret</GDESCR> </Table> <Table> <BUID>4</BUID>
<SUID>1605</SUID> <SUTID>7</SUTID> <SDESCR>Remote control</SDESCR> <CAT>0</CAT> <DESCR>Till
datarummet</DESCR> <GNO>91</GNO> <UNO>20</UNO> <GDESCR>Datarum</GDESCR> </Table> <Table>
<BUID>4</BUID> <SUID>1746</SUID> <SUTID>3</SUTID> <SDESCR>PIR</SDESCR> <CAT>7</CAT>
<DESCR>Fikarum</DESCR> <GNO>8</GNO> <UNO>2</UNO> <GDESCR>Fikarum</GDESCR> </Table> <Table>
<BUID>4</BUID> <SUID>1767</SUID> <SUTID>7</SUTID> <SDESCR>Remote control</SDESCR> <CAT>0</CAT>
<DESCR>Niclas </DESCR> <GNO>20</GNO> <UNO>3</UNO> <GDESCR>Fjärrkontroller</GDESCR> </Table> <Table>
<BUID>4</BUID> <SUID>1784</SUID> <SUTID>2</SUTID> <SDESCR>Magnetic</SDESCR> <CAT>2</CAT>
<DESCR>Dörr till kontoret</DESCR> <GNO>7</GNO> <UNO>3</UNO> <GDESCR>Kontoret</GDESCR> </Table>
</NewDataSet>
```

6.4. Get event data

Returns a list of all event data since the LastDataID

Name of function GetEventData

Input	BaseUnitID	char(8000)	***
	LoginName	char(50)	If Admin, this is Admin credentials
	Password	char(30)	If Admin, this is Admin credentials
	LastDataID	int	0=take last 24 hours of data <>0 Take next higher DataID

Output

Tag	Field	Type	
BUID	BaseUnitID	int	
SUID	SubUnitID	int	
DID	DataID	int	
UID	UserID	int	
DT	ReceivedDT	datetime	Local datetime of event
EID	EventID	int	
OS	OperationStatus	smallint	For readings etc

*** Three ways of supply BaseUnitID

- 1) BaseUnitID = 10 → select data from BaseUnit with BaseUnitID = 10
- 2) BaseUnitID = 0 → select data from all BaseUnits which has the same Customer as the LoginName. When Admin credentials, take all BaseUnit that belongs to the Admin
- 3) BaseUnitID = 1,4,10,20 → select data from all of the given BaseUnitID's

Meaning of OperationStatus

For magnetic contacts: 72 =Closed, 64=Open
 For light detector: 8 =Below limit/low (Light off), 12 =Above limit (Light on)
 For Switches: 100 = Off, 199 = On
 For measurements: -127 to +127, 128 = no value

```
<NewDataSet> <Table> <BUID>4</BUID> <SUID>873</SUID> <DID>5052535</DID> <DT>2010-08-30 18:57:28</DT>
<EID>20024</EID> <OS>88</OS> </Table> <Table> <BUID>4</BUID> <SUID>873</SUID> <DID>5052538</DID>
<DT>2010-08-30 18:57:41</DT> <EID>20024</EID> <OS>88</OS> </Table> <Table> <BUID>4</BUID>
<SUID>873</SUID> <DID>5052545</DID> <DT>2010-08-30 18:57:55</DT> <EID>20024</EID> <OS>88</OS> </Table>
<Table> <BUID>4</BUID> <SUID>873</SUID> <DID>5052549</DID> <DT>2010-08-30 18:58:07</DT>
<EID>20024</EID> <OS>88</OS> </Table> <Table> <BUID>4</BUID> <SUID>873</SUID> <DID>5052553</DID>
<DT>2010-08-30 18:58:14</DT> <EID>20024</EID> <OS>88</OS> </Table> <Table> <BUID>4</BUID>
<SUID>873</SUID> <DID>5052561</DID> <DT>2010-08-30 18:58:21</DT> <EID>20024</EID> <OS>88</OS> </Table>
<Table> <BUID>4</BUID> <SUID>873</SUID> <DID>5052563</DID> <DT>2010-08-30 18:58:30</DT>
<EID>20024</EID> <OS>88</OS> </Table> </NewDataSet>
```



6.5. GetReferenceEvents

Returns a reference list of all EventIDs and the description in the language that is set on the customer that the user belongs to.

Name of function GetReferenceEvents

Input	LoginName	char(50)
	Password	char(30)

Output	Tag	Field	Type
	EID	EventID	int
	EDESCR	Event Descr	char(100)
	LEC1	Look event code	char(10)

Start position of EventID defines the source

1xxxx	Event from Base Unit
2xxxx	Signal from Sub Unit
3xxxx	Message from WeBeHome

Example of return value:

```
<NewDataSet> <Table> <EID>10001</EID> <EDESCR>Medical Alarm</EDESCR> <LEC1>1100</LEC1> </Table> <Table>
<EID>10002</EID> <EDESCR>Fire Alarm</EDESCR> <LEC1>1110</LEC1> </Table> <Table> <EID>10003</EID>
<EDESCR>Smoke Alarm</EDESCR> <LEC1>1111</LEC1> </Table> <Table> <EID>10004</EID> <EDESCR>Panic
Alarm</EDESCR> <LEC1>1120</LEC1> </Table> <Table> <EID>10005</EID> <EDESCR>Duress</EDESCR>
<LEC1>1121</LEC1> </Table> <Table> <EID>10006</EID> <EDESCR>Burglar Alarm</EDESCR> <LEC1>1130</LEC1>
</Table> <Table> <EID>10008</EID> <EDESCR>Burglar Sensor Tampered</EDESCR> <LEC1>1137</LEC1> </Table>
<Table> <EID>10009</EID> <EDESCR>Keypad/Sensor Tampered</EDESCR> <LEC1>1144</LEC1> </Table> <Table>
<EID>10010</EID> <EDESCR>Water Leakage</EDESCR> <LEC1>1154</LEC1> </Table> <Table> <EID>10011</EID>
<EDESCR>High Temperature Alarm</EDESCR> <LEC1>1158</LEC1> </Table> <Table> <EID>10013</EID> <EDESCR>Low
Temperature Alarm</EDESCR> <LEC1>1159</LEC1> </Table> <Table> <EID>10015</EID> <EDESCR>High Value alarm
(non temp)</EDESCR> <LEC1>1168</LEC1> </Table> <Table> <EID>10017</EID> <EDESCR>Low Value Alarm (non
temp)</EDESCR> <LEC1>1169</LEC1> </Table> <Table> <EID>10019</EID> <EDESCR>AC Power Loss</EDESCR>
<LEC1>1301</LEC1> </Table> <Table> <EID>10021</EID> <EDESCR>Base Unit Low Battery</EDESCR>
<LEC1>1302</LEC1> </Table> <Table> <EID>10022</EID> <EDESCR>System reset</EDESCR> <LEC1>1305</LEC1>
</Table> <Table> <EID>10023</EID> <EDESCR>RF Jamming</EDESCR> <LEC1>1344</LEC1> </Table> <Table>
<EID>10024</EID> <EDESCR>Tel Line Fault</EDESCR> <LEC1>1351</LEC1> </Table> <Table> <EID>10025</EID>
<EDESCR>Exit Error Alarm</EDESCR> <LEC1>1374</LEC1> </Table> <Table> <EID>10026</EID> <EDESCR>Loss of
Supervision-RF</EDESCR> <LEC1>1381</LEC1> </Table> <Table> <EID>10027</EID> <EDESCR>Sensor Low
Battery</EDESCR> <LEC1>1384</LEC1> </Table> <Table> <EID>10028</EID> <EDESCR>Sensor Self-test
Failure</EDESCR> <LEC1>1389</LEC1> </Table> <Table> <EID>10029</EID> <EDESCR>Disarmed</EDESCR>
<LEC1>1400</LEC1> </Table> <Table> <EID>10031</EID> <EDESCR>Loop-Back Test Report</EDESCR>
<LEC1>1601</LEC1> </Table> <Table> <EID>10032</EID> <EDESCR>Periodic Test Report</EDESCR>
<LEC1>1602</LEC1> </Table> <Table> <EID>10033</EID> <EDESCR>Two Way Voice</EDESCR> <LEC1>1606</LEC1>
</Table> <Table> <EID>10034</EID> <EDESCR>Trigger in Monitor Mode</EDESCR> <LEC1>1618</LEC1> </Table>
<Table> <EID>10035</EID> <EDESCR>Monitor Mode</EDESCR> <LEC1>1619</LEC1> </Table> <Table>
<EID>10036</EID> <EDESCR>Inactivity Alarm</EDESCR> <LEC1>1641</LEC1> </Table> <Table> <EID>10037</EID>
<EDESCR>Burglar Alarm Restore</EDESCR> <LEC1>3130</LEC1> </Table> <Table> <EID>10038</EID>
<EDESCR>Restore High Temperature</EDESCR> <LEC1>3158</LEC1> </Table> <Table> <EID>10039</EID>
<EDESCR>Restore Low Temperature</EDESCR> <LEC1>3159</LEC1> </Table> <Table> <EID>10040</EID>
<EDESCR>Restore High Value</EDESCR> <LEC1>3168</LEC1> </Table> <Table> <EID>10041</EID> <EDESCR>Restore
Low Value</EDESCR> <LEC1>3169</LEC1> </Table> <Table> <EID>10042</EID> <EDESCR>AC Power
Restore</EDESCR> <LEC1>3301</LEC1> </Table> <Table> <EID>10043</EID> <EDESCR>Restore Base Unit Low
Battery</EDESCR> <LEC1>3302</LEC1> </Table> <Table> <EID>10044</EID> <EDESCR>Restore Tel Line
```




Customer API

Fault</EDESCR> <LEC1>3351</LEC1> </Table> <Table> <EID>10045</EID> <EDESCR>Restore Of Supervision-
RF</EDESCR> <LEC1>3381</LEC1> </Table> <Table> <EID>10046</EID> <EDESCR>Sensor Battery Restore</EDESCR>
<LEC1>3384</LEC1> </Table> <Table> <EID>10047</EID> <EDESCR>Armed (AWAY)</EDESCR> <LEC1>3400</LEC1>
</Table> <Table> <EID>10048</EID> <EDESCR>Armed (HOME)</EDESCR> <LEC1>3441</LEC1> </Table> <Table>
<EID>10049</EID> <EDESCR>Lost contact with Base Unit</EDESCR> <LEC1>1356</LEC1> </Table> <Table>
<EID>10050</EID> <EDESCR>Armed (AWAY)</EDESCR> <LEC1>1408</LEC1> </Table> <Table> <EID>10051</EID>
<EDESCR>Disarmed</EDESCR> <LEC1>1573</LEC1> </Table> <Table> <EID>10052</EID> <EDESCR>Armed
(HOME)</EDESCR> <LEC1>1574</LEC1> </Table> <Table> <EID>10053</EID> <EDESCR>New connection to
WeBeHome</EDESCR> <LEC1>3356</LEC1> </Table> <Table> <EID>11648</EID> <EDESCR>Door Open (Monitor
Mode)</EDESCR> <LEC1>1648</LEC1> </Table> <Table> <EID>11649</EID> <EDESCR>Door Close (Monitor
Mode)</EDESCR> <LEC1>1649</LEC1> </Table> <Table> <EID>13408</EID> <EDESCR>Quick arm (AWAY)</EDESCR>
<LEC1>3408</LEC1> </Table> <Table> <EID>20001</EID> <EDESCR>Test</EDESCR> <LEC1>01</LEC1> </Table>
<Table> <EID>20002</EID> <EDESCR>Low (under limit)</EDESCR> <LEC1>08</LEC1> </Table> <Table>
<EID>20003</EID> <EDESCR>High (over limit)</EDESCR> <LEC1>0C</LEC1> </Table> <Table> <EID>20004</EID>
<EDESCR>Armed</EDESCR> <LEC1>10</LEC1> </Table> <Table> <EID>20005</EID> <EDESCR>Change
state</EDESCR> <LEC1>12</LEC1> </Table> <Table> <EID>20006</EID> <EDESCR>Requeste for status</EDESCR>
<LEC1>13</LEC1> </Table> <Table> <EID>20007</EID> <EDESCR>Disarmed</EDESCR> <LEC1>14</LEC1> </Table>
<Table> <EID>20008</EID> <EDESCR>Monitor</EDESCR> <LEC1>15</LEC1> </Table> <Table> <EID>20009</EID>
<EDESCR>Home</EDESCR> <LEC1>18</LEC1> </Table> <Table> <EID>20010</EID> <EDESCR>Supervisory</EDESCR>
<LEC1>20</LEC1> </Table> <Table> <EID>20011</EID> <EDESCR>AC loss</EDESCR> <LEC1>22</LEC1> </Table>
<Table> <EID>20012</EID> <EDESCR>AC restore</EDESCR> <LEC1>23</LEC1> </Table> <Table> <EID>20013</EID>
<EDESCR>Value updated</EDESCR> <LEC1>24</LEC1> </Table> <Table> <EID>20014</EID>
<EDESCR>Restore</EDESCR> <LEC1>28</LEC1> </Table> <Table> <EID>20015</EID> <EDESCR>Fail(CO)</EDESCR>
<LEC1>29</LEC1> </Table> <Table> <EID>20016</EID> <EDESCR>Reset/Power on</EDESCR> <LEC1>2A</LEC1>
</Table> <Table> <EID>20017</EID> <EDESCR>Duress (Keypad)</EDESCR> <LEC1>2B</LEC1> </Table> <Table>
<EID>20018</EID> <EDESCR>Batt.low</EDESCR> <LEC1>30</LEC1> </Table> <Table> <EID>20019</EID>
<EDESCR>Open</EDESCR> <LEC1>40</LEC1> </Table> <Table> <EID>20020</EID> <EDESCR>Close</EDESCR>
<LEC1>48</LEC1> </Table> <Table> <EID>20021</EID> <EDESCR>Tamper</EDESCR> <LEC1>50</LEC1> </Table>
<Table> <EID>20022</EID> <EDESCR>Restore tamper</EDESCR> <LEC1>51</LEC1> </Table> <Table>
<EID>20023</EID> <EDESCR>Pre warning</EDESCR> <LEC1>54</LEC1> </Table> <Table> <EID>20024</EID>
<EDESCR>Trigger</EDESCR> <LEC1>58</LEC1> </Table> <Table> <EID>20025</EID> <EDESCR>Panic</EDESCR>
<LEC1>60</LEC1> </Table> <Table> <EID>20026</EID> <EDESCR>Inactivity</EDESCR> <LEC1>68</LEC1> </Table>
<Table> <EID>20027</EID> <EDESCR>Switches: All Off</EDESCR> <LEC1>0B</LEC1> </Table> <Table>
<EID>20028</EID> <EDESCR>Switches: All On</EDESCR> <LEC1>0F</LEC1> </Table> <Table> <EID>20029</EID>
<EDESCR>Acknowledge</EDESCR> <LEC1>C4</LEC1> </Table> <Table> <EID>20030</EID> <EDESCR>Switch 1
on</EDESCR> <LEC1>A8</LEC1> </Table> <Table> <EID>20031</EID> <EDESCR>Switch 2 on</EDESCR>
<LEC1>A9</LEC1> </Table> <Table> <EID>20032</EID> <EDESCR>Switch 3 on</EDESCR> <LEC1>AA</LEC1> </Table>
<Table> <EID>20033</EID> <EDESCR>Off</EDESCR> <LEC1>0B08</LEC1> </Table> <Table> <EID>20034</EID>
<EDESCR>On</EDESCR> <LEC1>0B0C</LEC1> </Table> <Table> <EID>20035</EID> <EDESCR>Activity</EDESCR>
<LEC1>5058</LEC1> </Table> <Table> <EID>20200</EID> <EDESCR>Camera boot/startup</EDESCR> <LEC1> / </Table>
<Table> <EID>20201</EID> <EDESCR>Camera tamper</EDESCR> <LEC1> / </Table> <Table> <EID>20202</EID>
<EDESCR>Camera motion detected</EDESCR> <LEC1> / </Table> <Table> <EID>20203</EID> <EDESCR>Camera sound
detected</EDESCR> <LEC1> / </Table> <Table> <EID>20204</EID> <EDESCR>Camera temp outside operation
range</EDESCR> <LEC1> / </Table> <Table> <EID>20205</EID> <EDESCR>Camera undefined event</EDESCR> <LEC1> / </Table>
<Table> <EID>20210</EID> <EDESCR>Camera recording started</EDESCR> <LEC1> / </Table> <Table>
<EID>20299</EID> <EDESCR>Camera keepalive (not stored to db)</EDESCR> <LEC1> / </Table> <Table>
<EID>30000</EID> <EDESCR>Changed mode to Disarm</EDESCR> <LEC1>000</LEC1> </Table> <Table>
<EID>30001</EID> <EDESCR>Changed mode to Home</EDESCR> <LEC1>001</LEC1> </Table> <Table>
<EID>30002</EID> <EDESCR>Changed mode to Away</EDESCR> <LEC1>002</LEC1> </Table> <Table>
<EID>30008</EID> <EDESCR>Changed mode to Monitor</EDESCR> <LEC1>008</LEC1> </Table> <Table>
<EID>30010</EID> <EDESCR>Device settings changed</EDESCR> <LEC1>010</LEC1> </Table> <Table>
<EID>30011</EID> <EDESCR>New device added</EDESCR> <LEC1>011</LEC1> </Table> <Table> <EID>30012</EID>
<EDESCR>Device removed</EDESCR> <LEC1>012</LEC1> </Table> <Table> <EID>30020</EID> <EDESCR>Message
sent to Base Unit</EDESCR> <LEC1>020</LEC1> </Table> <Table> <EID>30030</EID> <EDESCR>Turn Switch
Off</EDESCR> <LEC1>030</LEC1> </Table> <Table> <EID>30031</EID> <EDESCR>Turn Switch On</EDESCR>
<LEC1>031</LEC1> </Table> <Table> <EID>30040</EID> <EDESCR>Base Unit configuration changed</EDESCR>
<LEC1>040</LEC1> </Table> <Table> <EID>30050</EID> <EDESCR>Password of Base Unit changed</EDESCR>
<LEC1>050</LEC1> </Table> <Table> <EID>30060</EID> <EDESCR>Clear status of Base Unit</EDESCR>
<LEC1>060</LEC1> </Table> <Table> <EID>30070</EID> <EDESCR>Enter 5 min device test period</EDESCR>
<LEC1>070</LEC1> </Table> <Table> <EID>30080</EID> <EDESCR>Hand free dial</EDESCR> <LEC1>080</LEC1>
</Table> <Table> <EID>30091</EID> <EDESCR>Base Unit connected to Webehome.com</EDESCR> <LEC1>091</LEC1>
</Table> <Table> <EID>30092</EID> <EDESCR>Base Unit closed the Internet connection</EDESCR> <LEC1>092</LEC1>
</Table> <Table> <EID>30093</EID> <EDESCR>Base Unit opened a new Internet connection</EDESCR>
<LEC1>093</LEC1> </Table> <Table> <EID>30094</EID> <EDESCR>Internet contact lost with Base Unit</EDESCR>
<LEC1>094</LEC1> </Table> <Table> <EID>30095</EID> <EDESCR>Base Unit disconnected because no respons on
commands</EDESCR> <LEC1>095</LEC1> </Table> <Table> <EID>30096</EID> <EDESCR>Base Unit disconnected



Customer API

because not possible to verify BaseUnit</EDESCR> <LEC1>096</LEC1> </Table> <Table> <EID>30097</EID>
<EDESCR>Base Unit disconnected because data recived was empty</EDESCR> <LEC1>097</LEC1> </Table> <Table>
<EID>30098</EID> <EDESCR>WeBeHome service closed, Base Unit disconnected</EDESCR> <LEC1>098</LEC1>
</Table> <Table> <EID>30099</EID> <EDESCR>WeBeHome service restarted, Base Unit disconnected</EDESCR>
<LEC1>099</LEC1> </Table> <Table> <EID>30100</EID> <EDESCR>Not any valid data recived from Base Unit</EDESCR>
<LEC1>09A</LEC1> </Table> <Table> <EID>30101</EID> <EDESCR>Base Unit disconnected manually by
WeBeHome</EDESCR> <LEC1>09B</LEC1> </Table> </NewDataSet>