


wifi set-up demo



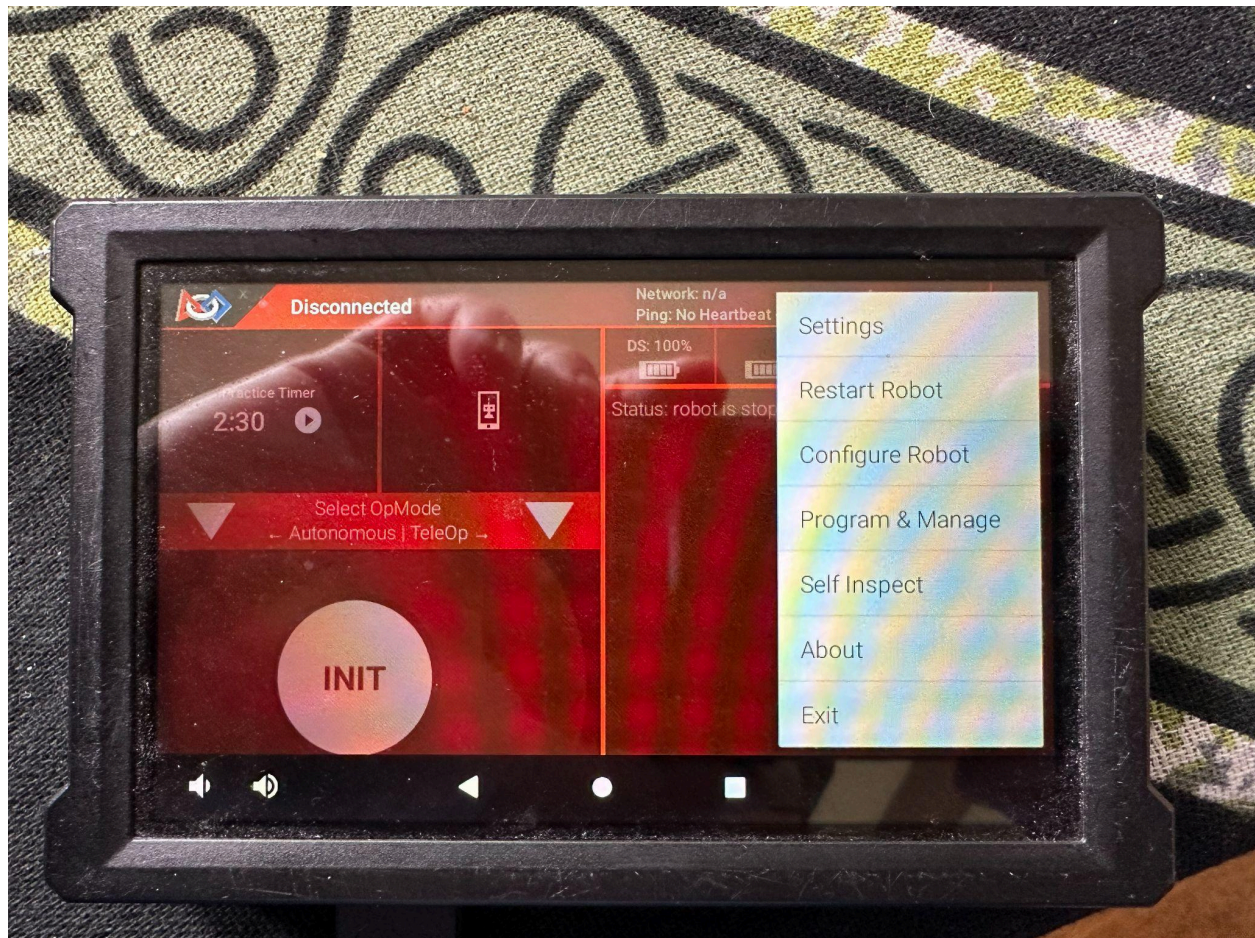

Wireless access point pairing is used to pair a driver station with a robot controller running on a Control Hub (use Wi-Fi Direct to pair with other robot controllers).

Each Control Hub robot controller hosts its own Wi-Fi network named with the name of the robot controller (default password: "password"). Click the button below to use the system Wi-Fi Settings of your driver station to select the network of the robot controller you want to pair with.

Current Robot Controller:

None

Wi-Fi Settings



DRIVER STATION SETTINGS

Pair with Robot Controller

Change the robot controller this driver station is paired with

Pairing Method

Control Hub

Driver Station Name

Change the name of the driver station

Driver Station Color Scheme

Change the color scheme of the driver station. Will take effect on next app launch.

Driver Station Layout

Change the Driver Station UI layout. Will take effect on next app launch



