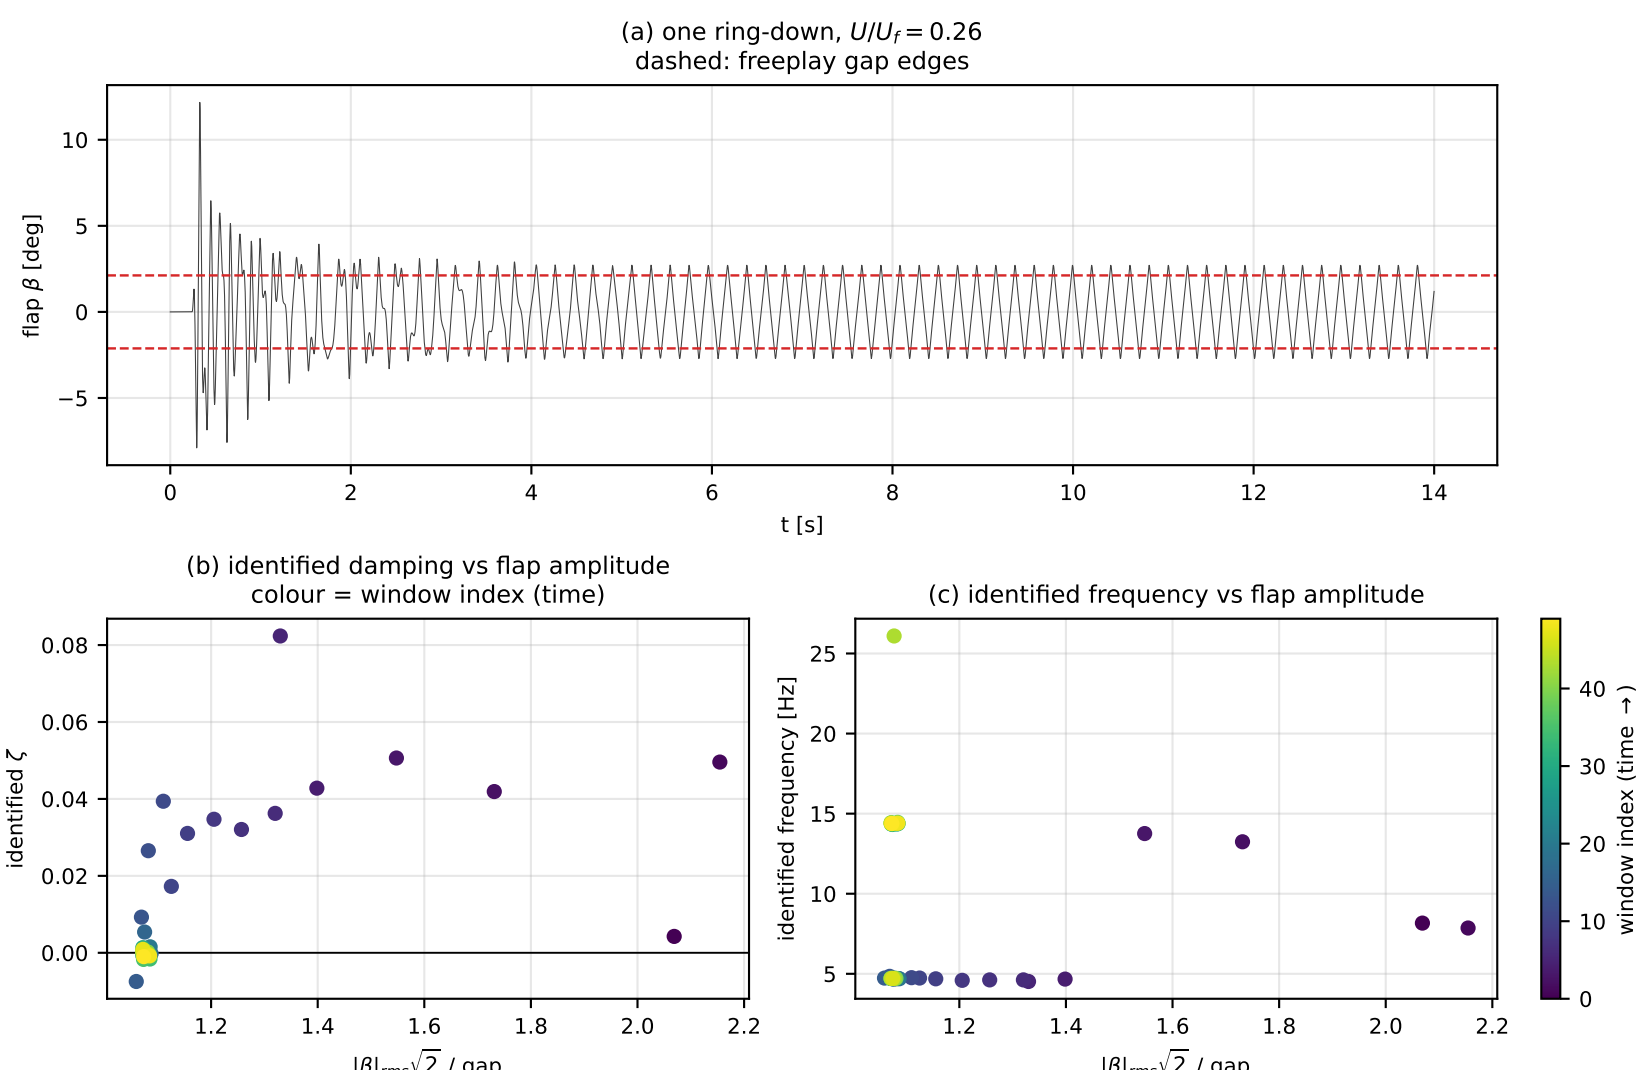
(a) one ring-down, $U/U_f = 0.26$
dashed: freeplay gap edges
flap β [deg]
t [s]
(b) identified damping vs flap amplitude
colour = window index (time)
identified ζ
$|\beta|_{rms}\sqrt{2}$ / gap
(c) identified frequency vs flap amplitude
identified frequency [Hz]
$|\beta|_{rms}\sqrt{2}$ / gap
window index (time →)