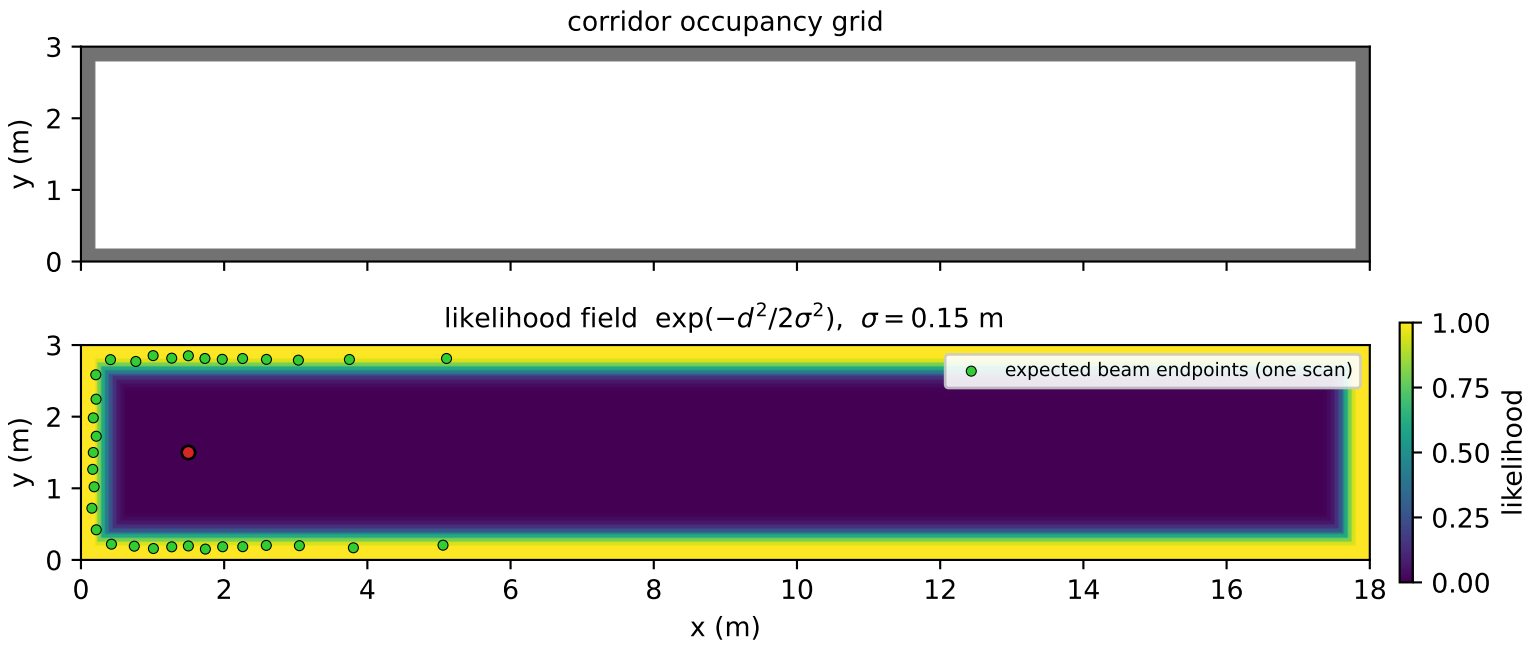
corridor occupancy grid
y (m)
likelihood field exp(−d²/2σ²), σ = 0.15 m
expected beam endpoints (one scan)
likelihood
x (m)