

Product Index

01、DK Module series

DK40



Body width 40MM
Maximum track length 200MM
Maximum Load3KG

DK50



Body width 50MM
Maximum track length 300MM
Maximum Load12KG

DK60



Body width 60MM
Maximum track length 600MM
Maximum Load20KG

DK86



Body width 86MM
Maximum track length 940MM
Maximum Load50KG

DK100



Body width 100MM
Maximum track length 1380MM
Maximum Load80KG

02、DTH Module series

DTH4



Body width 44MM
maximum stroke 500MM
Maximum Load25KG

DTH5



Body width 54MM
maximum stroke 800MM
Maximum Load30KG

DTH8



Body width 82MM
maximum stroke 1100MM
Maximum Load50KG

DTH12



Body width 120MM
maximum stroke 1100MM
Maximum Load110KG

03、DS Module series

DS045



Body width 46MM
maximum stroke 700MM
Maximum Load10KG

DS050



Body width 57MM
maximum stroke 1000MM
Maximum Load24KG

DS070



Body width 74MM
maximum stroke 600MM
Maximum Load24KG

DS090



Body width 87MM
maximum stroke 1000MM
Maximum Load24KG

DS120



Body width 126MM
maximum stroke 1200MM
Maximum Load50KG

DS160



Body width 158MM
maximum stroke 1600MM
Maximum Load80KG

DS200



Body width 198MM
maximum stroke 1600MM
Maximum Load120KG

04、DC Module series

DC070



Body width 74MM
maximum stroke 800MM
Maximum Load20KG


DC090



Body width 87MM
maximum stroke 1000MM
Maximum Load24KG


Product Index

DC120



Body width 126MM
maximum stroke 1200MM
Maximum Load50KG

DC160



Body width 158MM
maximum stroke 1400MM
Maximum Load80KG

DC200



Body width 198MM
maximum stroke 1400MM
Maximum Load120KG

05、DB Module series

DB090



Body width 87MM
maximum stroke 2000MM
Maximum Load24.8KG

DB120



Body width 126MM
maximum stroke 2000MM
Maximum Load40.7KG

DB160



Body width 158MM
maximum stroke 2000MM
Maximum Load45.5KG

DB200



Body width 198MM
maximum stroke 2000MM
Maximum Load31.5KG

06、DE Electric cylinder series

DE40



Body width 52MM
maximum stroke 500MM
Maximum Load40KG

DE50



Body width 63MM
maximum stroke 600MM
Maximum Load100KG

DE63



Body width 75MM
maximum stroke 600MM
Maximum Load500KG

DE80




Body width 93MM
maximum stroke 800MM
Maximum Load3000KG

DE125



Body width 134MM
maximum stroke 800MM
Maximum Load6000KG

07、Sliding table combination

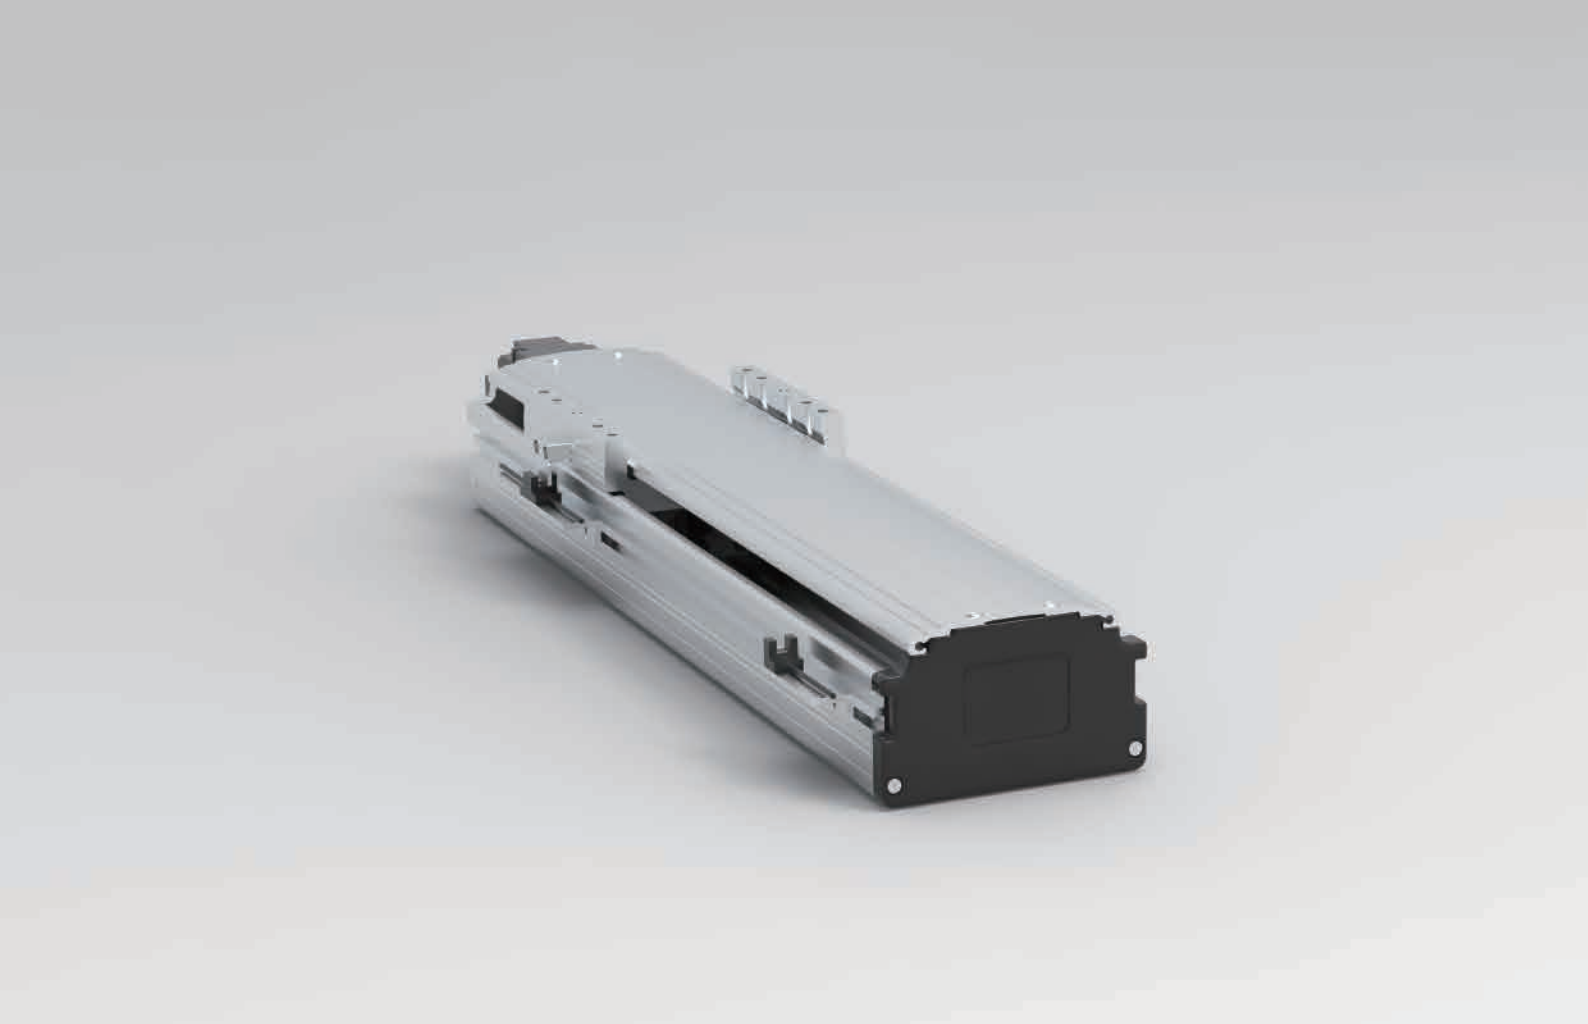


Sliding table series

DS series
screw drive

General environmental application slide table			
DS045	Body width 46MM maximum stroke 700MM Maximum Load10KG	DS120	Body width 126MM maximum stroke 1200MM Maximum Load50KG
DS050	Body width 57MM maximum stroke 1000MM Maximum Load24KG	DS160	Body width 158MM maximum stroke 1600MM Maximum Load80KG
DS070	Body width 74MM maximum stroke 600MM Maximum Load24KG	DS200	Body width 198MM maximum stroke 1600MM Maximum Load120KG
DS090	Body width 87MM maximum stroke 1000MM Maximum Load24KG		

⚙️ DS-045ST-L10-100W-300ST-SP

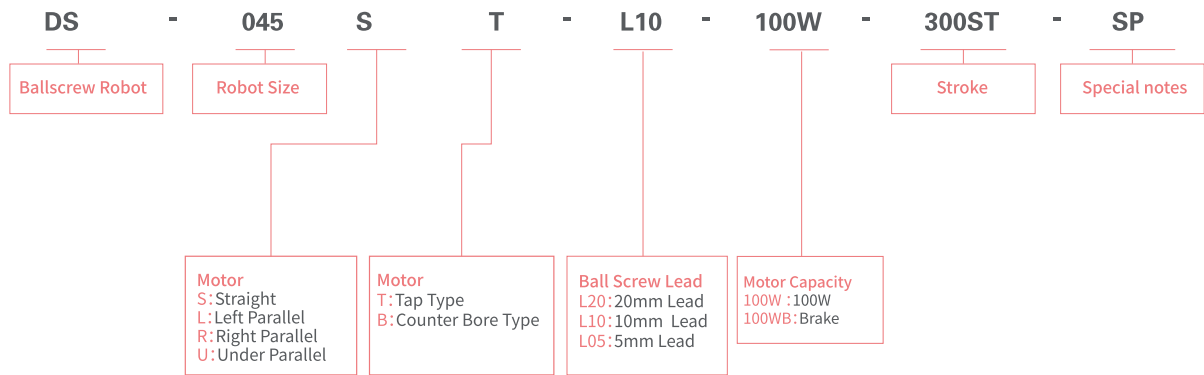

※ Specification

Servo Motor Output/rpm	100W/3000RPM
Drive mechanism	Ball screw(C7, 연삭), 12 Lead 20MM(10MM)
Liner motion guide	One way, No.12, 2 block
Repeatability	±0.02MM
stroke(mm)	100-700MM
Payload(kg) Ta = 0.2s	Lead 20 H: 2 V: 1.5
	Lead 10 H: 12 V: 3.5
Moment of inertia of area	Ix=5.57E+04, Iy=1.49E+05

※ product




Straight joint



Right Parallel joint




Left Parallel joint

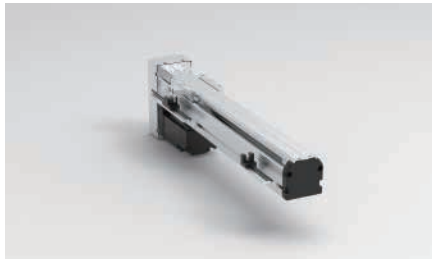


Under Parallel joint

DS-045ST

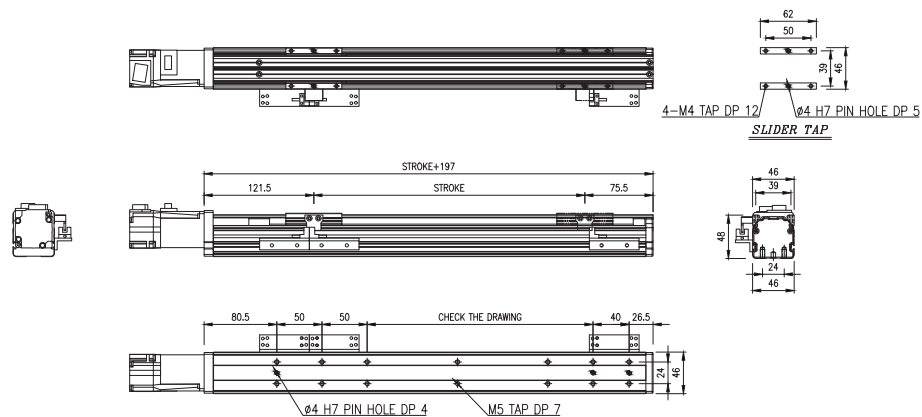

Stroke(mm)		100	200	300	400	500	600	700
Max. Speed (mm/sec)	Lead 20mm	1000						900
	Lead 10mm	500						450
Weight(kg)		2.71	3.03	3.35	3.67	3.99	4.31	4.64
Base & Slide		The weight of the model equipped with a brake is 0.2kg more heavier then this value. Aluminum Profile, 백색전작 유광						

DS-045SB

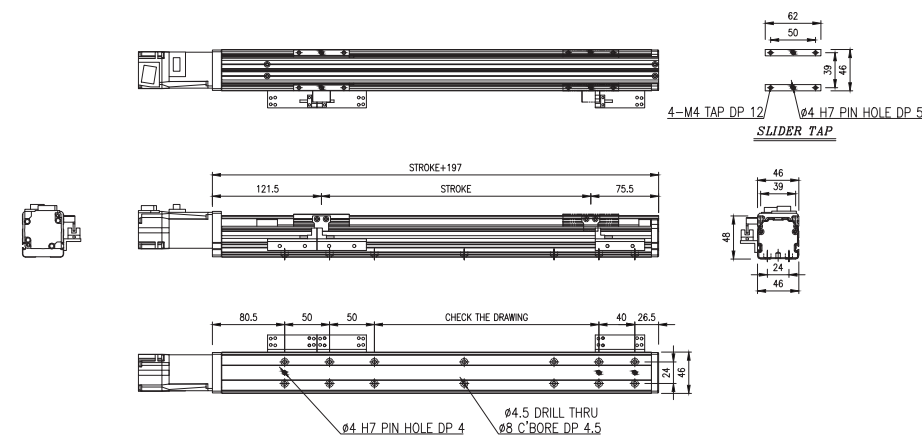

Stroke(mm)		100	200	300	400	500	600	700
Max. Speed (mm/sec)	Lead 20mm	1000						900
	Lead 10mm	500						450
Weight(kg)		2.71	3.03	3.35	3.67	3.99	4.31	4.64
Base & Slide		The weight of the model equipped with a brake is 0.2kg more heavier then this value. Aluminum Profile, 백색전작 유광						

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200


DS-045LT

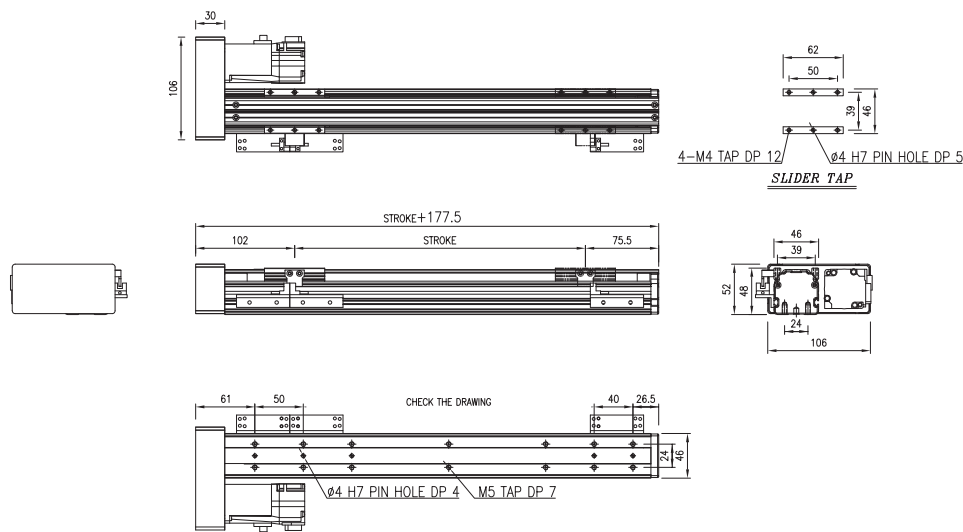

Stroke(mm)		100	200	300	400	500	600	700
Max. Speed (mm/sec)	Lead 20mm				1000			900
	Lead 10mm				500			450
Weight(kg)		2.86	3.18	3.5	3.82	4.14	4.46	4.78
Base & Slide		The weight of the model equipped with a brake is 0.2kg more heavier then this value. Aluminum Profile, 백색전작 유광						

unit:mm


DS-045RT

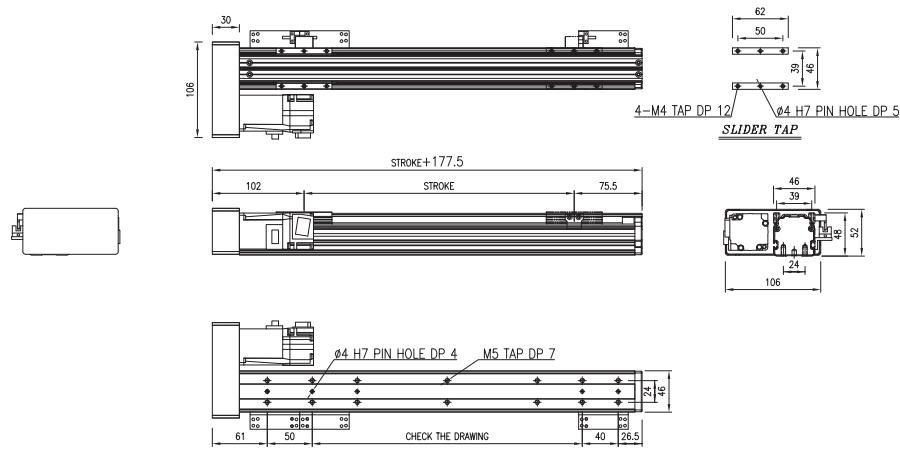

Stroke(mm)		100	200	300	400	500	600	700
Max. Speed (mm/sec)	Lead 20mm				1000			900
	Lead 10mm				500			450
Weight(kg)		2.86	3.18	3.5	3.82	4.14	4.46	4.78
Base & Slide		The weight of the model equipped with a brake is 0.2kg more heavier then this value. Aluminum Profile, 백색전작 유광						

unit:mm


DS-045LB

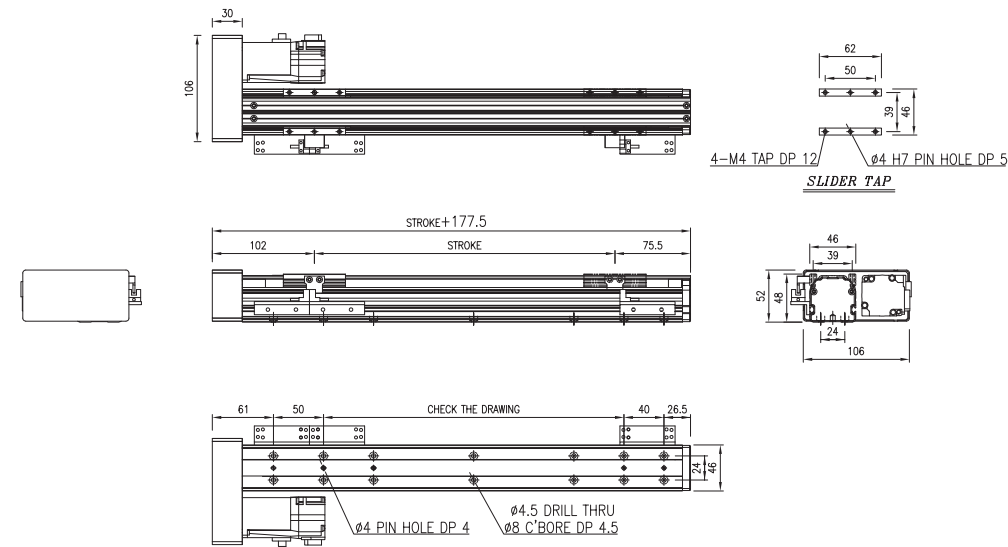

Stroke(mm)		100	200	300	400	500	600	700
Max. Speed (mm/sec)	Lead 20mm				1000			900
	Lead 10mm				500			450
Weight(kg)		2.86	3.18	3.5	3.82	4.14	4.46	4.78
Base & Slide		The weight of the model equipped with a brake is 0.2kg more heavier then this value. Aluminum Profile, 백색전작 유광						

unit:mm

DS-045RB

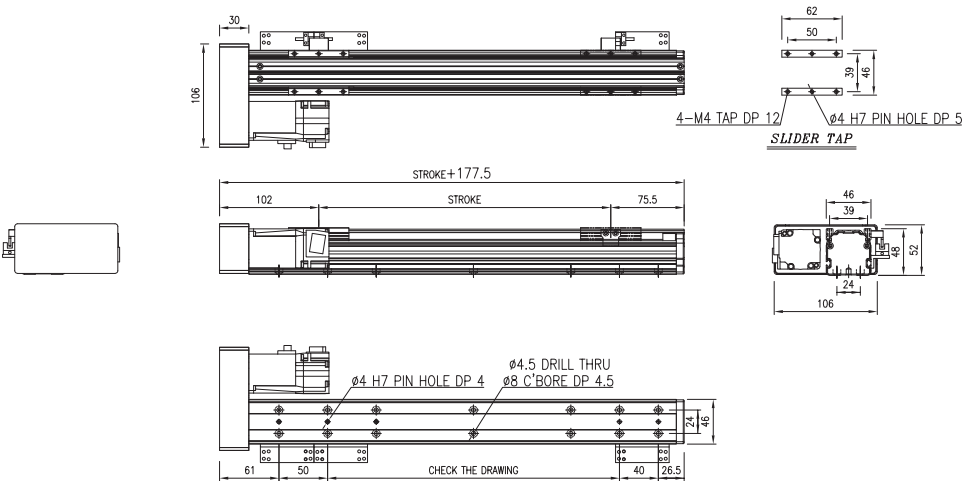

Stroke(mm)		100	200	300	400	500	600	700
Max. Speed (mm/sec)	Lead 20mm				1000			900
	Lead 10mm				500			450
Weight(kg)		2.86	3.18	3.5	3.82	4.14	4.46	4.78
Base & Slide		The weight of the model equipped with a brake is 0.2kg more heavier then this value. Aluminum Profile, 백색전작 유광						

unit:mm

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160


DS200

DS-045UT

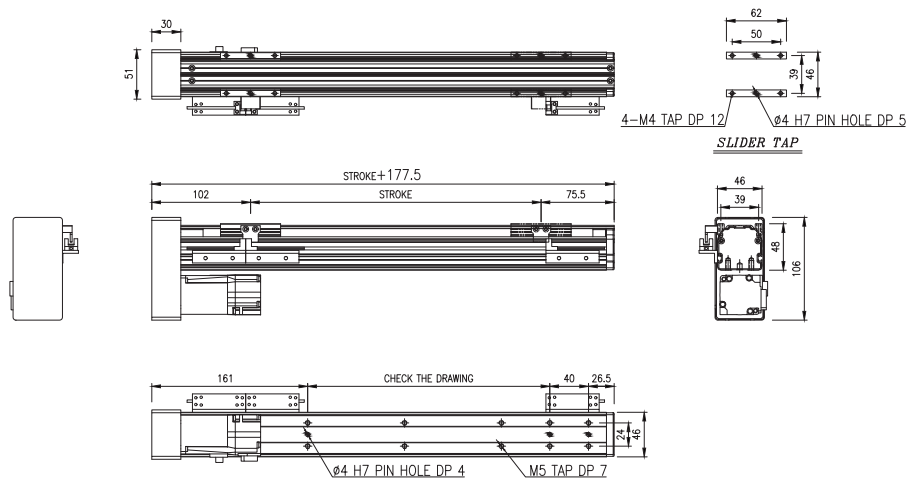

Stroke(mm)		100	200	300	400	500	600	700
Max. Speed (mm/sec)	Lead 20mm	1000						900
	Lead 10mm	500						450
Weight(kg)		2.86	3.18	3.5	3.82	4.14	4.46	4.78
Base & Slide		The weight of the model equipped with a brake is 0.2kg more heavier then this value. Aluminum Profile, 백색진작 유광						

DS-045UB

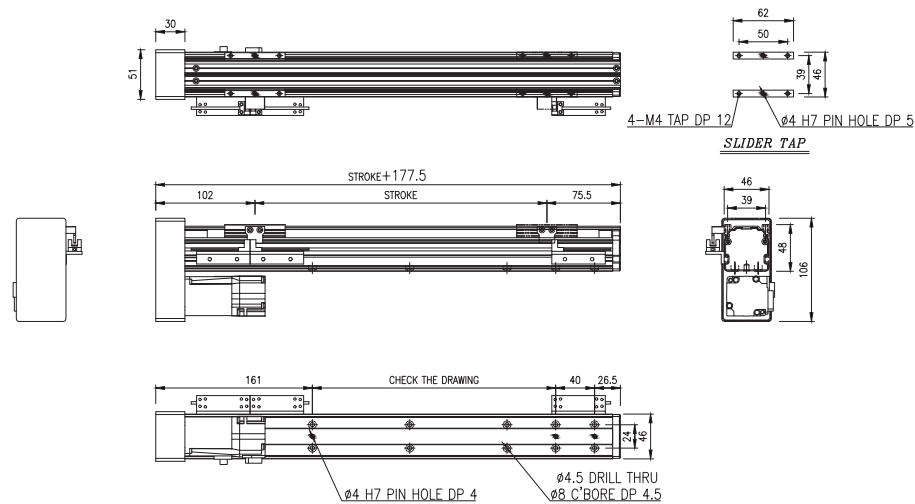

Stroke(mm)		100	200	300	400	500	600	700
Max. Speed (mm/sec)	Lead 20mm	1000						900
	Lead 10mm	500						450
Weight(kg)		2.86	3.18	3.5	3.82	4.14	4.46	4.78
Base & Slide		The weight of the model equipped with a brake is 0.2kg more heavier then this value. Aluminum Profile, 백색진작 유광						

unit:mm

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200

⚙️ DS-050ST-L10-100W-300ST-SP

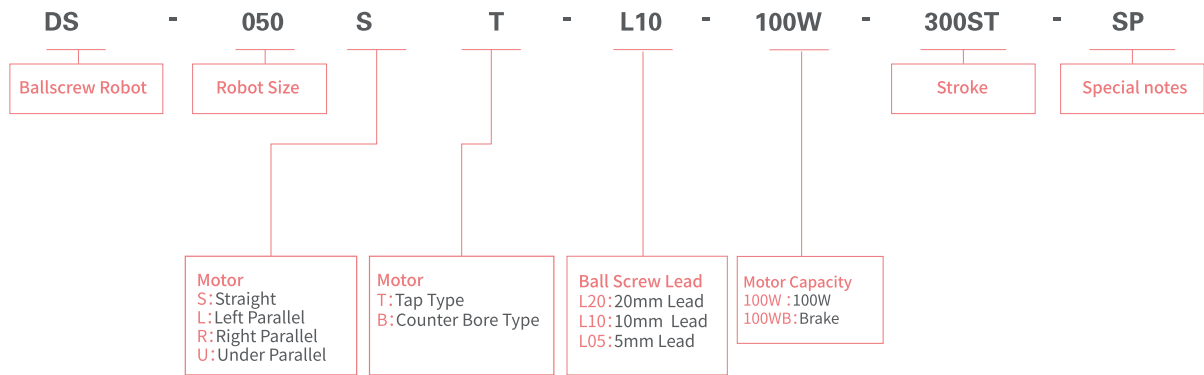

※ Specification

Servo Motor Output/rpm		100W/3000RPM
Drive mechanism		Ball screw(C7, 연삭), 15 Lead 20MM(10MM)
Liner motion guide		One way,15V, 2 block
Repeatability		±0.02MM
stroke(mm)		100-1000MM
Payload(kg) Ta = 0.2s	Lead 20	H: 4
		V: 3
	Lead 10	H: 24
		V: 7
Moment of inertia of area		Ix=5.95E+04, Iy=3.01E+05

※ product



Straight joint



Right Parallel joint




Left Parallel joint




Under Parallel joint

DS-050ST

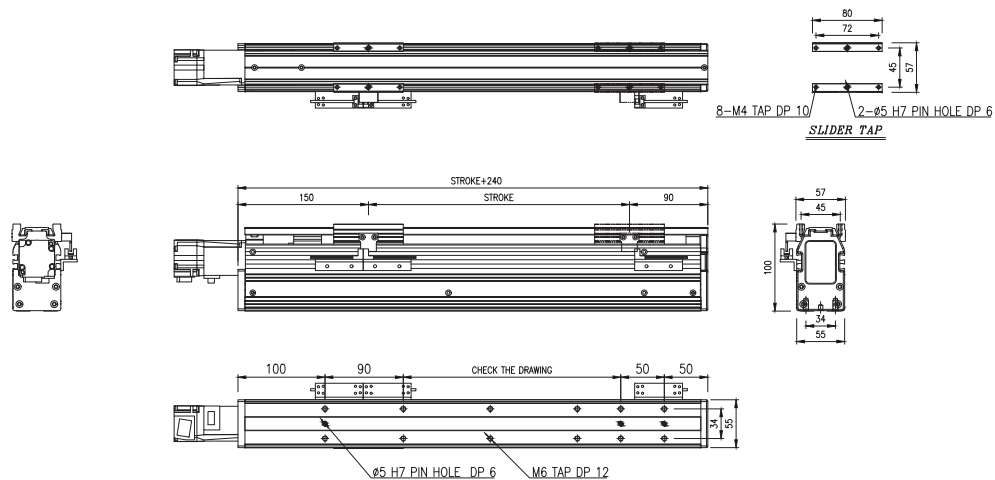

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm		1000		850		680		560	
	Lead 10mm		500		410		330		270	
Weight(kg)	4.65	5.32	5.99	6.66	7.33	8.00	8.67	9.34	10.1	10.68
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전작 유광									

DS-050SB

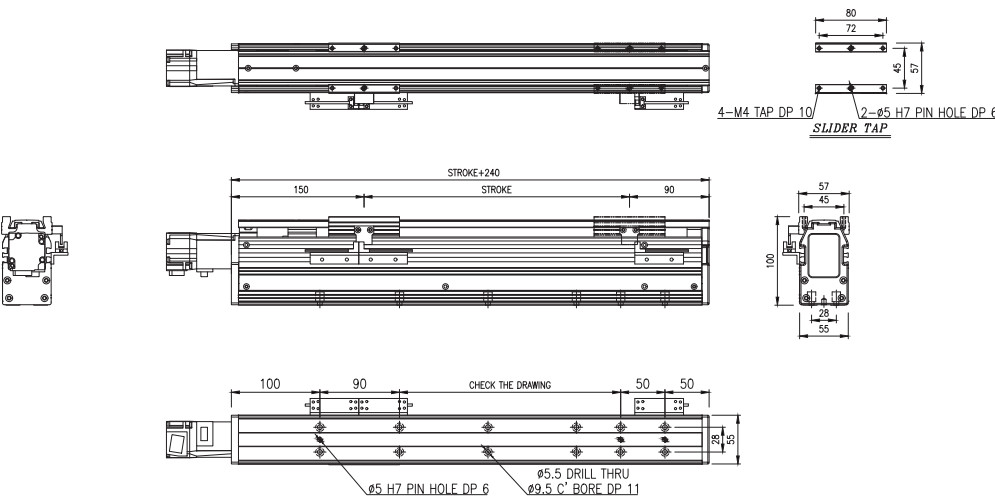

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm		1000		850		680		560	
	Lead 10mm		500		410		330		270	
Weight(kg)	4.65	5.32	5.99	6.66	7.33	8.00	8.67	9.34	10.1	10.68
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전작 유광									

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS45

DS050

DS070


DS090

DS120

DS160

DS200


DS-050LT

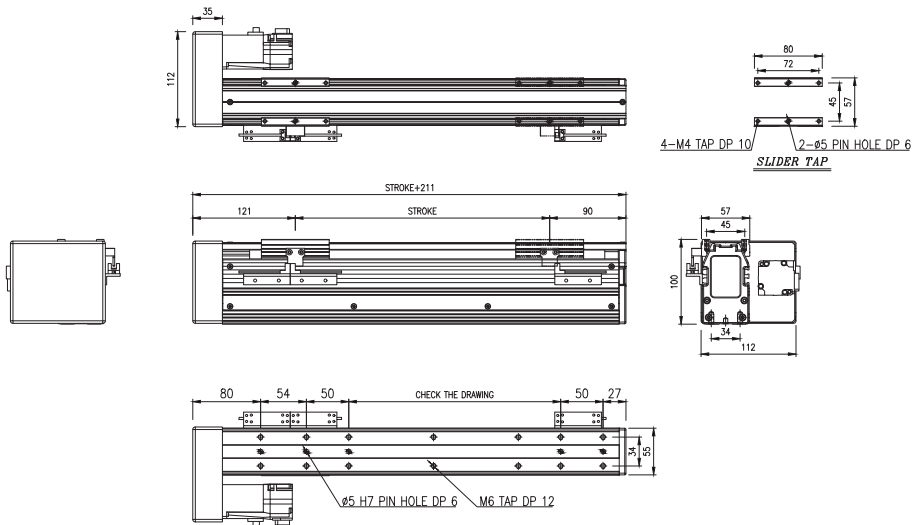

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm	1000							850	680	560
	Lead 10mm	500							410	330	270
Weight(kg)		4.89	5.56	6.23	6.90	7.57	8.24	8.90	9.57	10.24	10.91
Base & Slide		The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전작 유광									

unit:mm


DS-050RT

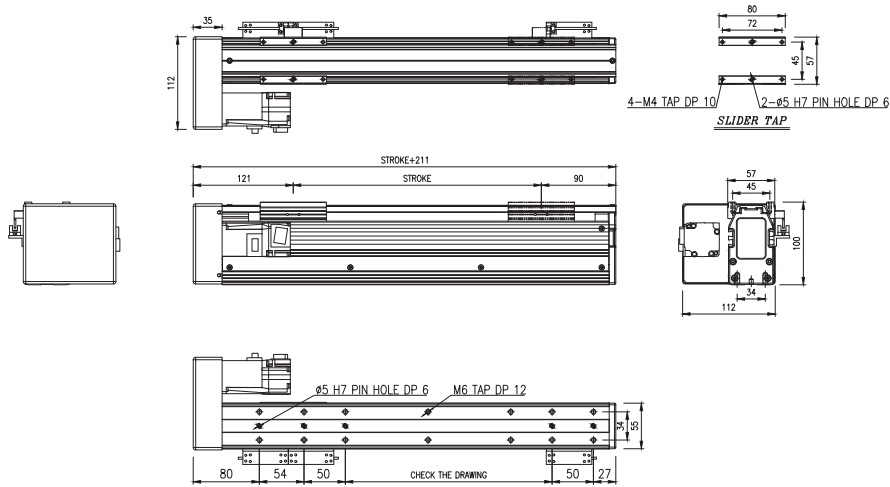

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm	1000							850	680	560
	Lead 10mm	500							410	330	270
Weight(kg)		4.89	5.56	6.23	6.90	7.57	8.24	8.90	9.57	10.24	10.91
Base & Slide		The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전작 유광									

unit:mm


DS-050LB

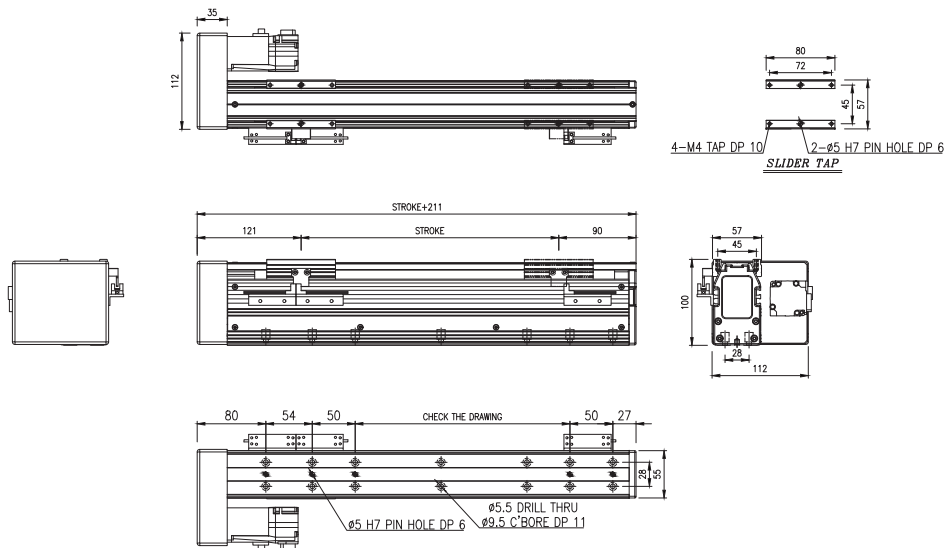

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm	1000							850	680	560
	Lead 10mm	500							410	330	270
Weight(kg)		4.89	5.56	6.23	6.90	7.57	8.24	8.90	9.57	10.24	10.91
Base & Slide		The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전작 유광									

unit:mm

DS-050RB

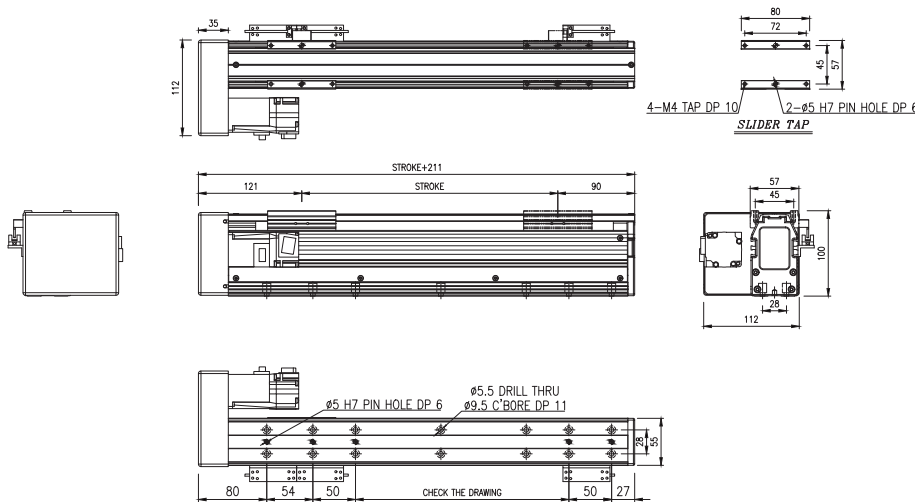

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm	1000							850	680	560
	Lead 10mm	500							410	330	270
Weight(kg)		4.89	5.56	6.23	6.90	7.57	8.24	8.90	9.57	10.24	10.91
Base & Slide		The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전작 유광									

unit:mm

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS45

DS050

DS070


DS090

DS120

DS160

DS200


DS-050UT

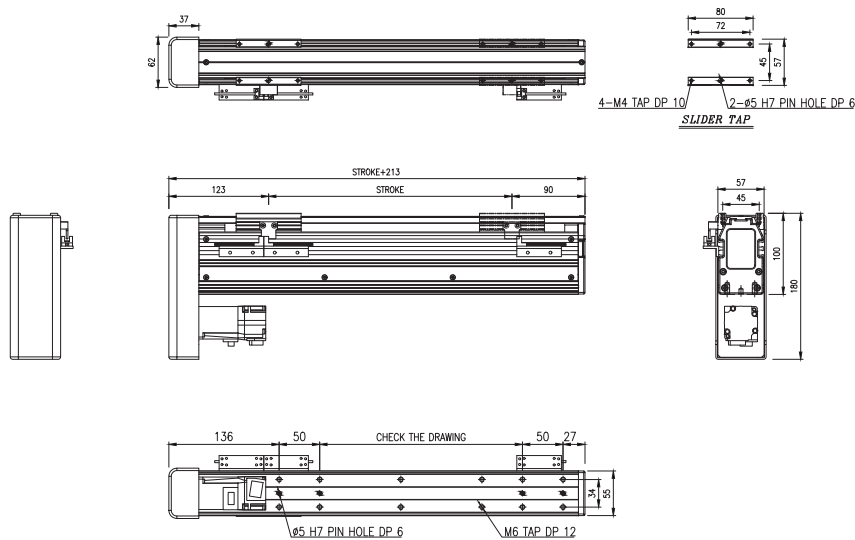

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm	1000							850	680	560
	Lead 10mm	500							410	330	270
Weight(kg)		4.84	5.51	6.18	6.84	7.51	8.18	8.85	9.52	10.19	10.86
Base & Slide		The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전작 유광									

unit:mm

DS-050UB

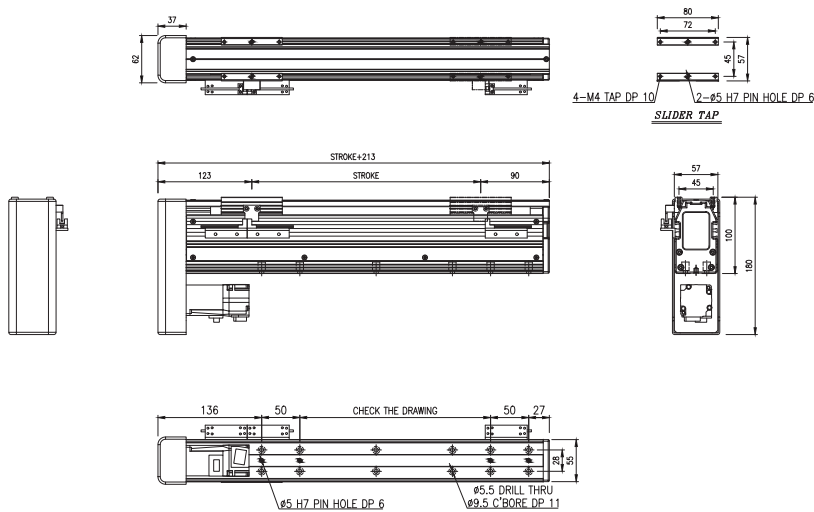

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm	1000							850	680	560
	Lead 10mm	500							410	330	270
Weight(kg)		4.84	5.51	6.18	6.84	7.51	8.18	8.85	9.52	10.19	10.86
Base & Slide		The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전작 유광									

unit:mm

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS45

DS050

DS070


DS090

DS120

DS160

DS200

⚙️ DS-070ST-L10-100W-300ST-SP

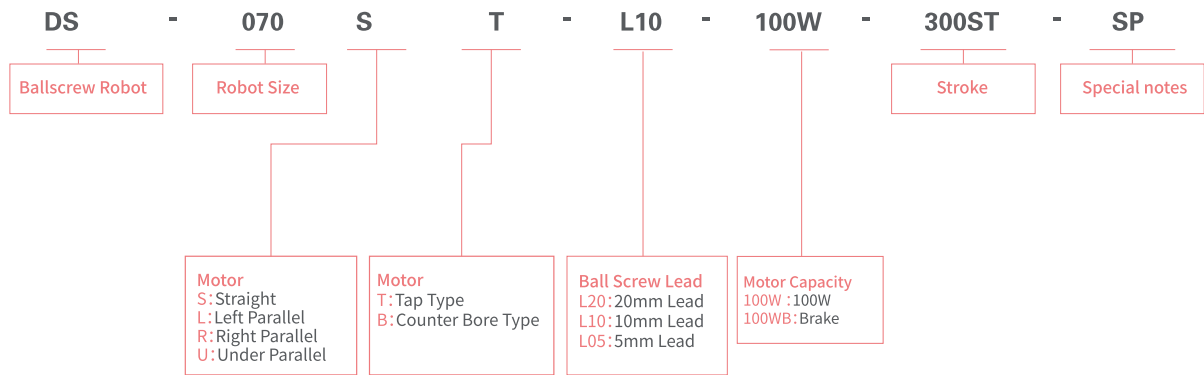


※ Specification

Servo Motor Output/rpm	100W/3000RPM
Drive mechanism	Ball screw(C7, 연삭), 15 Lead 20MM(10MM)
Liner motion guide	One way,No.24, 2 block
Repeatability	±0.02MM
stroke(mm)	100-600MM
Payload(kg) Ta = 0.2s	Lead 20 H: 4 V: 3
	Lead 10 H: 24 V: 7
Moment of inertia of area	Ix=1.65E+05, Iy=4.84E+05

※ product



Straight joint

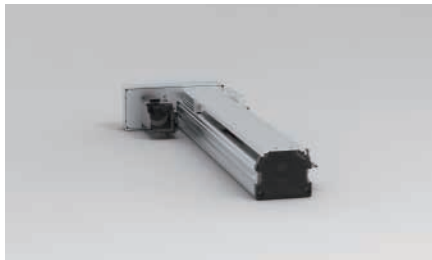

Right Parallel joint




Left Parallel joint



Under Parallel joint


DS-070ST

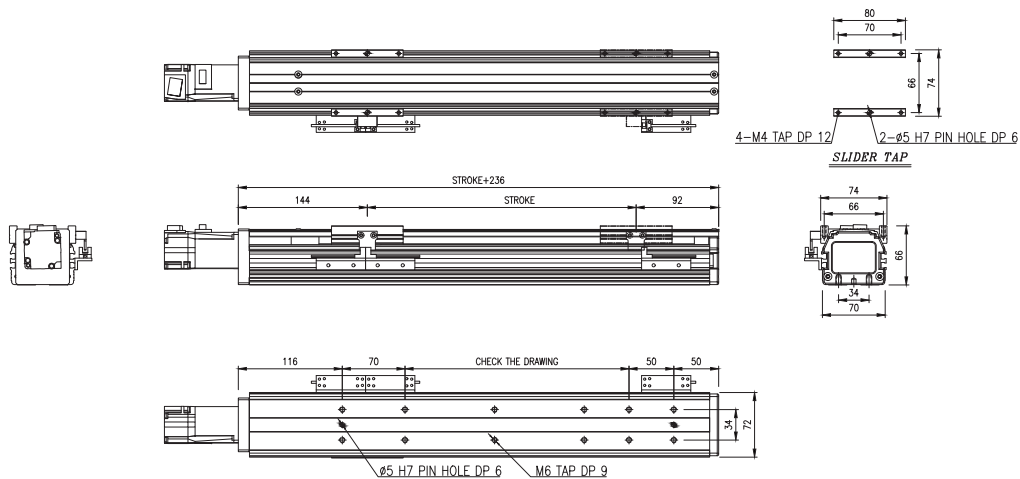

Stroke(mm)		100	200	300	400	500	600
Max. Speed (mm/sec)	Lead 20mm	1000					
	Lead 10mm	500					
Weight(kg)		4.09	4.67	5.25	5.83	6.41	6.99
Base & Slide		The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전작 유광					

unit:mm

DS-070SB

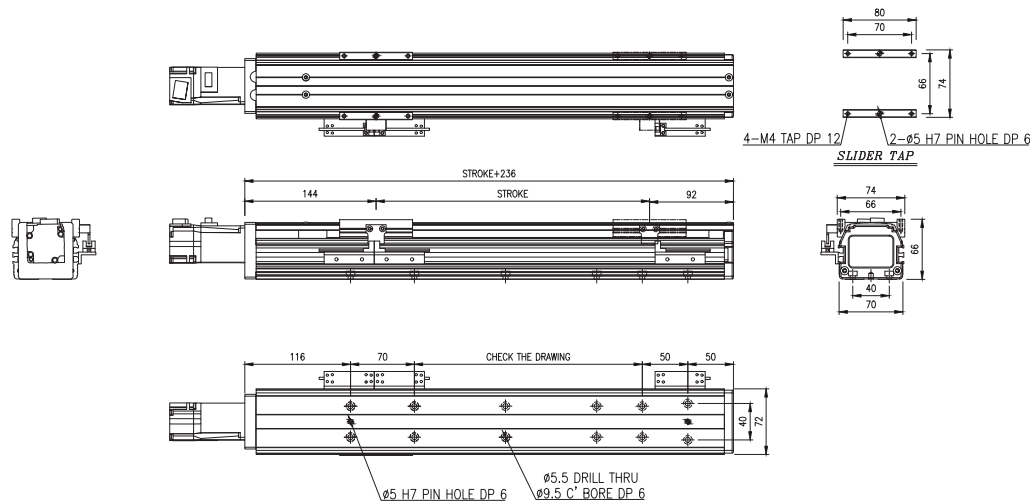

Stroke(mm)		100	200	300	400	500	600
Max. Speed (mm/sec)	Lead 20mm	1000					
	Lead 10mm	500					
Weight(kg)		4.09	4.67	5.25	5.83	6.41	6.99
Base & Slide		The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전작 유광					

unit:mm

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200


DS-070LT

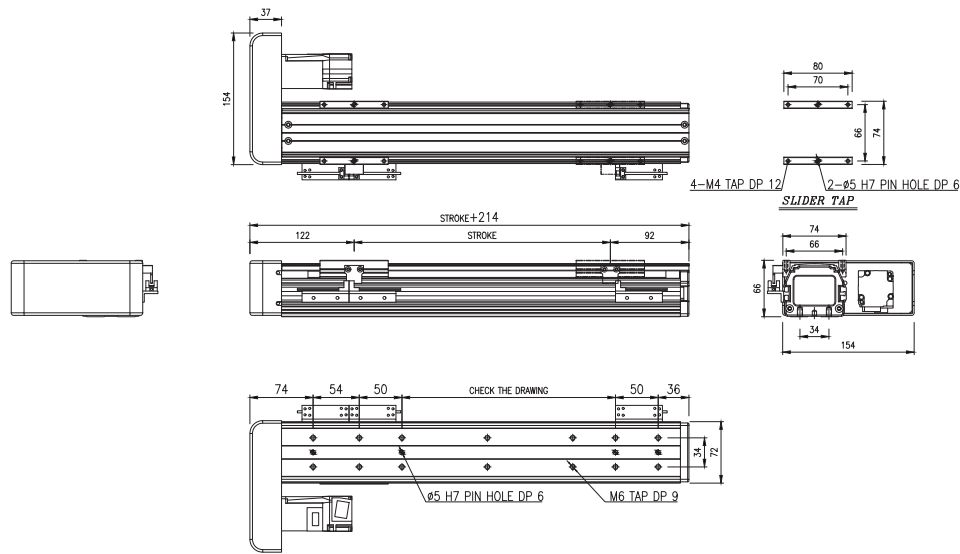

unit:mm

Stroke(mm)		100	200	300	400	500	600
Max. Speed (mm/sec)	Lead 20mm	1000					
	Lead 10mm	500					
Weight(kg)		4.37	4.94	5.51	6.09	6.66	7.23
Base & Slide		The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전작 유광					


DS-070RT

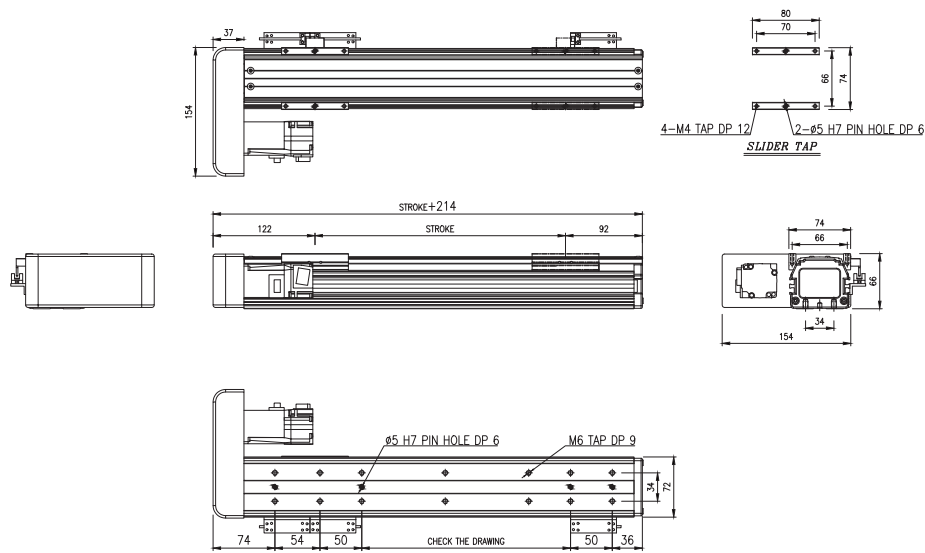

unit:mm

Stroke(mm)		100	200	300	400	500	600
Max. Speed (mm/sec)	Lead 20mm	1000					
	Lead 10mm	500					
Weight(kg)		4.37	4.94	5.51	6.09	6.66	7.23
Base & Slide		The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전작 유광					


DS-070LB

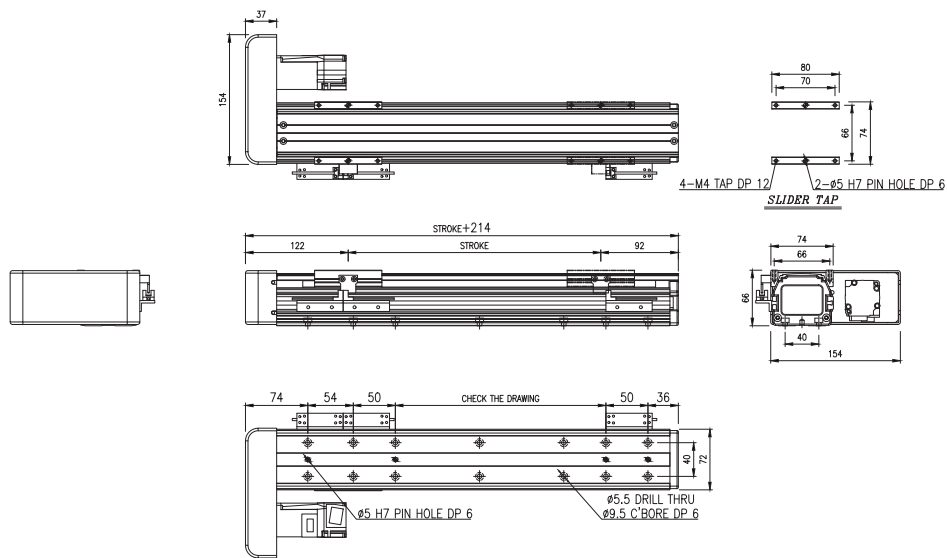

unit:mm

Stroke(mm)		100	200	300	400	500	600
Max. Speed (mm/sec)	Lead 20mm	1000					
	Lead 10mm	500					
Weight(kg)		4.37	4.94	5.51	6.09	6.66	7.23
Base & Slide		The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전작 유광					

DS-070RB

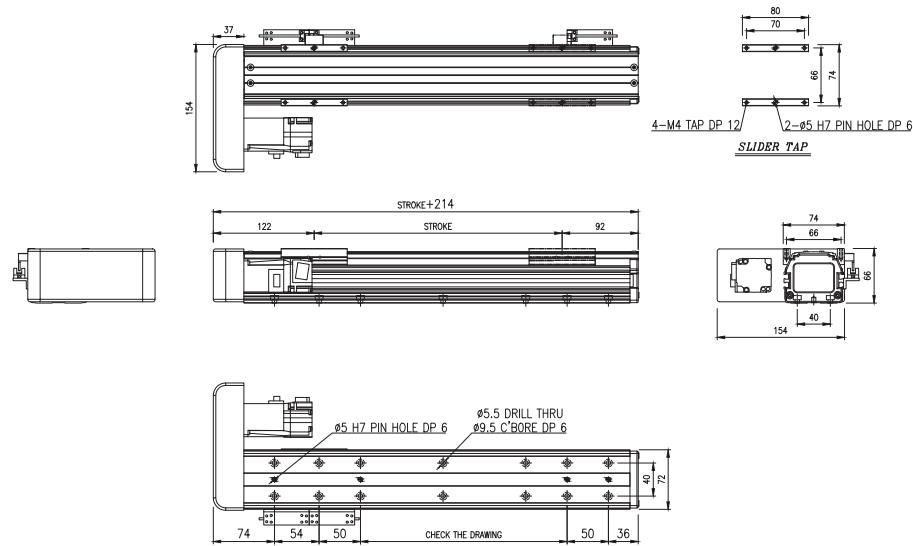

unit:mm

Stroke(mm)		100	200	300	400	500	600
Max. Speed (mm/sec)	Lead 20mm	1000					
	Lead 10mm	500					
Weight(kg)		4.37	4.94	5.51	6.09	6.66	7.23
Base & Slide		The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전작 유광					

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200


DS-070UT

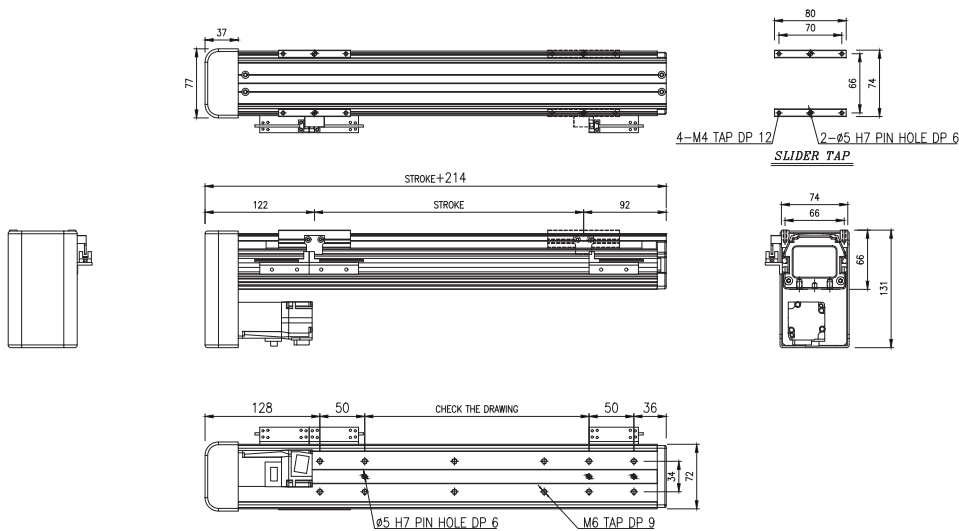

unit:mm

Stroke(mm)		100	200	300	400	500	600
Max. Speed (mm/sec)	Lead 20mm	1000					
	Lead 10mm	500					
Weight(kg)		4.38	4.95	5.52	6.09	6.67	7.24
Base & Slide		The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전작 유광					

DS-070UB

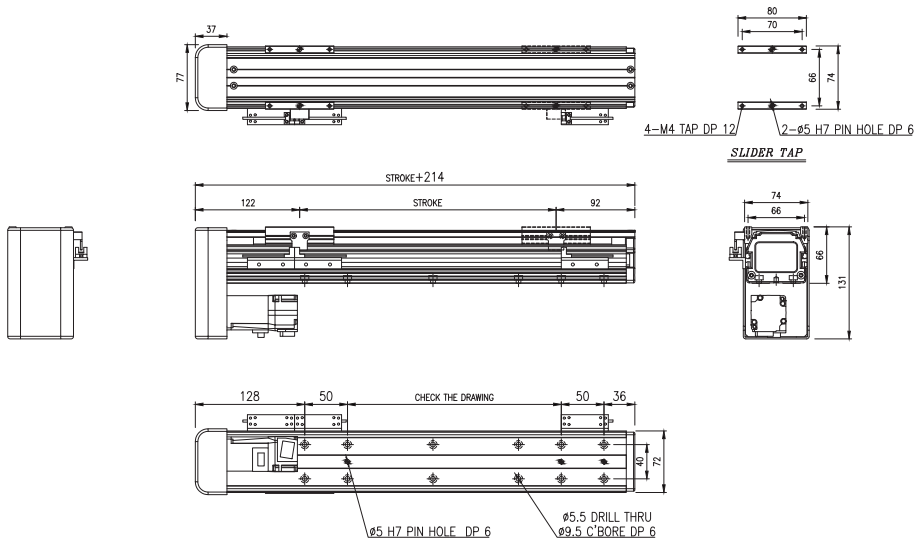

unit:mm

Stroke(mm)		100	200	300	400	500	600
Max. Speed (mm/sec)	Lead 20mm	1000					
	Lead 10mm	500					
Weight(kg)		4.38	4.95	5.52	6.09	6.67	7.24
Base & Slide		The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전작 유광					

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200

⚙️ DS-090ST-L10-100W-300ST-SP

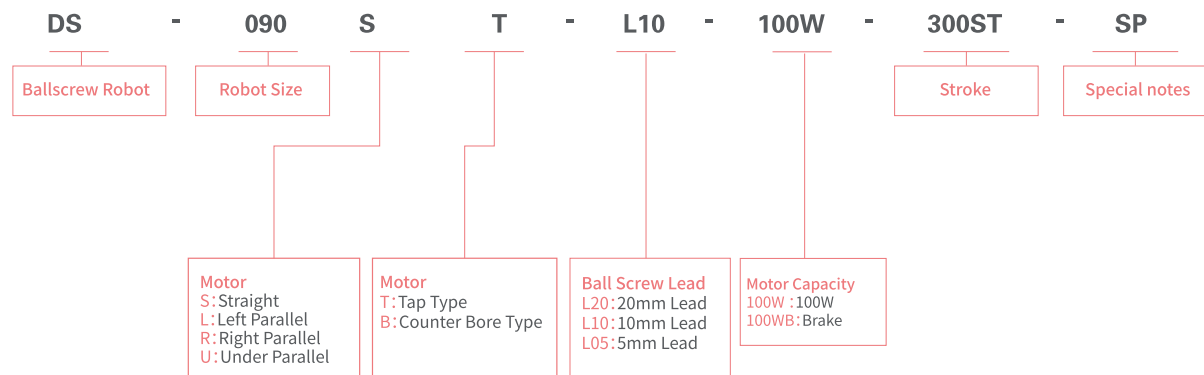

※ Specification

Servo Motor Output/rpm		100W/3000RPM
Drive mechanism		Ball screw(C7, 연삭), 15 Lead 20MM(10MM)
Liner motion guide		One way,No.42, 2 block
Repeatability		±0.02MM
stroke(mm)		100-1000MM
Payload(kg) Ta = 0.2s	Lead 20	H: 4
		V: 3
	Lead 10	H: 24
		V: 7
Moment of inertia of area		Ix=1.78E+05, Iy=1.09E+06

※ product



Straight joint



Right Parallel joint




Left Parallel joint




Under Parallel joint

DS-090ST

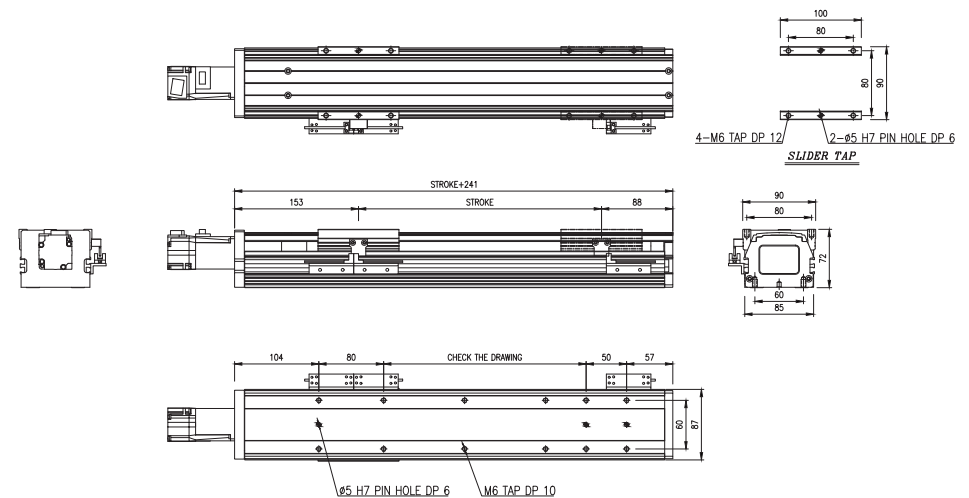

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm		1000		850		680		560	
	Lead 10mm		500		420		330		270	
Weight(kg)	5.01	5.83	6.65	7.48	8.3	9.12	9.95	10.77	11.59	12.41
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전좌 유광									

DS-090SB

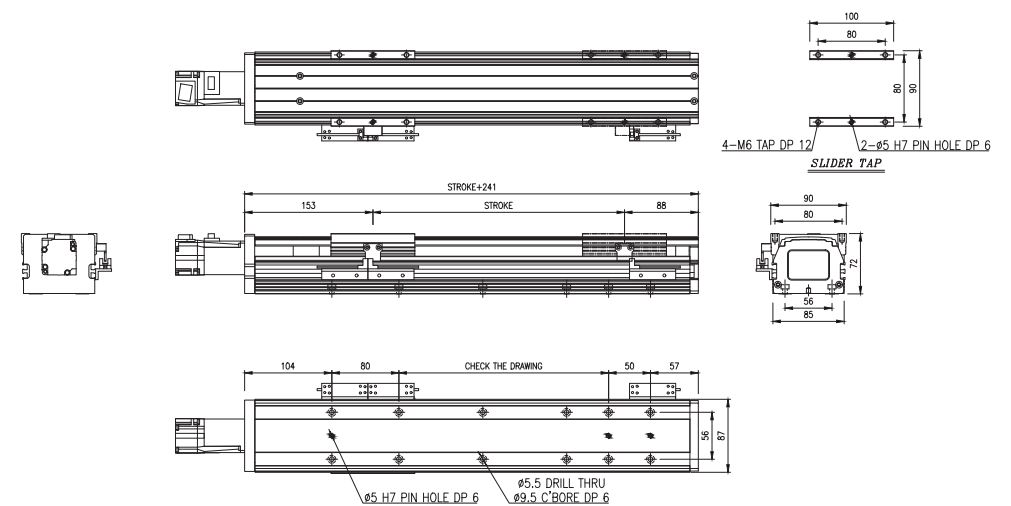

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm		1000		850		680		560	
	Lead 10mm		500		420		330		270	
Weight(kg)	5.01	5.83	6.65	7.48	8.3	9.12	9.95	10.77	11.59	12.41
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전좌 유광									

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200


DS-090LT

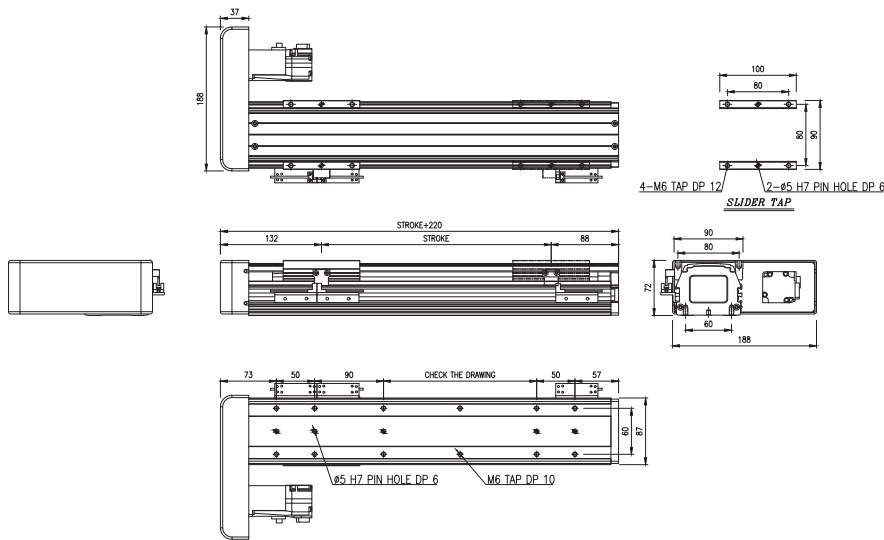

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm	1000							850	560
	Lead 10mm	500							330	270
Weight(kg)	4.65	5.32	5.99	6.66	7.34	8.01	8.68	9.35	10.03	10.7
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전작 유광									

unit:mm


DS-090RT

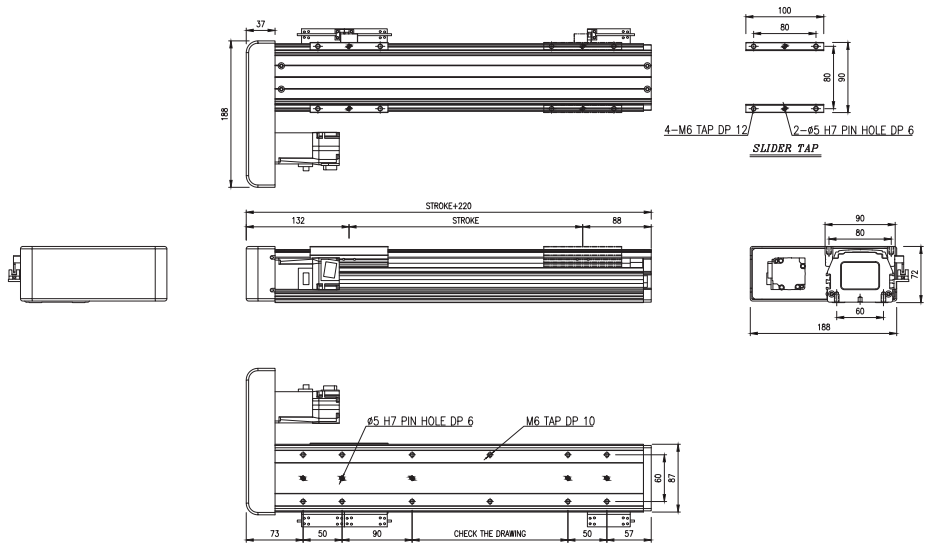

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm	1000							850	560
	Lead 10mm	500							330	270
Weight(kg)	4.65	5.32	5.99	6.66	7.34	8.01	8.68	9.35	10.03	10.7
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전작 유광									

unit:mm


DS-090LB

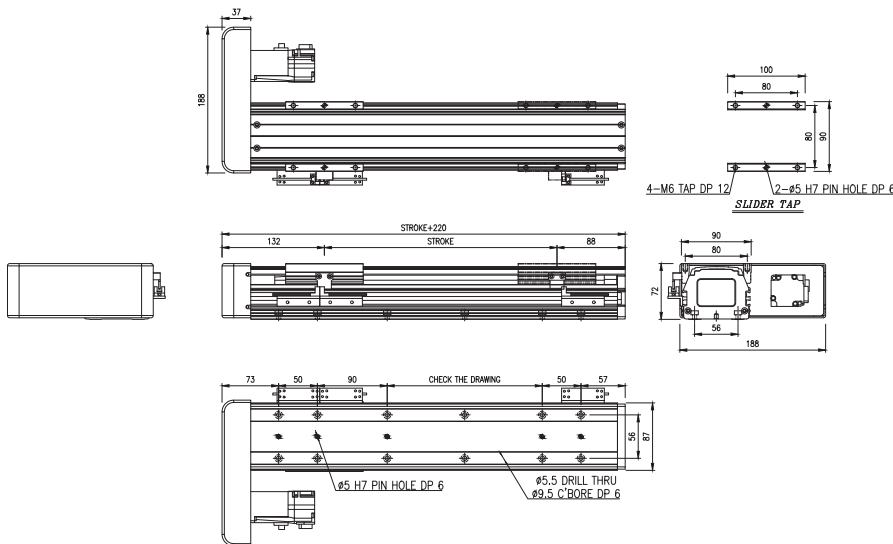

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm	1000							850	560
	Lead 10mm	500							330	270
Weight(kg)	4.65	5.32	5.99	6.66	7.34	8.01	8.68	9.35	10.03	10.7
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전작 유광									

unit:mm

DS-090RB

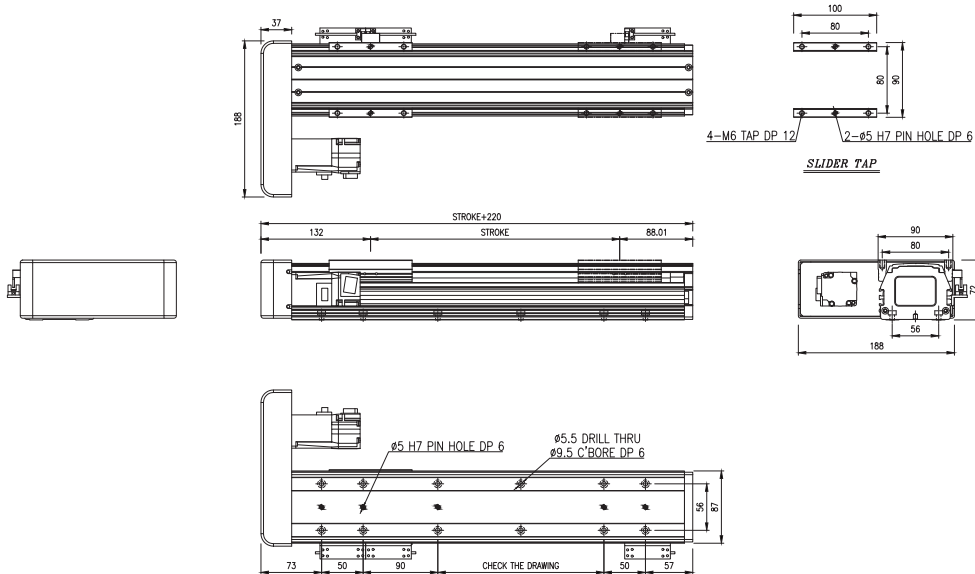

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm	1000							850	560
	Lead 10mm	500							330	270
Weight(kg)	4.65	5.32	5.99	6.66	7.34	8.01	8.68	9.35	10.03	10.7
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전작 유광									

unit:mm

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200


DS-090UT

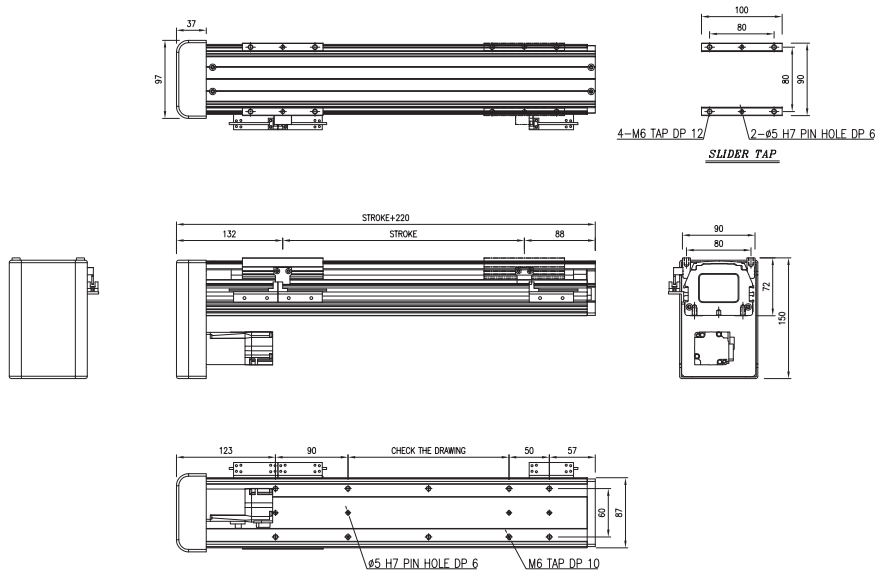

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm	1000							850	680	560
	Lead 10mm	500							410	330	270
Weight(kg)		4.63	5.31	5.98	6.65	7.33	8.00	8.67	9.34	10.02	10.6
Base & Slide		The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전작 유광									

unit:mm

DS-090UB

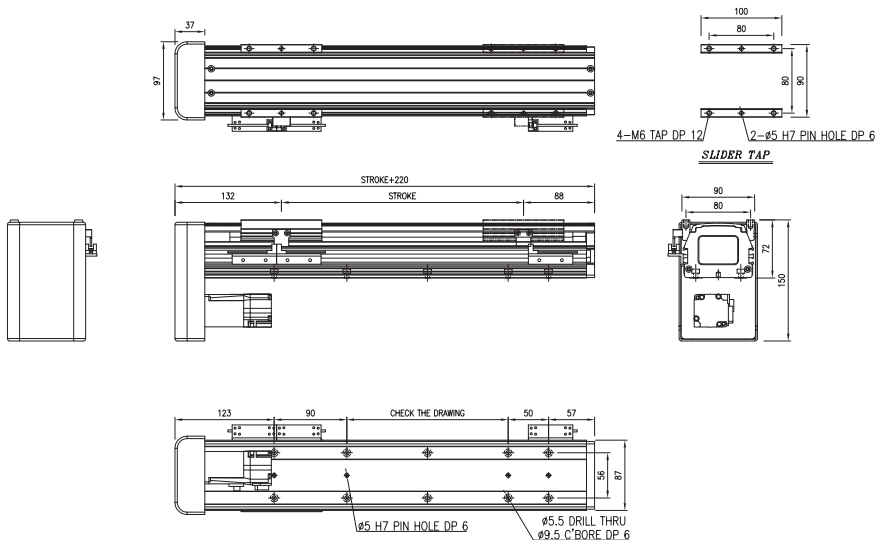

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm	1000							850	680	560
	Lead 10mm	500							410	330	270
Weight(kg)		4.63	5.31	5.98	6.65	7.33	8.00	8.67	9.34	10.02	10.6
Base & Slide		The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전작 유광									

unit:mm

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200

DS-090ST-L10-200W-300ST-SP

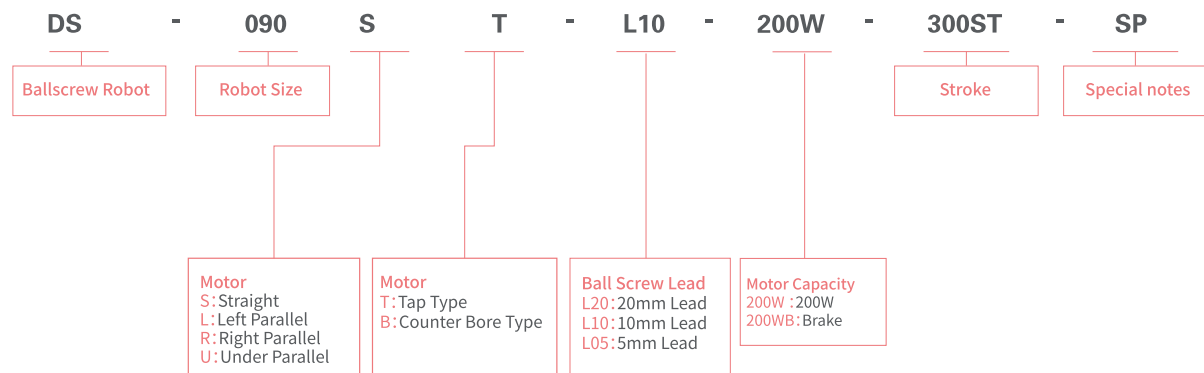

※ Specification

Servo Motor Output/rpm		200W/3000RPM
Drive mechanism		Ball screw(C7, 연삭), 15 Lead 20MM(10MM)
Liner motion guide		One way,No.42, 2 block
Repeatability		±0.02MM
stroke(mm)		100-1000MM
Payload(kg) Ta = 0.2s	Lead 20	H: 28
		V: 8
	Lead 10	H: 30
		V: 16
Moment of inertia of area		Ix=1.78E+05, Iy=1.09E+06

※ product



Straight joint



Right Parallel joint




Left Parallel joint




Under Parallel joint

DS-090ST

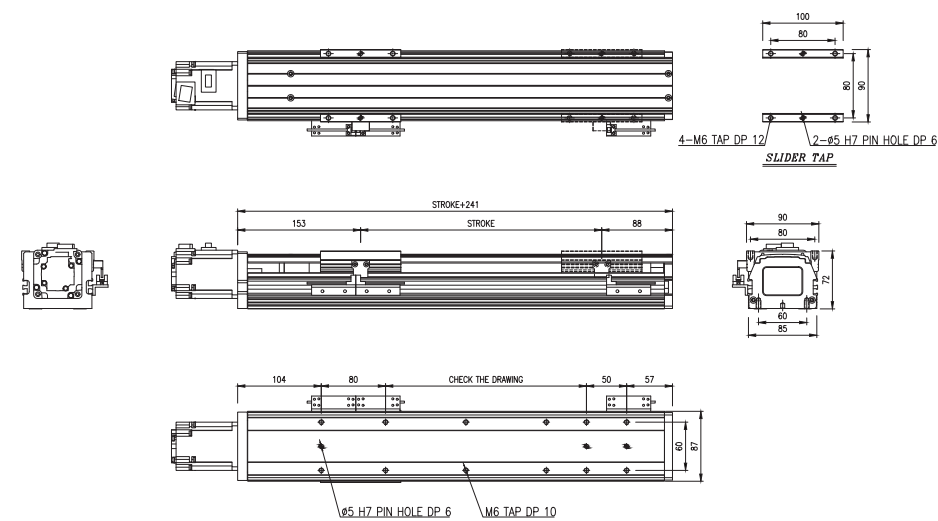

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm							850	680	560
	Lead 10mm							420	330	270
Weight(kg)	5.41	6.23	7.05	7.87	8.69	9.51	10.33	11.15	11.97	12.79
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전작 유광									

DS-090SB

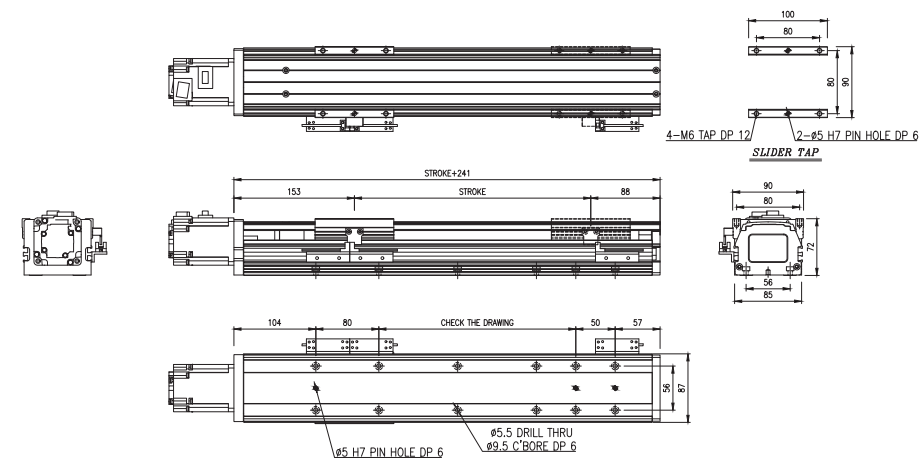

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm							850	680	560
	Lead 10mm							420	330	270
Weight(kg)	5.41	6.23	7.05	7.87	8.69	9.51	10.33	11.15	11.97	12.79
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전작 유광									

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200


DS-090LT

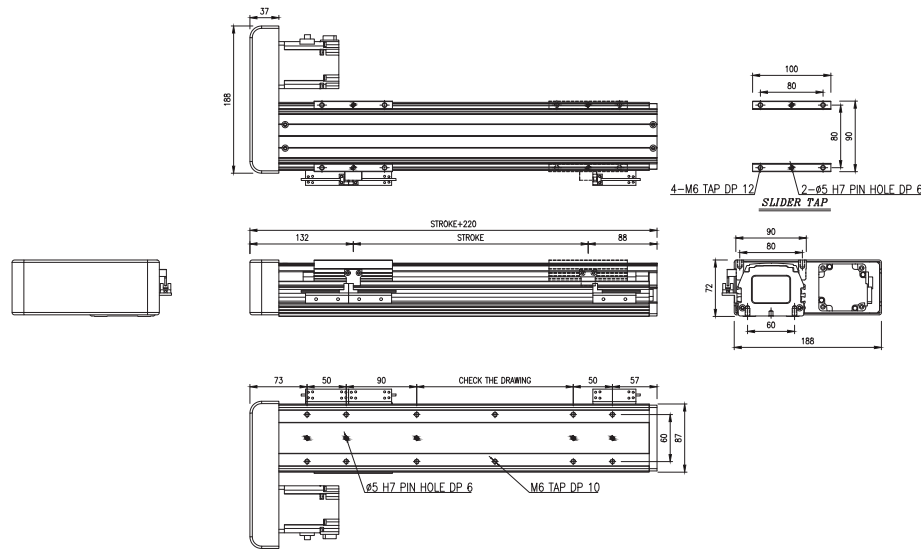

unit:mm

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm	1000							850	680	560
	Lead 10mm	500							420	330	270
Weight(kg)		5.05	5.72	6.39	7.06	7.73	8.40	9.07	9.74	10.41	11.08
Base & Slide		The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전작 유광									


DS-090RT

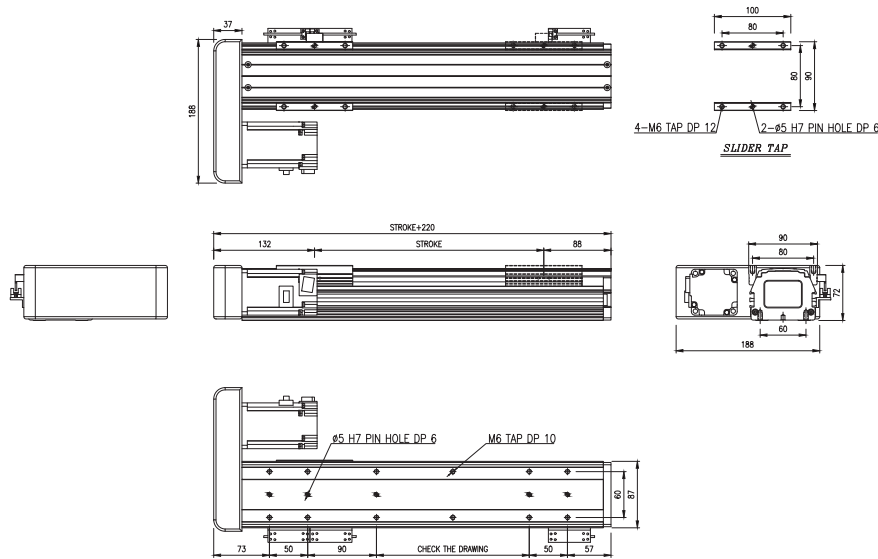

unit:mm

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm	1000							850	680	560
	Lead 10mm	500							420	330	270
Weight(kg)		5.05	5.72	6.39	7.06	7.73	8.40	9.07	9.74	10.41	11.08
Base & Slide		The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전작 유광									


DS-090LB

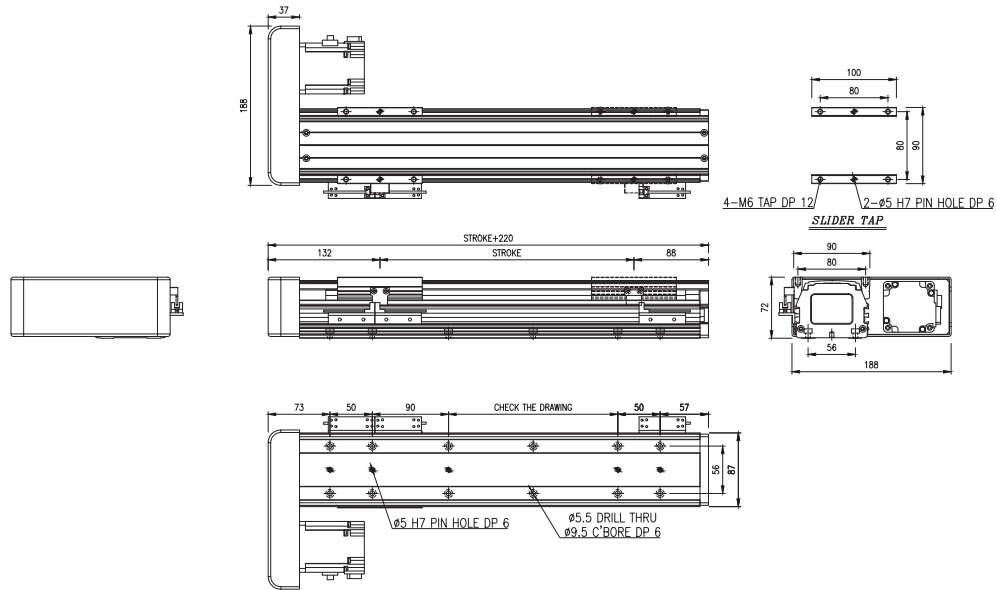

unit:mm

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm	1000							850	680	560
	Lead 10mm	500							420	330	270
Weight(kg)		5.05	5.72	6.39	7.06	7.73	8.40	9.07	9.74	10.41	11.08
Base & Slide		The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전작 유광									


DS-090RB

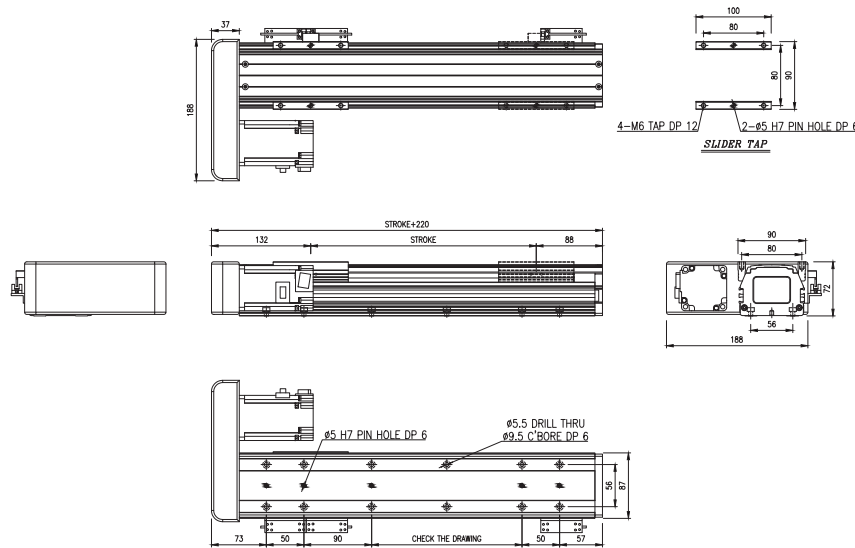

unit:mm

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm	1000							850	680	560
	Lead 10mm	500							420	330	270
Weight(kg)		5.05	5.72	6.39	7.06	7.73	8.40	9.07	9.74	10.41	11.08
Base & Slide		The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전작 유광									


DS-090UT

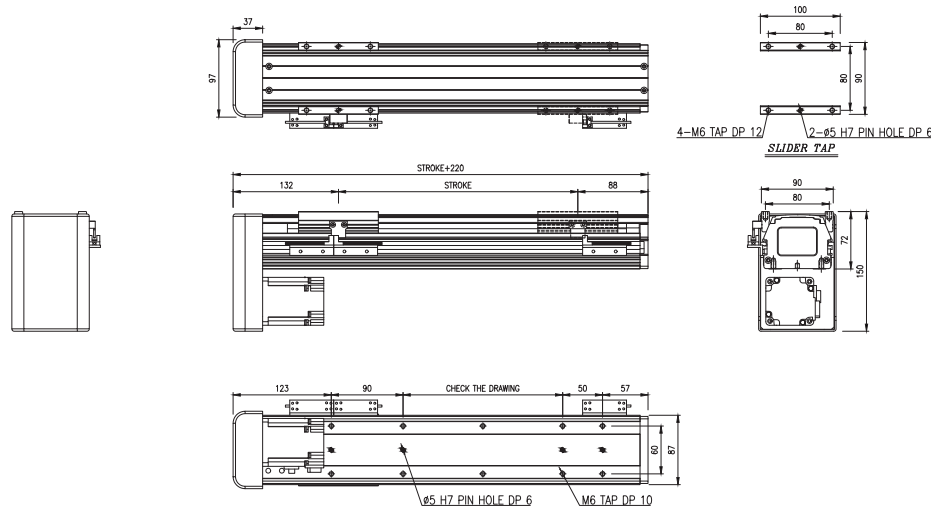

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm	1000							850	680	560
	Lead 10mm	500							420	330	270
Weight(kg)		5.03	5.71	6.39	7.07	7.75	8.43	9.11	9.79	10.47	11.15
Base & Slide		The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전작 유광									

unit:mm

DS-090UB

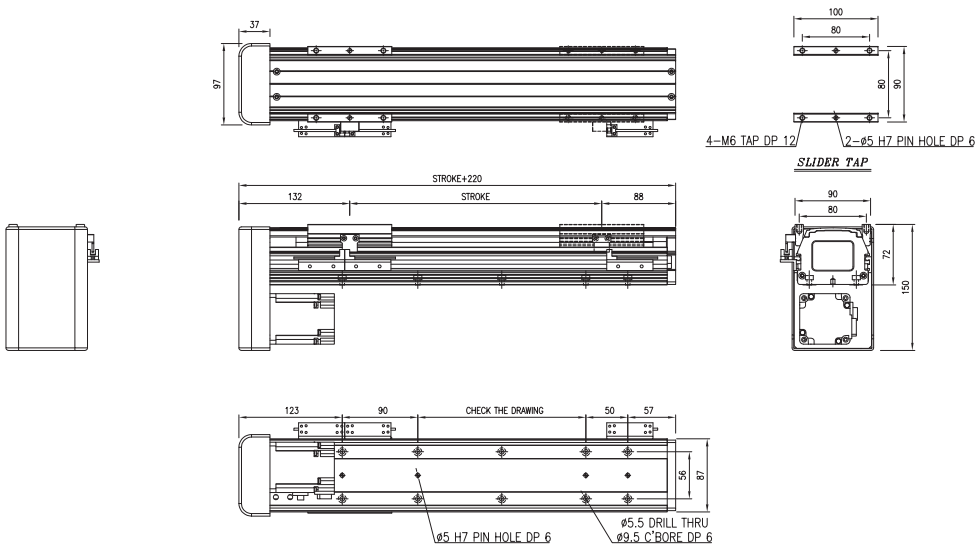

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm	1000							850	680	560
	Lead 10mm	500							420	330	270
Weight(kg)		5.03	5.71	6.39	7.07	7.75	8.43	9.11	9.79	10.47	11.15
Base & Slide		The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전작 유광									

unit:mm

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200

⚙️ DS-120ST-L10-200W-300ST-SP

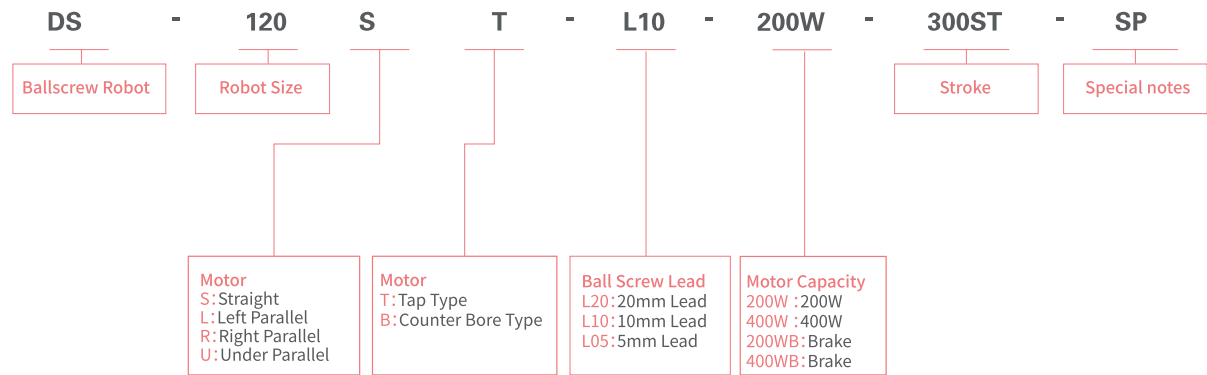

※ Specification

Drive mechanism		Ball screw (C7, 연삭) , Ø15 Lead 20MM (10MM)	
Liner motion guide		Two way, 15w, 2 block	
Repeatability		±0.02MM	
stroke(mm)		100-1200MM	
Servo Motor Output/rpm		200W/3000RPM	400W/3000RPM
Payload(kg) Ta = 0.2s	Lead 10	H: 30	H: 40
		V: 8	V: 18
	Lead 20	H: 50	H: 50
		V: 10	V: 18
Moment of inertia of area		Ix = 4.86E+05, Iy = 4.45E +06	

※ product



Straight joint



Right Parallel joint




Left Parallel joint



Under Parallel joint


DS-120ST

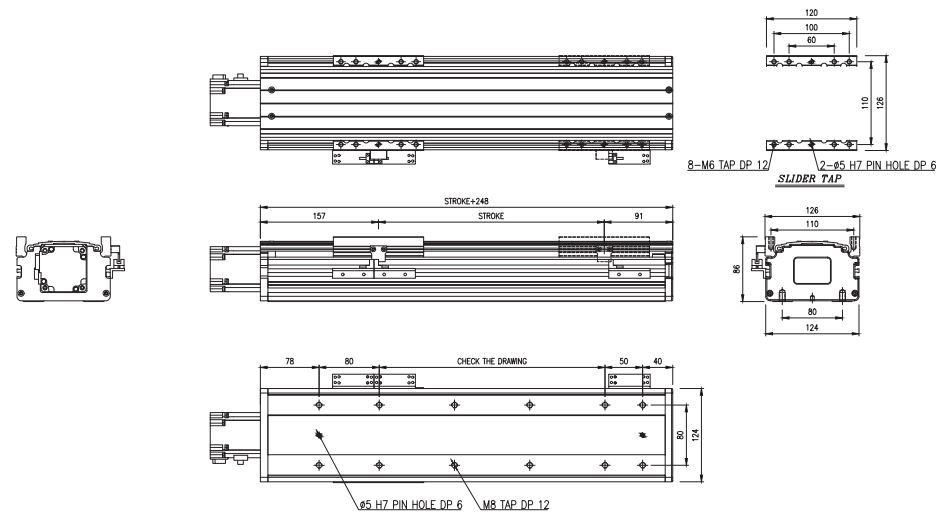

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200
Max. Speed (mm/sec)	Lead 20mm	1000							850	680	560	460	390
	Lead 10mm	500							420	320	270	230	190
Weight(kg)		6.13	7.10	8.06	9.03	9.99	10.96	11.92	12.89	13.85	14.82	15.78	16.75
Base & Slide		The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전좌 유광											

unit:mm

DS-120SB

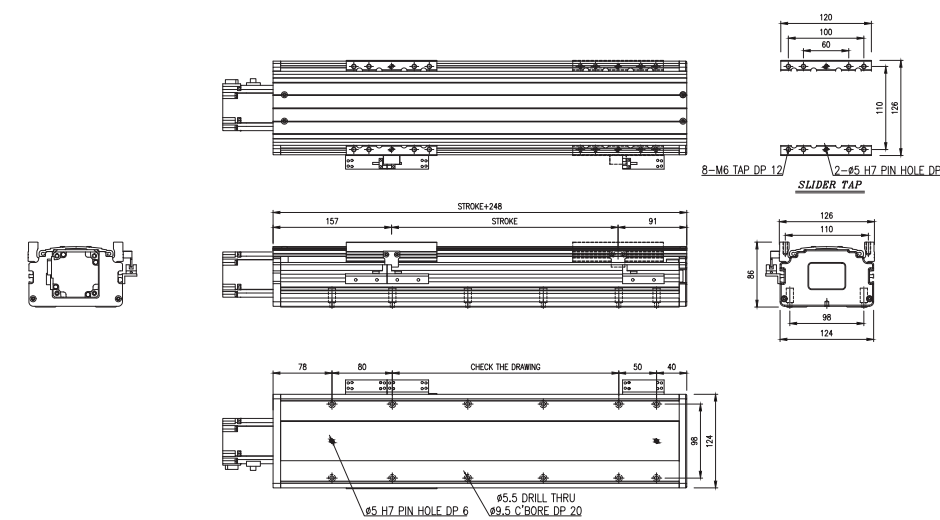

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200
Max. Speed (mm/sec)	Lead 20mm	1000							850	680	560	460	390
	Lead 10mm	500							420	320	270	230	190
Weight(kg)		6.13	7.10	8.06	9.03	9.99	10.96	11.92	12.89	13.85	14.82	15.78	16.75
Base & Slide		The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전좌 유광											

unit:mm

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200


DS-120LT

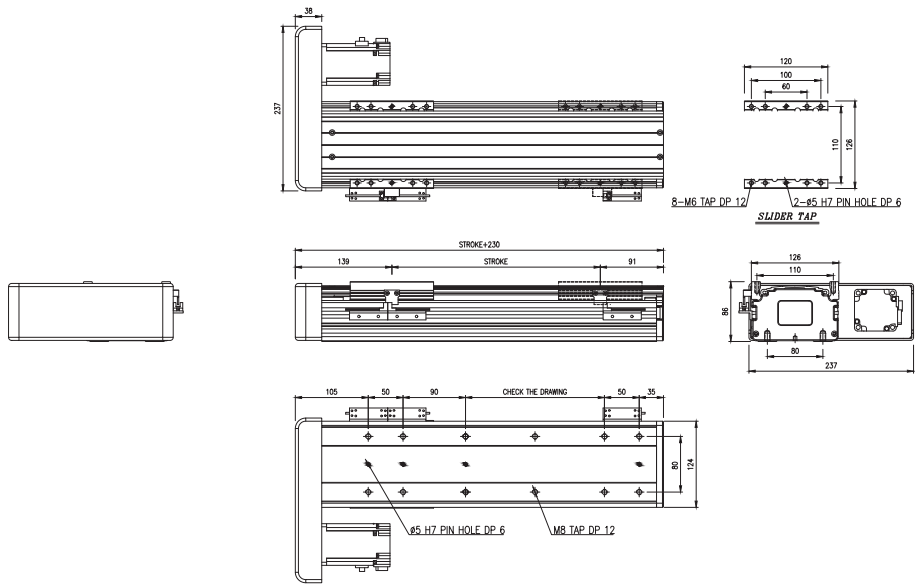

unit:mm

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200
Max. Speed (mm/sec)	Lead 20mm	1000							850	680	560	460	390
	Lead 10mm	500							420	320	270	230	190
Weight(kg)		6.13	7.10	8.06	9.03	9.99	10.96	11.92	12.89	13.85	14.82	15.78	16.75
Base & Slide		The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전작 유광											

DS-120LB

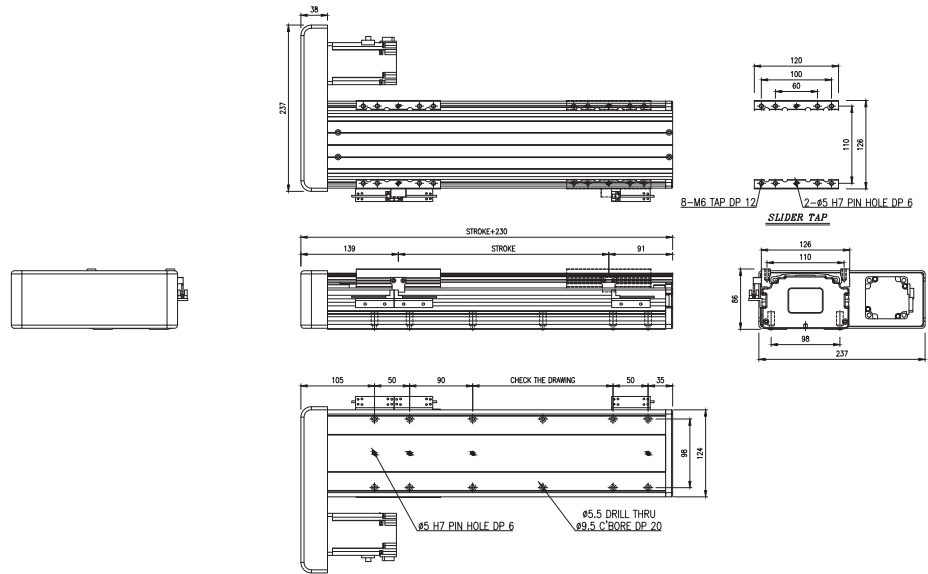


unit:mm

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200
Max. Speed (mm/sec)	Lead 20mm	1000							850	680	560	460	390
	Lead 10mm	500							420	320	270	230	190
Weight(kg)		6.13	7.10	8.06	9.03	9.99	10.96	11.92	12.89	13.85	14.82	15.78	16.75
Base & Slide		The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전작 유광											

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.


DS-120RT

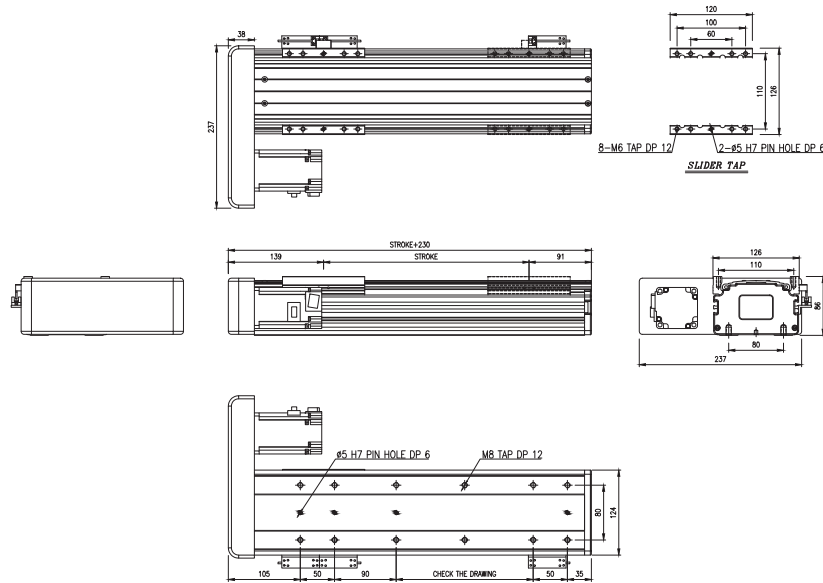

unit:mm

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200
Max. Speed (mm/sec)	Lead 20mm	1000							850	680	560	460	390
	Lead 10mm	500							420	320	270	230	190
Weight(kg)		6.13	7.10	8.06	9.03	9.99	10.96	11.92	12.89	13.85	14.82	15.78	16.75
Base & Slide		The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전작 유광											

DS-120RB

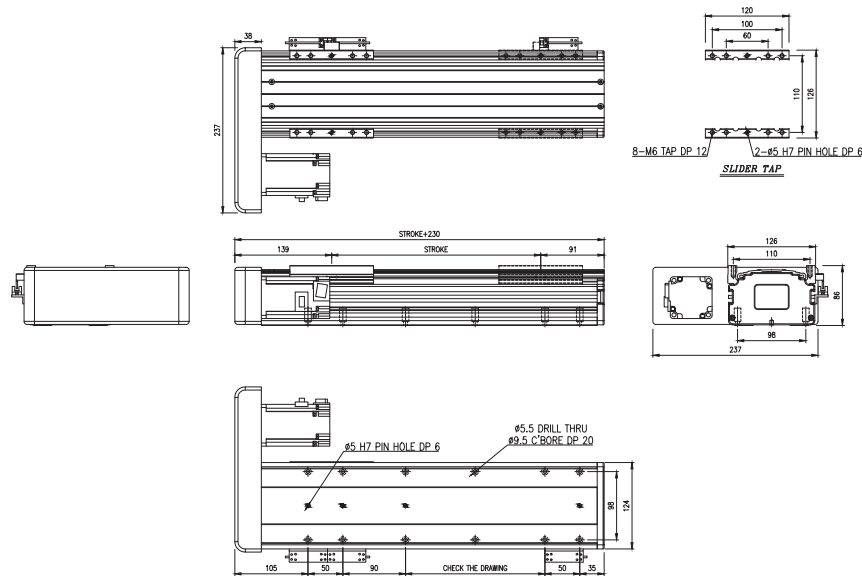

unit:mm

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200
Max. Speed (mm/sec)	Lead 20mm	1000							850	680	560	460	390
	Lead 10mm	500							420	320	270	230	190
Weight(kg)		6.13	7.10	8.06	9.03	9.99	10.96	11.92	12.89	13.85	14.82	15.78	16.75
Base & Slide		The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전작 유광											

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200


DS-120UT

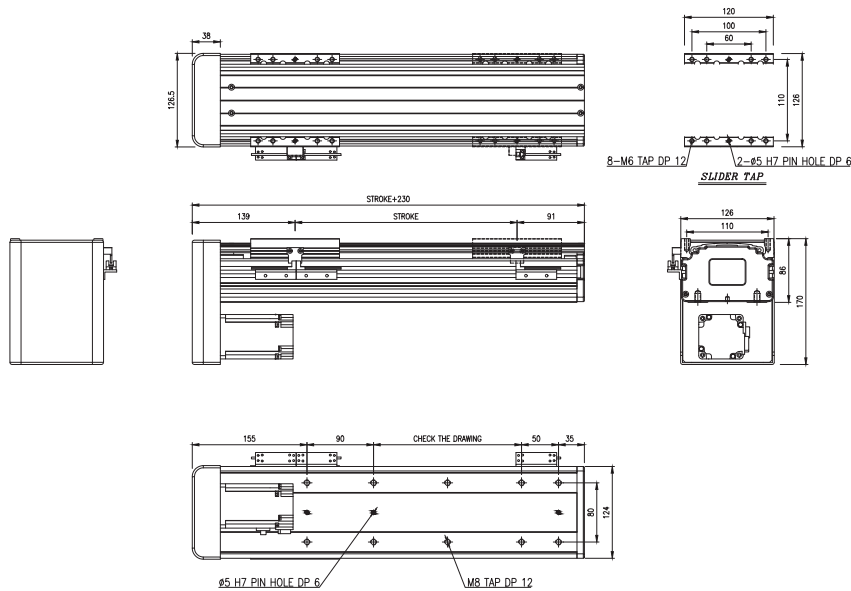

unit:mm

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200
Max. Speed (mm/sec)	Lead 20mm	1000							850	680	560	460	390
	Lead 10mm	500							420	320	270	230	190
Weight(kg)		6.22	7.19	8.15	9.12	10.08	11.05	12.01	12.98	13.94	14.91	15.87	16.84
Base & Slide		The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전작 유광											

DS-120UB

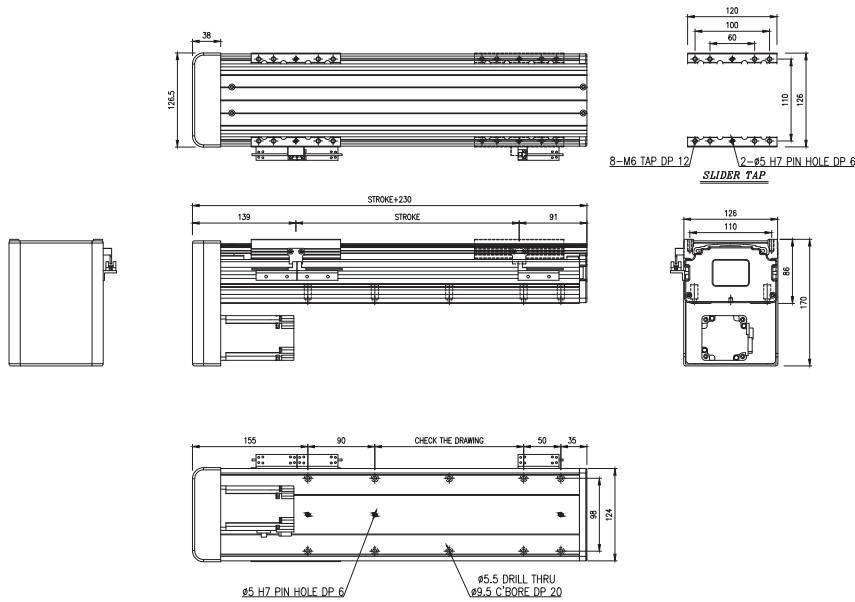

unit:mm

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200
Max. Speed (mm/sec)	Lead 20mm	1000							850	680	560	460	390
	Lead 10mm	500							420	320	270	230	190
Weight(kg)		6.22	7.19	8.15	9.12	10.08	11.05	12.01	12.98	13.94	14.91	15.87	16.84
Base & Slide		The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전작 유광											

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200

DS-160ST-L10-400W-300ST-SP

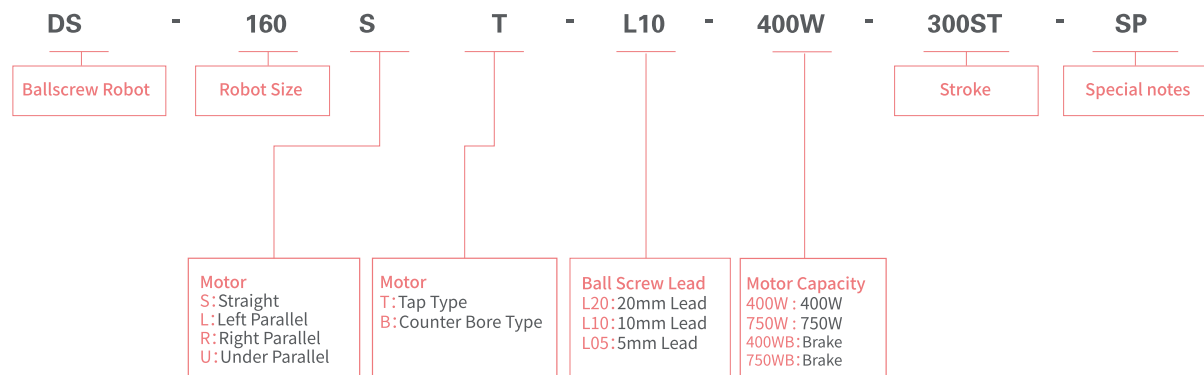

※ Specification

Drive mechanism	Ball screw(C7, 연삭), 15(20) Lead 20MM(10MM)		
Liner motion guide	Two way,20w, 2 block		
Repeatability	±0.02MM		
stroke(mm)	100-1600MM		
Servo Motor Output/rpm	400W/3000RPM	750W/3000RPM	
Payload(kg) Ta = 0.2s	Lead 20	H: 50	H: 60
		V: 18	V: 24
	Lead 10	H: 80	H: 80
		V: 32	V: 40
Moment of inertia of area	Ix=9.38E+05, Iy=1.05E+07		

※ product



Straight joint



Right Parallel joint




Left Parallel joint




Under Parallel joint

DS-160ST

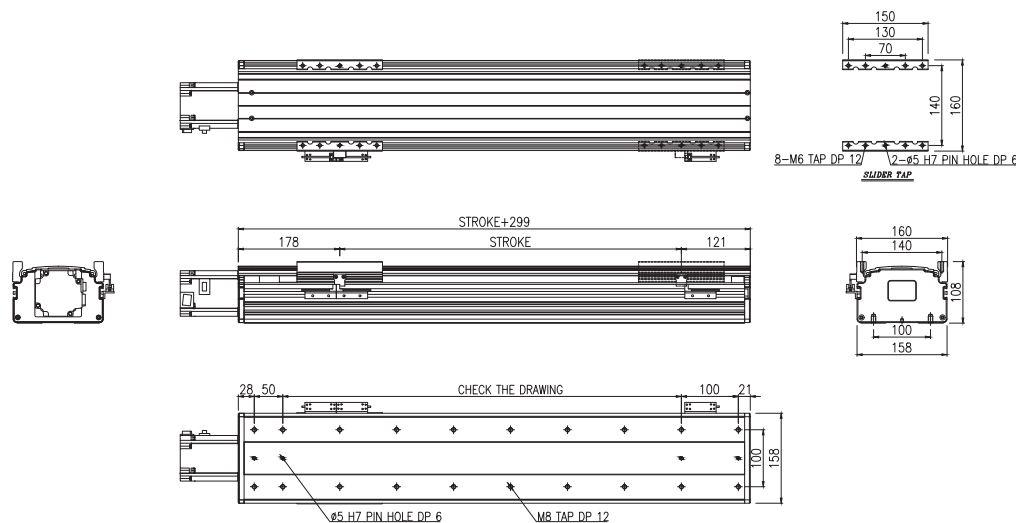

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
Max. Speed (mm/sec)	Lead 20mm	1000								910	750	620	530	450	390	340	300
	Lead 10mm	500								460	380	320	270	230	34.96	36.67	40.08
Weight(kg)		14.48	16.19	17.90	19.60	21.31	23.02	24.72	26.43	28.14	29.84	31.55	33.26	34.96	36.67	38.8	40.08
Base & Slide		The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광															

DS-160SB

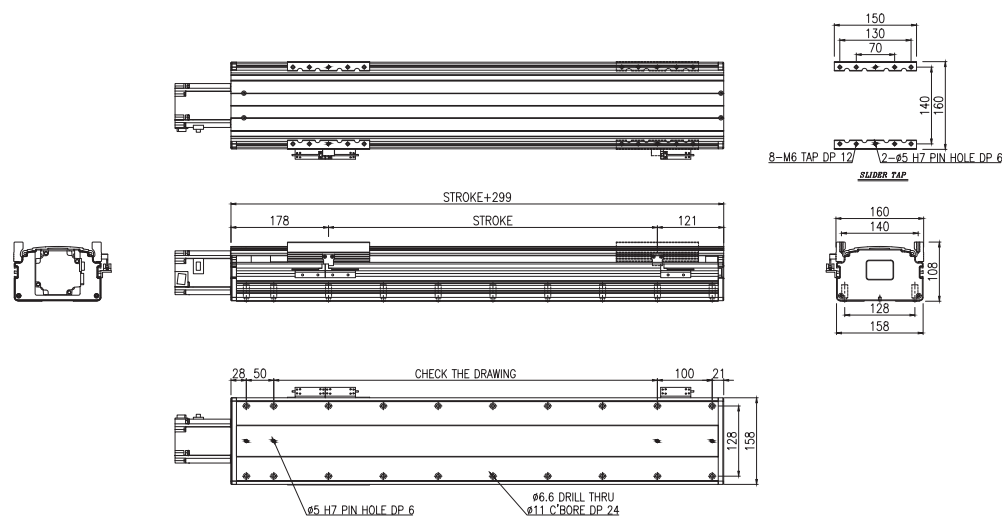

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
Max. Speed (mm/sec)	Lead 20mm	1000								910	750	620	530	450	390	340	300
	Lead 10mm	500								460	380	320	270	230	34.96	36.67	40.08
Weight(kg)		14.48	16.19	17.90	19.60	21.31	23.02	24.72	26.43	28.14	29.84	31.55	33.26	34.96	36.67	38.8	40.08
Base & Slide		The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광															

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200


DS-160LT

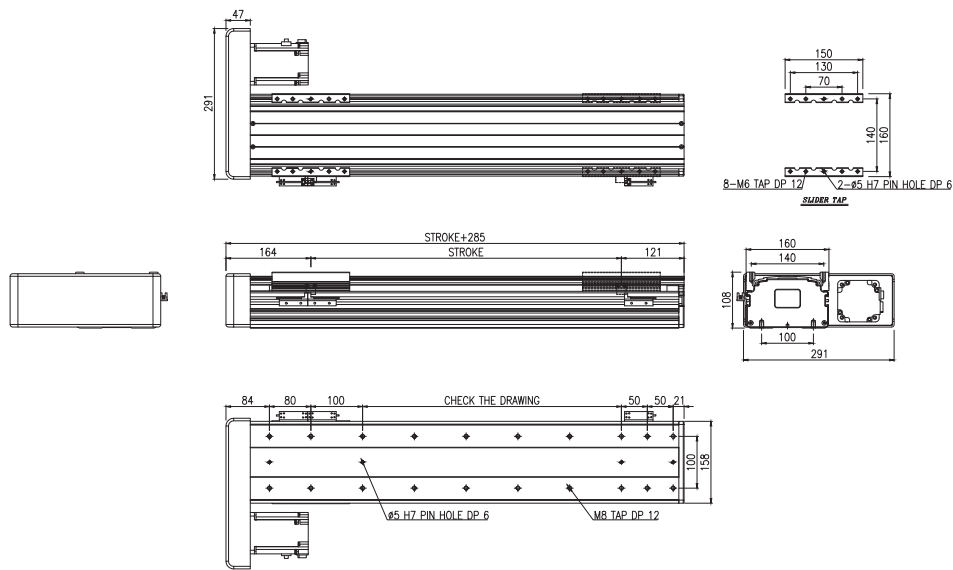

unit:mm

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
Max. Speed (mm/sec)	Lead 20mm	1000								910	750	620	530	450	390	340	300
	Lead 10mm	500								460	380	320	270	230			
Weight(kg)		14.7	16.41	18.11	19.82	21.53	23.23	24.94	26.65	28.35	30.06	31.77	33.47	35.18	36.89	38.59	40.3
Base & Slide		The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전작 유광															


DS-160LB

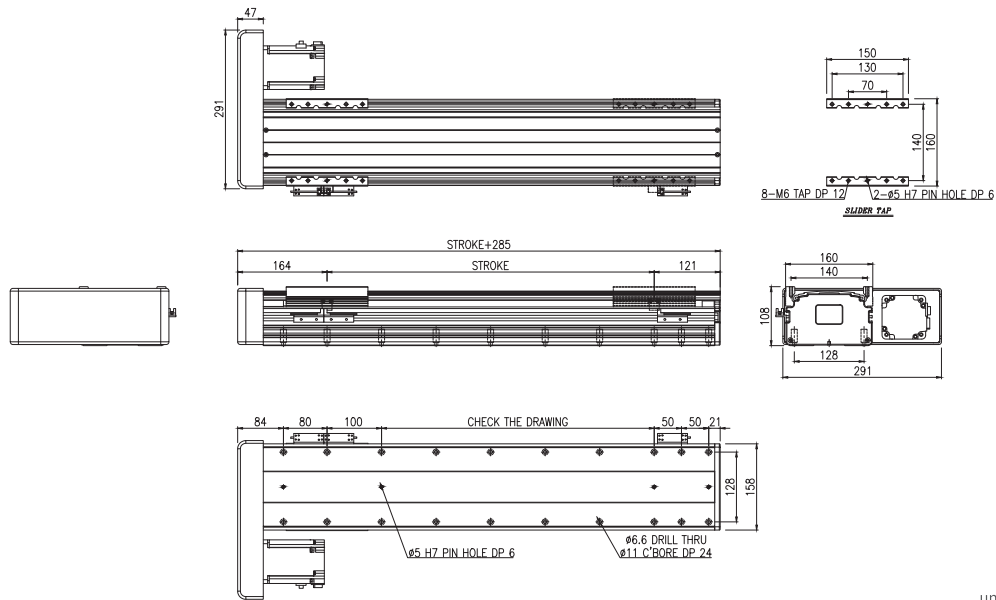

unit:mm

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
Max. Speed (mm/sec)	Lead 20mm	1000								910	750	620	530	450	390	340	300
	Lead 10mm	500								460	380	320	270	230			
Weight(kg)		14.7	16.41	18.11	19.82	21.53	23.23	24.94	26.65	28.35	30.06	31.77	33.47	35.18	36.89	38.59	40.3
Base & Slide		The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전작 유광															


DS-160RT

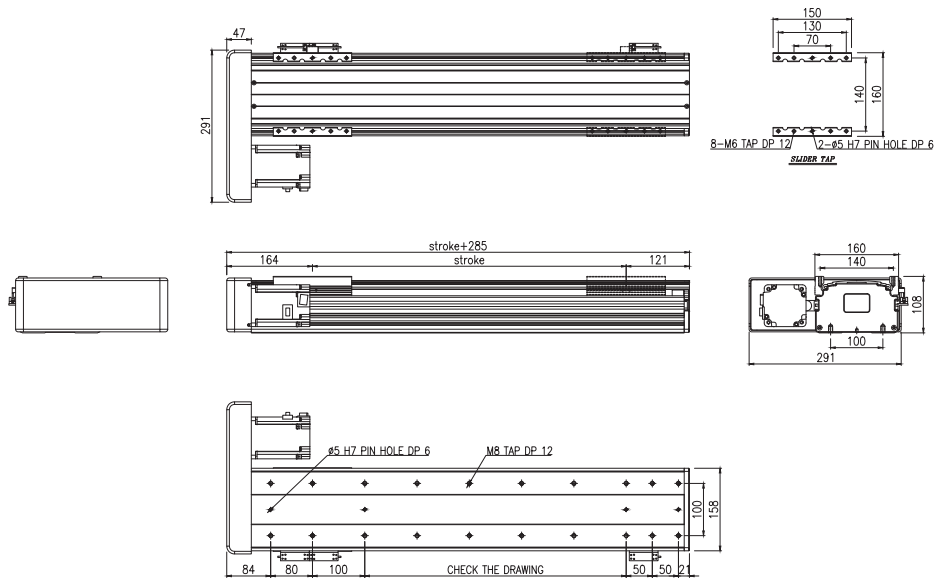

unit:mm

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
Max. Speed (mm/sec)	Lead 20mm	1000								910	750	620	530	450	390	340	300
	Lead 10mm	500								460	380	320	270	230			
Weight(kg)		14.7	16.41	18.11	19.82	21.53	23.23	24.94	26.65	28.35	30.06	31.77	33.47	35.18	36.89	38.59	40.3
Base & Slide		The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전작 유광															


DS-160RB

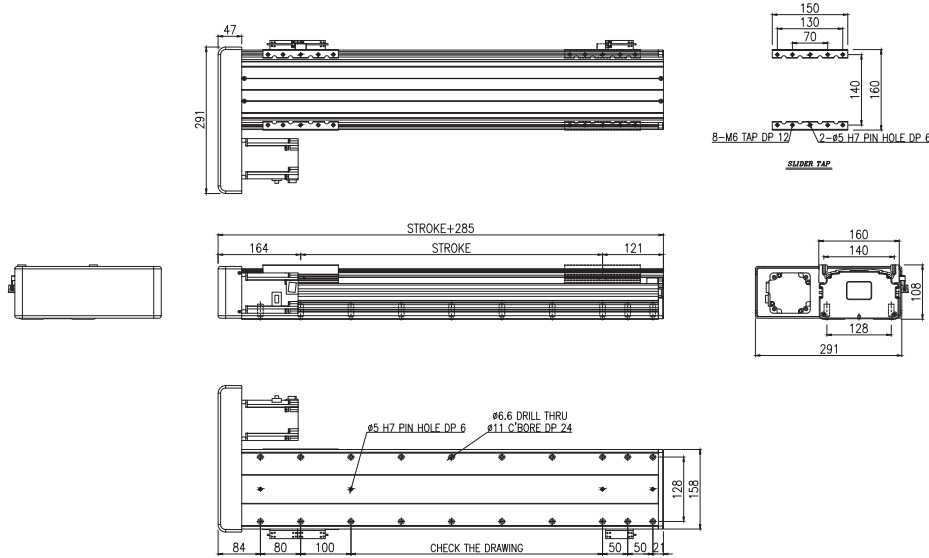

unit:mm

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
Max. Speed (mm/sec)	Lead 20mm	1000								910	750	620	530	450	390	340	300
	Lead 10mm	500								460	380	320	270	230			
Weight(kg)		14.7	16.41	18.11	19.82	21.53	23.23	24.94	26.65	28.35	30.06	31.77	33.47	35.18	36.89	38.59	40.3
Base & Slide		The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전작 유광															


DS-160UT

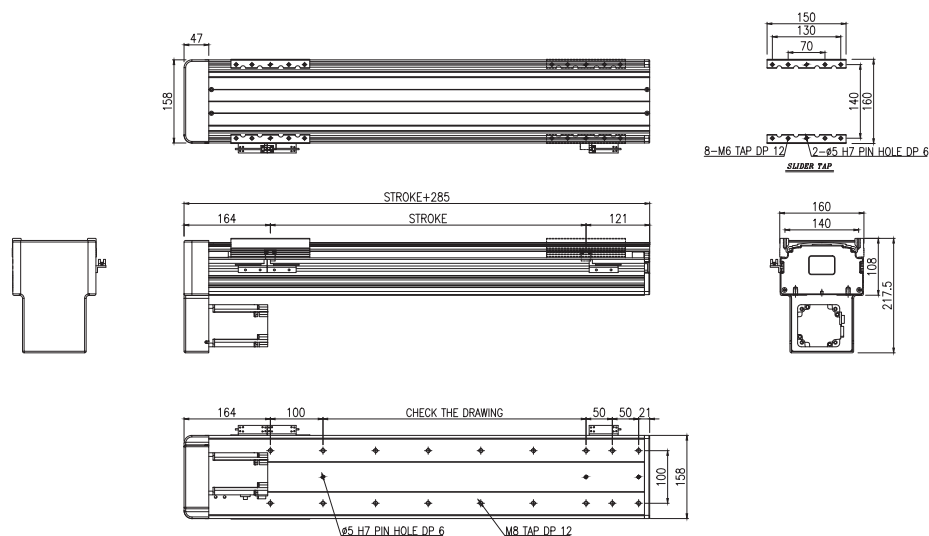

unit:mm

	Stroke(mm)	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
	Max Speed (mm/sec)	1000															
	Lead 20mm	500															
	Lead 10mm	460 750 620 530 450 390 340 300															
	Weight(kg)	14.61	16.31	18.02	19.23	21.43	23.14	24.85	26.55	28.26	29.97	31.67	33.38	35.29	36.79	38.5	40.21
		The weight of the model equipped with a brake is 0.61kg more heavier than this value.															
	Base & Slide	Aluminum Profile, 백색전착 유광															

DS-160UB

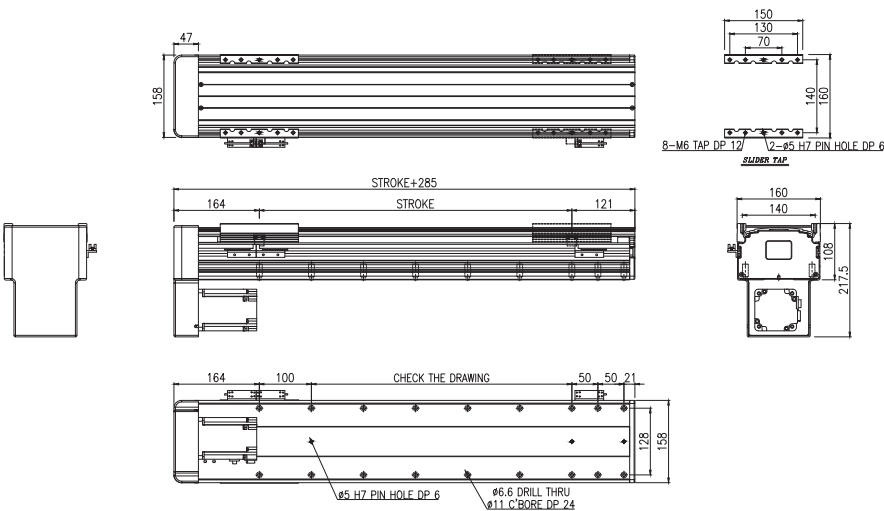

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	
Max. Speed (mm/sec)	Lead 20mm	1000								910	750	620	530	450	390	340	300
	Lead 10mm	500								460	380	320	270	230			
Weight(kg)		14.61	16.31	18.02	19.23	21.43	23.14	24.85	26.55	28.26	29.97	31.67	33.38	35.29	36.79	38.5	40.21
Base & Slide		The weight of the model equipped with a brake is 0.61kg more heavier then this value.															
		Aluminum Profile, 백색전착 유광															

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050


DS070

DS090

DS120

DS200

⚙️ DS-200ST-L10-750W-300ST-SP

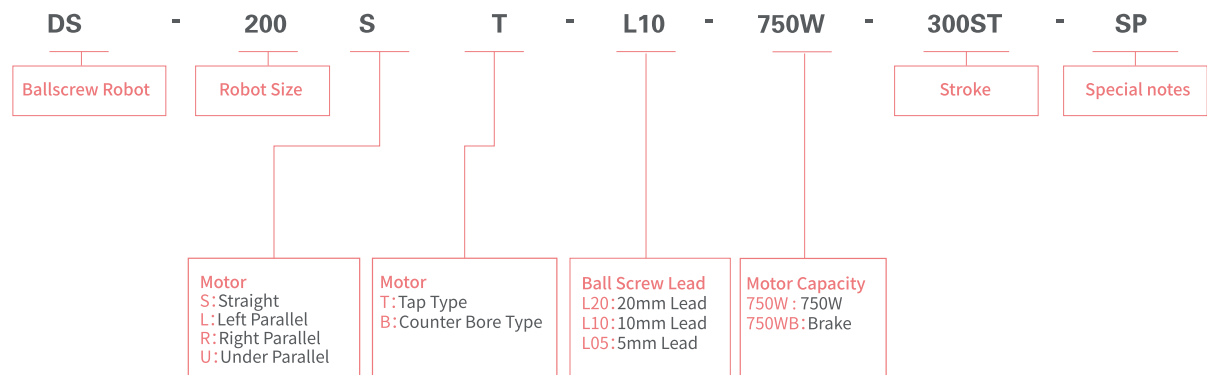

※ Specification

Servo Motor Output/rpm		750W/3000RPM
Drive mechanism		Ball screw(C7, 연삭),20(25) Lead 20MM(10MM)
Liner motion guide		Two way,25w, 2 block
Repeatability		±0.02MM
stroke(mm)		100-1600MM
Payload(kg) Ta = 0.2s	Lead 10	H: 100
		V: 30
	Lead 20	H: 120
		V: 55
Moment of inertia of area		Ix=1.79E+06, Iy=2.631E+07

※ product



Straight joint



Right Parallel joint




Left Parallel joint




Under Parallel joint

DS-200ST

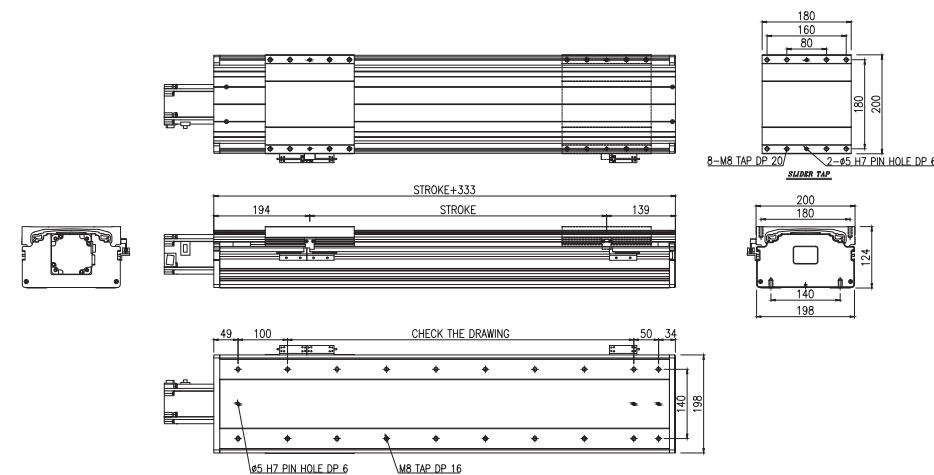

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
Max. Speed (mm/sec)	Lead 20mm	1000								910	750	620	530	450	390	340	300
	Lead 10mm	500								460	380	320	270	230			
Weight(kg)		24.25	26.82	29.39	31.96	34.54	37.11	39.68	42.25	44.83	47.40	49.97	52.54	55.12	57.69	60.26	62.83
Base & Slide		The weight of the model equipped with a brake is 1.0kg more heavier then this value. Aluminum Profile, 백색전작 유광															

DS-200SB

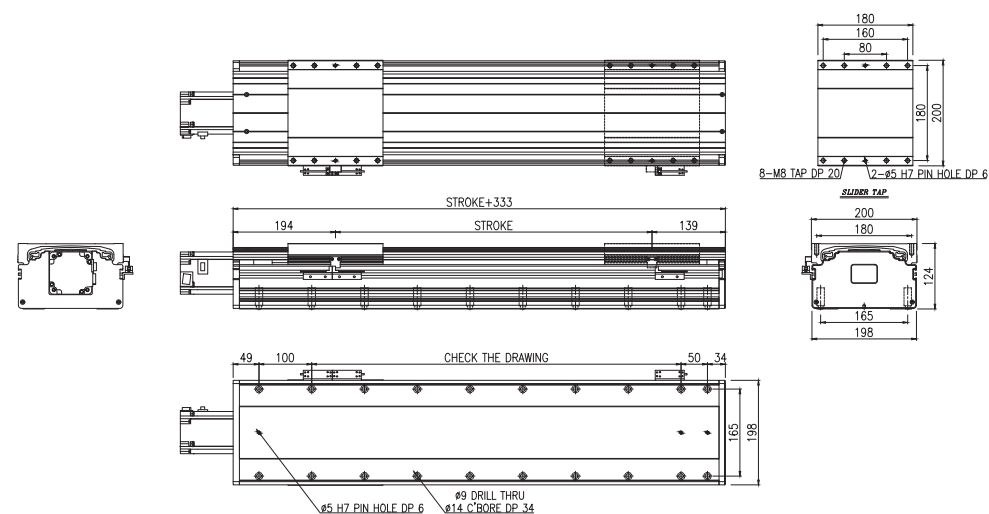

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
Max. Speed (mm/sec)	Lead 20mm	1000								910	750	620	530	450	390	340	300
	Lead 10mm	500								460	380	320	270	230			
Weight(kg)		24.25	26.82	29.39	31.96	34.54	37.11	39.68	42.25	44.83	47.40	49.97	52.54	55.12	57.69	60.26	62.83
Base & Slide		The weight of the model equipped with a brake is 1.0kg more heavier then this value. Aluminum Profile, 백색전작 유광															

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200


DS-200LT

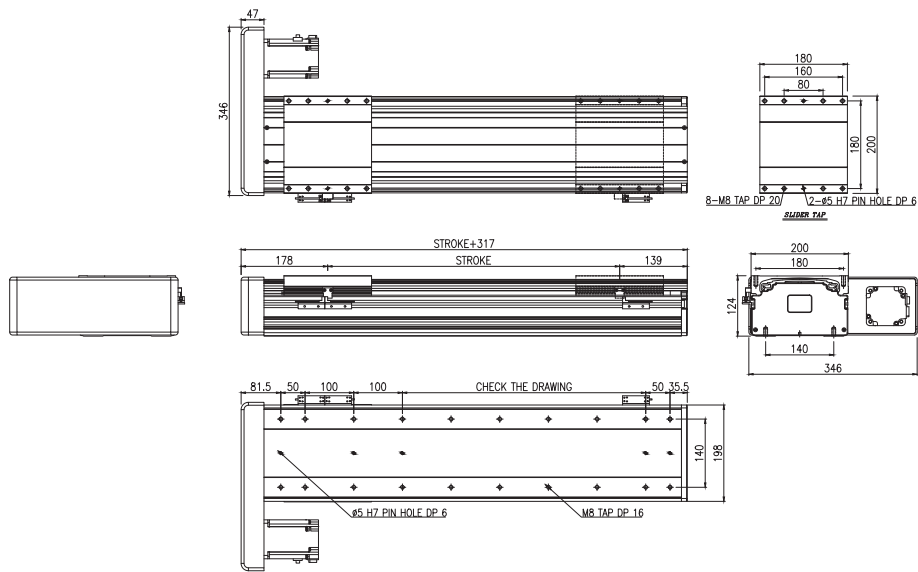

unit:mm

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
Max. Speed (mm/sec)	Lead 20mm	1000								910	750	620	530	450	390	340	300
	Lead 10mm	500								460	380	320	270	230			
Weight(kg)		23.20	25.77	28.34	30.91	33.49	36.06	38.63	41.20	43.78	46.35	48.92	51.50	54.07	55.64	59.21	61.79
Base & Slide		The weight of the model equipped with a brake is 1.0kg more heavier then this value. Aluminum Profile, 백색전작 유광															


DS-200LB

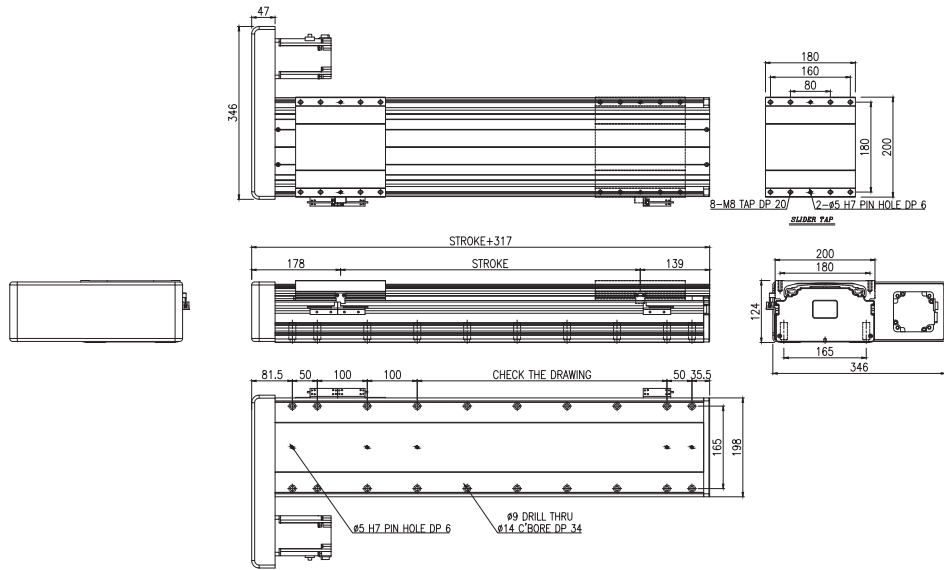

unit:mm

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
Max. Speed (mm/sec)	Lead 20mm	1000								910	750	620	530	450	390	340	300
	Lead 10mm	500								460	380	320	270	230			
Weight(kg)		23.20	25.77	28.34	30.91	33.49	36.06	38.63	41.20	43.78	46.35	48.92	51.50	54.07	55.64	59.21	61.79
Base & Slide		The weight of the model equipped with a brake is 1.0kg more heavier then this value. Aluminum Profile, 백색전작 유광															


DS-200RT

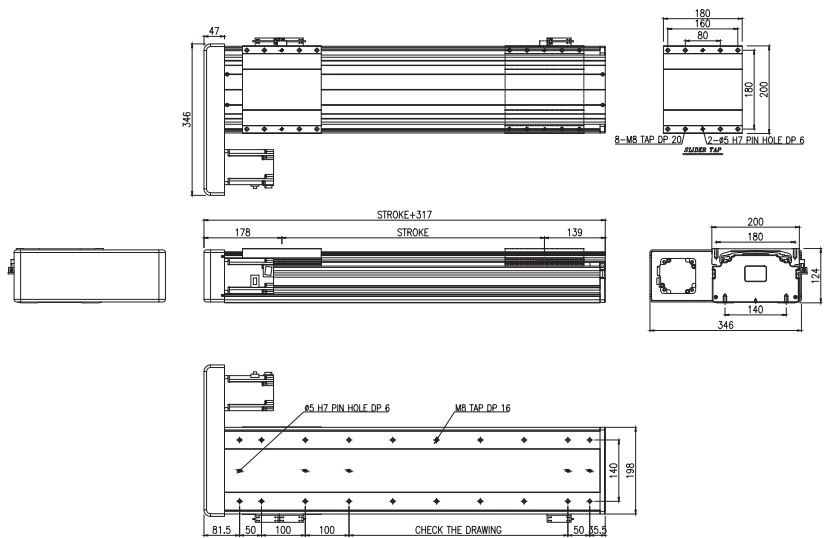

unit:mm

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
Max. Speed (mm/sec)	Lead 20mm	1000								910	750	620	530	450	390	340	300
	Lead 10mm	500								460	380	320	270	230			
Weight(kg)		23.20	25.77	28.34	30.91	33.49	36.06	38.63	41.20	43.78	46.35	48.92	51.50	54.07	55.64	59.21	61.79
Base & Slide		The weight of the model equipped with a brake is 1.0kg more heavier then this value. Aluminum Profile, 백색전작 유광															

DS-200RB

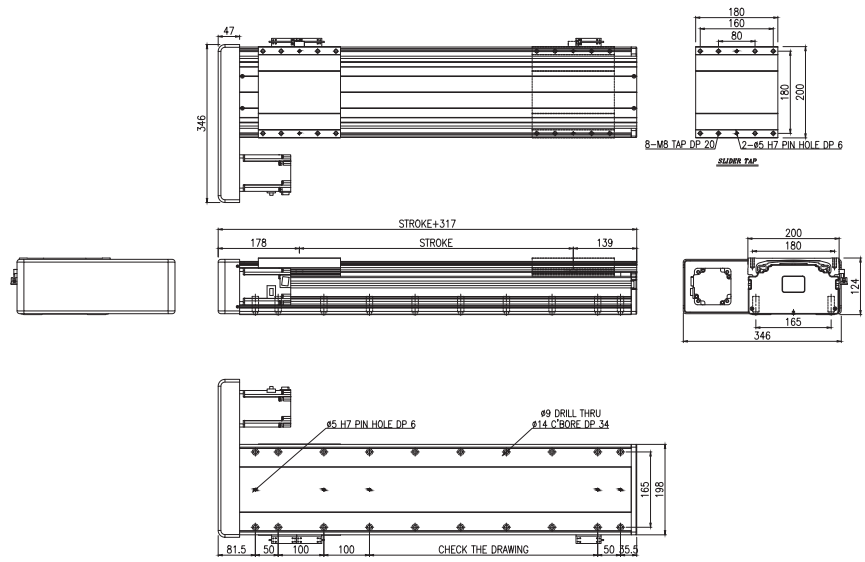

unit:mm

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
Max. Speed (mm/sec)	Lead 20mm	1000								910	750	620	530	450	390	340	300
	Lead 10mm	500								460	380	320	270	230			
Weight(kg)		23.20	25.77	28.34	30.91	33.49	36.06	38.63	41.20	43.78	46.35	48.92	51.50	54.07	55.64	59.21	61.79
Base & Slide		The weight of the model equipped with a brake is 1.0kg more heavier then this value. Aluminum Profile, 백색전작 유광															

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200


DS-200UT

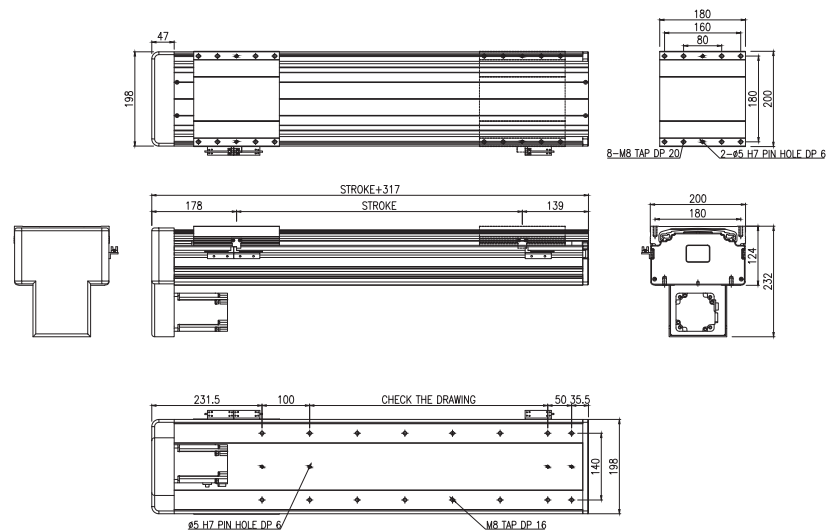

unit:mm

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
Max. Speed (mm/sec)	Lead 20mm									910	750	620	530	450	390	340	300
	Lead 10mm									460	380	320	270	230			
Weight(kg)		22.06	25.63	28.21	30.78	33.35	35.92	38.5	41.07	43.64	46.21	48.79	51.36	53.93	56.51	59.08	61.6
Base & Slide		The weight of the model equipped with a brake is 1.0kg more heavier then this value. Aluminum Profile, 백색전착 유광															

DS-200UB

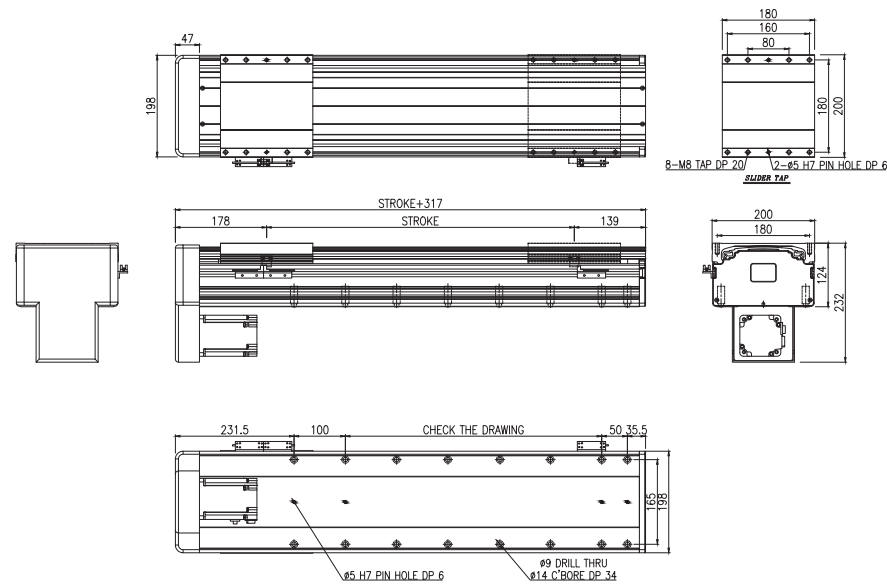

unit:mm

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
Max. Speed (mm/sec)	Lead 20mm	1000								910	750	620	530	450	390	340	300
	Lead 10mm	500								460	380	320	270	230			
Weight(kg)		22.06	25.63	28.21	30.78	33.35	35.92	38.5	41.07	43.64	46.21	48.79	51.36	53.93	56.51	59.08	61.6
Base & Slide		The weight of the model equipped with a brake is 1.0kg more heavier then this value. Aluminum Profile, 백색전착 유광															

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045


DS050

DS070

DS090

DS120

DS160

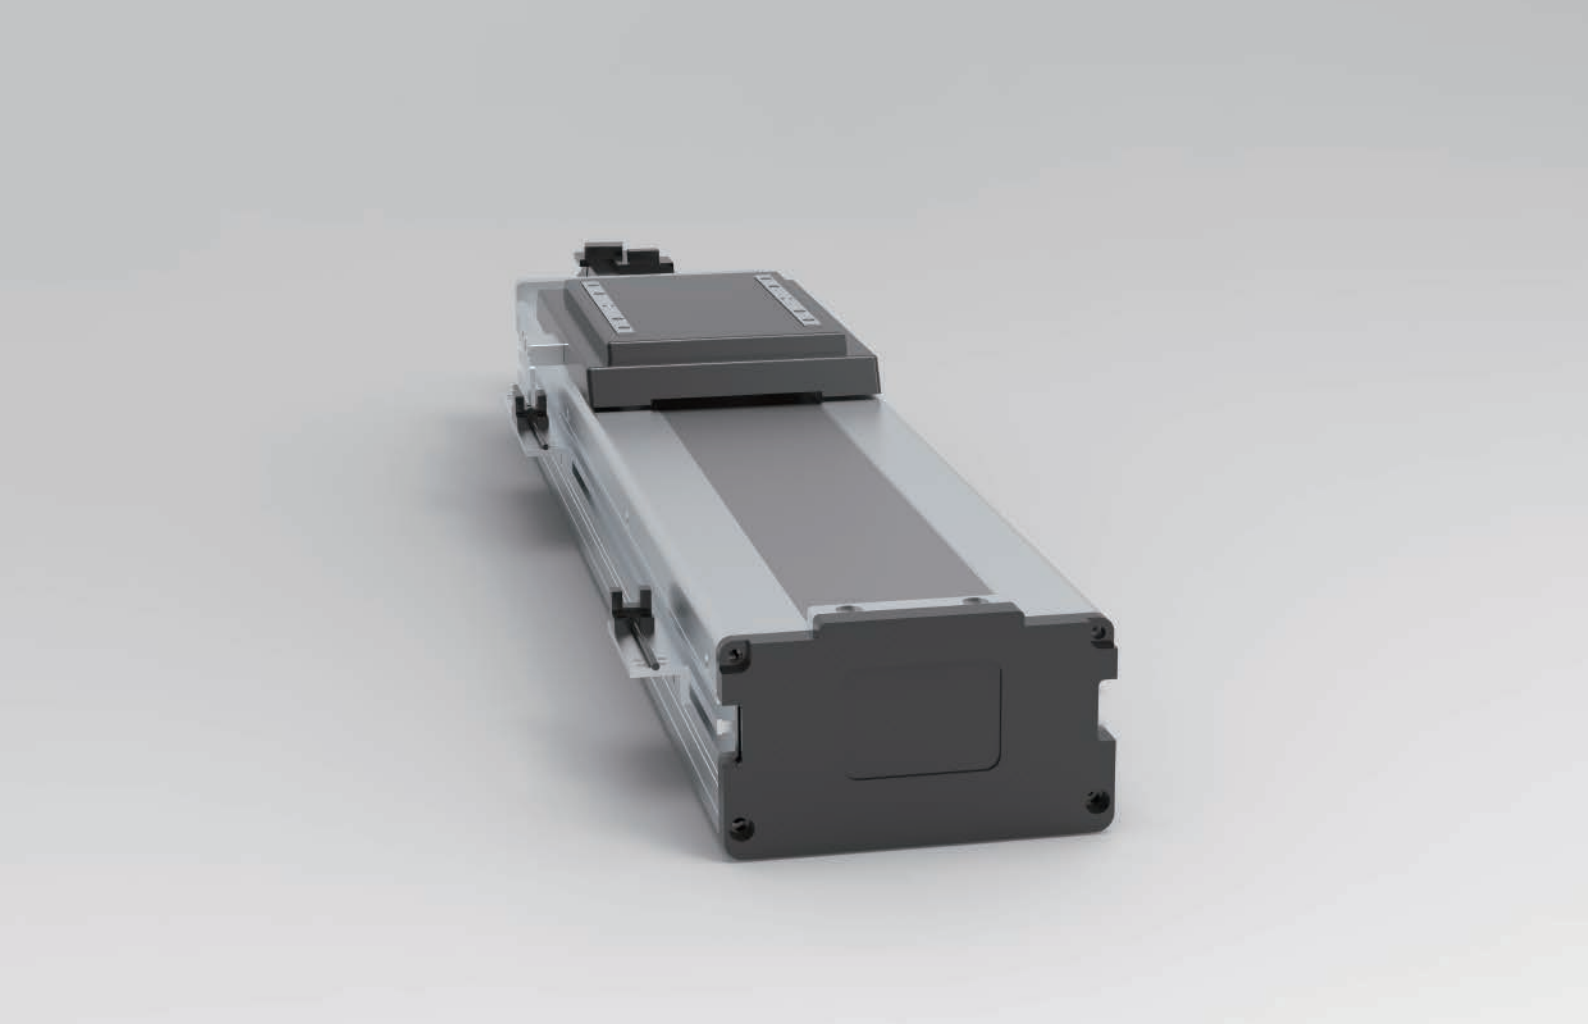


Sliding table series

DC series
screw drive

Cleaning environment application slide table			
DC070	Body width 74MM maximum stroke 800MM Maximum Load20KG	DC160	Body width 158MM maximum stroke 1400MM Maximum Load80KG
DC090	Body width 87MM maximum stroke 1000MM Maximum Load24KG	DC200	Body width 198MM maximum stroke 1400MM Maximum Load120KG
DC120	Body width 126MM maximum stroke 1200MM Maximum Load50KG		

⚙️ DC-070S-L10-100W-300ST-SP

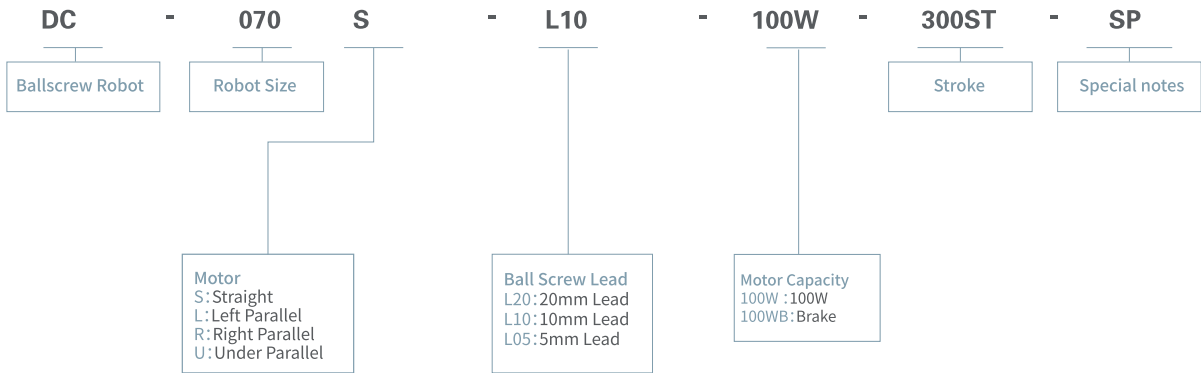


※ Specification

Servo Motor Output/rpm		100W/3000RPM
Drive mechanism		Ball screw(C7, 연삭),15 Lead 20MM(10MM)
Liner motion guide		One way,No.24, 2 block
Repeatability		±0.02MM
stroke(mm)		100-800MM
Payload(kg) Ta = 0.2s	Lead 20	H:3
		V:2
	Lead 10	H:20
		V:5
Moment of inertia of area		Ix=2.97E+05, Iy=7.26E+05


※ product




Straight joint

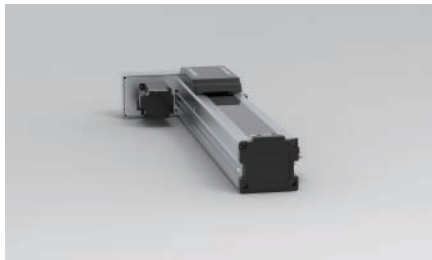

Right Parallel joint

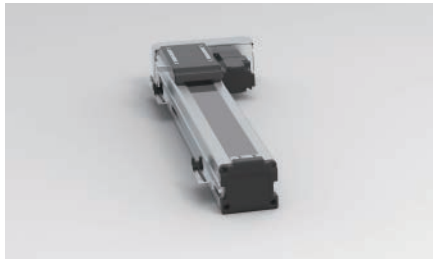


Left Parallel joint

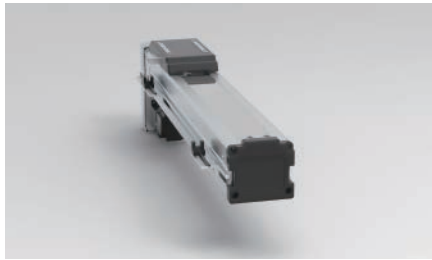


Under Parallel joint

DC-070S

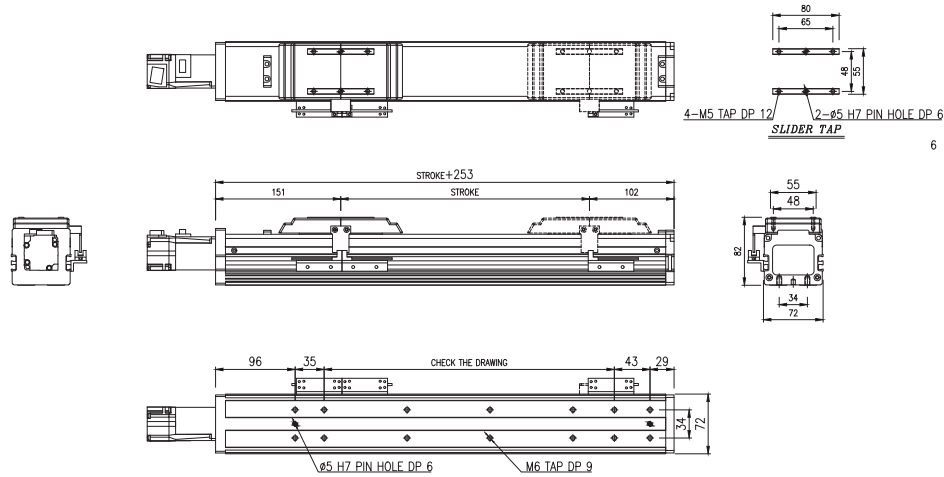

Stroke(mm)		100	200	300	400	500	600	700	800
Max. Speed (mm/sec)	Lead 20mm	1000							800
	Lead 10mm	500							400
Weight(kg)		5.16	5.78	6.41	7.03	7.66	8.28	8.90	9.53
Base & Slide		The weight of the model equipped with a brake is 0.2kg more heavier then this value. Aluminum Profile, 백색전작 유광							


DC-070L

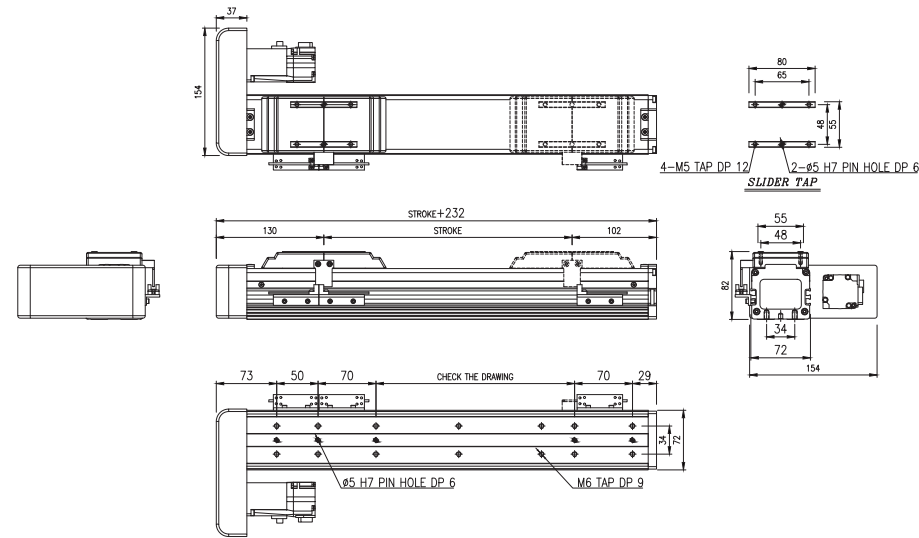

Stroke(mm)		100	200	300	400	500	600	700	800
Max. Speed (mm/sec)	Lead 20mm	1000							800
	Lead 10mm	500							400
Weight(kg)		5.67	5.67	6.93	7.56	8.9	8.82	9.45	10.08
Base & Slide		The weight of the model equipped with a brake is 0.2kg more heavier then this value. Aluminum Profile, 백색전작 유광							

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.


DC-070R

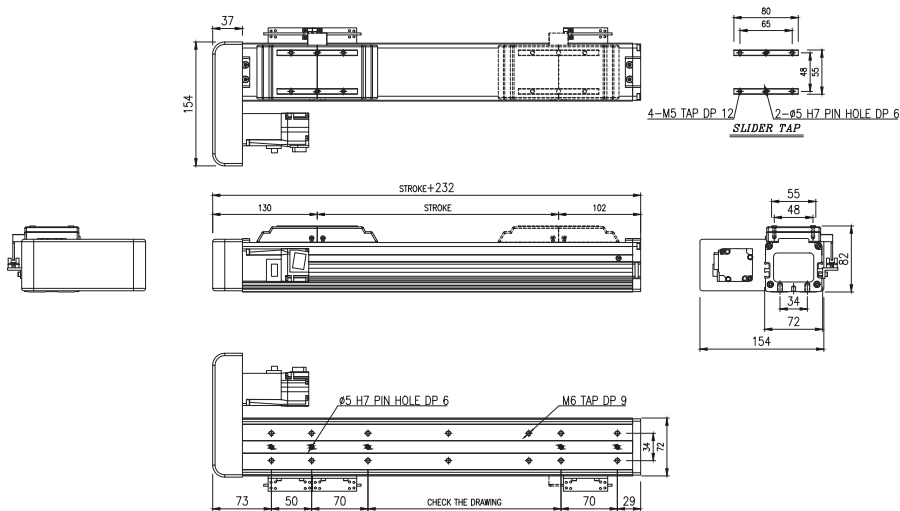

Stroke(mm)		100	200	300	400	500	600	700	800
Max. Speed (mm/sec)	Lead 20mm	1000							800
	Lead 10mm	500							400
Weight(kg)		5.67	6.30	6.93	7.56	8.19	8.82	9.45	10.08
Base & Slide		The weight of the model equipped with a brake is 0.2kg more heavier then this value. Aluminum Profile, 백색진작 유광							

unit:mm

DC-070U

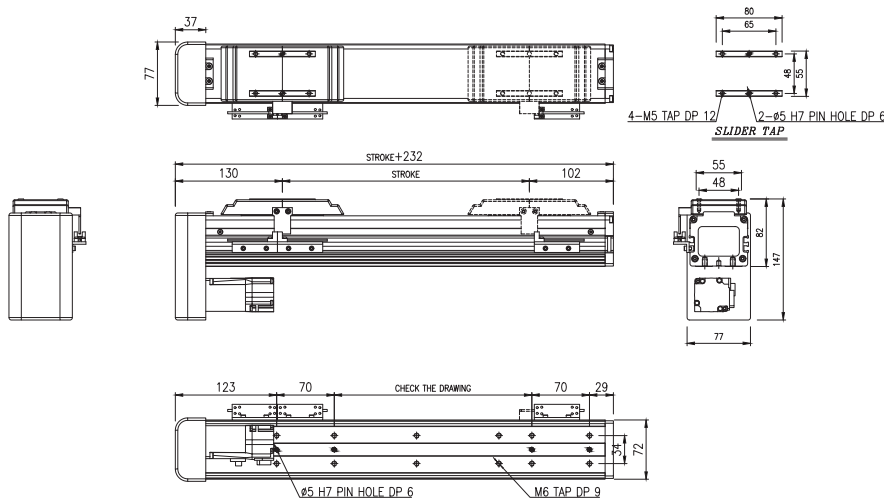

Stroke(mm)		100	200	300	400	500	600	700	800
Max. Speed (mm/sec)	Lead 20mm	1000							800
	Lead 10mm	500							400
Weight(kg)		5.67	6.30	6.93	7.56	8.9	8.82	9.45	10.08
Base & Slide		The weight of the model equipped with a brake is 0.2kg more heavier then this value. Aluminum Profile, 백색진작 유광							

unit:mm

DK

DTH

DS

DC

DB

DE

DC070


DC090

DC120

DS160

DS200

⚙️ DC-090S-L10-100W-300ST-SP

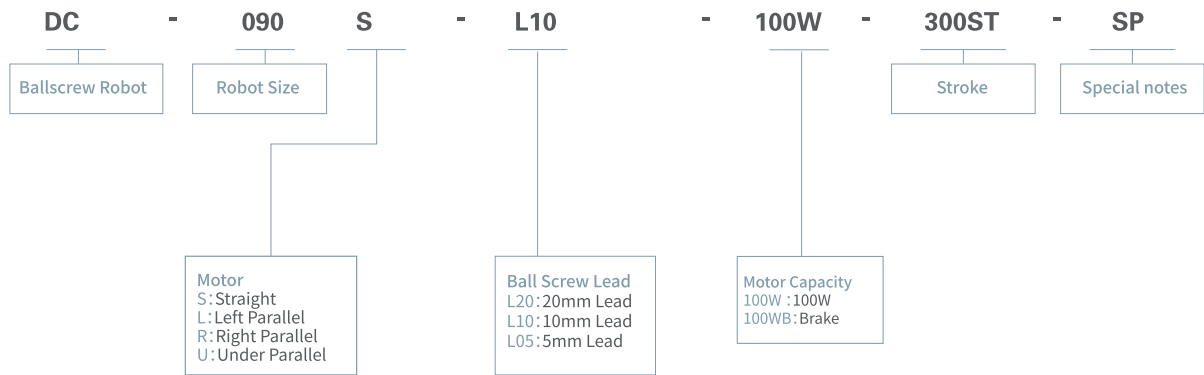


※ Specification

Servo Motor Output/rpm		100W/3000RPM
Drive mechanism		Ball screw(C7, 연삭),15 Lead 20MM(10MM)
Liner motion guide		One way,No.42, 2 block
Repeatability		±0.02MM
stroke(mm)		100-1000MM
Payload(kg) Ta = 0.2s	Lead 20	H:4
		V:3
	Lead 10	H:24
		V:7
Moment of inertia of area		Ix=5.02E+05, Iy=1.43E+06


※ product




Straight joint

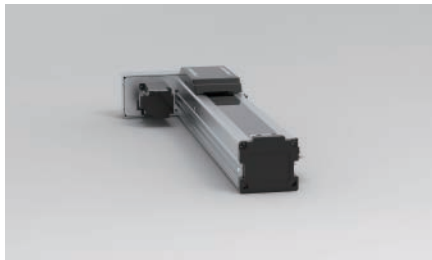

Right Parallel joint

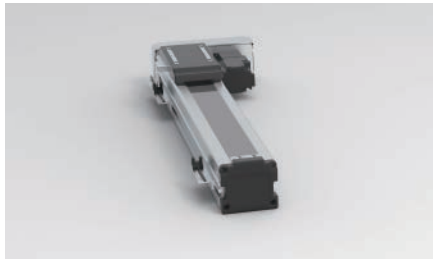


Left Parallel joint

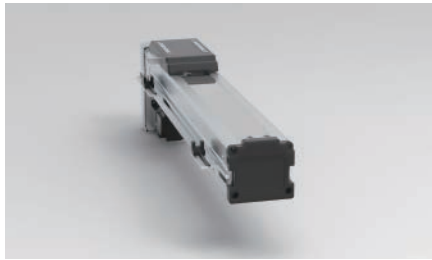


Under Parallel joint

DC-090S-10

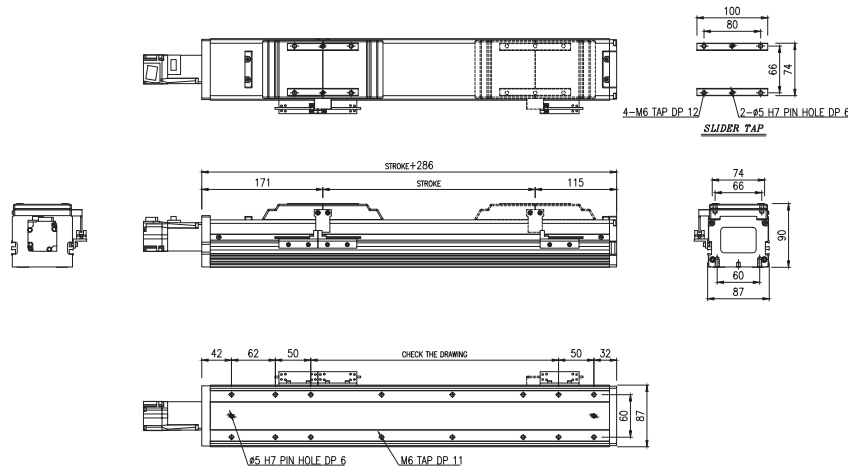

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm							760	620	500
	Lead 10mm							380	310	250
Weight(kg)	7.01	7.90	8.79	9.69	10.58	11.47	12.36	13.25	14.14	15.03
Base & Slide	The weight of the model equipped with a brake is 0.4kg more heavier then this value. Aluminum Profile, 백색전착 유광									


DC-090L

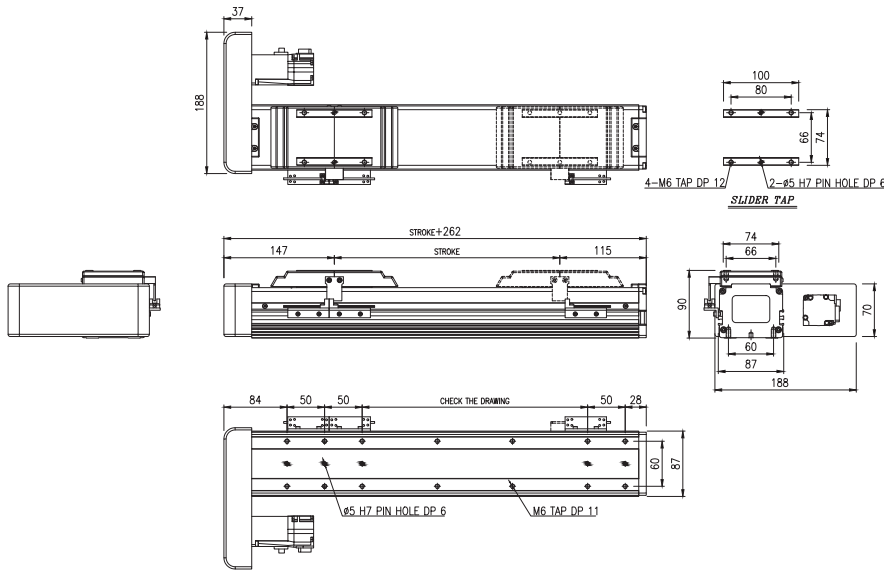

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm							760	620	500
	Lead 10mm							380	310	250
Weight(kg)	7.27	8.16	9.05	9.94	10.83	11.72	12.61	13.50	14.39	15.28
Base & Slide	The weight of the model equipped with a brake is 0.4kg more heavier then this value. Aluminum Profile, 백색전착 유광									

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.


DC-090R

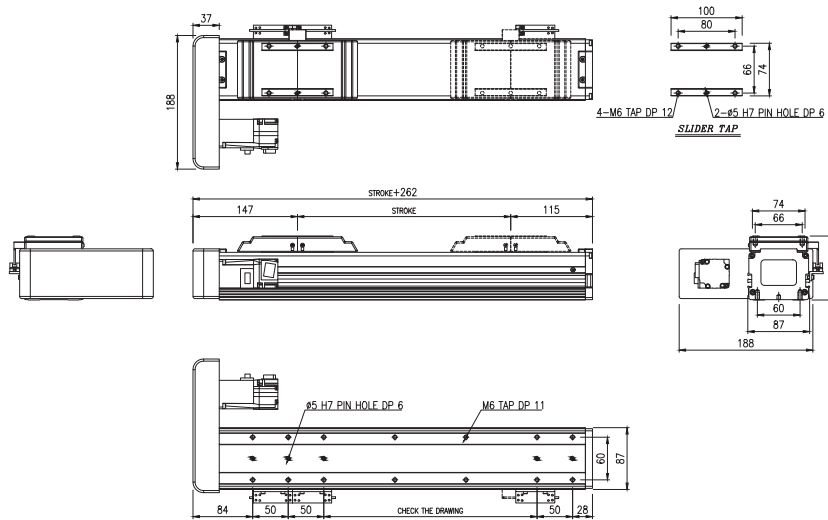

unit:mm

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm	1000							760	620	500
	Lead 10mm	500							380	310	250
Weight(kg)		7.27	8.16	9.05	9.94	10.83	11.72	12.61	13.50	14.39	15.28
Base & Slide		The weight of the model equipped with a brake is 0.4kg more heavier then this value. Aluminum Profile, 백색진작 유광									

DC-090U

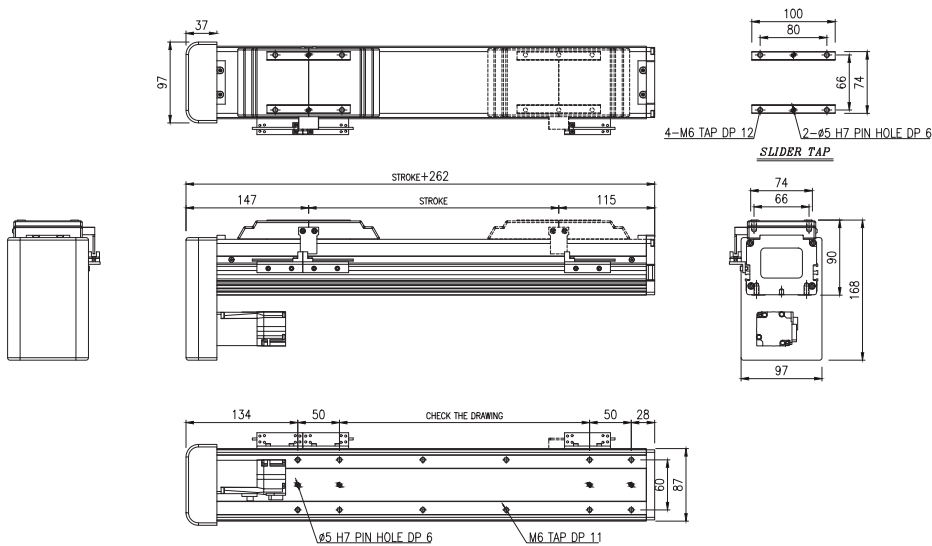

unit:mm

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm	1000							760	620	500
	Lead 10mm	500							380	310	250
Weight(kg)		7.27	8.16	9.05	9.94	10.83	11.72	12.61	13.50	14.39	15.28
Base & Slide		The weight of the model equipped with a brake is 0.4kg more heavier then this value. Aluminum Profile, 백색진작 유광									

DK

DTH

DS

DC

DB

DE

DC070


DC090

DC120

DS160

DS200

⚙️ DC-090S-L20-200W-300ST-SP

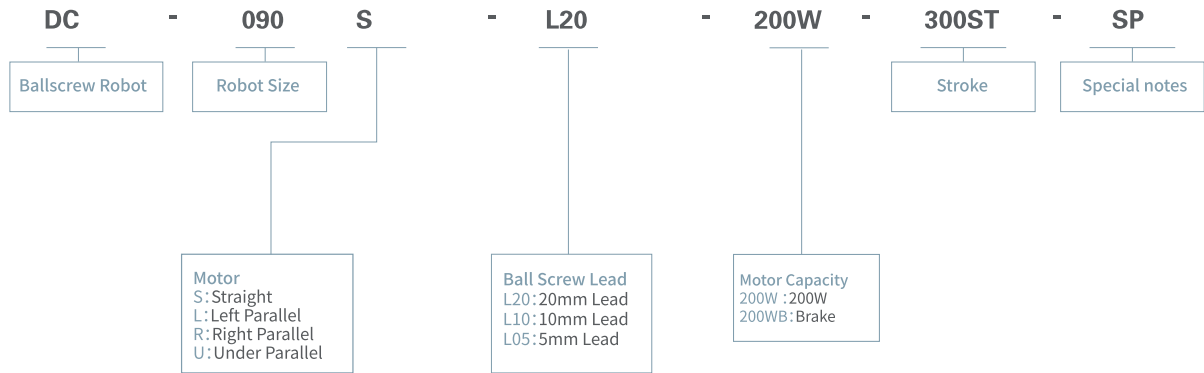


※ Specification

Servo Motor Output/rpm		200W/3000RPM
Drive mechanism		Ball screw(C7, 연삭),15 Lead 20MM(10MM)
Liner motion guide		One way,No.42, 2 block
Repeatability		±0.02MM
stroke(mm)		100-1000MM
Payload(kg) Ta = 0.2s	Lead 20	H:28
		V:8
	Lead 10	H:30
		V:16
Moment of inertia of area		Ix=5.02E+05, Iy=1.43E+06


※ product




Straight joint

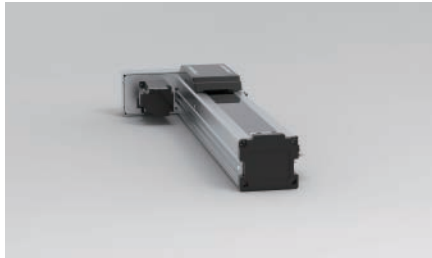

Right Parallel joint

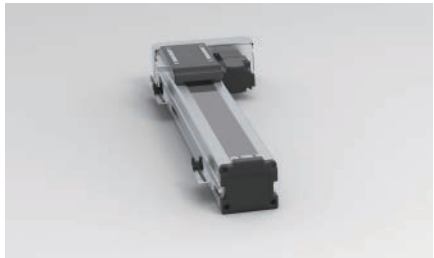


Left Parallel joint

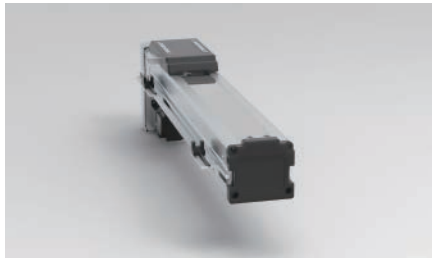


Under Parallel joint

DC-090S

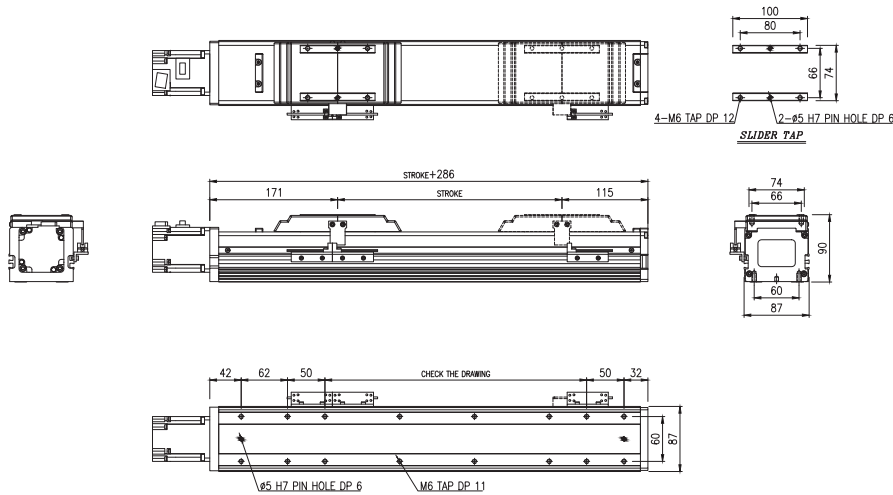

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm							760	620	500
	Lead 10mm							380	310	250
Weight(kg)	7.87	8.76	9.65	10.55	11.44	12.33	13.22	14.11	15.00	15.89
Base & Slide	The weight of the model equipped with a brake is 0.4kg more heavier then this value. Aluminum Profile, 백색전착 유광									

DC-090L

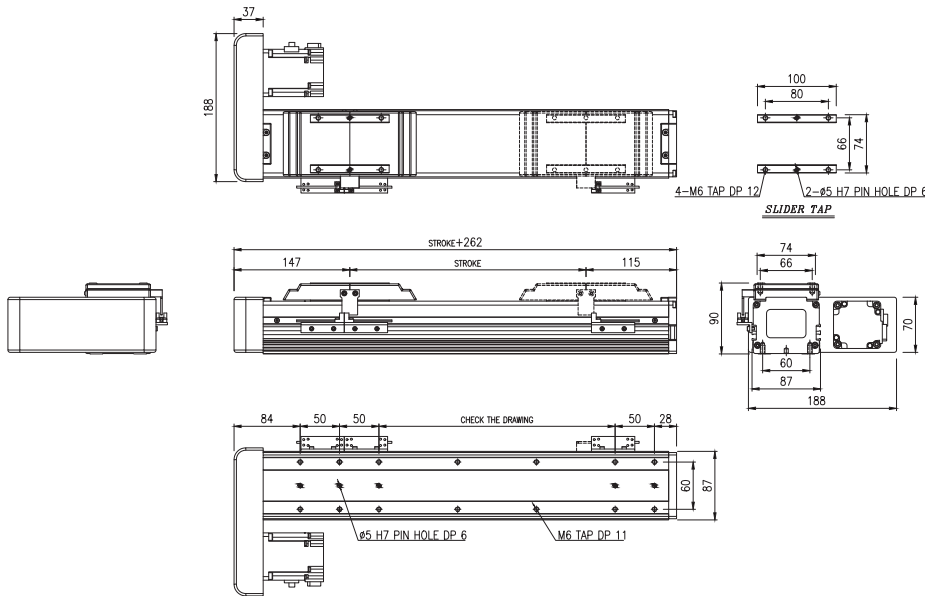

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm							760	620	500
	Lead 10mm							380	310	250
Weight(kg)	7.27	8.16	9.05	9.94	10.83	11.72	12.61	13.50	14.39	15.28
Base & Slide	The weight of the model equipped with a brake is 0.4kg more heavier then this value. Aluminum Profile, 백색전착 유광									

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DC070


DC090

DC120

DS160

DS200


DC-090R

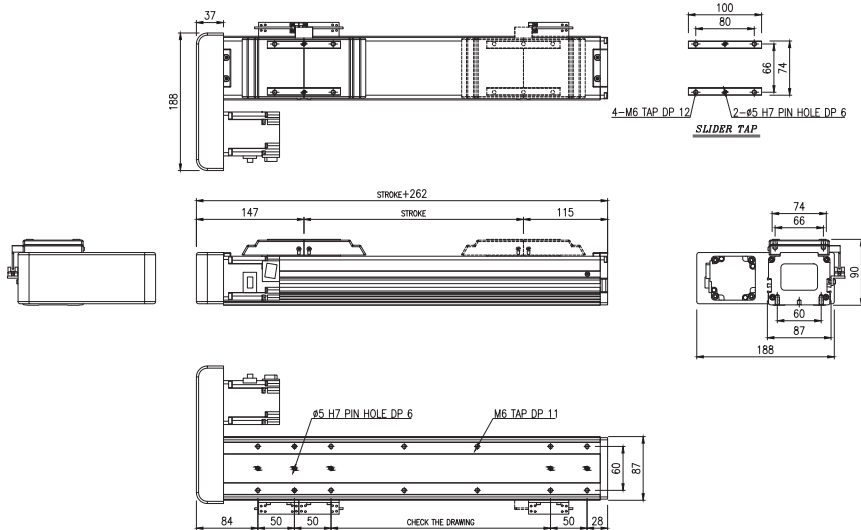

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm	1000							760	620	500
	Lead 10mm	500							380	310	250
Weight(kg)		7.27	8.16	9.05	9.94	10.83	11.72	12.61	13.50	14.39	15.28
Base & Slide		The weight of the model equipped with a brake is 0.4kg more heavier then this value. Aluminum Profile, 백색진작 유광									

unit:mm

DC-090U

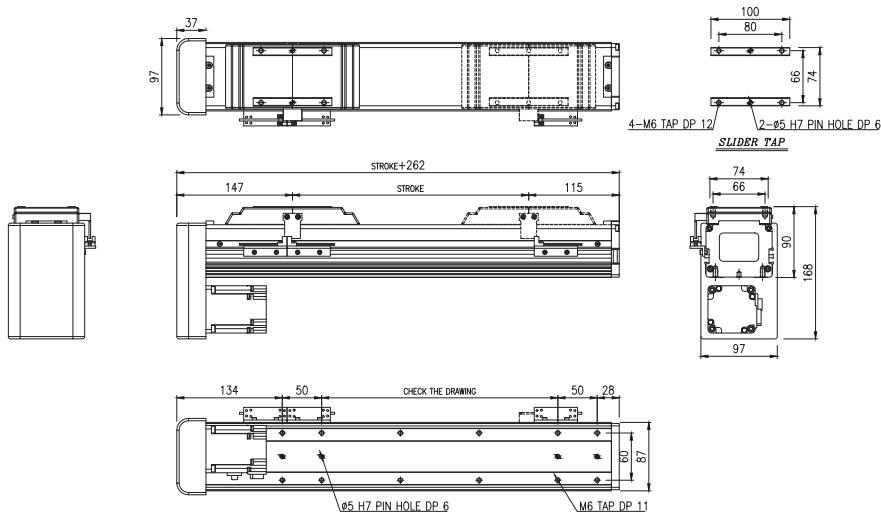

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm	1000							760	620	500
	Lead 10mm	500							380	310	250
Weight(kg)		7.27	8.16	9.05	9.94	10.83	11.72	12.61	13.50	14.39	15.28
Base & Slide		The weight of the model equipped with a brake is 0.4kg more heavier then this value. Aluminum Profile, 백색진작 유광									

unit:mm

DK

DTH

DS

DC

DB

DE

DC070


DC090

DC120

DS160

DS200


⚙️ DC-120S-L10-200W-300ST-SP

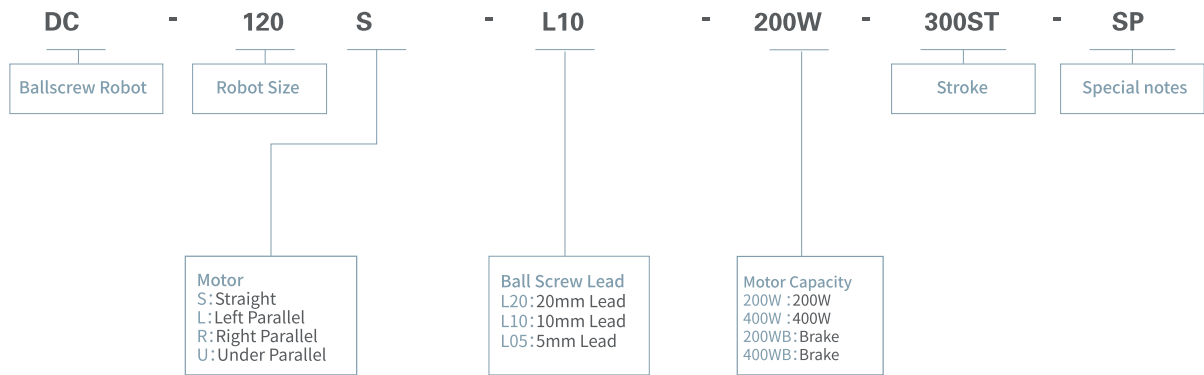


※ Specification

Drive mechanism		Ball screw (C7, 연삭), Ø15 Lead 20MM (10MM)	
Liner motion guide		Two way, 15w, 2 block	
Repeatability		±0.02MM	
stroke(mm)		100-1200MM	
Servo Motor Output/rpm		200W/3000RPM	400W/3000RPM
Payload(kg) Ta = 0.2s	Lead 10	H: 30	H: 40
		V: 8	V: 18
	Lead 20	H: 50	H: 50
		V: 10	V: 18
Moment of inertia of area		Ix = 4.86E+05, Iy = 4.45E +06	

※ product

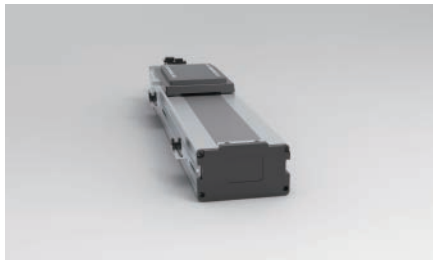


Straight joint

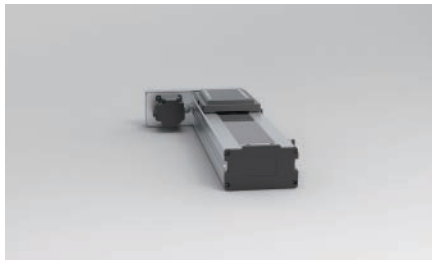

Right Parallel joint




Left Parallel joint

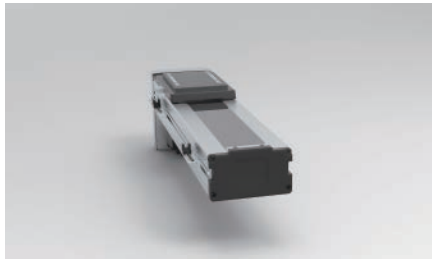


Under Parallel joint

DC-120S

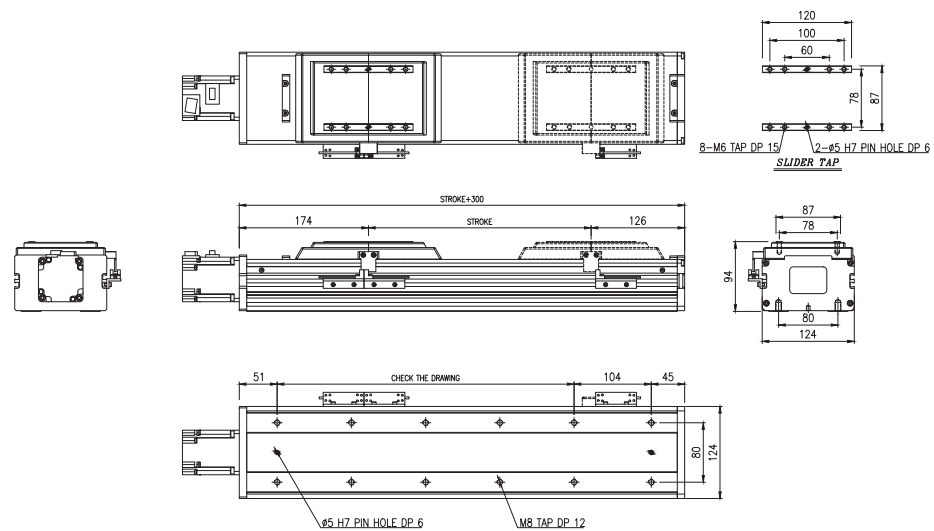

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200
Max. Speed (mm/sec)	Lead 20mm	1000							760	620	500	420	360
	Lead 10mm	500							380	310	250	210	180
Weight(kg)		10.94	12.70	13.2	14.34	15.47	16.61	17.74	18.87	20.01	21.14	22.28	23.41
Base & Slide		The weight of the model equipped with a brake is 0.4kg more heavier then this value. Aluminum Profile, 백색전작 유광											

DC-120L

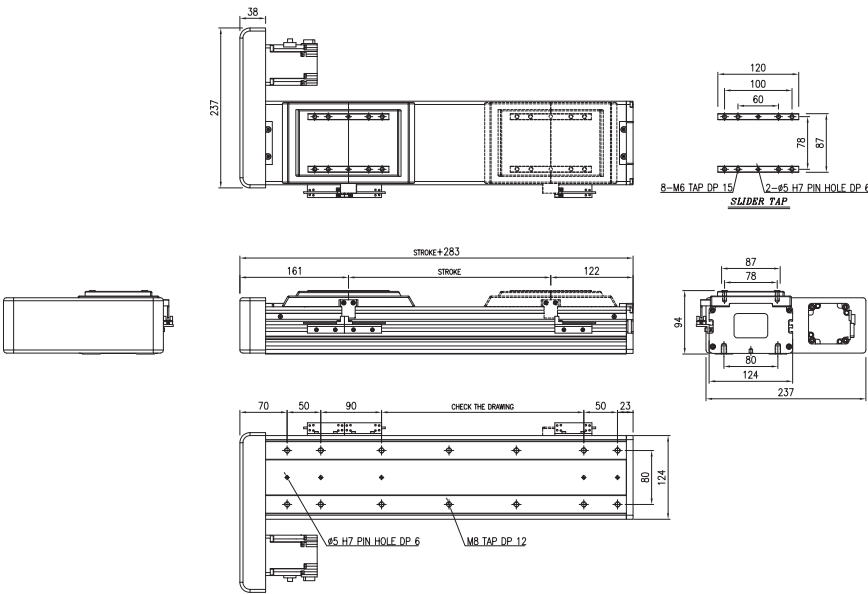

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200
Max. Speed (mm/sec)	Lead 20mm	1000							760	620	500	420	360
	Lead 10mm	500							380	310	250	210	180
Weight(kg)		11.29	12.42	13.55	14.68	15.81	16.94	18.07	19.20	20.33	21.46	22.59	23.72
Base & Slide		The weight of the model equipped with a brake is 0.4kg more heavier then this value. Aluminum Profile, 백색전작 유광											

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DC070


DC090

DC120

DS160

DS200


DC-120R

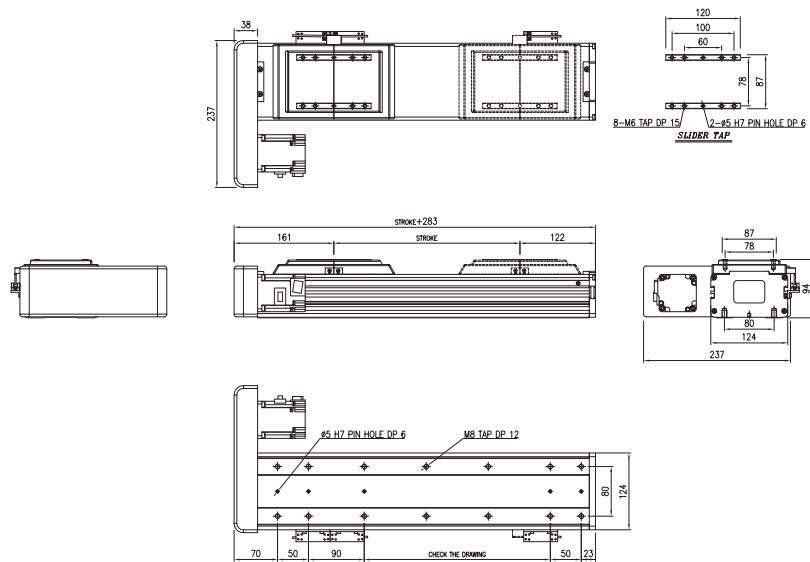

unit:mm

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200
Max. Speed (mm/sec)	Lead 20mm	1000							760	620	500	420	360
	Lead 10mm	500							380	310	250	210	180
Weight(kg)		11.29	12.42	13.55	14.68	15.81	16.94	18.07	19.20	20.33	21.46	22.59	23.72
Base & Slide		The weight of the model equipped with a brake is 0.4kg more heavier then this value. Aluminum Profile, 백색진작 유광											

DC-120U

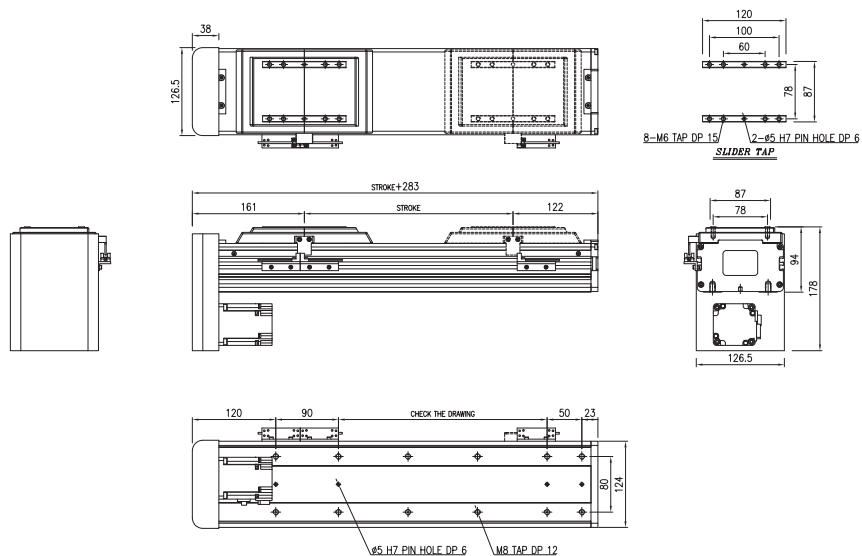

unit:mm

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200
Max. Speed (mm/sec)	Lead 20mm	1000							760	620	500	420	360
	Lead 10mm	500							380	310	250	210	180
Weight(kg)		11.29	12.42	13.55	14.68	15.81	16.94	18.07	19.20	20.33	21.46	22.59	23.72
Base & Slide		The weight of the model equipped with a brake is 0.4kg more heavier then this value. Aluminum Profile, 백색진작 유광											

DK

DTH

DS

DC

DB

DE

DC070


DC090

DC120

DS160

DS200

⚙️ DC-160S-L10-400W-300ST-SP

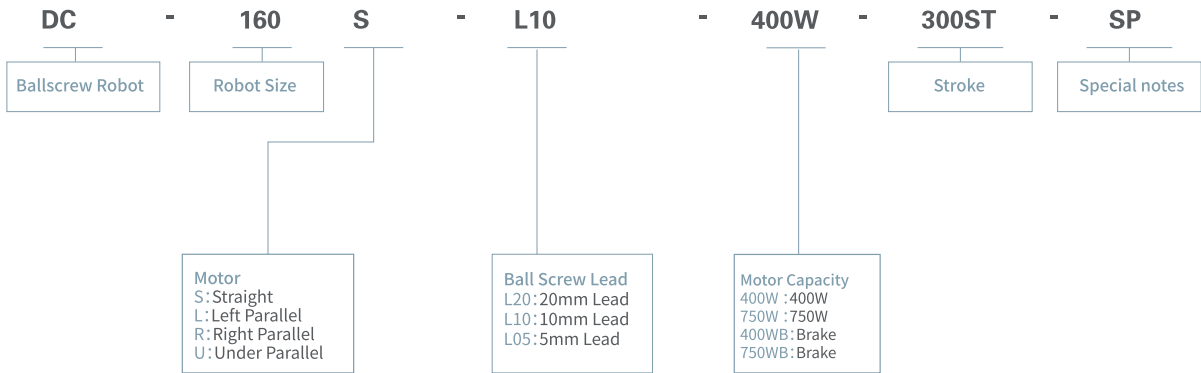


※ Specification

Drive mechanism		Ball screw(C7, 연삭), Ø20 Lead 20MM(10MM)	
Liner motion guide		Two way,No.20w, 2 block	
Repeatability		±0.02MM	
stroke(mm)		100-1400MM	
Servo Motor Output/rpm		400W/3000RPM	750W/3000RPM
Payload(kg) Ta = 0.2s	Lead 20	H: 2	H:60
		V: 1.5	V:24
	Lead 10	H: 12	H:80
		V: 3.5	V:40
Moment of inertia of area		Ix=5.57E+04, Iy=1.49E+05	


※ product




Straight joint

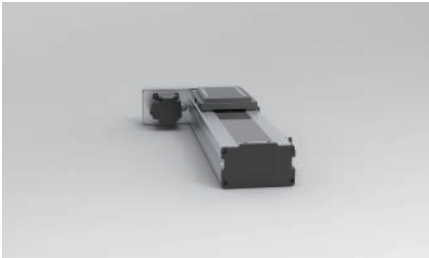

Right Parallel joint

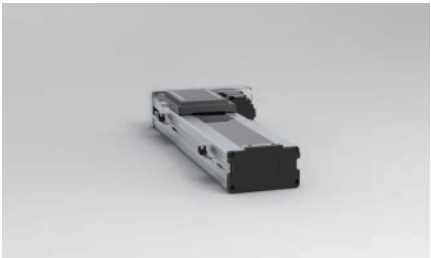


Left Parallel joint

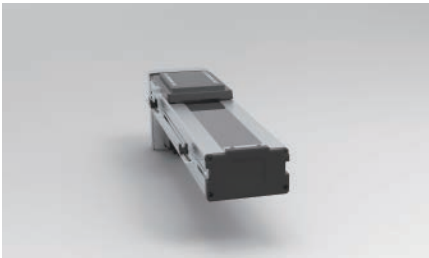


Under Parallel joint

DC-160S

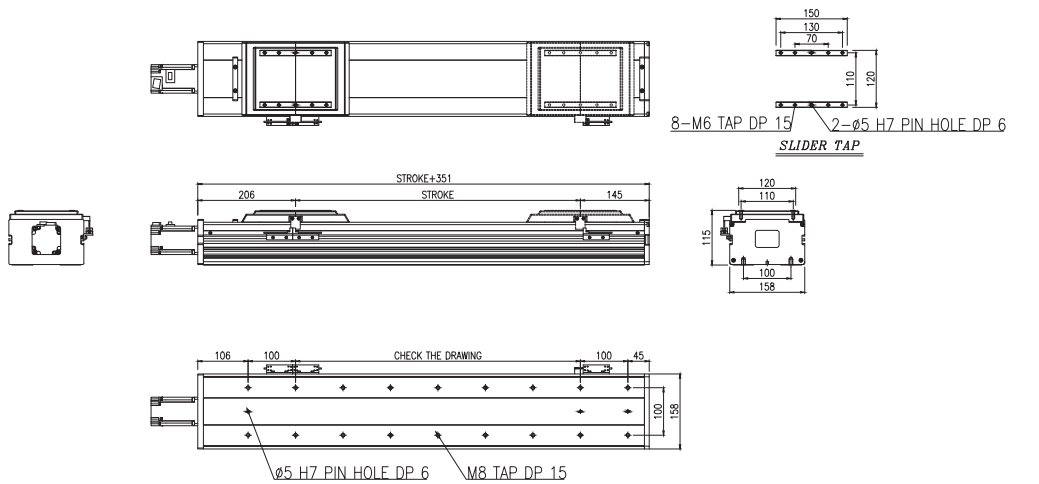

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400
Max. Speed (mm/sec)	Lead 20mm	1000									840	700	580	480	360
	Lead 10mm	500									420	350	290	240	180
Weight(kg)		18.35	19.82	21.29	22.76	24.23	25.7	27.17	28.64	30.11	31.58	32.05	34.52	35.09	37.46
Base & Slide		The weight of the model equipped with a brake is 1kg more heavier then this value. Aluminum Profile, 백색전작 유광													


DC-160L

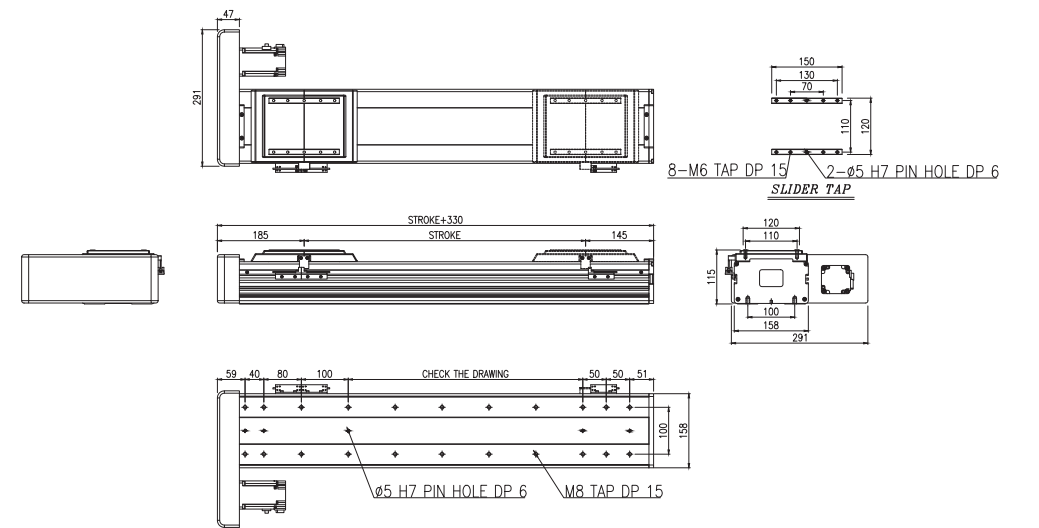

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400
Max. Speed (mm/sec)	Lead 20mm	1000									840	700	580	480	360
	Lead 10mm	500									420	350	290	240	180
Weight(kg)		18.24	19.72	21.2	22.68	24.16	25.64	27.12	28.60	30.08	31.56	32.04	34.52	36	37.48
Base & Slide		The weight of the model equipped with a brake is 1kg more heavier then this value. Aluminum Profile, 백색전작 유광													

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.


DC-160R

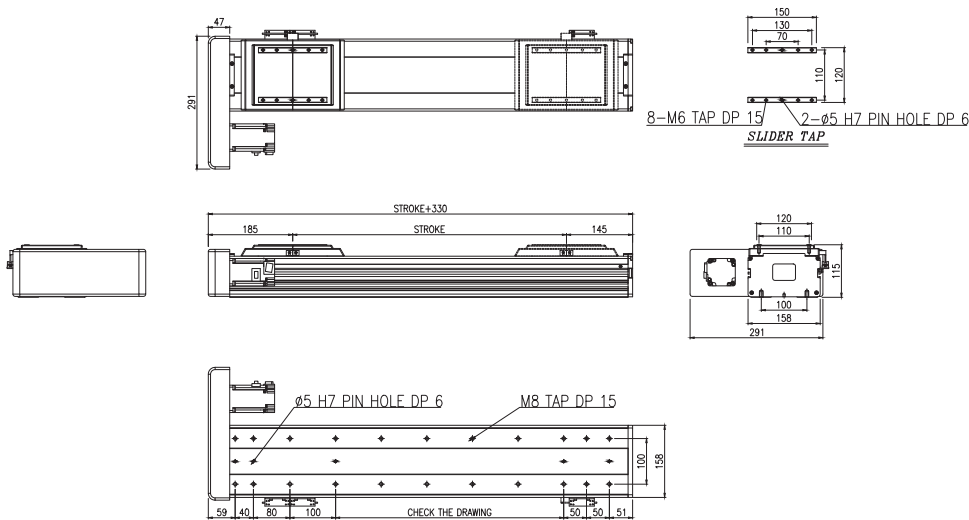

unit:mm

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400
Max. Speed (mm/sec)	Lead 20mm	1000								840	700	580	480	420	360
	Lead 10mm	500								420	350	290	240	210	180
Weight(kg)		18.24	19.72	21.2	22.68	24.16	25.64	27.12	28.60	30.08	31.56	32.04	34.52	36	37.48
Base & Slide		The weight of the model equipped with a brake is 1kg more heavier then this value. Aluminum Profile, 백색진작 유광													

DC-160U

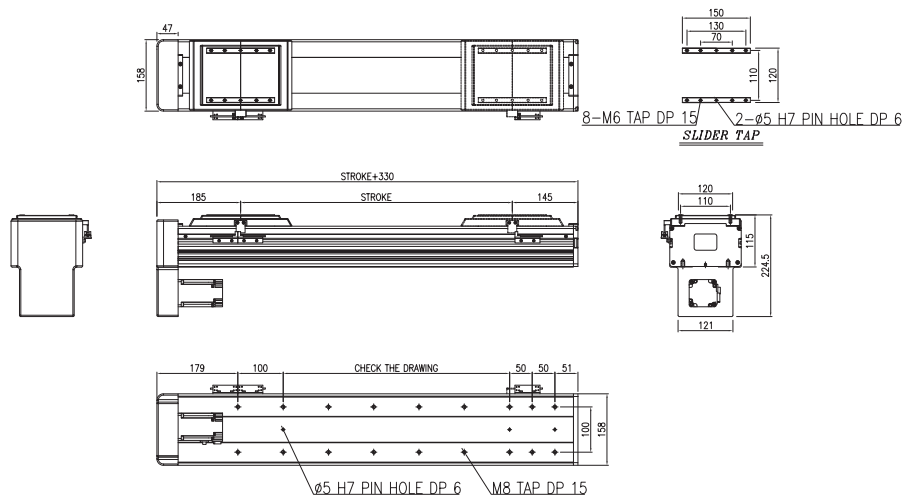

unit:mm

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400
Max. Speed (mm/sec)	Lead 20mm	1000								840	700	580	480	420	360
	Lead 10mm	500								420	350	290	240	210	180
Weight(kg)		18.24	19.72	21.2	22.68	24.16	25.64	27.12	28.60	30.08	31.56	32.04	34.52	36	37.48
Base & Slide		The weight of the model equipped with a brake is 1kg more heavier then this value. Aluminum Profile, 백색진작 유광													

DK

DTH

DS

DC

DB

DE

DC070


DC090

DC120

DS160

DS200


⚙️ DC-200S-L10-750W-300ST-SP

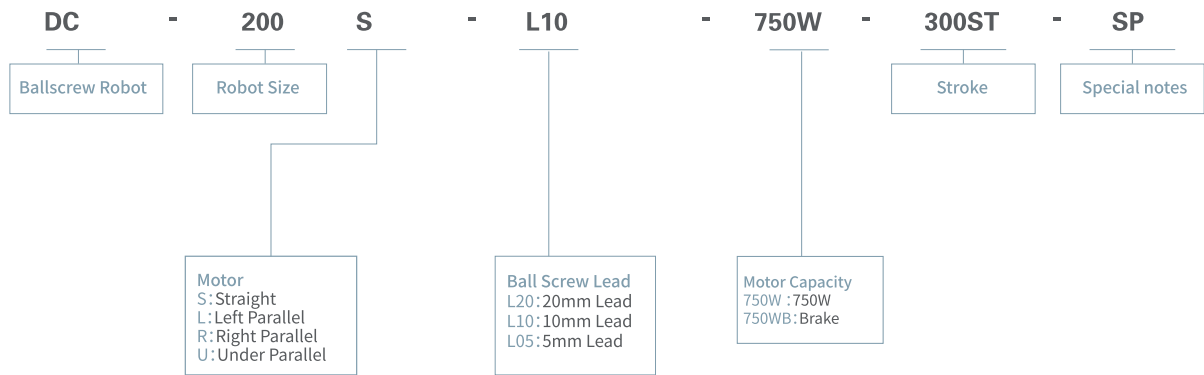


※ Specification

Servo Motor Output/rpm	750W/3000RPM	
Drive mechanism	Ball screw(C7, 연삭), 20 Lead 20MM(10MM)	
Liner motion guide	Two way,No.25w, 2 block	
Repeatability	±0.02MM	
stroke(mm)	100-1400MM	
Payload(kg) Ta = 0.2s	Lead 20	H:100
		V:30
	Lead 10	H:120
		V:55
Moment of inertia of area	Ix=2.39E+06, Iy=2.66E+07	

※ product

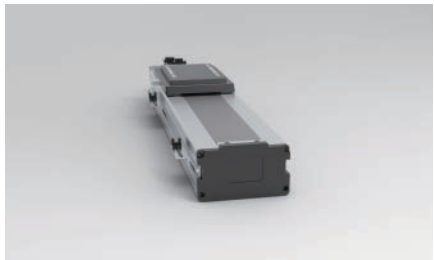


Straight joint

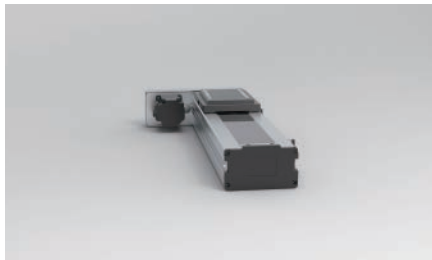

Right Parallel joint




Left Parallel joint

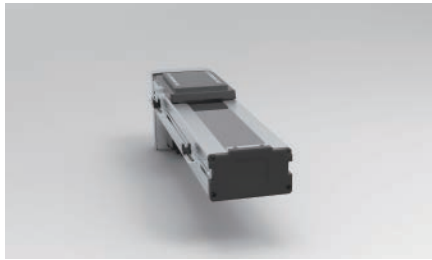


Under Parallel joint

DC-200S

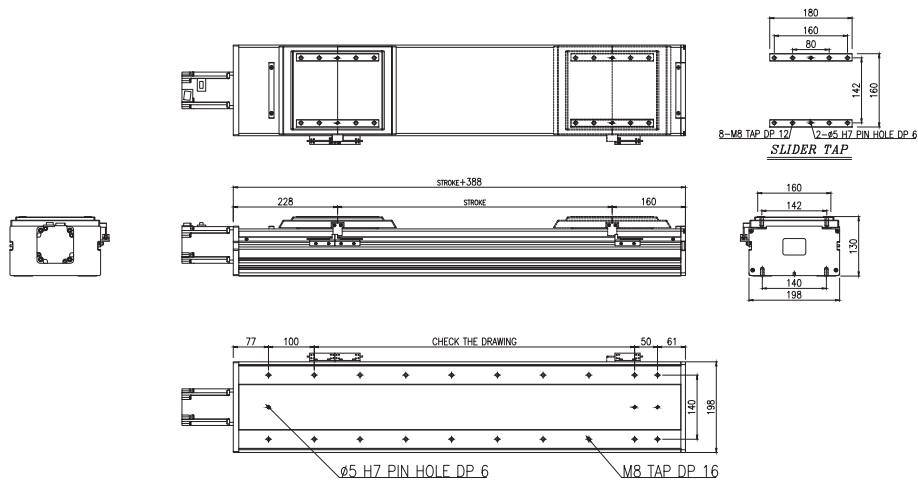

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400
Max. Speed (mm/sec)	Lead 20mm	1000									840	700	580	480	360
	Lead 10mm	500									420	350	290	240	180
Weight(kg)		26.59	28.77	30.95	33.13	35.31	37.49	39.07	41.85	44.03	46.21	48.39	50.57	52.75	54.93
Base & Slide		The weight of the model equipped with a brake is 1kg more heavier then this value. Aluminum Profile, 백색전작 유광													


DC-200L

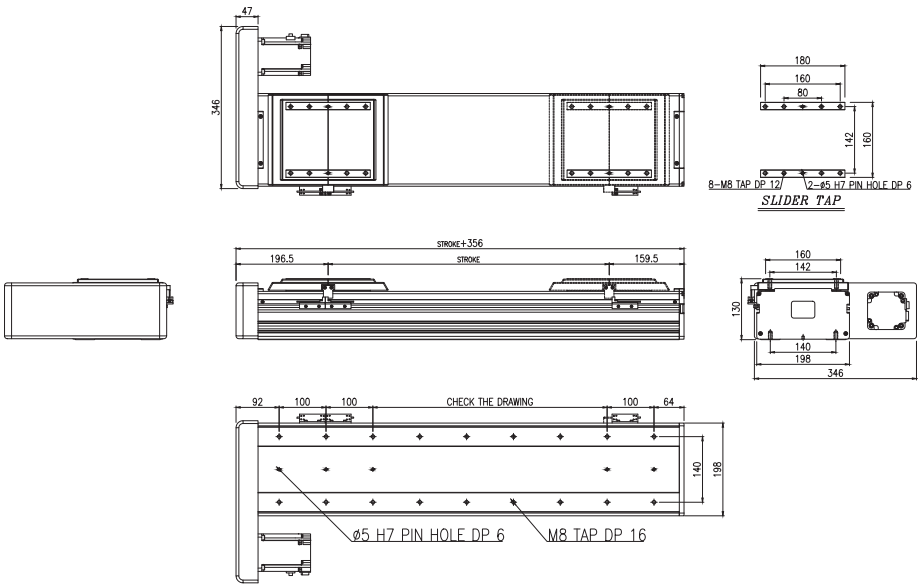

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400
Max. Speed (mm/sec)	Lead 20mm	1000									840	700	580	420	360
	Lead 10mm	500									420	350	290	210	180
Weight(kg)		26.65	27.83	30.01	32.19	34.37	36.55	38.73	40.91	43.09	45.27	47.45	49.63	51.81	53.99
Base & Slide		The weight of the model equipped with a brake is 1kg more heavier then this value. Aluminum Profile, 백색전작 유광													

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.


DC-200R

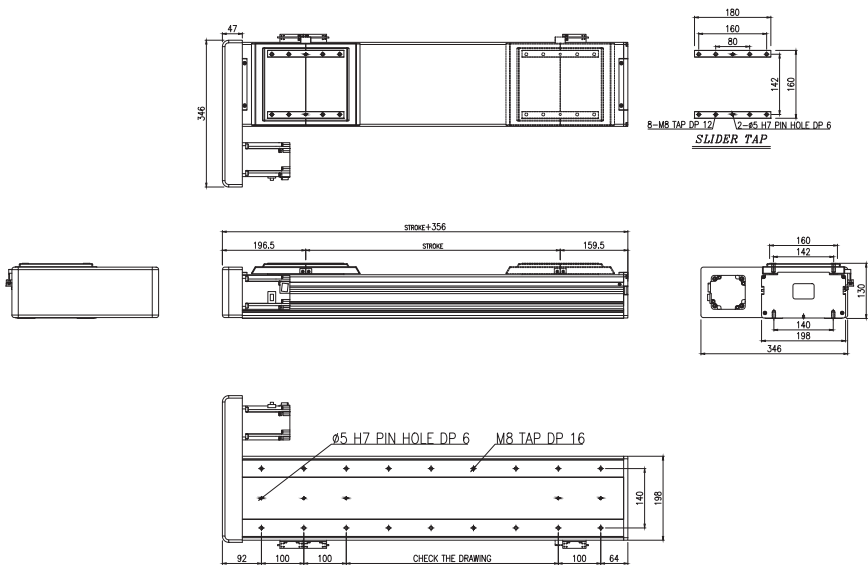

unit:mm

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400
Max. Speed (mm/sec)	Lead 20mm	1000								840	700	580	480	420	360
	Lead 10mm	500								420	350	290	240	210	180
Weight(kg)		26.65	27.83	30.01	32.19	34.37	36.55	38.73	40.91	43.09	45.27	47.45	49.63	51.81	53.99
Base & Slide		The weight of the model equipped with a brake is 1kg more heavier then this value. Aluminum Profile, 백색전착 유광													

DC-200U

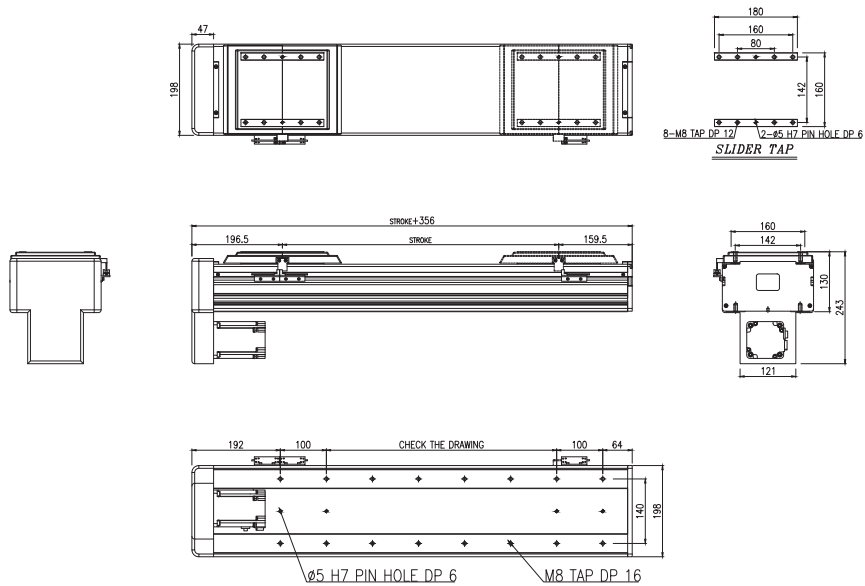

unit:mm

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400
Max. Speed (mm/sec)	Lead 20mm	1000								840	700	580	480	420	360
	Lead 10mm	500								420	350	290	240	210	180
Weight(kg)		26.65	27.83	30.01	32.19	34.37	36.55	38.73	40.91	43.09	45.27	47.45	49.63	51.81	53.99
Base & Slide		The weight of the model equipped with a brake is 1kg more heavier then this value. Aluminum Profile, 백색전착 유광													

DK

DTH

DS

DC

DB

DE


DC070

DC090

DC120

DS160

DS200

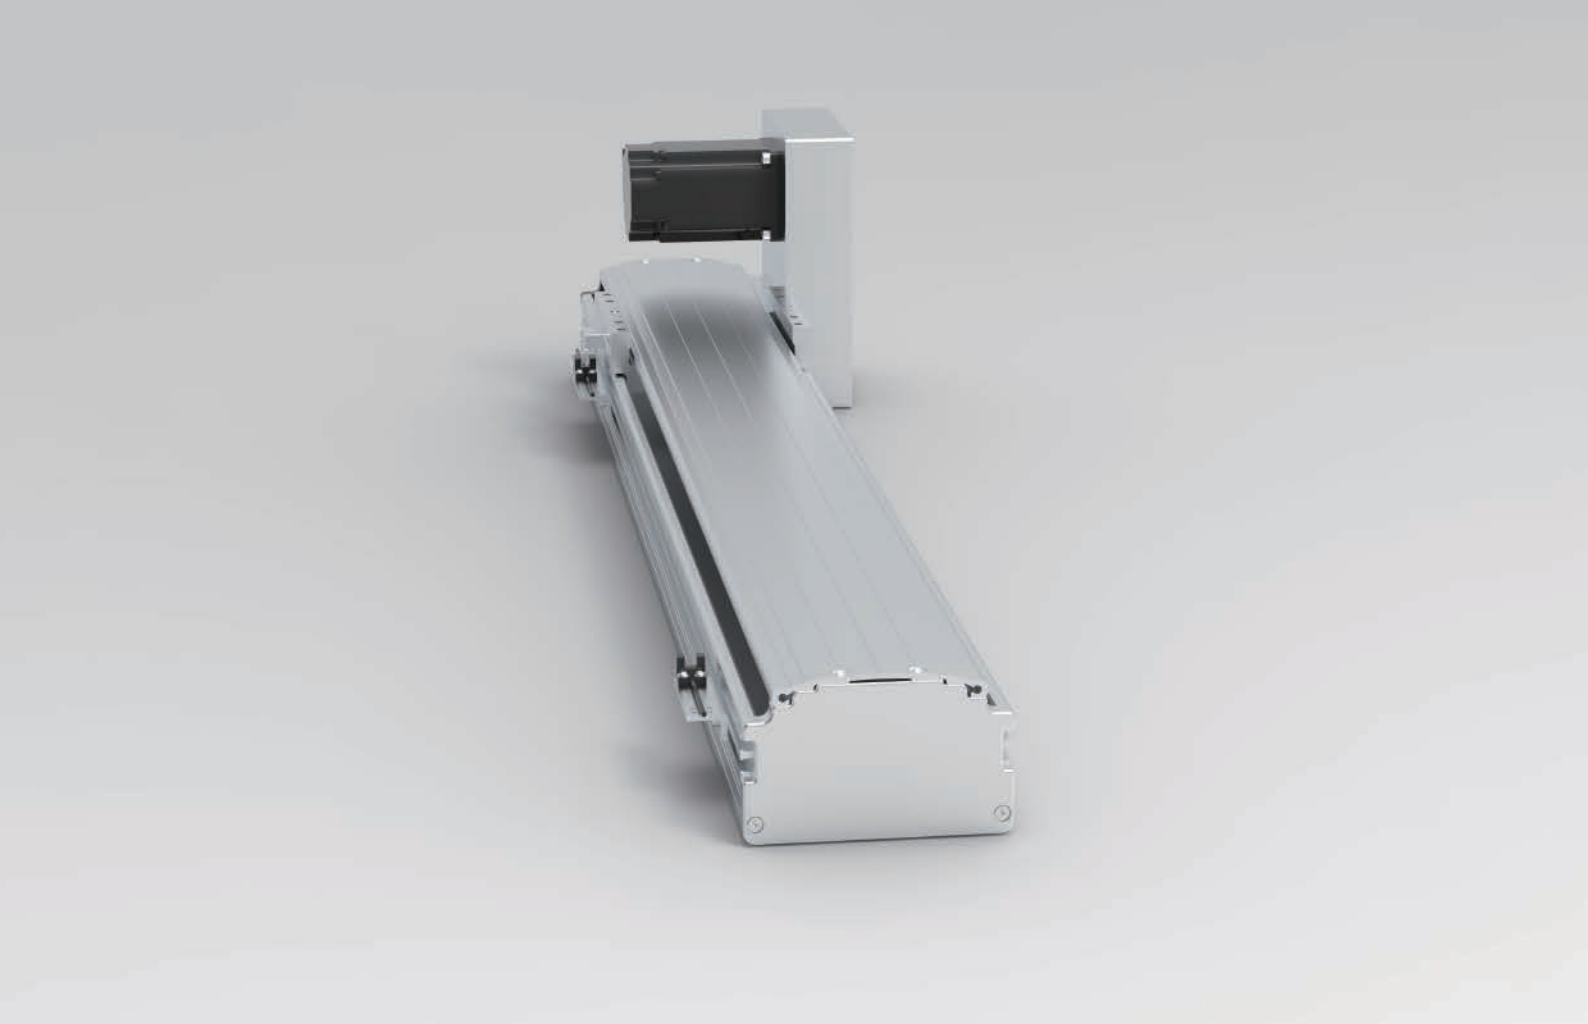


Sliding table series

DB series
Synchronous belt pulley transmission

General environmental application slide table			
DB090	Body width 87MM maximum stroke 2000MM Maximum Load24.8KG	DB160	Body width 158MM maximum stroke 2000MM Maximum Load45.5KG
DB120	Body width 126MM maximum stroke 2000MM Maximum Load40.7KG	DB200	Body width 198MM maximum stroke 2000MM Maximum Load31.5KG

⚙️ DB-090DLT-200W-600ST-SP

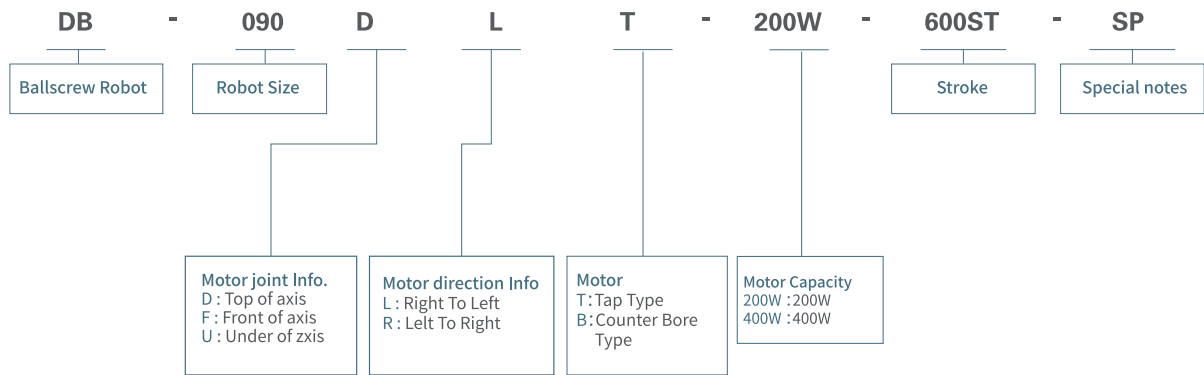

※ Specification

Drive mechanism	Joint Timing PulleyDrive Pulley & Belt	
Joint Pully Ratio / rpm	1 : 2 / 1500RPM	
Drive Pully P.C.D	23.87	
Belt Info.	T5, 25W	
Liner Guide(LM-Guide)	One Way, 42-2UU	
Repeatability(mm)Ta = 0.2s Lead 20mm	±0.1MM	
Servo Motor Output/rpm	200W/3000RPM	400W/3000RPM
Payload(kg)	H : 14.2	H : 24.8
Moment of inertia of area	Ix = 1.65E+05, Iy = 4.84E +05	

※ product



1.DB90DL



2.DB090-FL



3.DB090-UL



4.DB090-DR




5.DB090-FR




6.DB090-UR

DB-090DLT

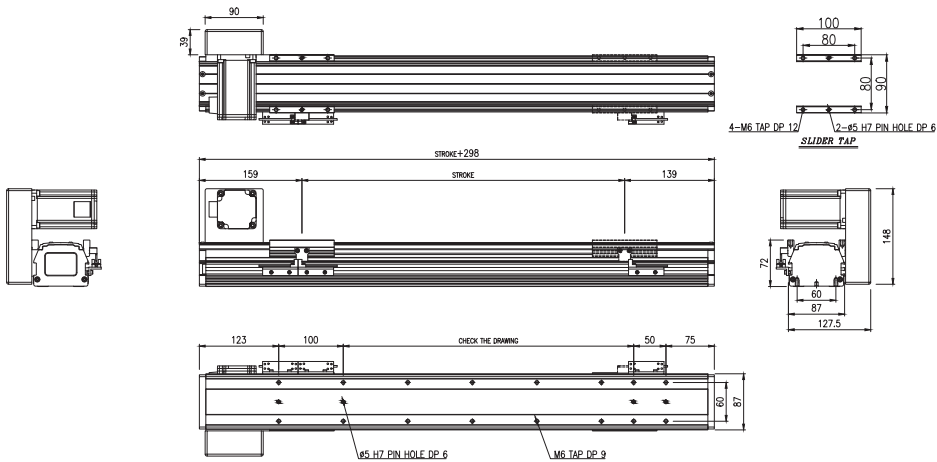

Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	11.5	12.20	12.90	13.6	14.3	15.9	16.3	17	17.7	18.4	19.1
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-090DLB

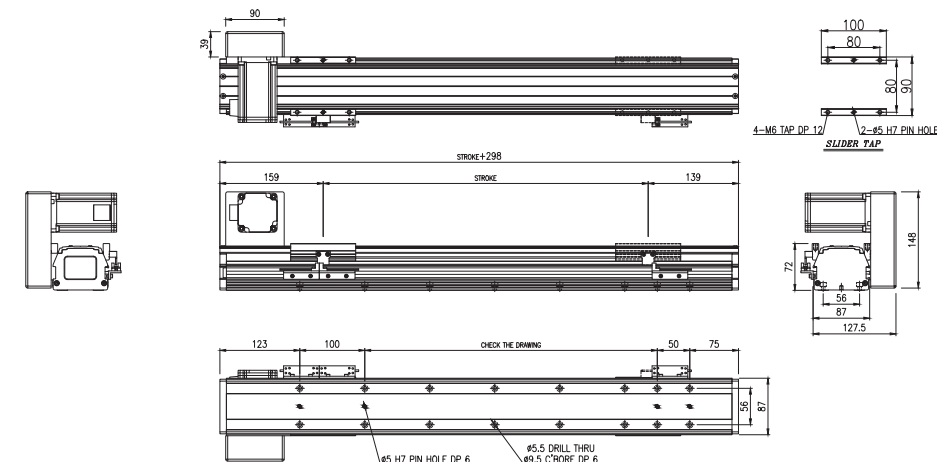

Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	11.5	12.20	12.90	13.6	14.3	15.9	16.3	17	17.7	18.4	19.1
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE


DB090

DB120

DB160


DB200

DB-090FLT

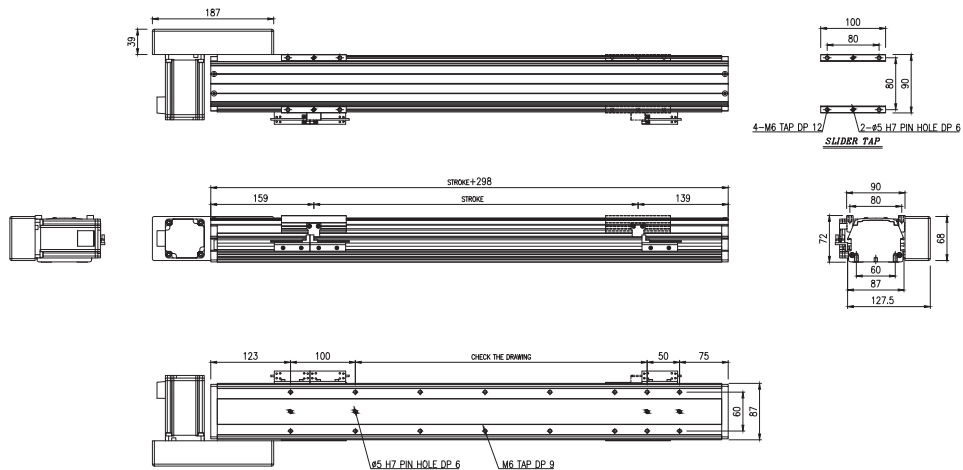


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	11.5	12.20	12.90	13.6	14.3	15.9	16.3	17	17.7	18.4	19.1
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-090ULT

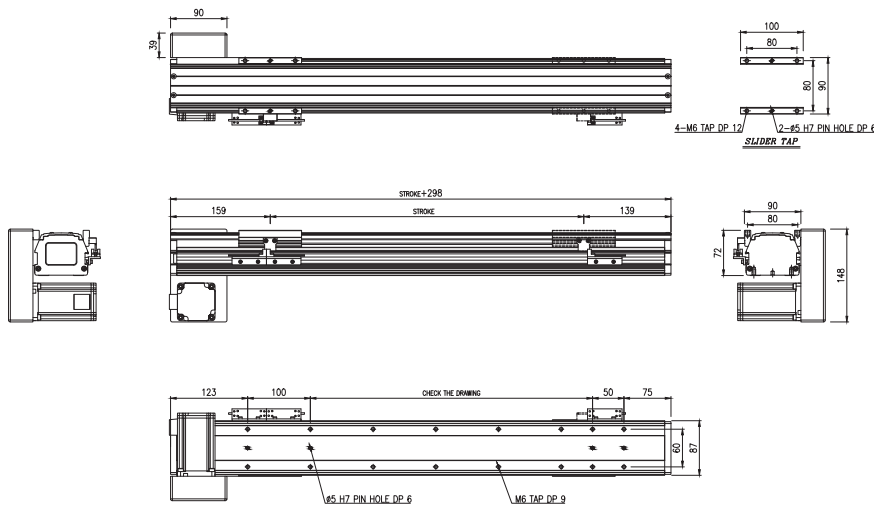


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	11.5	12.20	12.90	13.6	14.3	15.9	16.3	17	17.7	18.4	19.1
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-090FLB

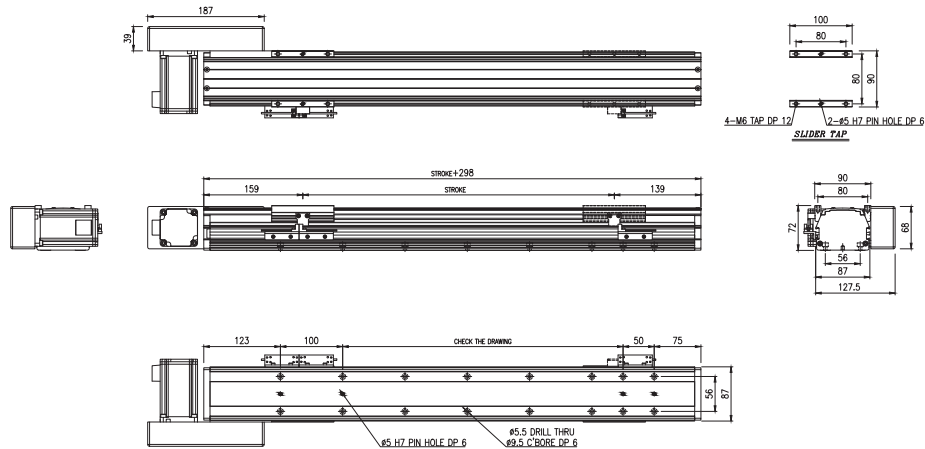


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	11.5	12.20	12.90	13.6	14.3	15.9	16.3	17	17.7	18.4	19.1
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-090ULB

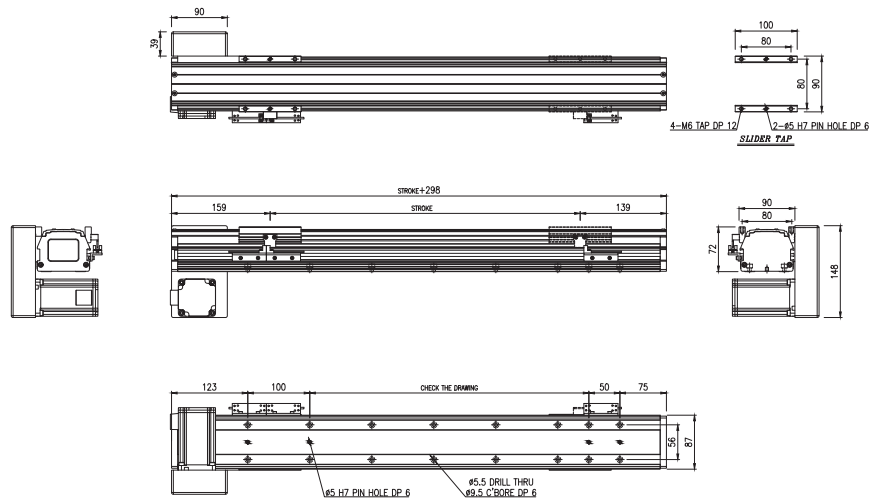

Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	11.5	12.20	12.90	13.6	14.3	15.9	16.3	17	17.7	18.4	19.1
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-090DRT

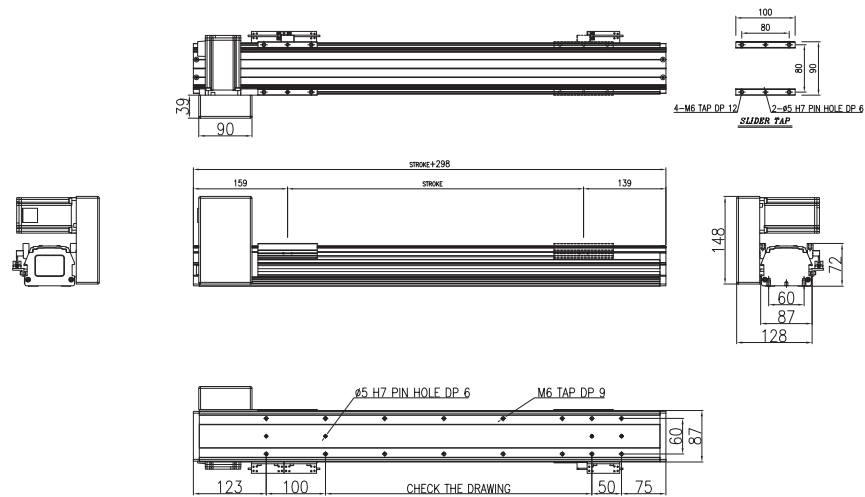


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	11.5	12.20	12.90	13.6	14.3	15.9	16.3	17	17.7	18.4	19.1
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-090FRT




Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	11.5	12.20	12.90	13.6	14.3	15.9	16.3	17	17.7	18.4	19.1
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-090DRB

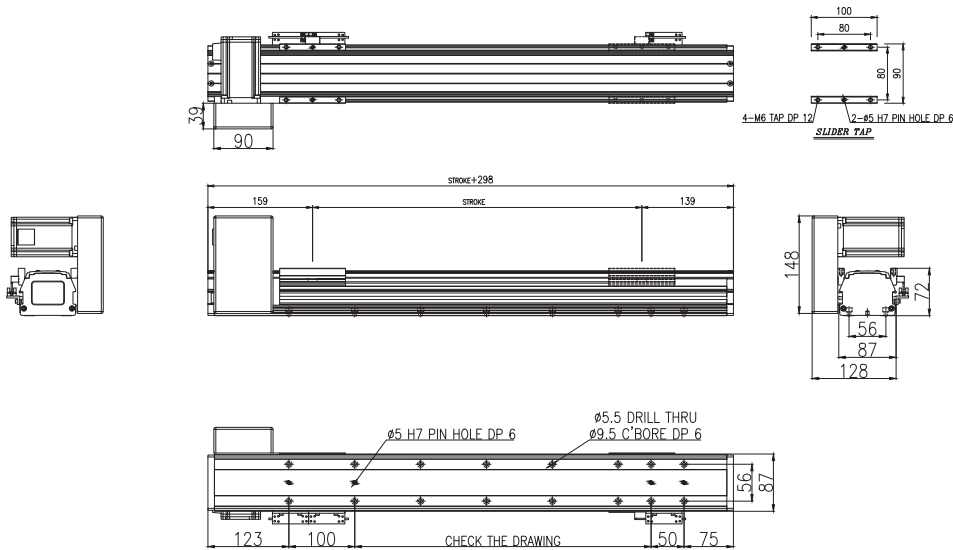

Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	11.5	12.20	12.90	13.6	14.3	15.9	16.3	17	17.7	18.4	19.1
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-090FRB

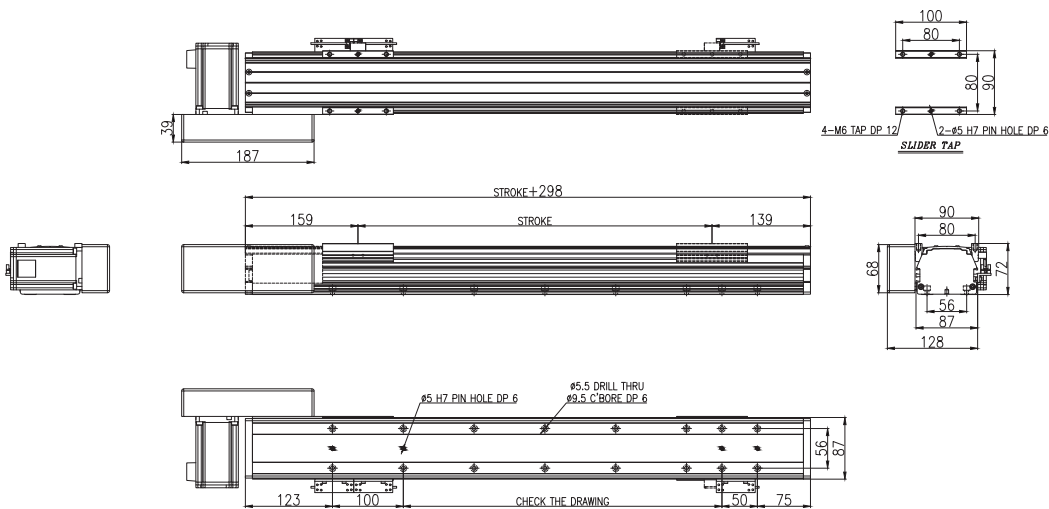

Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	11.5	12.20	12.90	13.6	14.3	15.9	16.3	17	17.7	18.4	19.1
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DK

DTH

DS

DC

DB

DE


DB090

DB120

DB160


DB200

DB-090URT

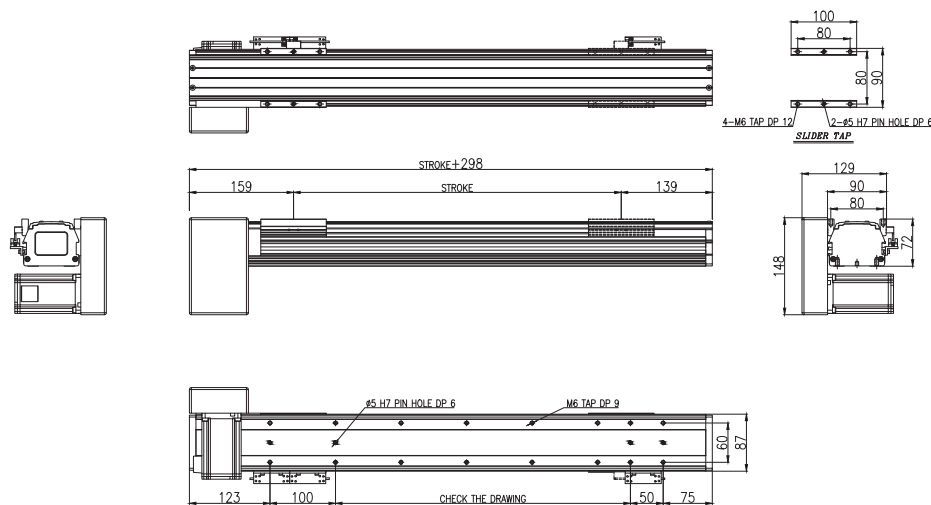


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	11.5	12.20	12.90	13.6	14.3	15.9	16.3	17	17.7	18.4	19.1
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-090URB

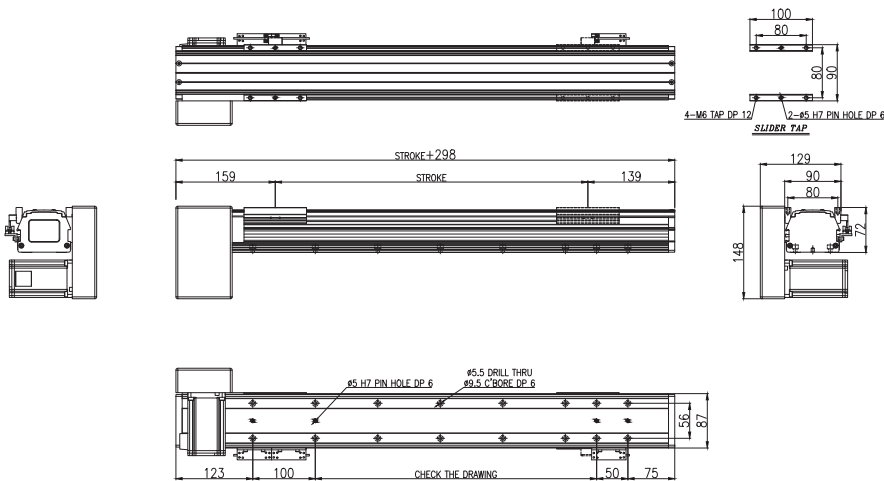

Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	11.5	12.20	12.90	13.6	14.3	15.9	16.3	17	17.7	18.4	19.1
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-120DLT-400W-600ST-SP

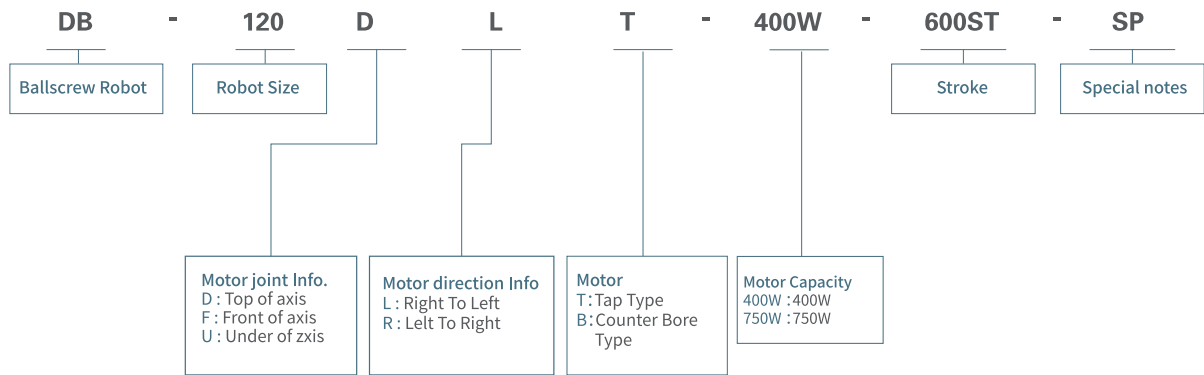

※ Specification

Drive mechanism	Joint Timing Pulley Drive Pulley & Belt	
Joint Pulley Ratio / rpm	1 : 2.5 / 1200RPM 1 : 2 / 1500RPM	
Drive Pulley P.C.D	33.42	
Belt Info.	S5M, 25W	
Liner Guide(LM-Guide)	Two Way, 15W-2UU	
Repeatability(mm)Ta = 0.2s Lead 20mm	±0.1MM	
Servo Motor Output/rpm	400W/3000RPM	750W/3000RPM
Payload(kg)	H : 16.7	H : 40.7
Moment of inertia of area	Ix = 4.86E+05, Iy = 4.45E +06	

※ product



1.DB120DL



2.DB120-FL



3.DB120-UL



4.DB120-DR




5.DB120-FR




6.DB120-UR

DB-120DLT

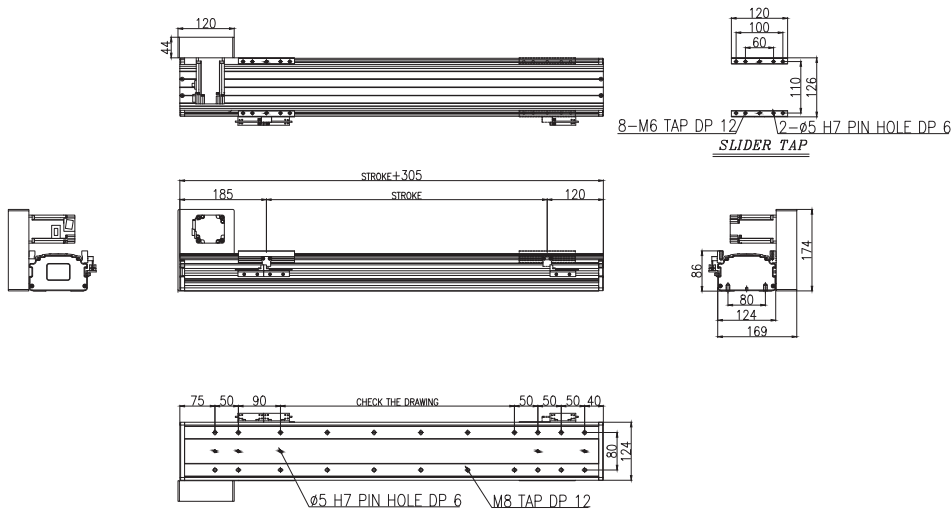

Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	17.5	18.5	19.5	20.4	21.4	22.4	23.4	25.3	26.3	27.2	28.2
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-120DLB

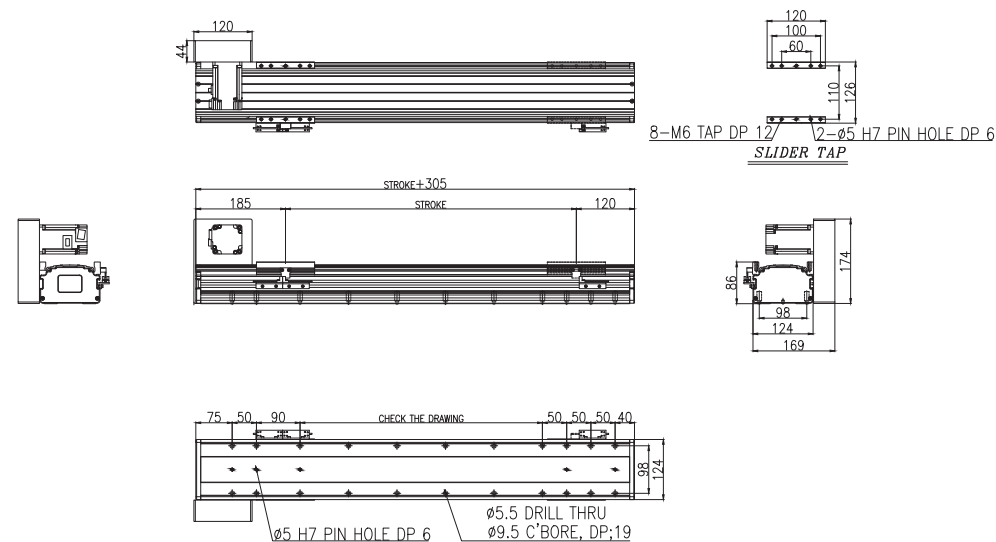

Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	17.5	18.5	19.5	20.4	21.4	22.4	23.4	25.3	26.3	27.2	28.2
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광										

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE


DB090

DB120

DB160


DB200

DB-120DRT

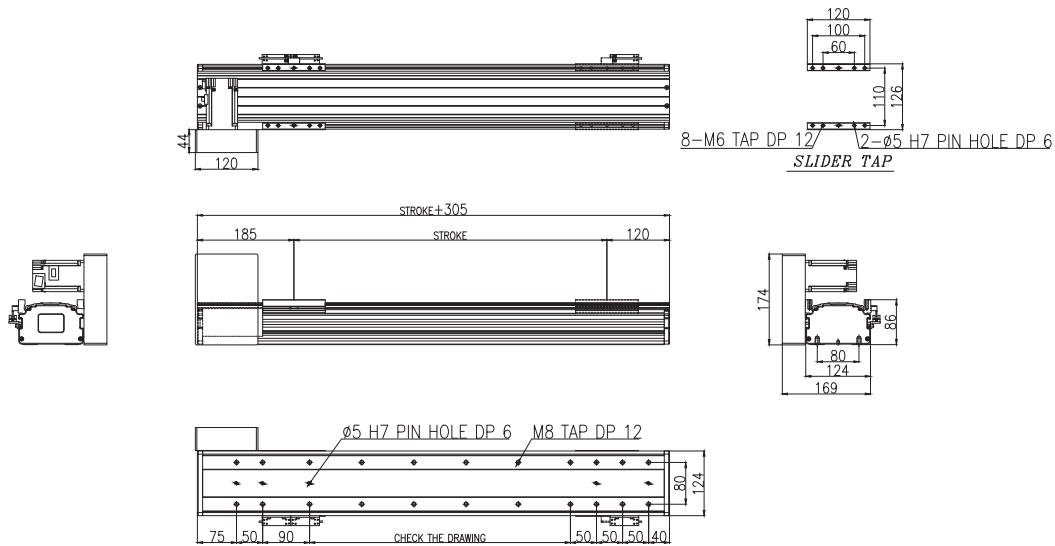


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	17.5	18.5	19.5	20.4	21.4	22.4	23.4	25.3	26.3	27.2	28.2
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-120FRT

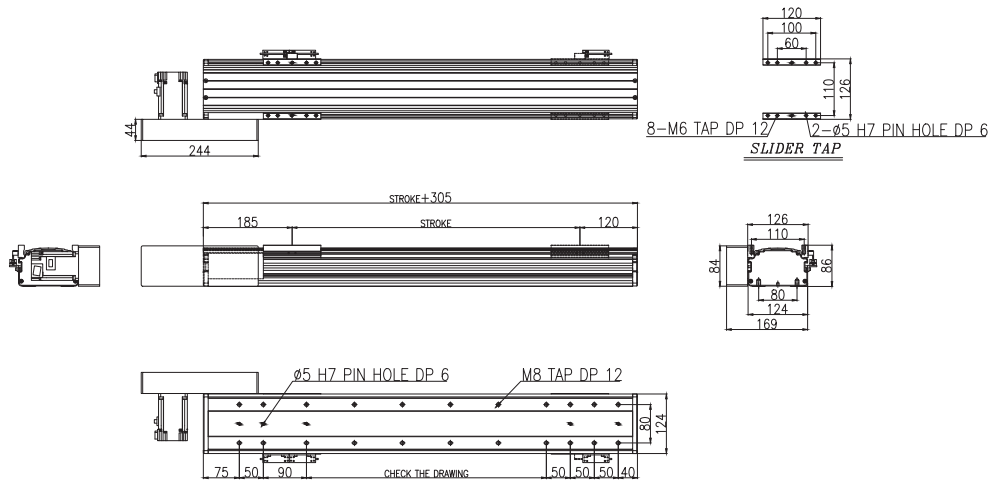


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	17.5	18.5	19.5	20.4	21.4	22.4	23.4	25.3	26.3	27.2	28.2
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-120DRB

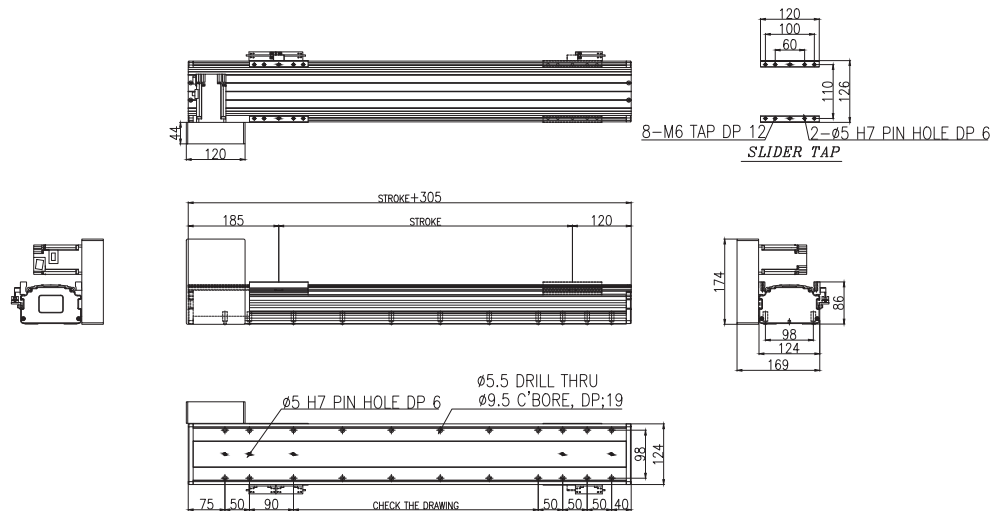


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	17.5	18.5	19.5	20.4	21.4	22.4	23.4	25.3	26.3	27.2	28.2
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-120FRB

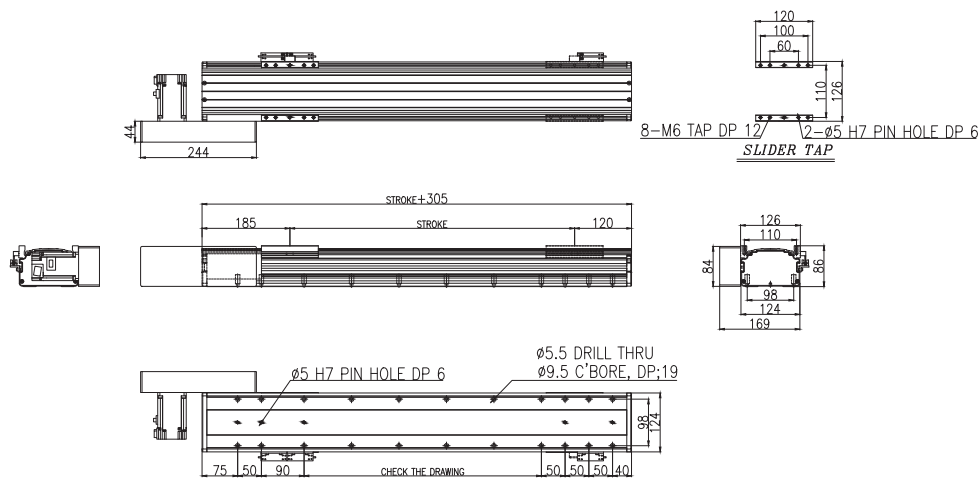


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	17.5	18.5	19.5	20.4	21.4	22.4	23.4	25.3	26.3	27.2	28.2
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-120URT

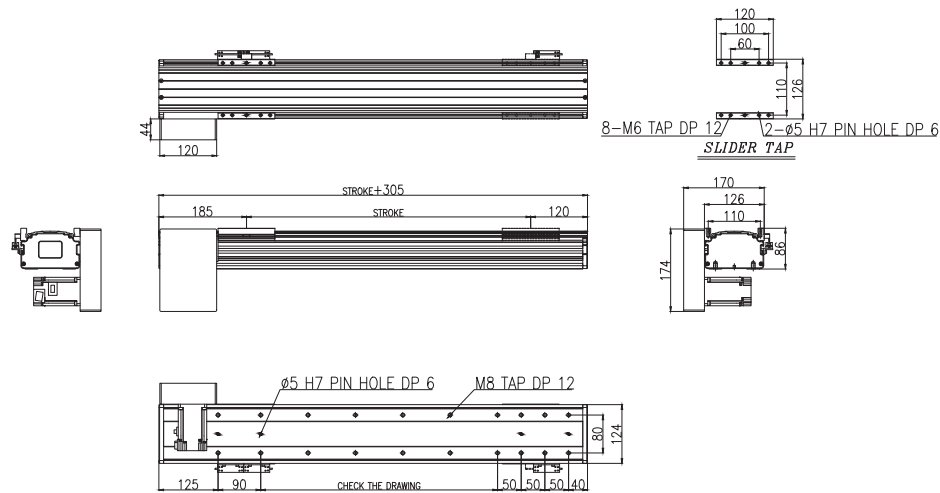


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	17.5	18.5	19.5	20.4	21.4	22.4	23.4	25.3	26.3	27.2	28.2
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-120URB

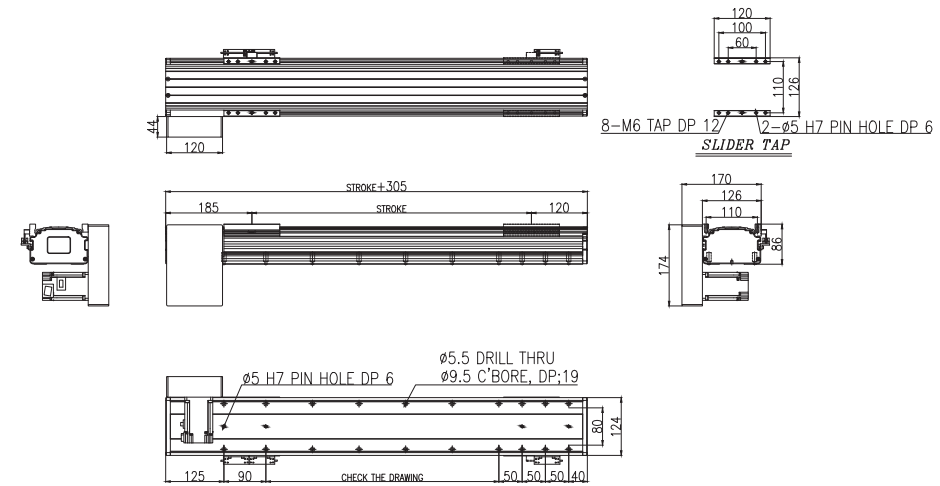

Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	17.5	18.5	19.5	20.4	21.4	22.4	23.4	25.3	26.3	27.2	28.2
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광										


DB-160DLT

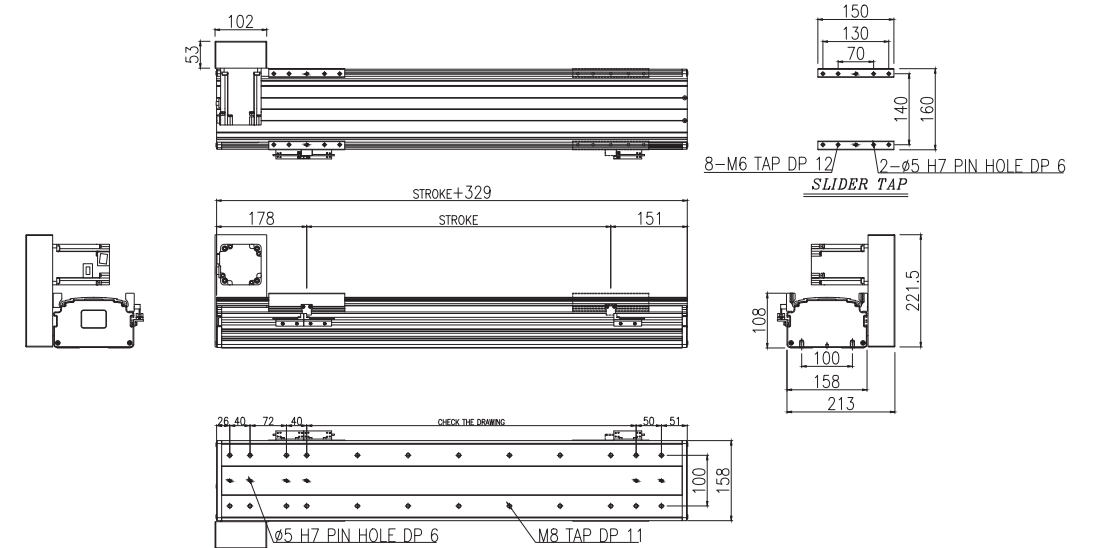

DB-160DLT

[illegible]

DB-160DLB

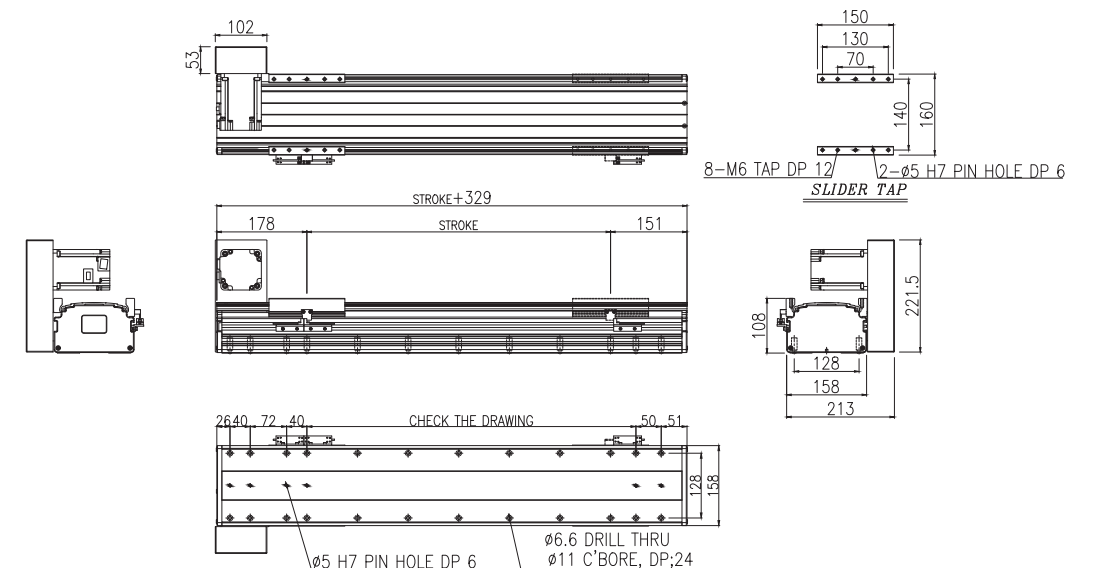[illegible]

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

✖ Specification

Drive mechanism	Joint Timing Pulley Drive Pulley & Belt	
Joint Pully Ratio / rpm	1 : 2.5 / 1200RPM	
Drive Pully P.C.D	33.42	
Belt Info.	S5M, 30W	
Liner Guide(LM-Guide)	Two Way, 20W-2UU	
Repeatability(mm)Ta = 0.2s Lead 20mm	±0.1MM	
Servo Motor Output/rpm	400W/3000RPM	750W/3000RPM
Payload(kg)	H : 17.4	H : 45.5
Moment of inertia of area	Ix = 9.38E+05, Iy = 1.05E +07	

✖ product



3.DB160-UL



6.DB160-UR

DK

DTH

DS

DC

DB

DE


DB090

DB120

DB160


DB200

DB-160FLT

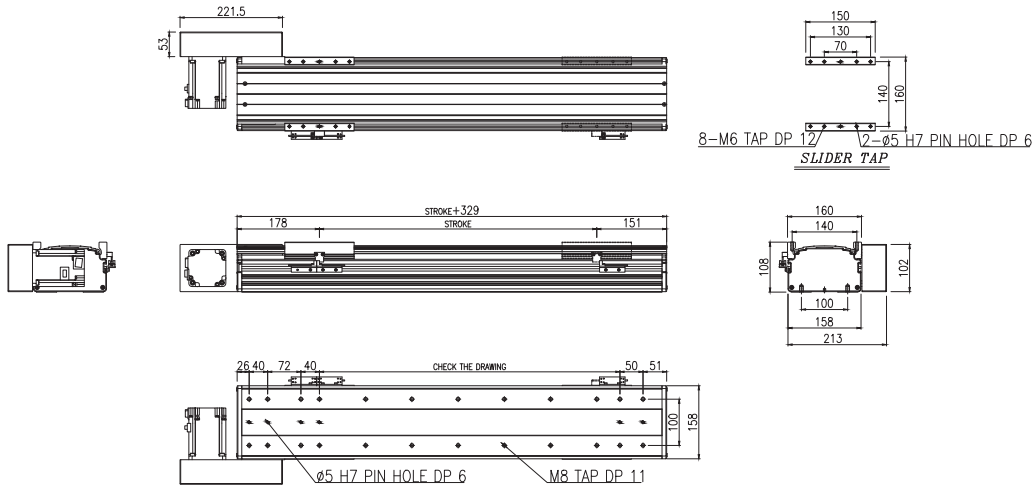


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	26.2	27.6	29.1	30.6	32	33.6	35.1	36.6	38.1	41.1	42.6
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-160ULT

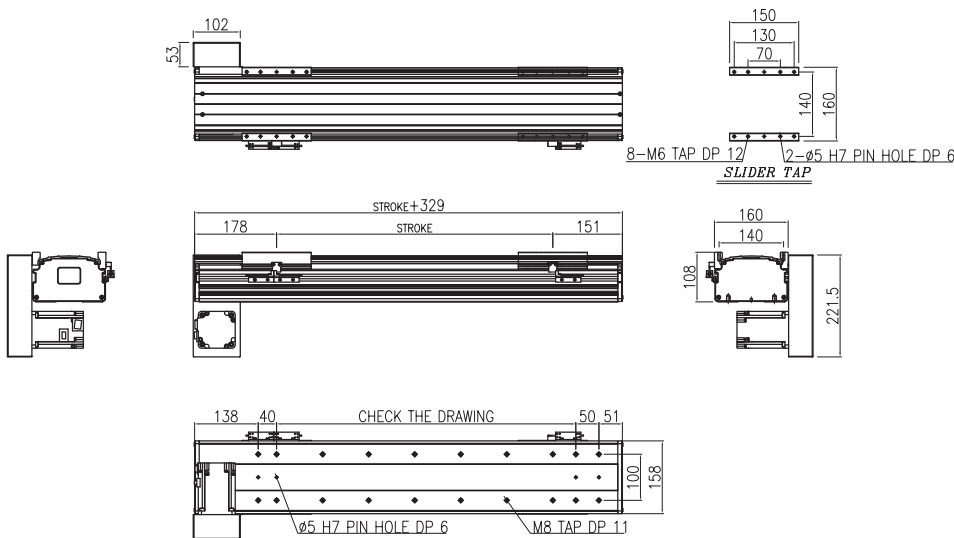


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	26.2	27.6	29.1	30.6	32	33.6	35.1	36.6	38.1	41.1	42.6
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-160FLB

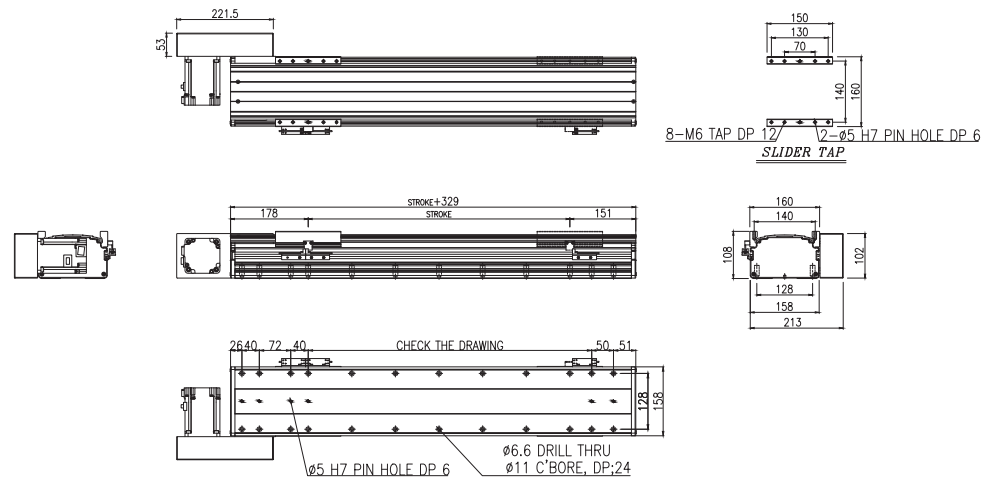

Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	26.2	27.6	29.1	30.6	32	33.6	35.1	36.6	38.1	41.1	42.6
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-160ULB

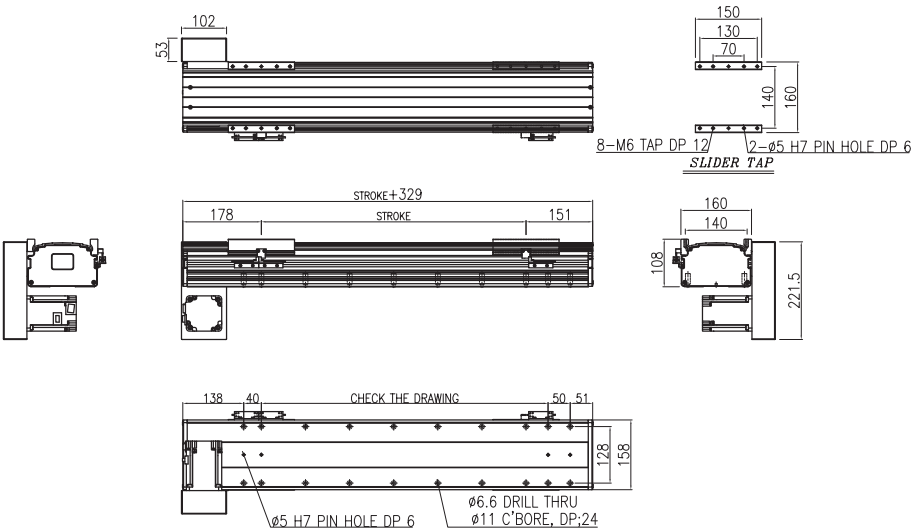

Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	26.2	27.6	29.1	30.6	32	33.6	35.1	36.6	38.1	41.1	42.6
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DK

DTH

DS

DC

DB

DE


DB090

DB120

DB160


DB200

DB-160DRT

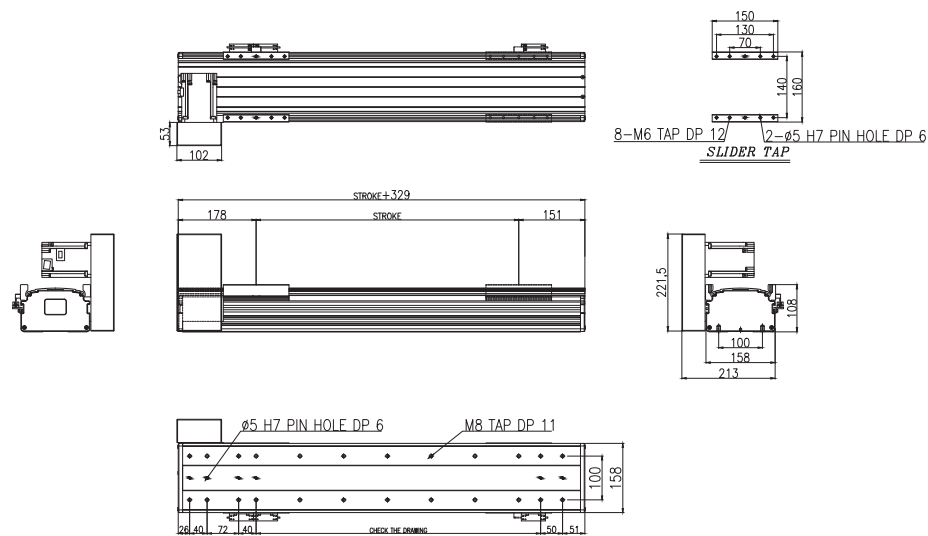


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	26.2	27.6	29.1	30.6	32	33.6	35.1	36.6	38.1	41.1	42.6
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-160FRT

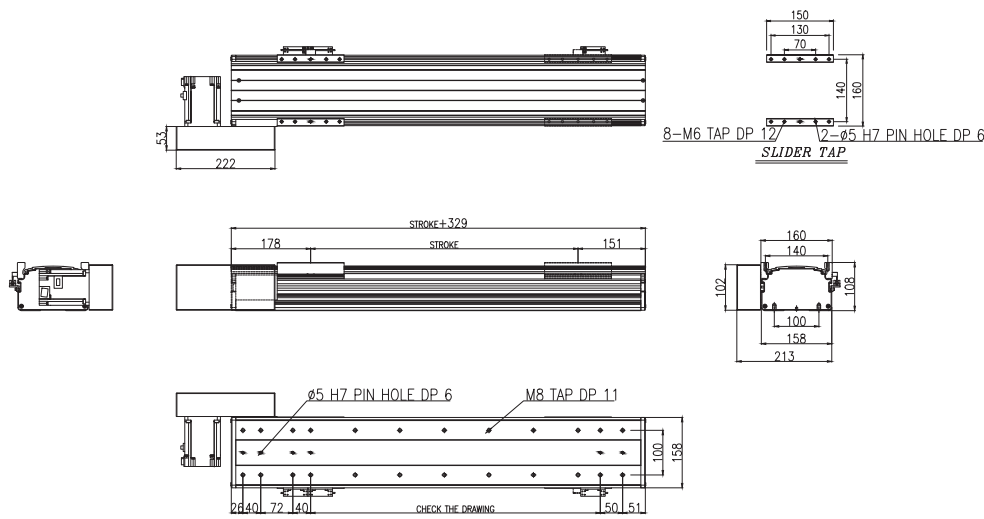


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	26.2	27.6	29.1	30.6	32	33.6	35.1	36.6	38.1	41.1	42.6
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-160DRB

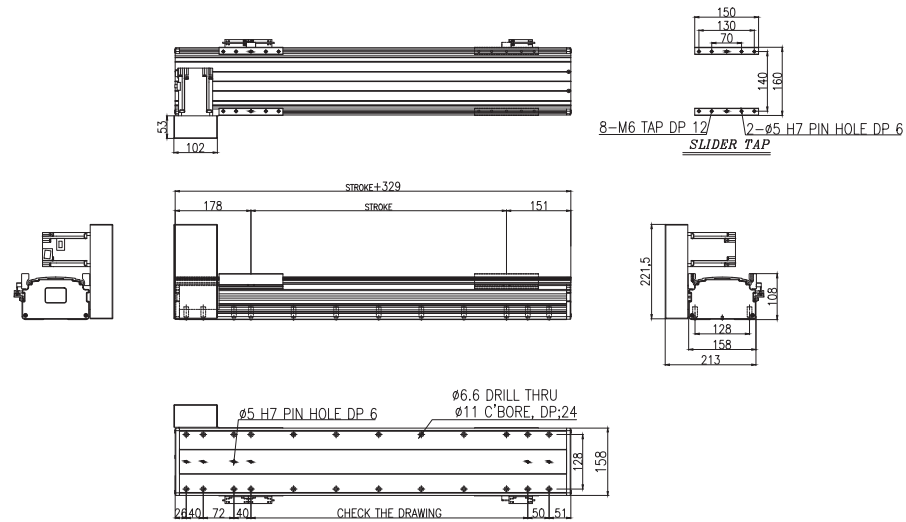

Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	26.2	27.6	29.1	30.6	32	33.6	35.1	36.6	38.1	41.1	42.6
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-160FRB

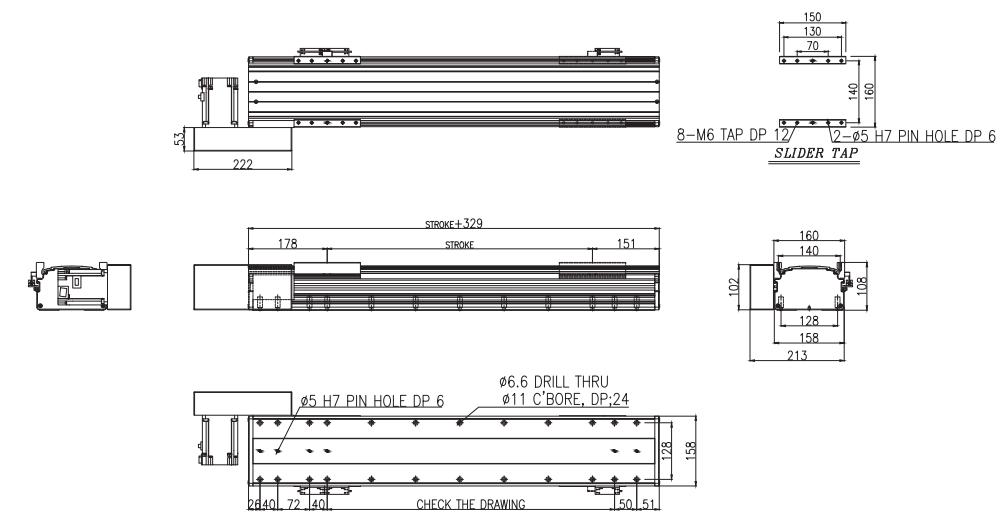

Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	26.2	27.6	29.1	30.6	32	33.6	35.1	36.6	38.1	41.1	42.6
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광										


[illegible][illegible]

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DE

DB200

⚙️ DB-200DLT-400W-600ST-SP

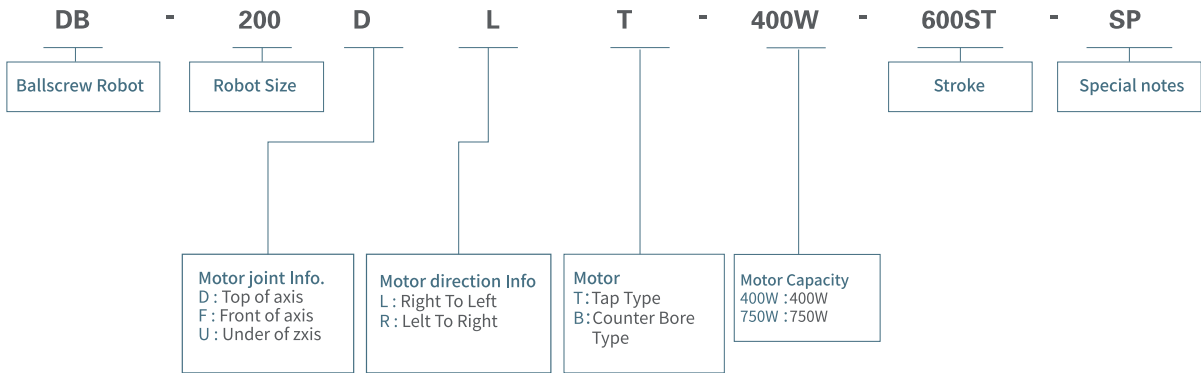

※ Specification

Drive mechanism	Joint Timing Pulley Drive Pulley & Belt	
Joint Pulley Ratio / rpm	1 : 3 / 1200RPM	
Drive Pulley P.C.D	42.97	
Belt Info.	S5M, 50W	
Liner Guide(LM-Guide)	Two Way, 25W-2UU	
Repeatability(mm)Ta = 0.2s Lead 20mm	±0.1MM	
Servo Motor Output/rpm	400W/3000RPM	750W/3000RPM
Payload(kg)	H : 23.6	H : 31.5
Moment of inertia of area	Ix = 1.79E+06, Iy = 2.63E +07	

※ product



1.DB200DL



2.DB200-FL



3.DB200-UL



4.DB200-DR




5.DB200-FR




6.DB200-UR

DB-200DLT

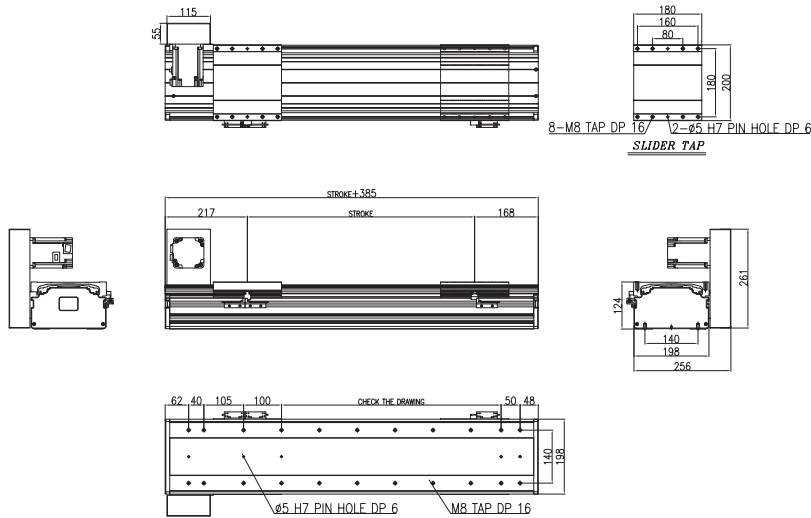

Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	45	47.3	49.6	51.9	54.2	56.5	58.8	61.1	63.4	65.7	68
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-200DLB

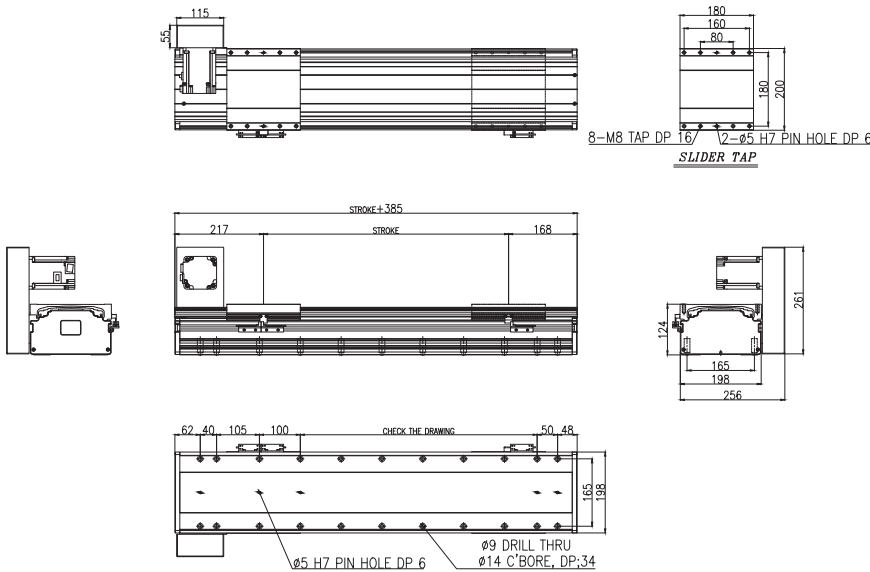

Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	45	47.3	49.6	51.9	54.2	56.5	58.8	61.1	63.4	65.7	68
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE


DB090

DB120

DB160


DB200

DB-200FLT

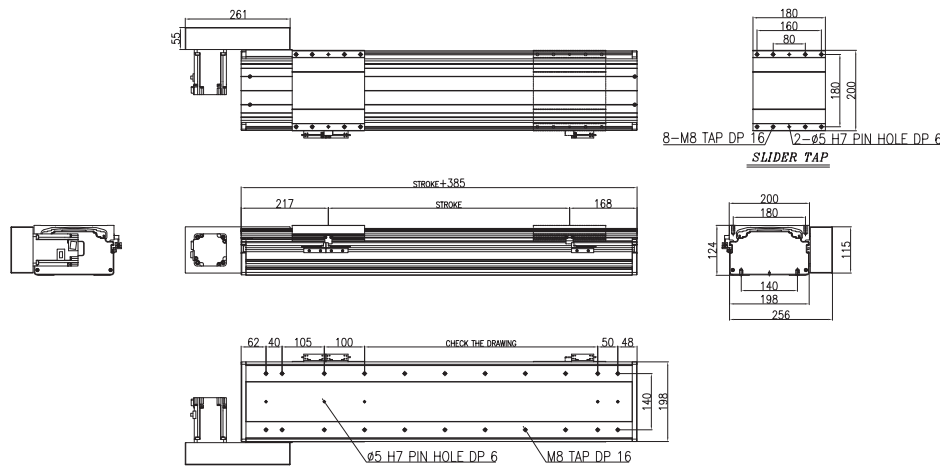


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	45	47.3	49.6	51.9	54.2	56.5	58.8	61.1	63.4	65.7	68
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-200ULT

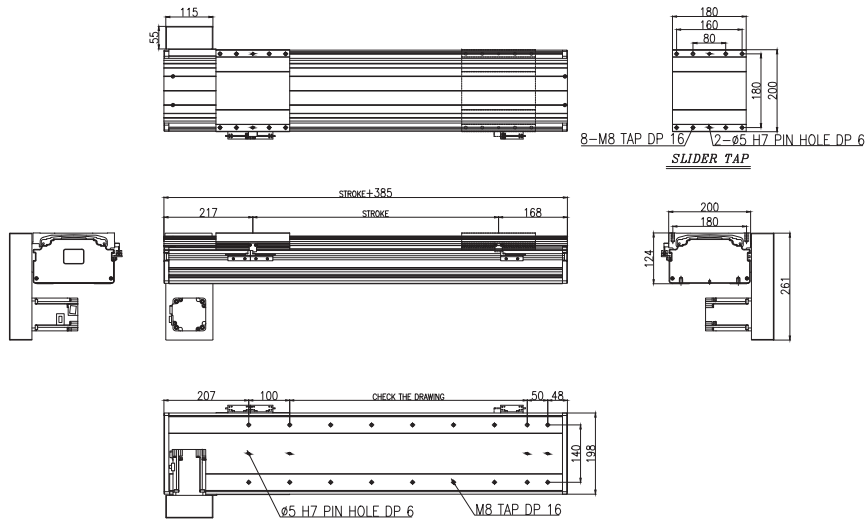


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	45	47.3	49.6	51.9	54.2	56.5	58.8	61.1	63.4	65.7	68
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-200FLB

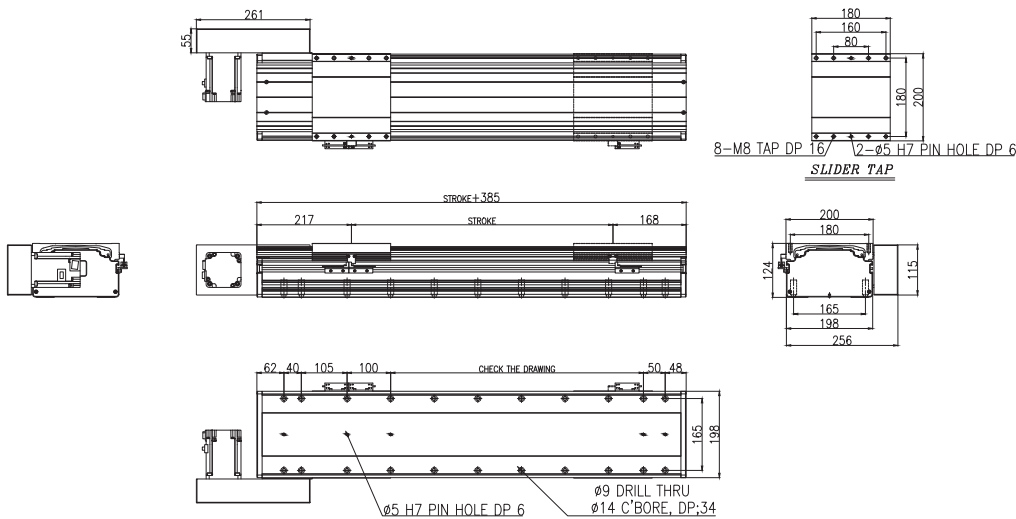


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	45	47.3	49.6	51.9	54.2	56.5	58.8	61.1	63.4	65.7	68
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-200ULB

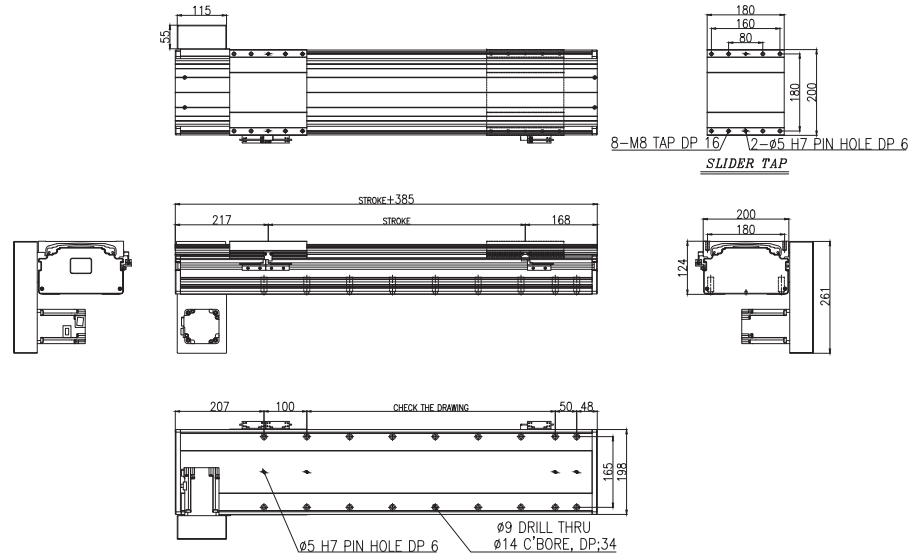


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	45	47.3	49.6	51.9	54.2	56.5	58.8	61.1	63.4	65.7	68
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-200DRT

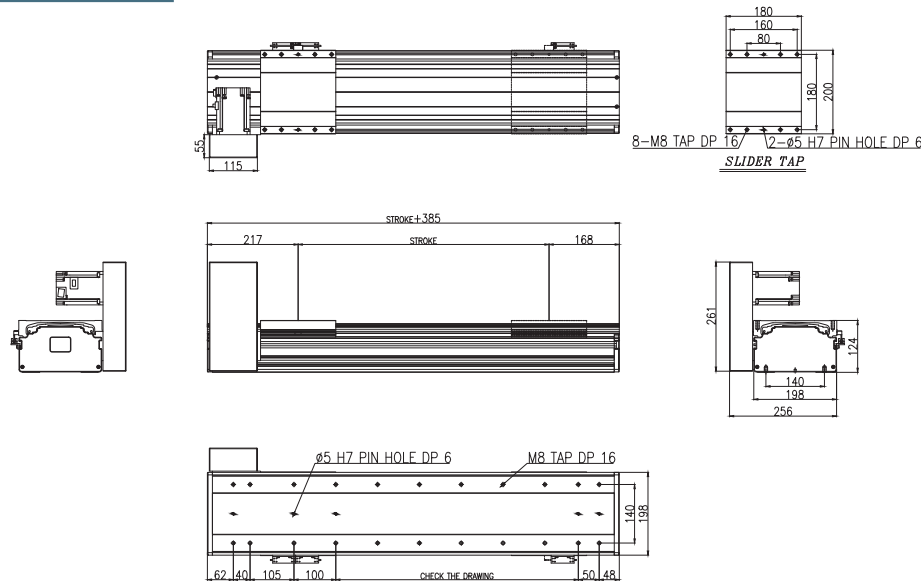


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	45	47.3	49.6	51.9	54.2	56.5	58.8	61.1	63.4	65.7	68
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-200FRT

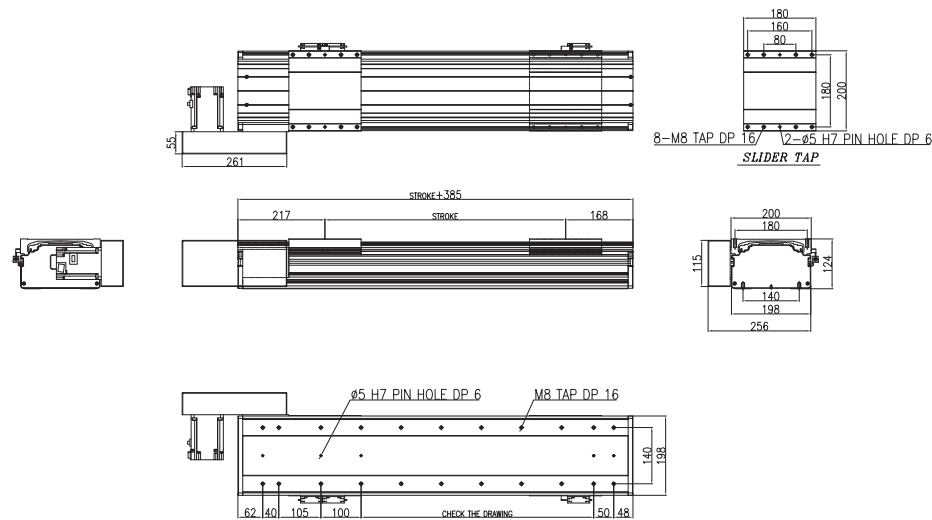


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	45	47.3	49.6	51.9	54.2	56.5	58.8	61.1	63.4	65.7	68
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-200DRB

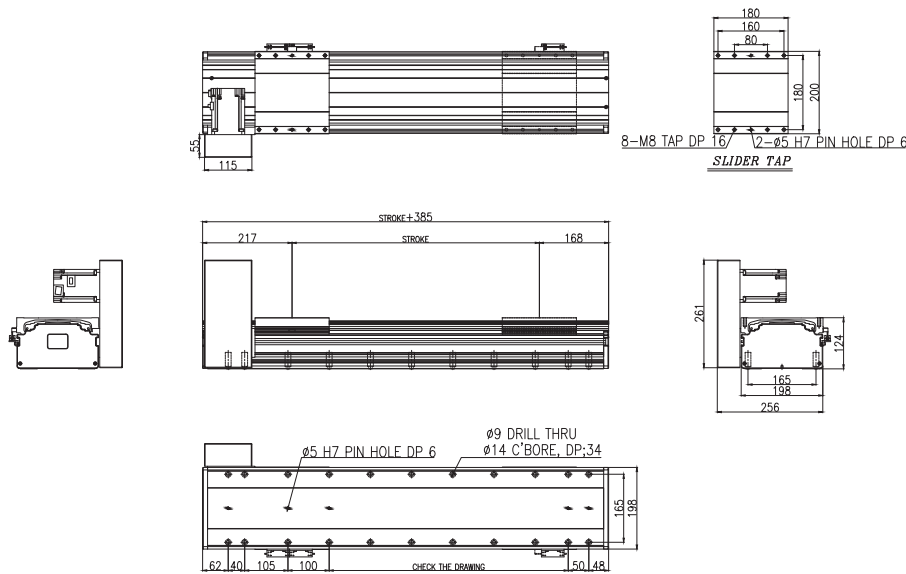


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	45	47.3	49.6	51.9	54.2	56.5	58.8	61.1	63.4	65.7	68
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-200FRB

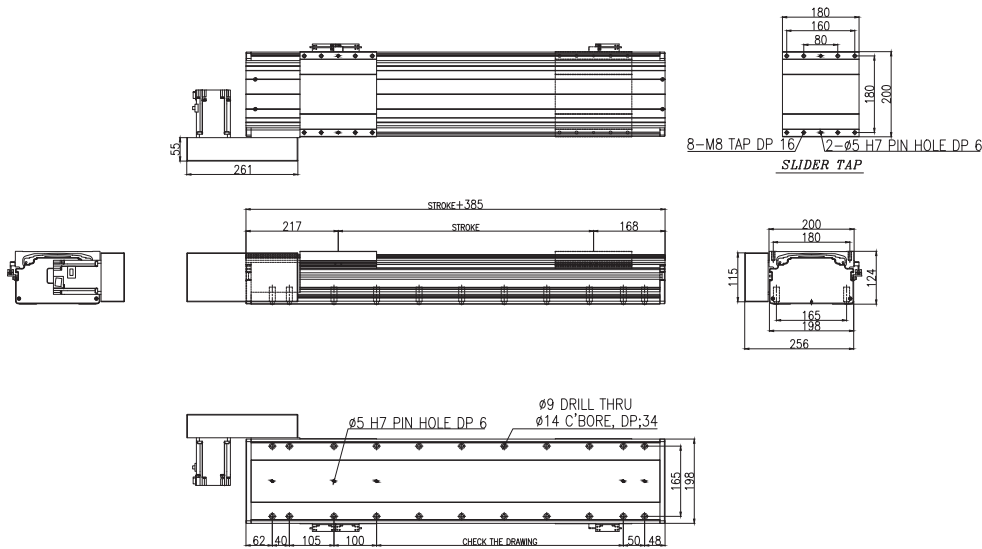


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	45	47.3	49.6	51.9	54.2	56.5	58.8	61.1	63.4	65.7	68
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-200URT

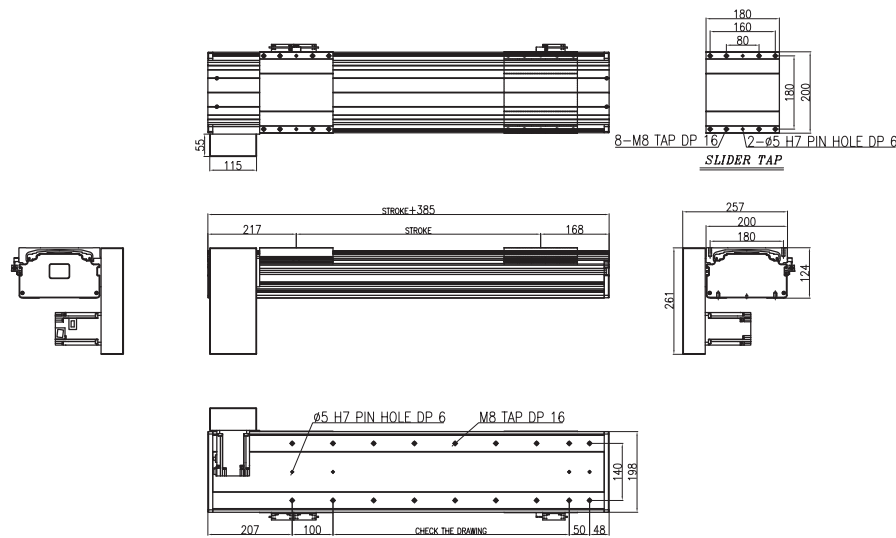

Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	45	47.3	49.6	51.9	54.2	56.5	58.8	61.1	63.4	65.7	68
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전학 유광										

DB-200URB

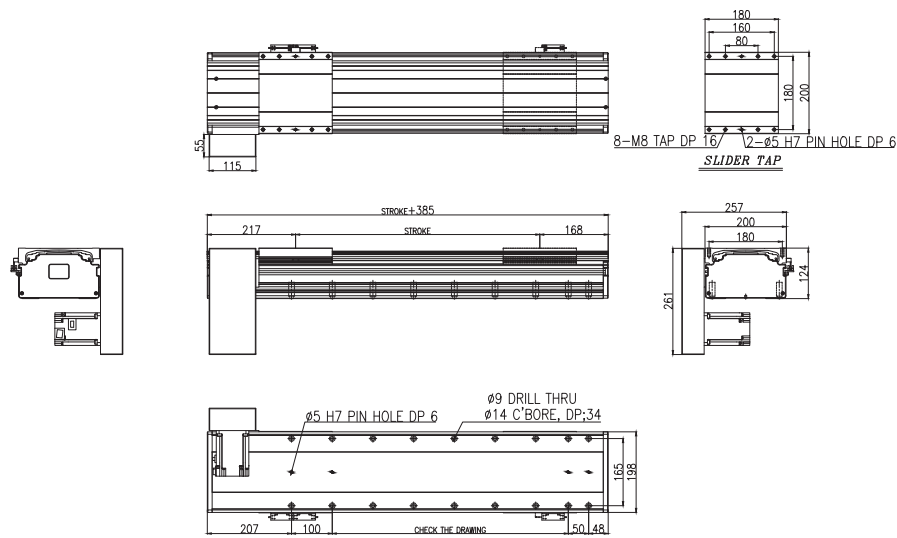

Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	45	47.3	49.6	51.9	54.2	56.5	58.8	61.1	63.4	65.7	68
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전학 유광										

DK

DTH

DS

DC

DB

DE

DB090

DB120

DB160

DB200



Screw drive

DK series
KK module

DK40

**Body width 40MM
Maximum track length 200MM
Maximum Load 3KG**

DK86

**Body width 86MM
Maximum track length 940MM
Maximum Load 50KG**

DK50

**Body width 50MM
Maximum track length 300MM
Maximum Load 12KG**



DK100

**Body width 100MM
Maximum track length 1380MM
Maximum Load 80KG**

DK60

**Body width 60MM
Maximum track length 600MM
Maximum Load 20KG**

DK 模组产品型号

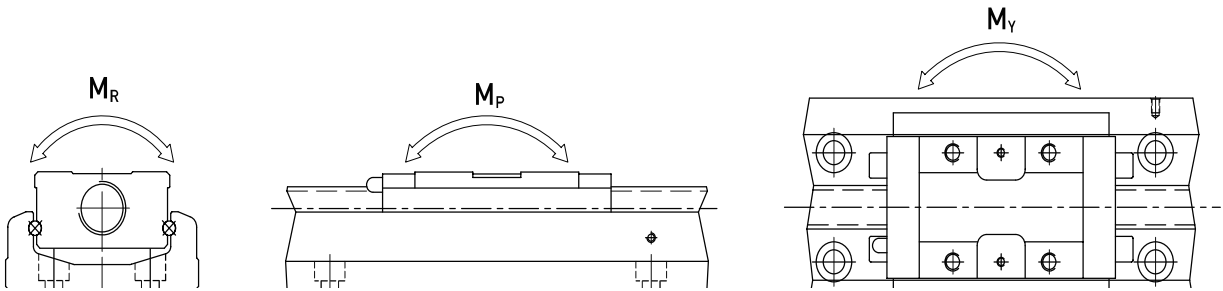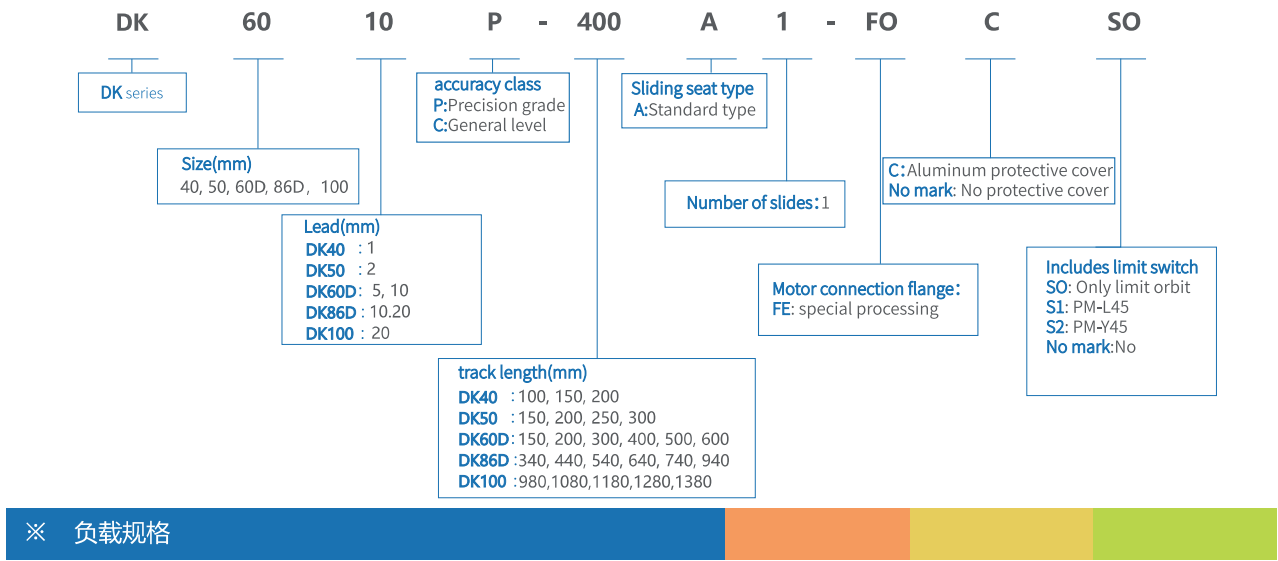

Model		Ball screw				linear guideway															
		Screw outer diameter (mm)	screw lead (mm)	Basic dynamic rated load (N)	Basic static rated load (N)	Allowable static moment															
						Basic dynamic rated load (N)				pitch M _p (N-m)				yaw M _y (N-m)				roll M _R (N-m)			
						slide A	slide S	slide A	slide S	slide A1	slide A2	slide S1	slide S2	slide A1	slide A2	slide S1	slide S2	slide A1	slide A2	slide S1	slide S2
DK4001	Precision grade	8	1	735	1538	3920	-	6468	-	33	182	-	-	33	182	-	-	81	162	-	-
	General level			676	1284																
DK5002	Precision grade	8	2	2136	3489	8007	-	12916	-	116	545	-	-	116	545	-	-	222	444	-	-
	General level			1813	2910																
DK6005	Precision grade	12	5	3744	6243	13230	7173	21462	11574	152	760	72	367	152	760	72	367	419	838	241	482
	General level			3377	5625																
DK6010	Precision grade	12	10	2410	3743	13230	7173	21462	11574	152	760	72	367	152	760	72	367	419	838	241	482
	General level			2107	3234																
DK8610	Precision grade	15	10	7144	12642	31458	21051	50764	29475	622	3050	228	1309	622	3050	228	1309	1507	3014	847	1694
	General level			6429	11387																
DK8620	Precision grade	15	20	4645	7655	31458	21051	50764	29475	622	3050	228	1309	622	3050	228	1309	1507	3014	847	1694
	General level			4175	6889																
DK10020	Precision grade	20	20	7046	12544	39200	-	63406	-	960	4763	-	-	960	4763	-	-	2205	4410	-	-
	General level			4782	9163																

※ accuracy class

Model	Length of guide rail	Localization reproducibility		positioning accuracy		Walking parallelism		Maximum starting torque (N-cm)	
		Precision grade	General level	Precision grade	General level	Precision grade	General level	Precision grade	General level
DK40	100	±0.003	±0.01	0.020	-	0.010	-	1.2	0.8
	150								
	200								
DK50	150	±0.003	±0.01	0.020	-	0.010	-	4	2
	200								
	250								
	300								
DK60	150	±0.003	±0.01	0.020	-	0.010	-	15	7
	200								
	300								
	400								
	500			0.025	-	0.015	-	15	7
	600								
DK86	340	±0.003	±0.01	0.025	-	0.015	-	15	10
	440								
	540								
	640								
	740			0.030	-	0.020	-	17	10
DK100	940	±0.003	±0.01	0.040	-	0.030	-	25	10
	980								
	1080			0.035	-	0.025	-	17	12
	1180			0.040	-	0.03	-	20	12
	1280		±0.005	0.045	-	0.035	-	23	15
	1380							25	

DK

DTH

DS

DC


DB

DE

DK060

DK40 Excluding protective cover

Model	Ball screw lead (mm)	Rail length L2(mm)	Speed (mm/sec)	
			Precision grade	General level
DK40	01	100	190	190
		150	190	190
		200	190	190
DK50	02	150	270	270
		200	270	270
		250	270	270
		300	270	270
DK60	05	150	550	390
		200	550	390
		300	550	390
		400	550	390
		500	550	390
		600	340	340
	10	150	1100	790
		200	1100	790
		300	1100	790
		400	1100	790
		500	1100	790
		600	670	670
DK86	10	340	740	520
		440	740	520
		540	740	520
		640	740	520
		740	740	520
		940	610	430
	20	340	1480	1050
		440	1480	1050
		540	1480	1050
		640	1480	1050
		740	1480	1050
		940	1220	870
DK100	20	980	1120	800
		1080	980	800
		1180	750	750
		1280	630	630
		1380	530	530

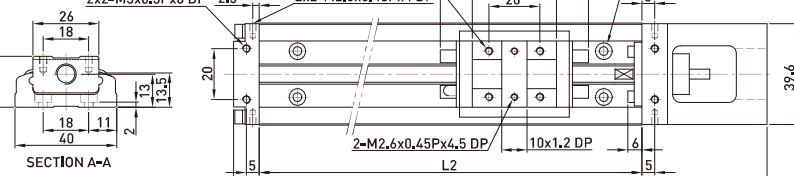

Technical drawing of the 1000 Series 1/2" valve, showing three views: SECTION A-A, VIEW B, and a side view.

SECTION A-A: Shows the cross-section of the valve body. Dimensions include 26, 18, 20, 18, 11, 40, 2, 13.5, 2.5, 20, 5, 33, 20, 58, 33, 20, 5, 39.6, 6, 5, 10x1.2 DP, 2-M2,6x0,45Px4,5 DP, 2x2-M3x0,5Px6 DP, 4-M3x0,5Px4,5 DP, and 2xn-Ø3,4THRU,Ø6,5x3 DP.

VIEW B: Shows the front view of the valve. Dimensions include 30, 0.5, 20, 10, 27.5, 13.5, 0.5, 49, 12, 25, 14.5, 8, 0.5, Ø20, Ø17, 60, G, and (n-1)x60.

Side View: Shows the side profile of the valve. Dimensions include 20, 5, 33, 20, 58, 33, 20, 5, 39.6, 6, 5, 10x1.2 DP, 2-M2,6x0,45Px4,5 DP, 2x2-M3x0,5Px6 DP, 4-M3x0,5Px4,5 DP, and 2xn-Ø3,4THRU,Ø6,5x3 DP.

unit:mm

Rail length L2(mm)	Full length L1 (mm)	Maximum travel (mm)		G (mm)	N	Weight (kg)	
		A1 slide	A2 slide			A1 slide	A2 slide
100	159	36	-	20	2	0.48	-
150	209	86	34	15	3	0.6	0.67
200	259	136	84	40	3	0.72	0.79

unit:mm

Rail length L2(mm)	Full length L1 (mm)	Maximum travel (mm)		G (mm)	N	Weight (kg)	
		A1 slide	A2 slide			A1 slide	A2 slide
100	159	36	-	20	2	0.55	-
150	209	86	34	15	3	0.68	0.76
200	259	136	84	40	3	0.82	0.89

This drawing is for reference only. Actual dimensions are based on the 2D/3D drawings provided. Product styles and appearance specifications may change without prior notice.

DK

DTH

DS


DC

DB

DE


DK060

DK60D Excluding protective cover

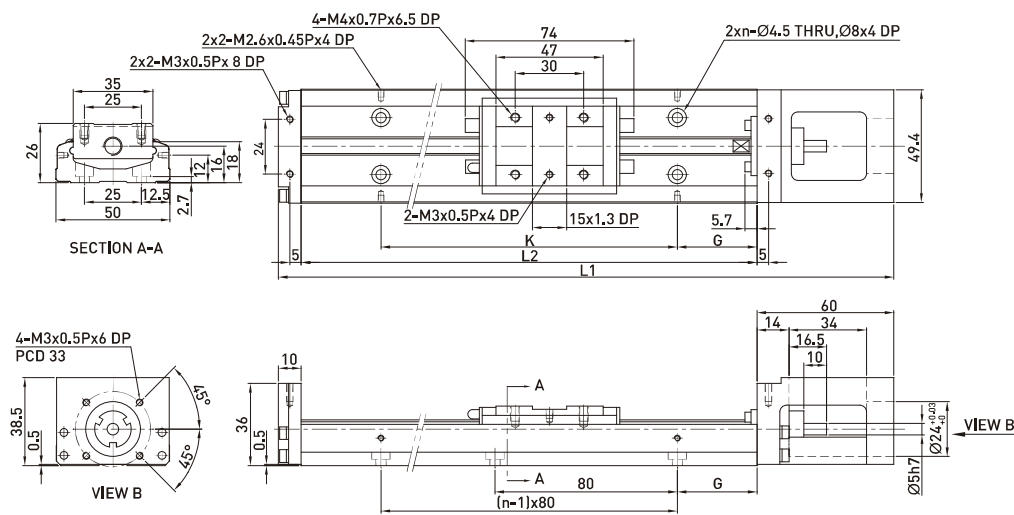

unit:mm


Rail length L2(mm)	Full length L1 (mm)	Maximum travel (mm)		G (mm)	k(mm)	N	Weight (kg)	
		A1 slide	A2 slide				A1 slide	A2 slide
150	220	70	-	35	80	2	1	-
200	270	120	55	20	160	3	1.2	1.4
250	320	170	105	45	160	3	1.4	1.6
300	370	220	155	30	240	4	1.6	1.8

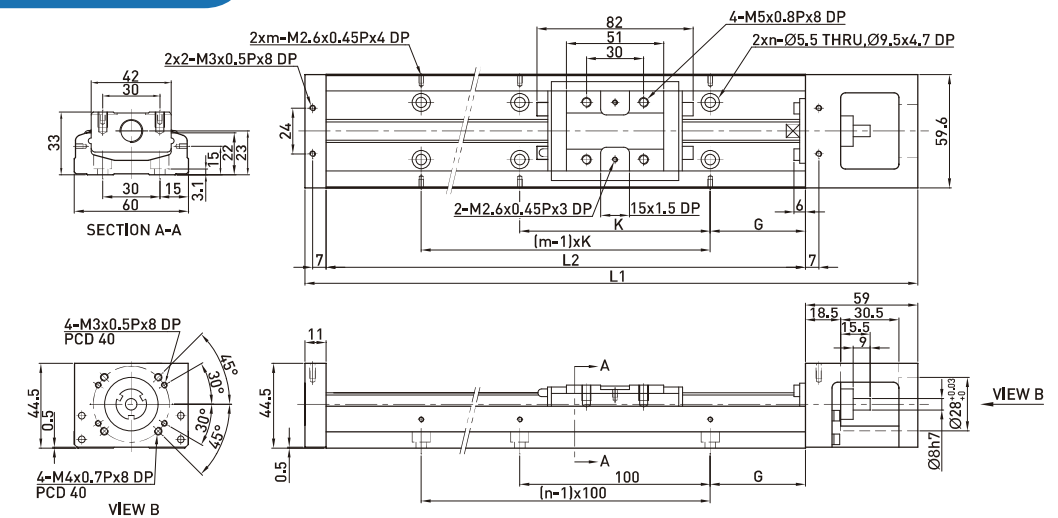

unit:mm


Rail length L2(mm)	Full length L1 (mm)	Maximum travel (mm)		G (mm)	k(mm)	N	M	Weight (kg)	
		A1 slide	A2 slide					A1slide	A2 slide
150	220	60	-	25	100	2	2	1.5	-
200	270	110	-	50	100	2	2	1.8	-
300	370	210	135	50	200	3	2	2.4	2.7
400	470	310	235	50	100	4	4	3	3.3
500	570	410	335	50	200	5	3	3.6	3.9
600	670	510	435	50	100	6	6	4.2	4.6

DK60D including protective cover

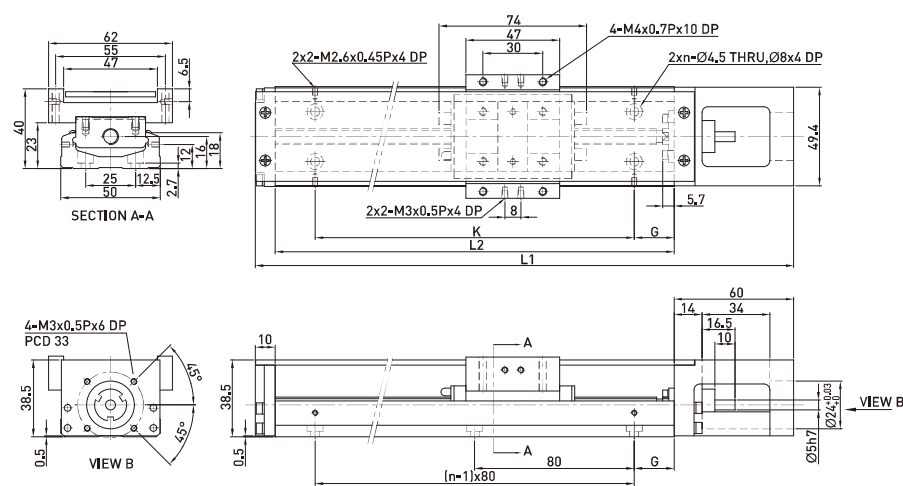

unit:mm


Rail length L2(mm)	Full length L1 (mm)	Maximum travel (mm)		G (mm)	K(mm)	N	Weight (kg)	
		A1 slide	A2 slide				A1 slide	A2 slide
150	220	70	-	35	80	2	1.1	-
200	270	120	55	20	160	3	1.3	1.5
250	320	170	105	45	160	3	1.6	1.8
300	370	220	155	30	240	4	1.8	2.0

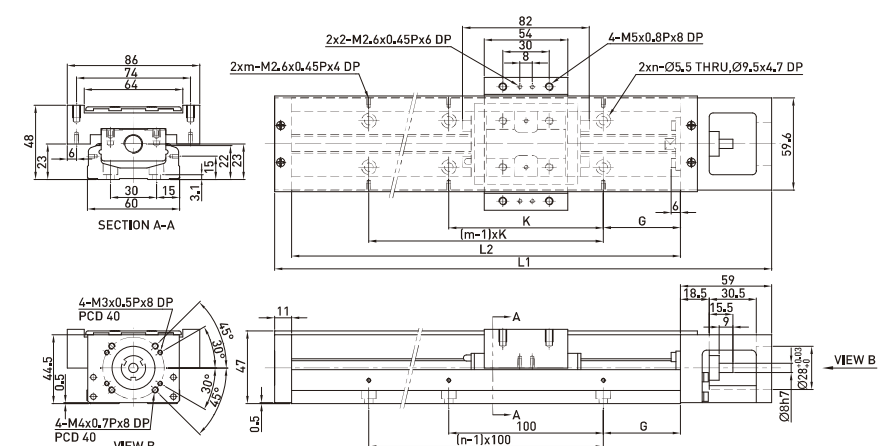

unit:mm

Rail length L2(mm)	Full length L1 (mm)	Maximum travel (mm)		G (mm)	K(mm)	N	M	Weight (kg)	
		A1 slide	A2 slide					A1 slide	A2 slide
150	220	60	-	25	100	2	2	1.7	-
200	270	110	-	50	100	2	2	2.1	-
300	370	210	135	50	200	3	2	2.7	3.0
400	470	310	235	50	100	4	4	3.3	3.6
500	570	410	335	50	200	5	3	3.9	4.2
600	670	510	435	50	100	6	6	4.6	5.0


DK100 Excluding protective cover

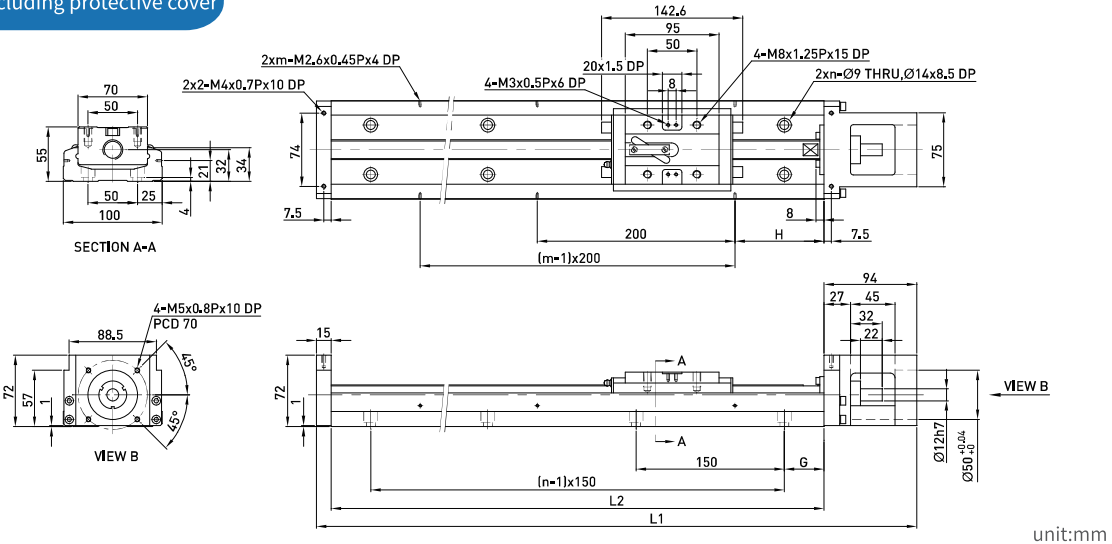

Rail length L2(mm)	Full length L1 (mm)	Maximum travel (mm)		H (mm)	N	M	Weight (kg)	
		A1 slide	A2 slide				A1 slide	A2 slide
340	440	216.5	108.5	70	3	2	5.7	6.5
440	540	316.5	208.5	20	4	3	6.9	7.7
540	640	416.5	308.5	70	5	3	8.0	8.8
640	740	516.5	408.5	20	6	4	9.2	10.0
740	840	616.5	508.5	70	7	4	10.4	11.2
940	1040	816.5	708.5	70	9	5	11.6	12.4

Rail length L2(mm')	Full length L1 (mm)	Maximum travel (mm)		G(mm)	H (mm)	N	M	Weight (kg)	
		A1slide	A2 slide					A1slide	A2 slide
980	1089	828	700	40	90	7	5	18.6	20.3
1080	1189	928	800	15	40	8	6	20.3	22.0
1180	1289	1028	900	65	90	8	6	22.0	23.7
1280	1389	1128	1000	40	40	9	7	23.6	25.3
1380	1489	1228	1100	15	90	10	7	25.3	27.0

DK100 Including protective cover

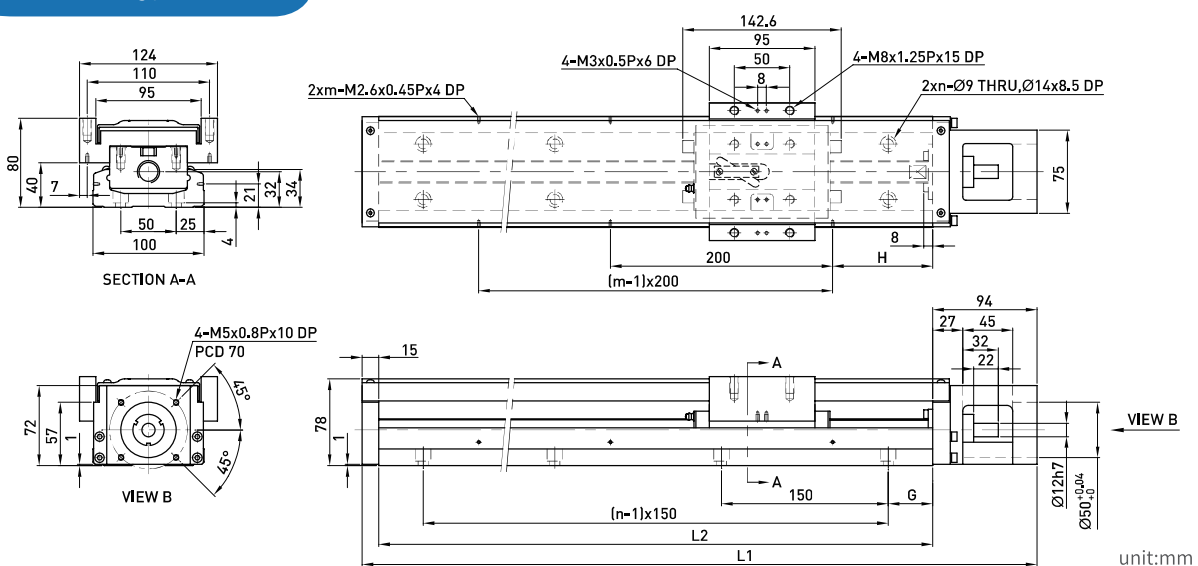

Rail length L2(mm)	Full length L1 (mm)	Maximum travel (mm)		H (mm)	N	M	Weight (kg)	
		A1slide	A2slide				A1 slide	A2 slide
340	440	216.5	108.5	70	3	2	6.5	7.3
440	540	316.5	208.5	20	4	3	7.8	8.6
540	640	416.5	308.5	70	5	3	9.0	9.8
640	740	516.5	408.5	20	6	4	10.3	11.3
740	840	616.5	508.5	70	7	4	11.6	12.4
940	1040	816.5	708.5	70	9	5	13.0	13.8

Rail length L2(mm)	Full length L1 (mm)	Maximum travel (mm)		G(mm)	H (mm)	N	M	Weight (kg)	
		A1slide	A2slide					A1 slide	A2 slide
980	1089	828	700	40	90	7	5	20.4	22.1
1080	1189	928	800	15	40	8	6	22.2	23.9
1180	1289	1028	900	65	90	8	6	24.0	25.7
1280	1389	1128	1000	40	40	9	7	25.7	27.4
1380	1489	1228	1100	15	90	10	7	27.5	29.2

※ Motor seat and motor connection flange


- **DK40**

Motor seat F0



Motor seat F0

Motor connection flange F1

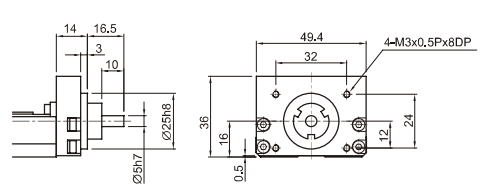


DK

DTHDSDCDBDE


※ Motor seat and motor connection flange

• DK100


Motor seat F0

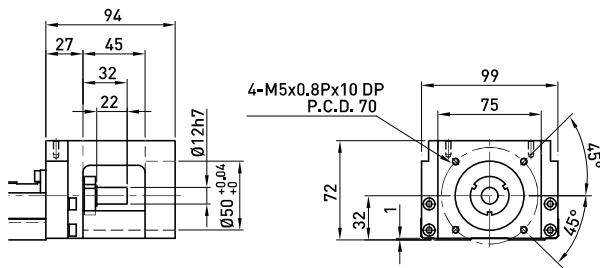


Motor connection flange F1

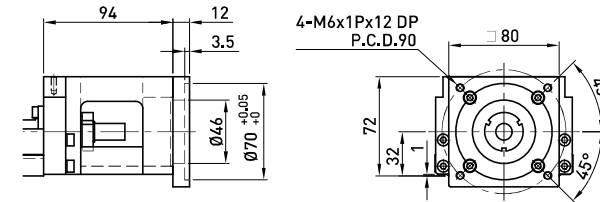


Motor connection flange F2

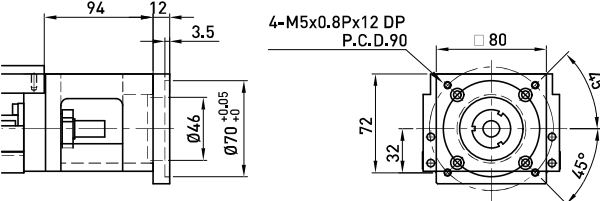


Motor connection flange F3

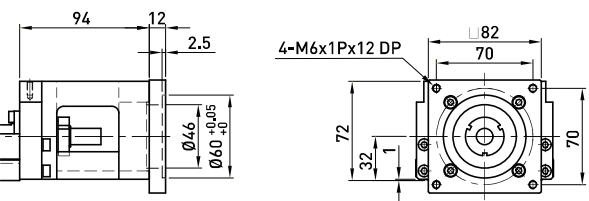

Motor connection flange F4


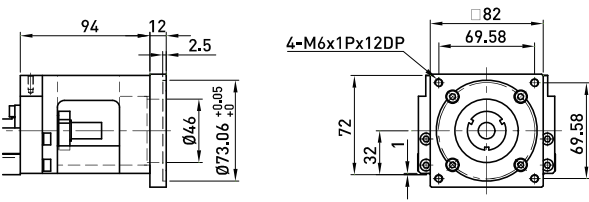


Transfer fixed seat H0

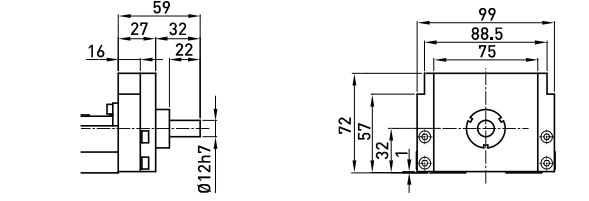


※ Limit switch

• Extreme guide rail

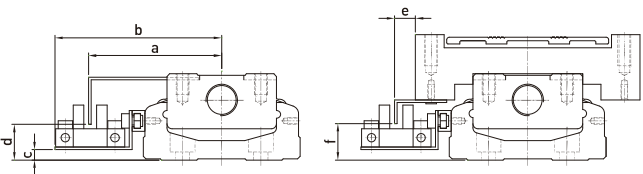

Size	A	B	C	D	E	F
DK40	41.5	54.1	0.5	10.8	15.3	12
DK50	45.5	59	1	10	15	11
DK60D	51	63.8	4	14.5	8	13
DK86D	63.5	76.7	8	18	8	18
DK100	71	84	10	20	9	20

Limit switch S1: PM-L45

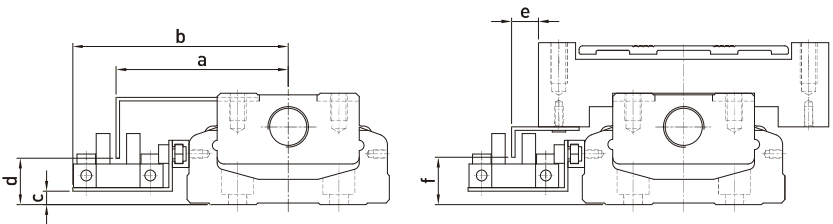

Size	A	B	C	D	E	F
DK40	36.5	44.3	1	9.8	10.5	12
DK50	41.3	48	1	10.5	10.2	11
DK60D	46.2	52.8	4	14	3.2	13
DK86D	59	65.7	8	18	3	18
DK100	66	73	10	20	4.2	20

Limit switch S2: PM-Y45

DK

DTH

DS

DC

DB

DE

DK060




Screw drive

DTH series
slideway with embedded screw

DTH4	Body width 44MM maximum stroke 500MM Maximum Load25KG	DTH8	Body width 82MM maximum stroke 1100MM Maximum Load50KG
DTH5	Body width 54MM maximum stroke 800MM Maximum Load30KG	DTH12	Body width 120MM maximum stroke 1100MM Maximum Load110KG

⚙️ DTH4

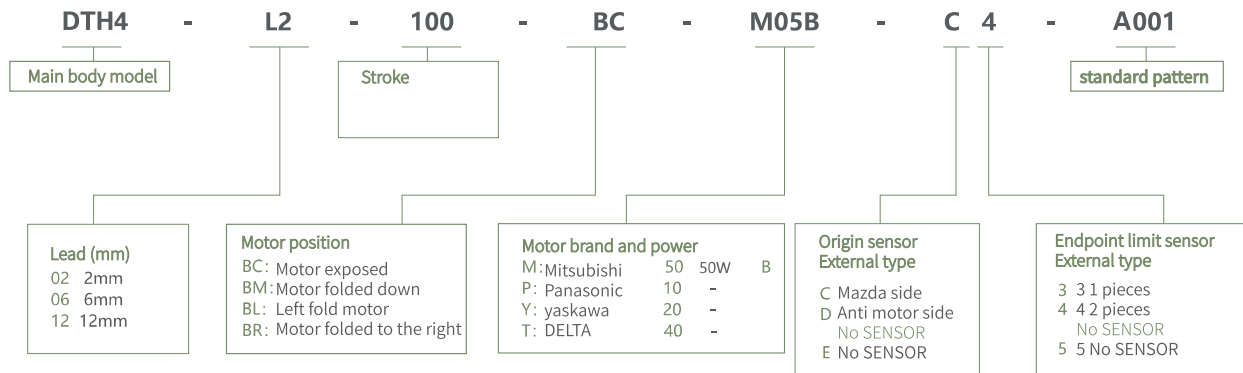

✖ Basic style


specifications	Repetitive positioning accuracy: mm		±0.01		
	Screw lead mm		2	6	12
	Maximum speed mm/s		100	300	600
	Maximum load mass kg	Horizontal use	25	20	12
		Vertical use	8	5	2
	Freeze thrust N		424	141	71
Parts	Standard travel mm		50-800MM/50 interval		
	AC servo motor capacity W		50		
	Ball screw outer diameter mm		C7 φ 10		
	Coupling mm		7x8		
	Origin sensor	External cheat	PM-Y45(NPN)		

When the travel exceeds 750, there will be screw deflection. Please refer to page 14 of the table of contents. Set the motor acceleration and deceleration to 0.2 seconds.


✖ Allowable load torque table

✖ Static allowable load inertia


(Unit : mm)




(Unit : mm)



(Unit : mm)



(Unit : N.m)




Horizontal installation		A	B	C
screw lead 2	12kg	1000	55	80
	18kg	750	35	50
	25kg	500	23	32
screw lead 6	10kg	550	53	70
	15kg	350	32	45
	20kg	250	22	31
screw lead 12	8kg	305	59	75
	10kg	240	45	57
	12kg	195	37	47

Side hanging installation		A	B	C
screw lead 2	12kg	80	55	1000
	18kg	50	35	750
	25kg	32	23	500
screw lead 6	10kg	72	52	550
	15kg	45	32	345
	20kg	31	22	250
screw lead 12	8kg	75	59	300
	10kg	58	45	240
	12kg	47	37	190

Vertical installation		A	C
screw lead 2	4kg	200	200
	8kg	100	100
	-	-	-
screw lead 6	3kg	200	200
	5kg	120	120
	-	-	-
screw lead 12	1.5kg	350	350
	2kg	260	260
	-	-	-

The data represented by the force distance table represents the center of gravity. Under normal use in accordance with the catalog specifications, the guaranteed lifespan is 10000 kilometers. Inverted hanging cannot be used according to standard specifications. If you have any requirements, please contact our business


Motor exposed

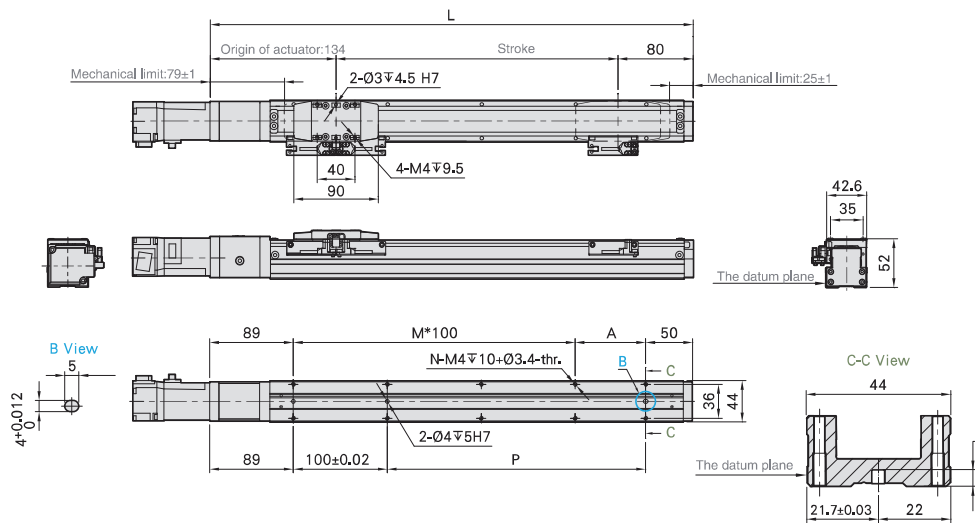

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	264	314	364	414	464	514	564	614	664	714	764	814	864	914	964	1014
A	25	75	25	75	25	75	25	75	25	75	25	75	25	75	25	75
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20
P	25	75	125	175	225	275	325	375	425	475	525	575	625	675	725	775
KG	0.95	1.12	1.29	1.47	1.65	1.83	2.01	2.19	2.37	2.55	2.73	2.91	3.09	3.27	3.45	3.63

unit:mm

Motor folded down

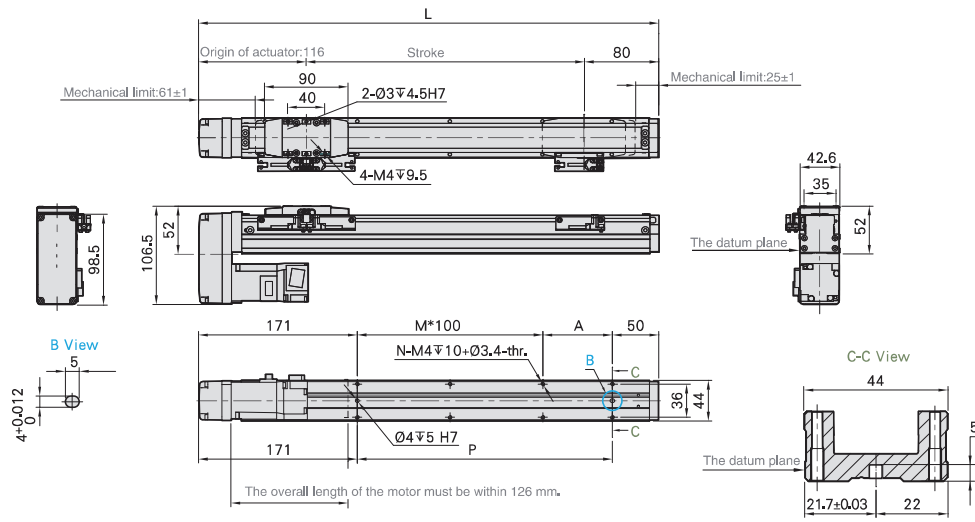

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	246	296	346	396	446	496	546	596	646	696	746	796	846	896	946	996
A	25	75	25	75	25	75	25	75	25	75	25	75	25	75	25	75
M	0	0	1	1	2	2	3	3	4	4	5	5	6	6	7	7
N	4	4	6	6	8	8	10	10	12	12	14	14	16	16	18	18
P	25	75	125	175	225	275	325	375	425	475	525	575	625	675	725	775
KG	1.04	1.22	1.40	1.58	1.76	1.94	2.12	2.30	2.48	2.66	2.84	3.02	3.20	3.38	3.56	3.74

unit:mm

This drawing is for reference only. Actual dimensions are based on the 2D/3D drawings provided. Product styles and appearance specifications may change without prior notice

DK

DTH

DS

DC

DB

DE


DTH4

DTH5

DTH8

DTH12


Left fold motor

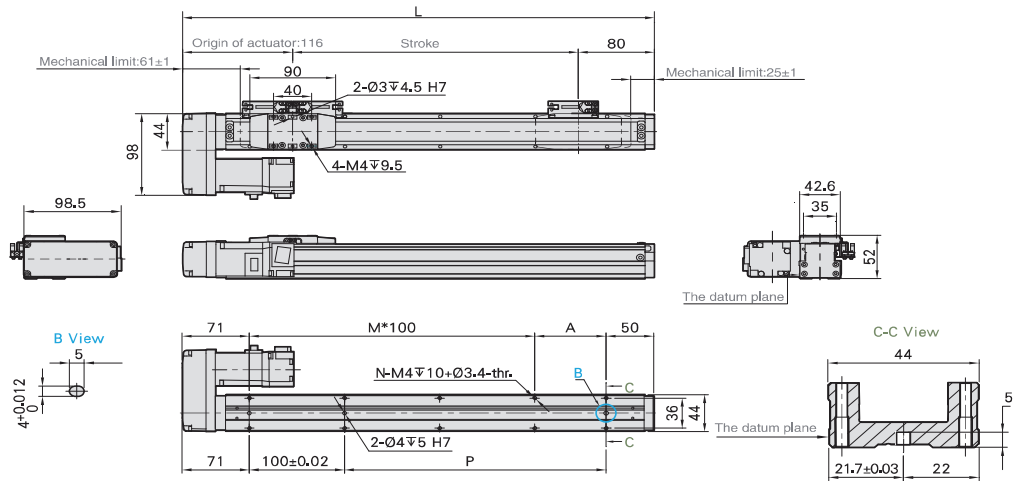

unit:mm

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	246	296	346	396	446	496	546	596	646	696	746	796	846	896	946	996
A	25	75	25	75	25	75	25	75	25	75	25	75	25	75	25	75
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20
P	25	75	125	175	225	275	325	375	425	475	525	575	625	675	725	775
KG	1.04	1.22	1.40	1.58	1.76	1.94	2.12	2.30	2.48	2.66	2.84	3.02	3.20	3.38	3.56	3.74

Motor folded to the right

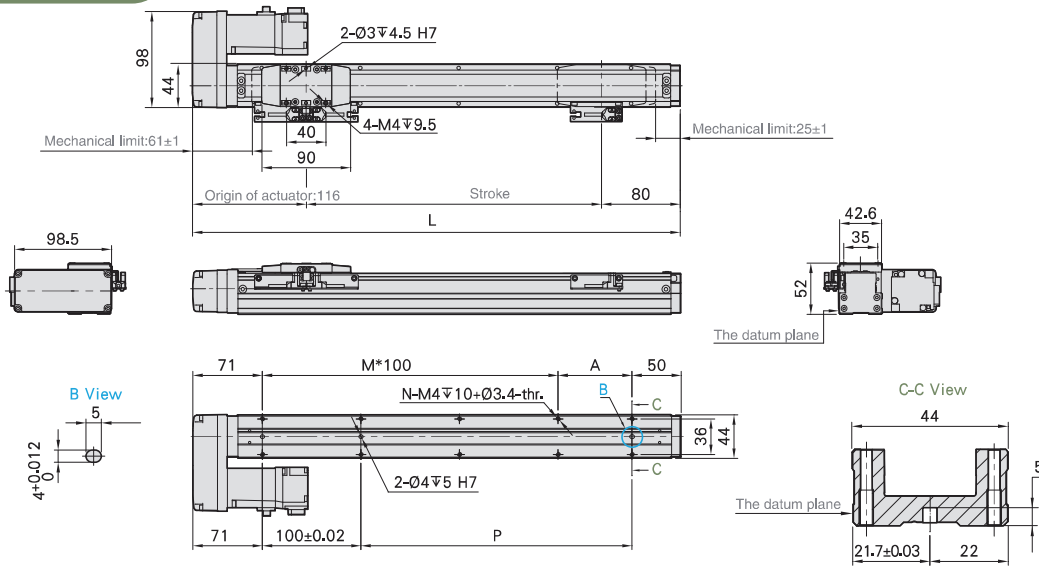

unit:mm

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	246	296	346	396	446	496	546	596	646	696	746	796	846	896	946	996
A	25	75	25	75	25	75	25	75	25	75	25	75	25	75	25	75
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20
P	25	75	125	175	225	275	325	375	425	475	525	575	625	675	725	775
KG	1.04	1.22	1.40	1.58	1.76	1.94	2.12	2.30	2.48	2.66	2.84	3.02	3.20	3.38	3.56	3.74

This drawing is for reference only. Actual dimensions are based on the 2D/3D drawings provided. Product styles and appearance specifications may change without prior notice

DK

DTH

DS

DC

DB

DE


DTH4

DTH5

DTH8

DTH12

⚙️ DTH5

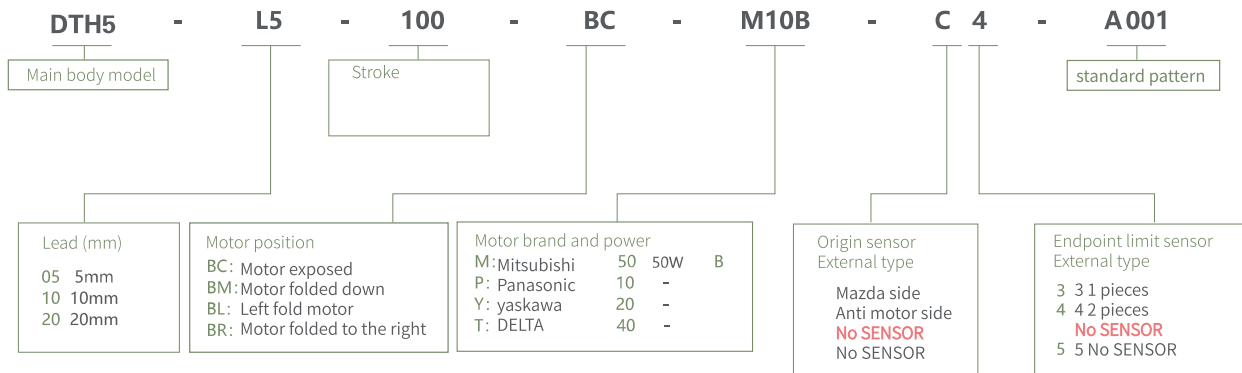

⌘ Basic style


specifications	Repetitive positioning accuracy: mm		±0.01		
	Screw lead mm		5	10	20
	Maximum speed mm/s		250	500	1000
	Maximum load mass kg	Horizontal use	30	15	10
		Vertical use	10	5	2.5
	Freeze thrust N		341	170	85
Parts	Standard travel mm		50-800MM/50 interval		
	AC servo motor capacity W		100		
	Ball screw outer diameter mm		C7 φ 12		
	Coupling mm		7x8		
	Origin sensor	External cheat	PM-Y45(NPN)		

When the travel exceeds 750, there will be screw deflection. Please refer to page 14 of the table of contents. Set the motor acceleration and deceleration to 0.2 seconds.

⌘ Allowable load torque table


⌘ Static allowable load inertia

(Unit : mm)




Horizontal installation		A	B	C
screw lead 05	10kg	650	75	100
	20kg	440	32	45
	30kg	270	19	25
screw lead 10	5kg	600	145	185
	10kg	370	70	85
	15kg	250	42	52
screw lead 20	5kg	320	120	130
	8kg	220	70	80
	10kg	175	55	60

(Unit : mm)




Side hanging installation		A	B	C
screw lead 05	10kg	100	75	650
	20kg	45	32	420
	30kg	25	19	260
screw lead 10	5kg	180	145	600
	10kg	85	68	370
	15kg	52	42	250
screw lead 20	5kg	130	120	320
	8kg	75	70	220
	10kg	60	55	170

(Unit : mm)



Vertical installation		A	C
screw lead 05	6kg	145	145
	8kg	110	110
	10kg	90	90
screw lead 10	1kg	800	800
	3kg	260	260
	5kg	155	155
screw lead 20	1kg	600	600
	2kg	300	300
	2.5kg	250	250


(Unit : N.m)



MY	103
MP	103
MR	144

The data represented by the force distance table represents the center of gravity. Under normal use in accordance with the catalog specifications, the guaranteed lifespan is 10000 kilometers. Inverted hanging cannot be used according to standard specifications. If you have any requirements, please contact our business


Motor exposed

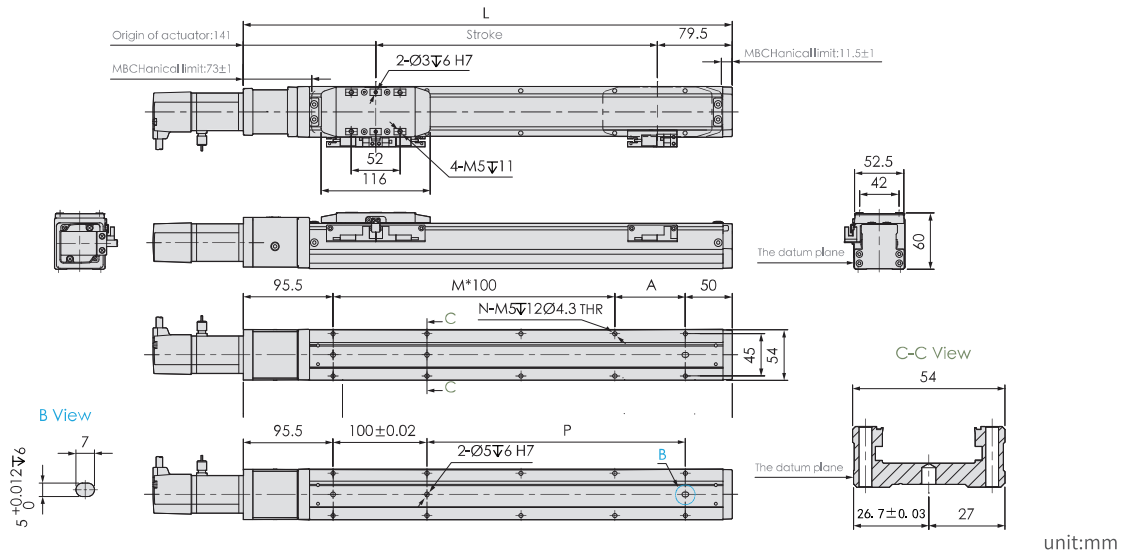

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	270.5	320.5	370.5	420.5	470.5	520.5	570.5	620.5	670.5	720.5	770.5	820.5	870.5	920.5	970.5	1020.5
A	25	75	25	75	25	75	25	75	25	75	25	75	25	75	25	75
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20
P	25	75	125	175	225	275	325	375	425	475	525	575	625	675	725	775
KG	1.65	1.79	1.92	2.11	2.39	2.50	2.52	2.75	2.86	2.95	3.15	3.28	3.44	3.58	3.71	4.09

unit:mm

Motor folded down

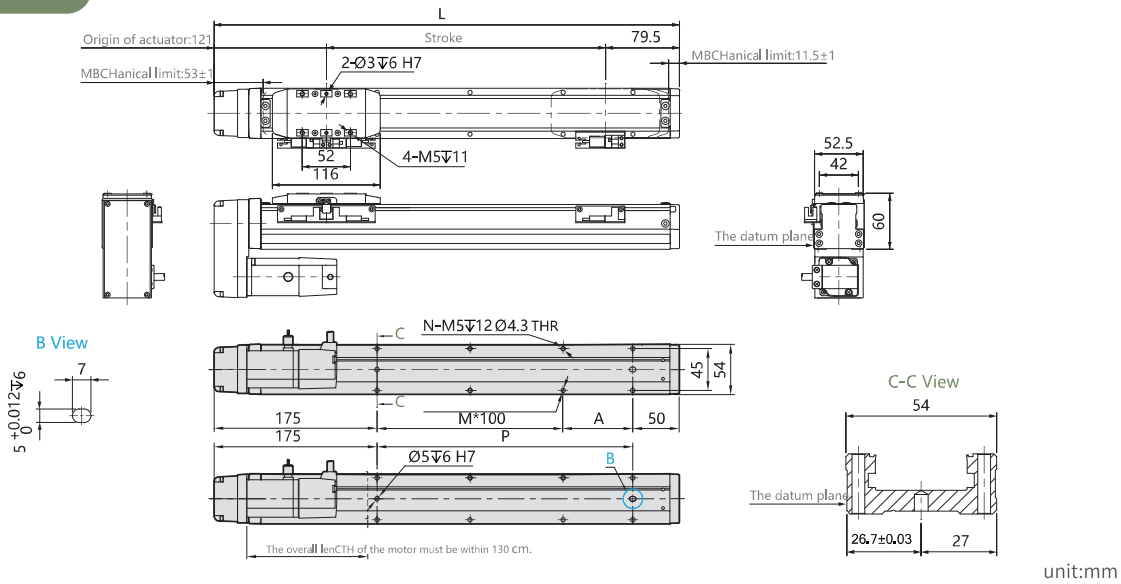


行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000
A	25	75	25	75	25	75	25	75	25	75	25	75	25	75	25	75
M	0	0	1	1	2	2	3	3	4	4	5	5	6	6	7	7
N	4	4	6	6	8	8	10	10	12	12	14	14	16	16	18	18
P	25	75	125	175	225	275	325	375	425	475	525	575	625	675	725	775
KG	1.68	1.80	2.03	2.14	2.42	2.53	2.58	2.78	2.89	2.98	3.18	3.31	3.47	3.60	3.74	4.12

unit:mm


This drawing is for reference only. Actual dimensions are based on the 2D/3D drawings provided. Product styles and appearance specifications may change without prior notice

Left fold motor

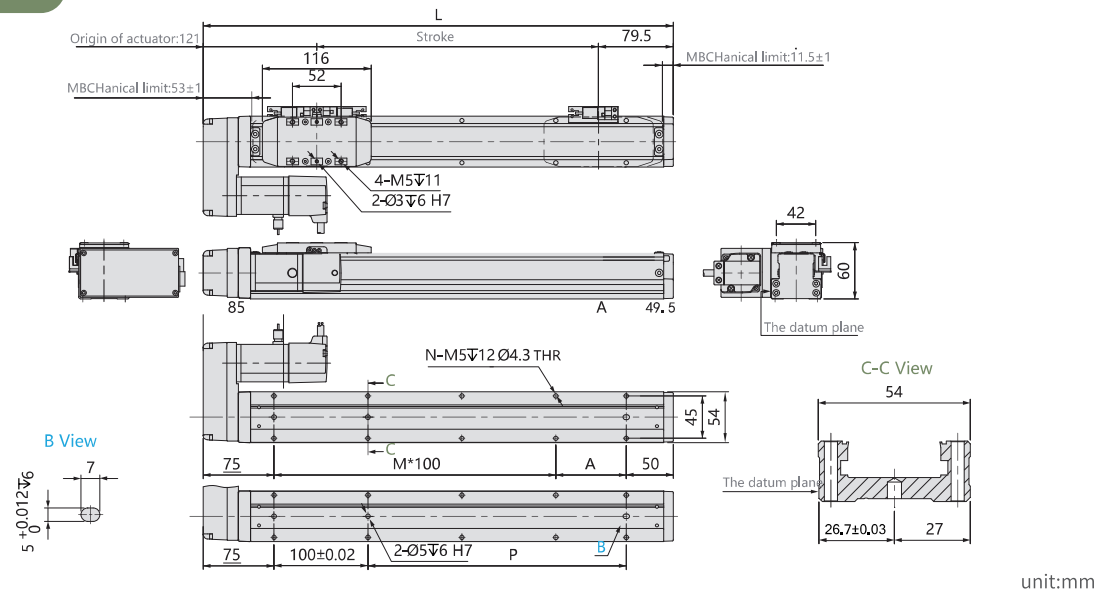

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000
A	25	75	25	75	25	75	25	75	25	75	25	75	25	75	25	75
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20
P	25	75	125	175	225	275	325	375	425	475	525	575	625	675	725	775
KG	1.68	1.80	2.03	2.14	2.42	2.53	2.58	2.78	2.89	2.98	3.18	3.31	3.47	3.60	3.74	4.12

Motor folded to the right

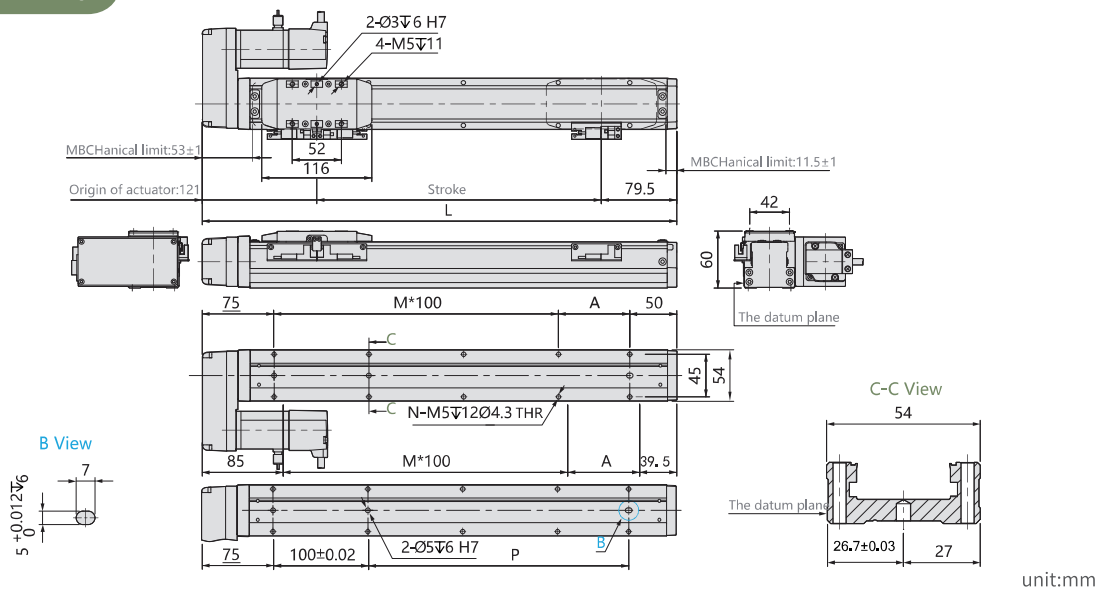

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000
A	25	75	25	75	25	75	25	75	25	75	25	75	25	75	25	75
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20
P	25	75	125	175	225	275	325	375	425	475	525	575	625	675	725	775
KG	1.68	1.80	2.03	2.14	2.42	2.53	2.58	2.78	2.89	2.98	3.18	3.31	3.47	3.60	3.74	4.12

This drawing is for reference only. Actual dimensions are based on the 2D/3D drawings provided. Product styles and appearance specifications may change without prior notice

DK

DTH

DS

DC

DB

DE


DTH4

DTH5

DTH8

DTH12

 DTH8

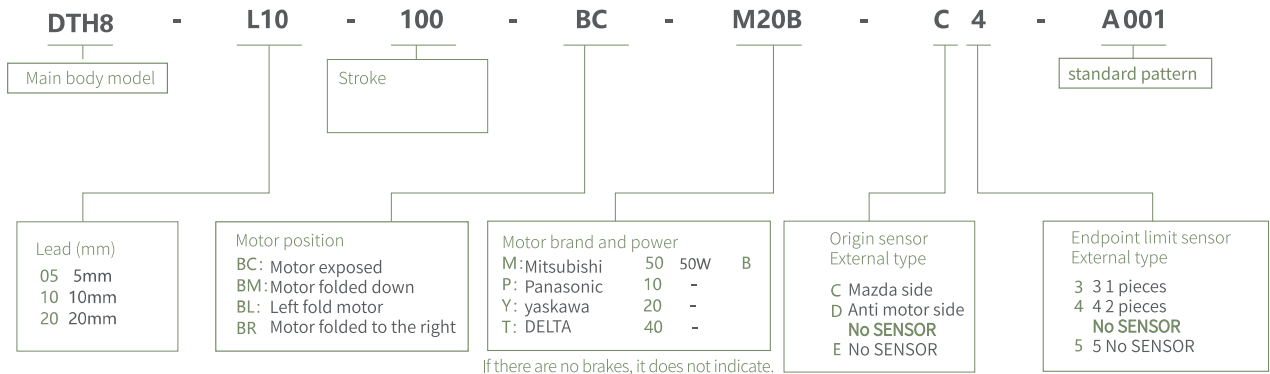

✕ Basic style


specifications	Repetitive positioning accuracy: mm		±0.01			
	Screw lead mm		5	10	20	
	Maximum speed mm/s		250	500	1000	
	Maximum load mass kg	Horizontal use	50	30	18	
		Vertical use	15	8	3	
	Freeze thrust N		683	341	174	
Parts	Standard travel mm		50-1100MM/50 interval			
	AC servo motor capacity W		200			
	Ball screw outer diameter mm		C7 φ 16			
	Coupling mm		10x14/11 注			
	Origin sensor	External cheat	PM-Y45(NPN)			

When the travel exceeds 750, there will be screw deflection. Please refer to page 14 of the table of contents. Set the motor acceleration and deceleration to 0.2 seconds.
Note 1: When using a Panasonic 200W motor, the motor axis is 11; Other brands have a motor axis of 14.


✕ Allowable load torque table

✕ Static allowable load inertia


(Unit : mm)




(Unit : mm)



(Unit : mm)



(Unit : N.m)



Horizontal installation		A	B	C
screw lead 05	20kg	1560	153	237
	35kg	890	81	126
	50kg	550	53	82
screw lead 10	10kg	1730	286	412
	20kg	839	136	196
	30kg	541	86	124
screw lead 20	6kg	1213	403	493
	9kg	800	264	323
	18kg	592	194	238


Side hanging installation		A	B	C
screw lead 05	20kg	214	153	1435
	35kg	113	81	845
	50kg	74	53	506
screw lead 10	10kg	370	286	1400
	20kg	176	136	800
	30kg	112	86	495
screw lead 20	6kg	444	403	760
	9kg	292	264	650
	18kg	214	194	544

Vertical installation		A	C
screw lead 05	10kg	331	331
	15kg	220	220
	-	-	-
screw lead 10	5kg	589	589
	8kg	368	368
	-	-	-
screw lead 20	3kg	935	935
	-	-	-
	-	-	-

MY	318
MP	318
MR	626


The data represented by the force distance table represents the center of gravity. Under normal use in accordance with the catalog specifications, the guaranteed lifespan is 10000 kilometers. Inverted hanging cannot be used according to standard specifications. If you have any requirements, please contact our business

Motor exposed

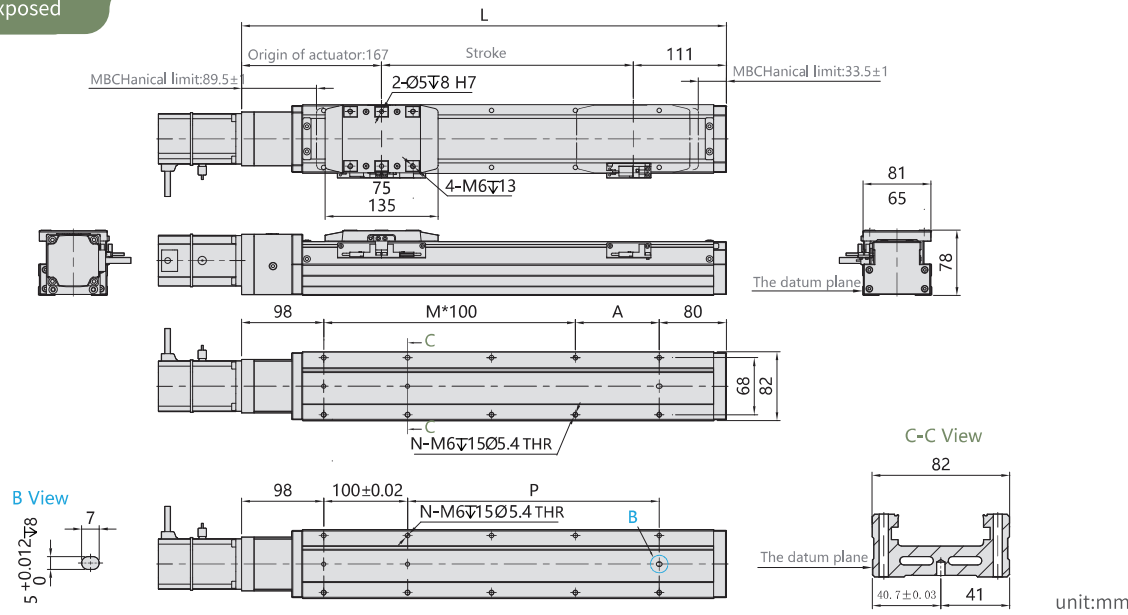

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100
L	328	378	428	478	528	578	628	678	728	778	828	878	928	978	1028	1078	1128	1178	1228	1278	1328	1378
A	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26
P	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100
KG	3.91	4.29	4.70	5.00	5.35	5.68	6.00	6.35	6.64	6.97	7.41	7.71	8.12	8.41	8.65	8.96	9.37	9.62	10.01	10.28	10.70	11.12

Motor folded down

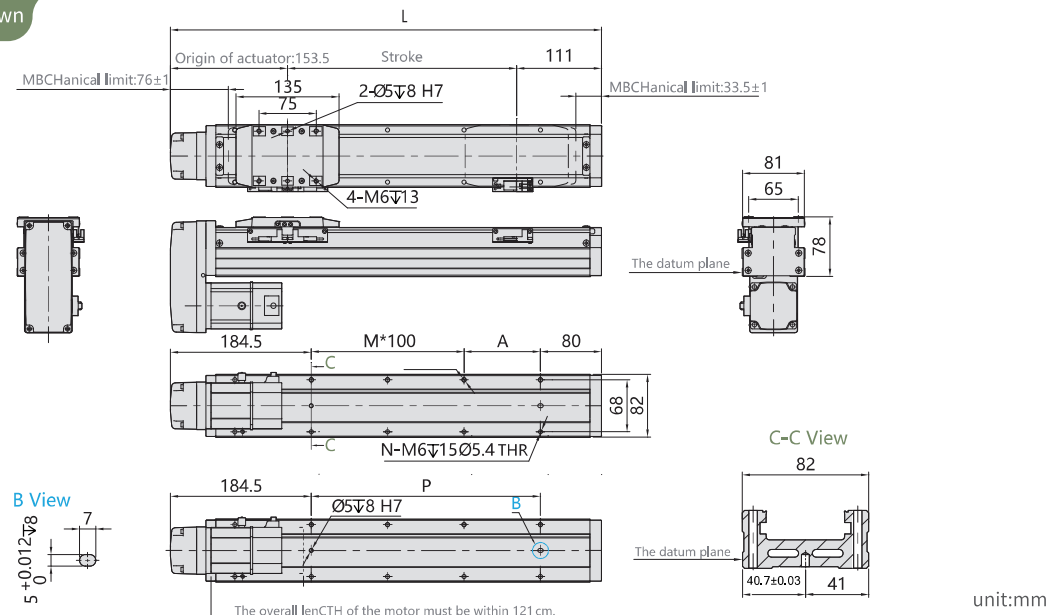

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100
L	314.5	364.5	414.5	464.5	514.5	564.5	614.5	664.5	714.5	764.5	814.5	864.5	914.5	964.5	1014.5	1064.5	1114.5	1164.5	1214.5	1264.5	1314.5	1364.5
A	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100
M	0	0	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10
N	4	4	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24
P	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100
KG	3.95	4.33	4.74	5.09	5.39	5.72	6.04	6.39	6.68	7.01	7.45	7.75	8.16	8.45	8.69	9.00	9.41	9.66	10.08	10.32	10.74	11.16

This drawing is for reference only. Actual dimensions are based on the 2D/3D drawings provided. Product styles and appearance specifications may change without prior notice

DK

DTH

DS

DC

DB

DE


DTH4

DTH5

DTH8


DTH12

Left fold motor

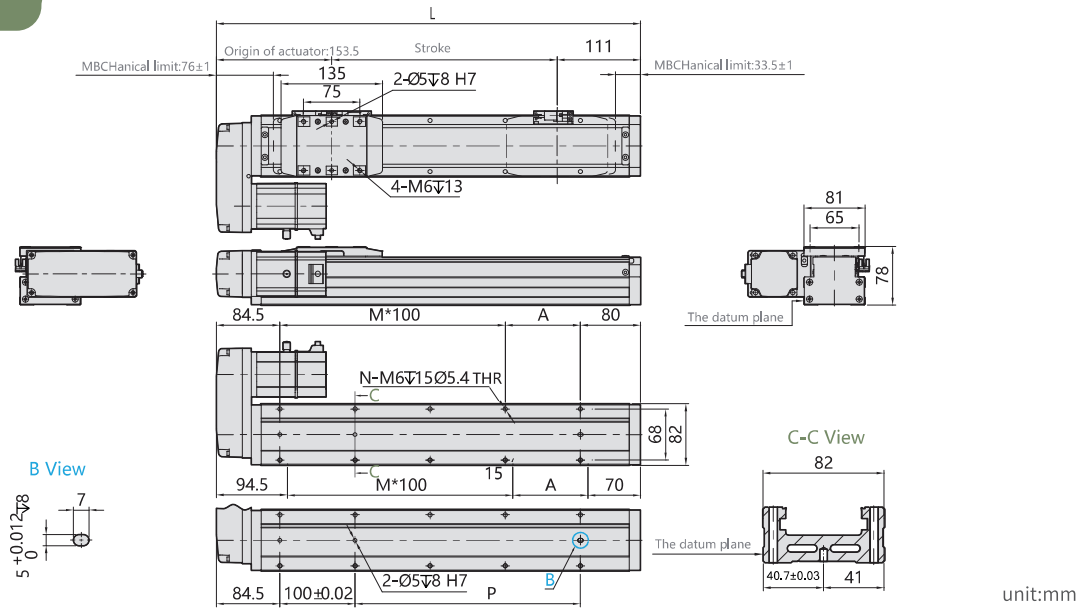

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100
L	314.5	364.5	414.5	464.5	514.5	564.5	614.5	664.5	714.5	764.5	814.5	864.5	914.5	964.5	1014.5	1064.5	1114.5	1164.5	1214.5	1264.5	1314.5	1364.5
A	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26
P	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100
KG	3.95	4.33	4.74	5.09	5.39	5.72	6.04	6.39	6.68	7.01	7.45	7.75	8.16	8.45	8.69	9.00	9.41	9.66	10.08	10.32	10.74	11.16

Motor folded to the right

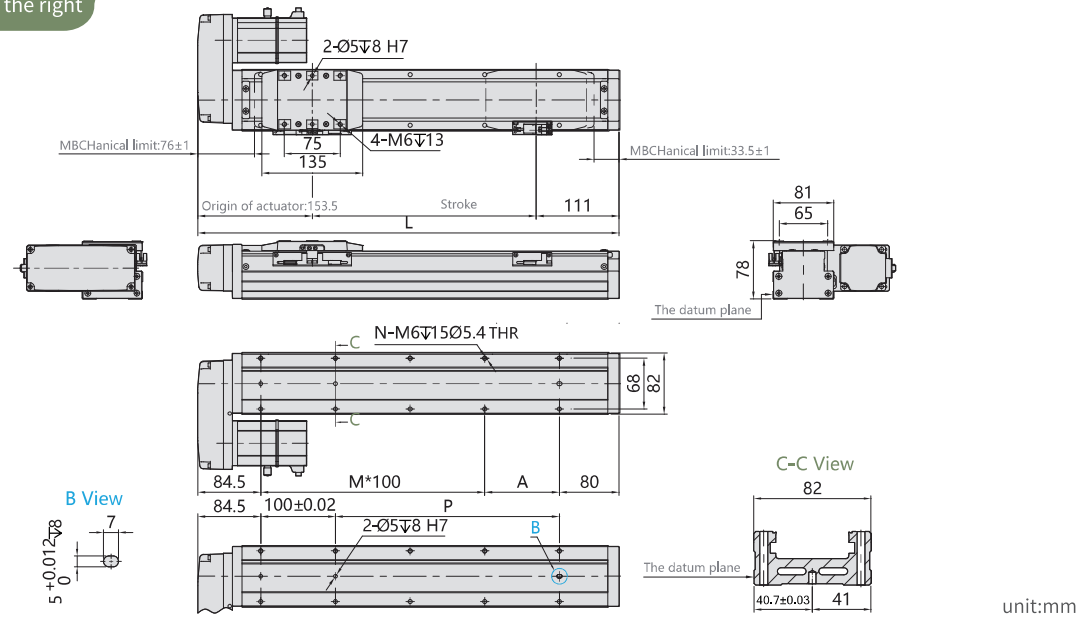

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100
L	314.5	364.5	414.5	464.5	514.5	564.5	614.5	664.5	714.5	764.5	814.5	864.5	914.5	964.5	1014.5	1064.5	1114.5	1164.5	1214.5	1264.5	1314.5	1364.5
A	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26
P	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100
KG	3.95	4.33	4.74	5.09	5.39	5.72	6.04	6.39	6.68	7.01	7.45	7.75	8.16	8.45	8.69	9.00	9.41	9.66	10.08	10.32	10.74	11.16

This drawing is for reference only. Actual dimensions are based on the 2D/3D drawings provided. Product styles and appearance specifications may change without prior notice

DK

DTH

DS

DC

DB

DE


DTH4

DTH5

DTH8

DTH12

DTH12

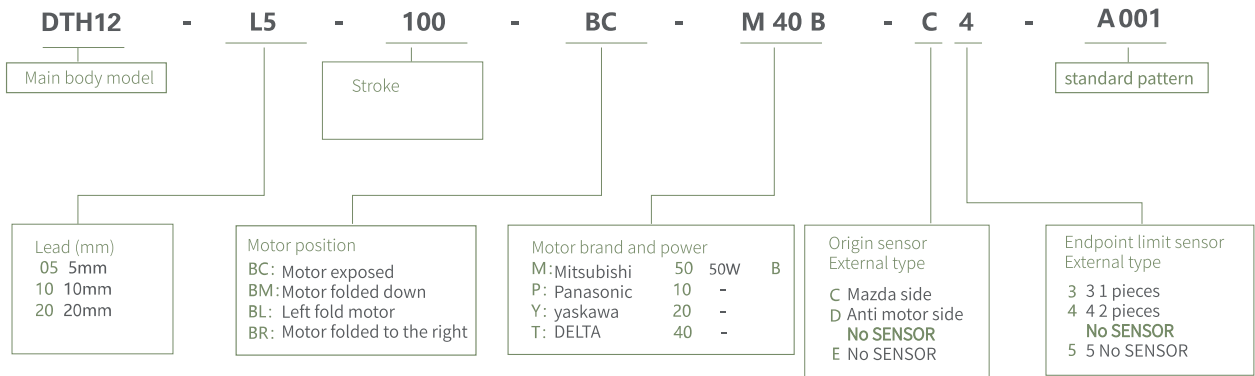





✂ Basic style

specifications	Repetitive positioning accuracy: mm		±0.01			
	Screw lead mm		5	10	20	32
	Maximum speed mm/s		250	500	1000	1600
	Maximum load mass kg	Horizontal use	110	88	40	30
		Vertical use	33	22	10	8
	Freeze thrust N		1388	694	347	218
Parts	Standard travel mm		50-1250MM/50 interval			
	AC servo motor capacity W		400			
	Ball screw outer diameter mm		C7φ16			
	Coupling mm		10×14			
	Origin sensor	External cheat	PM-Y45(NPN)			


When the travel exceeds 750, there will be screw deflection. Please refer to page 14 of the table of contents. Set the motor acceleration and deceleration to 0.2 seconds.

✂ Allowable load torque table


✂ Static allowable load inertia

(Unit : mm)				(Unit : mm)				(Unit : mm)				(Unit : N.m)			
															
Horizontal installation				Side hanging installation				Vertical installation							
screw lead 05	60kg	2850	250	340	screw lead 05	55kg	280	280	3300	screw lead 05	15kg	1200	1200	MY	606
	80kg	2100	180	250		75kg	200	195	2400		22kg	820	820		606
	110kg	1500	120	170		110kg	130	125	1550		33kg	550	550		1168
screw lead 10	30kg	2850	490	600	screw lead 10	35kg	400	410	2500	screw lead 10	10kg	1600	1600		
	50kg	1700	280	350		55kg	245	250	1550		14kg	1150	1150		
	88kg	950	140	190		88kg	150	150	950		22kg	730	730		
screw lead 20	10kg	3400	1250	1400	screw lead 20	12kg	900	1070	3000	screw lead 20	7kg	1800	1800		
	22kg	1650	550	620		20kg	550	630	1800		10kg	1250	1250		
	40kg	900	290	330		40kg	260	300	900		-	-	-		
screw lead 32	15kg	1100	570	550	screw lead 32	15kg	440	570	1050	screw lead 32	5kg	1600	1600		
	25kg	620	330	320		30kg	210	270	520		8kg	1000	1000		
	30kg	520	270	260		-	-	-	-		-	-	-		

Motor exposed

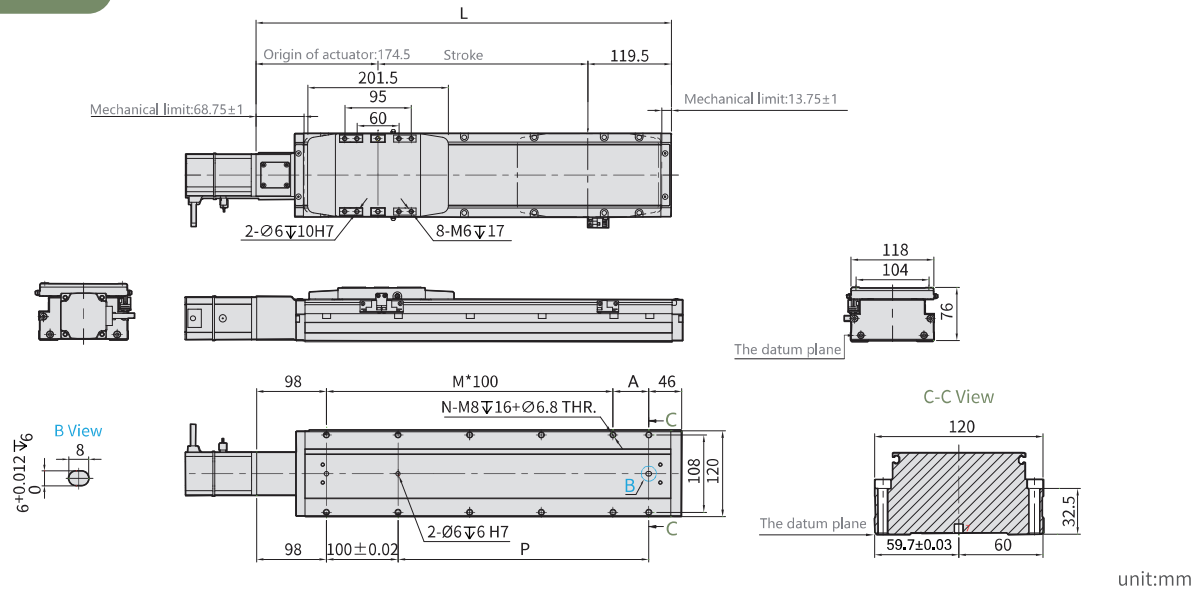

Motor folded down

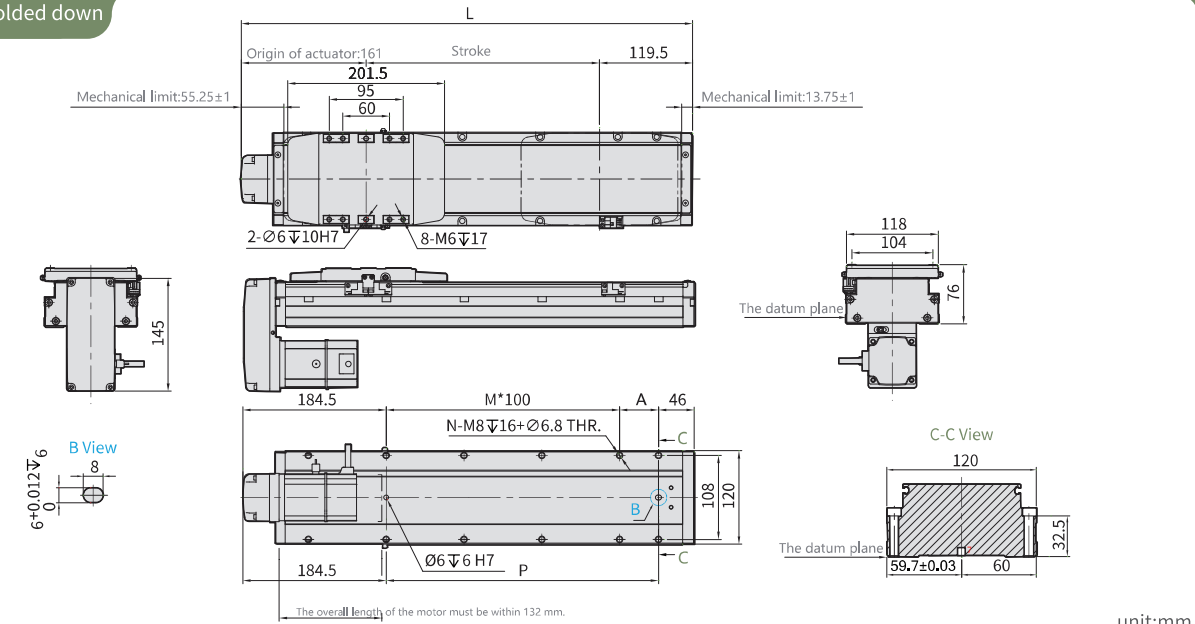

This drawing is for reference only. Actual dimensions are based on the 2D/3D drawings provided. Product styles and appearance specifications may change without prior notice

DK

DTH

DS

DC

DB

DE

DTH4

DTH5

DTH8

DTH12

unit:mm

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250
L	320.5	370.5	420.5	470.5	520.5	570.5	620.5	670.5	720.5	770.5	820.5	870.5	920.5	970.5	1020.5	1070.5	1120.5	1170.5	1220.5	1270.5	1320.5	1370.5	1420.5	1470.5	1520.5
A	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100
M	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13
N	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30
P	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300
KG	5.25	5.6	5.95	6.3	6.65	7	7.35	7.7	8.05	8.4	8.75	9.1	9.45	9.8	10.15	10.85	11.2	11.55	11.9	12.25	12.6	12.56	12.91	13.26	13.61

unit:mm

Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250
L	320.5	370.5	420.5	470.5	520.5	570.5	620.5	670.5	720.5	770.5	820.5	870.5	920.5	970.5	1020.5	1070.5	1120.5	1170.5	1220.5	1270.5	1320.5	1370.5	1420.5	1470.5	1520.5
A	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100
M	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13
N	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30
P	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300
KG	5.25	5.6	5.95	6.3	6.65	7	7.35	7.7	8.5	8.4	8.75	9.1	9.45	9.8	10.15	10.85	11.2	11.55	11.9	12.25	12.6	12.56	12.91	13.26	13.61

This drawing is for reference only. Actual dimensions are based on the 2D/3D drawings provided. Product styles and appearance specifications may change without prior notice.

DE

DTH12




Screw drive

DE series
Piston rod servo electric cylinder

DE40	Body width 52MM maximum stroke 500MM Maximum Load40KG	DE80	Body width 93MM maximum stroke 800MM Maximum Load3000KG
DE50	Body width 63MM maximum stroke 600MM Maximum Load100KG	DE125	Body width 134MM maximum stroke 800MM Maximum Load6000KG
DE63	Body width 75MM maximum stroke 600MM Maximum Load500KG		

DE40-L10-300-F-D-M20-S3

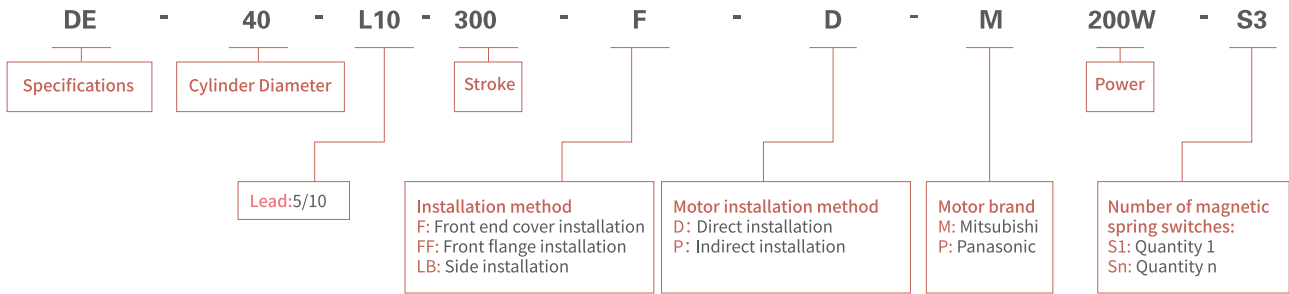


※ Specification

Power (unit: W)	100		200		400	
Rated torque (unit: N.M)	0.32		0.64		1.27	
Repetitive positioning accuracy (unit: MM)	±0.02					
Screw specifications	1205	1210	1210	1210	1205	1210
Maximum thrust (unit: N)	340	170	170	340	1280	690
Maximum speed (unit: MM/S)	250	500	500	500	250	500
Longest Journey (Unit: MM)	500					
Maximum load (KG)	40KG					
Screw grade	C7 Rolling Grade					
Piston rotation angle	±0.7°					
Maximum torque (in N.M)	1.8					
Basic 0 travel weight (unit: KG)	1.35					
Increase weight per 100 trips (unit: KG)	0.47					
Magnetic switch						


※ Product Drawing



DE40-F-D

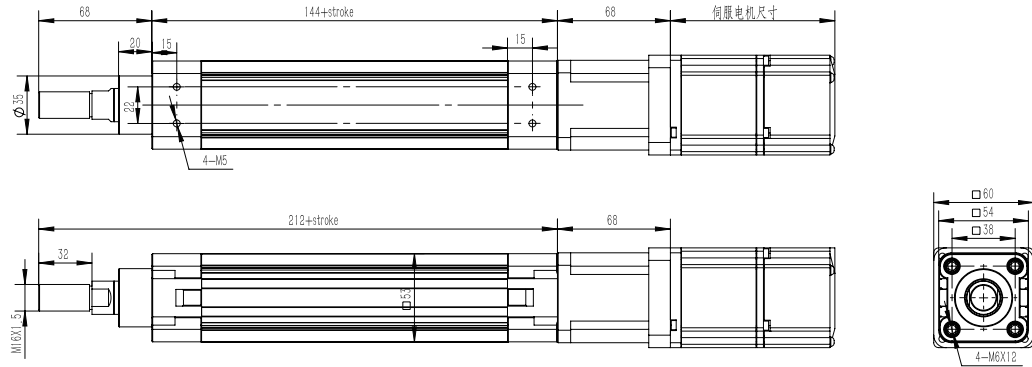

DE40-F-P

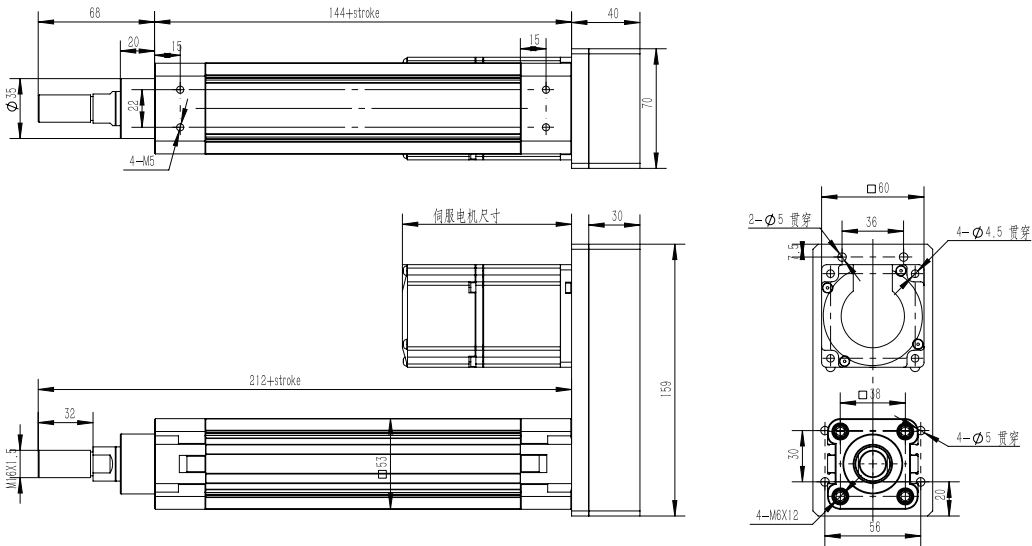

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DE40


DE50

DE63


DE80

DE125


DE40-FF-D

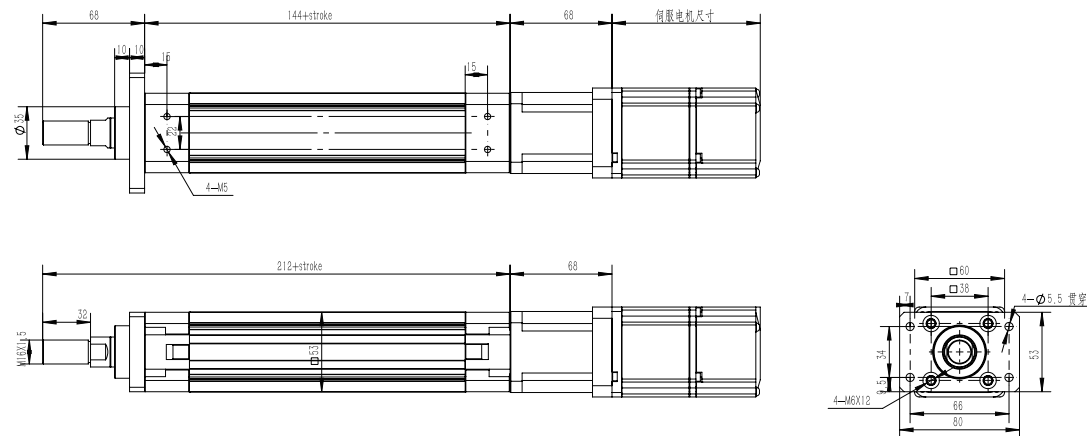


DE40-LB-D

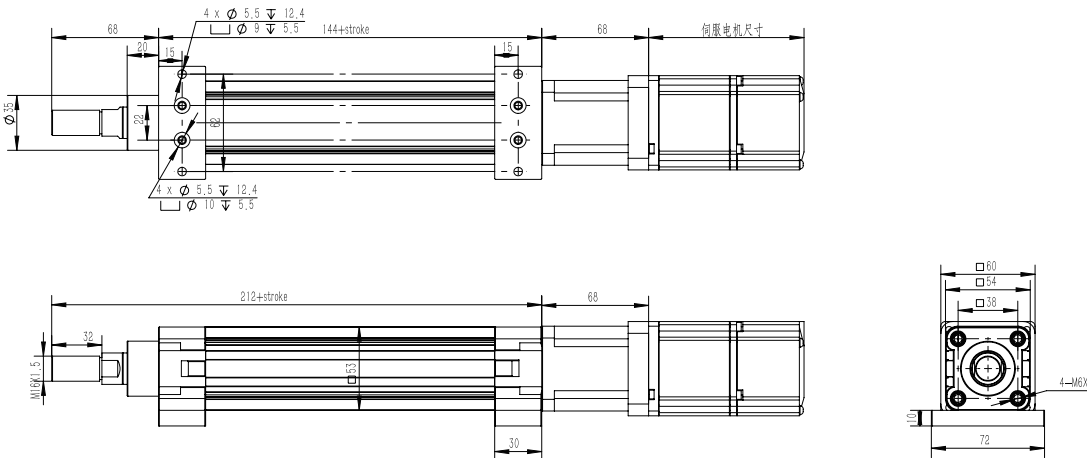

DE40-FF-P

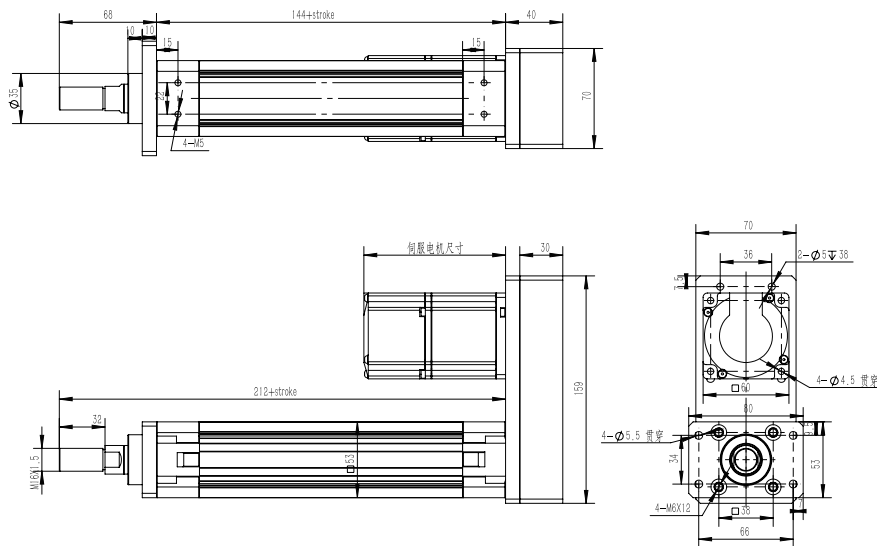

DE40-LB-P

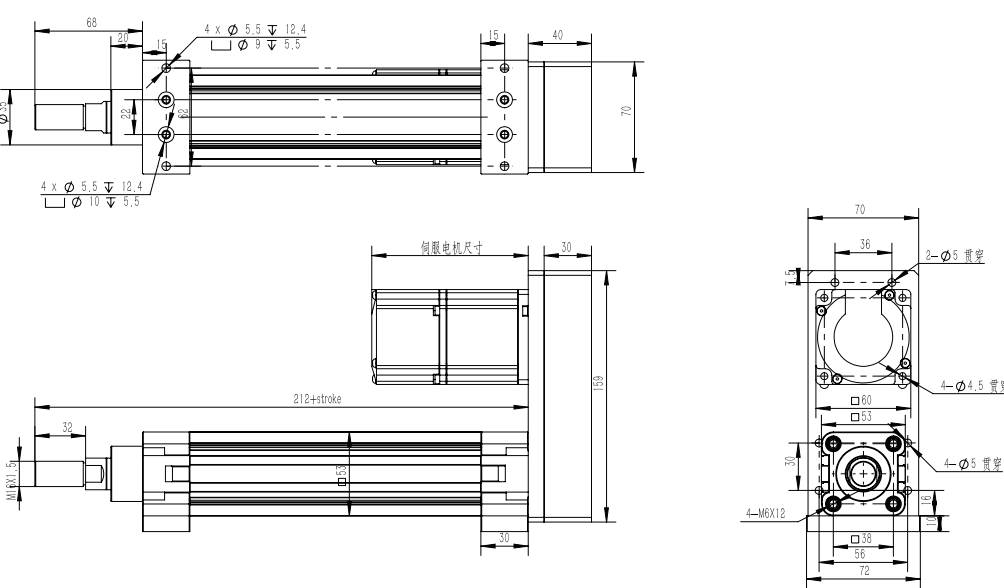

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DE40


DE50

DE63

DE80

DE125

DE50-L10-300-F-D-M40-S3

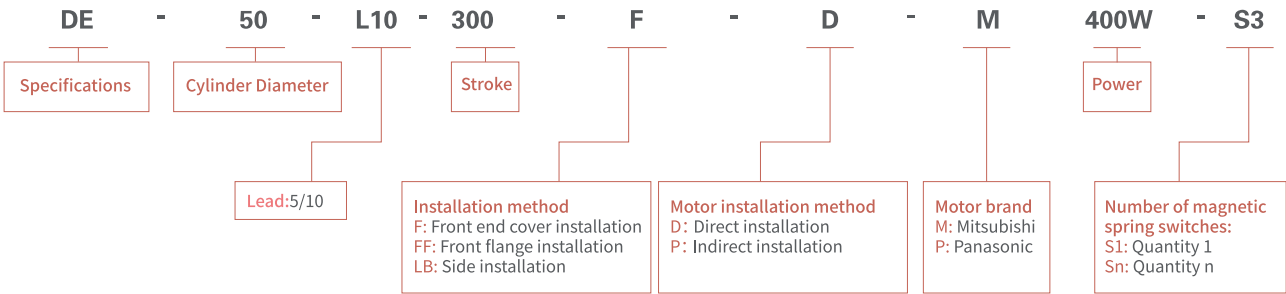


※ Specification

Power (unit: W)	400		750	
Rated torque (unit: N.M)	1.32		2.4	
Screw specifications	1605	1610	1605	1610
Maximum thrust (unit: N)	1280	690	2560	1280
Maximum speed (unit: MM/S)	250	500	250	500
Longest Journey (Unit: MM)	600			
Repetitive positioning accuracy (unit: MM)	±0.02			
Maximum load (KG)	100KG			
Screw grade	C7轧制级			
Piston rotation angle	±0.7°			
Maximum torque (in N.M)	6			
Basic 0 travel weight (unit: KG)	2.1			
Increase weight per 100 trips (unit: KG)	0.62			
Magnetic switch				


※ Product Drawing



DE50-F-D

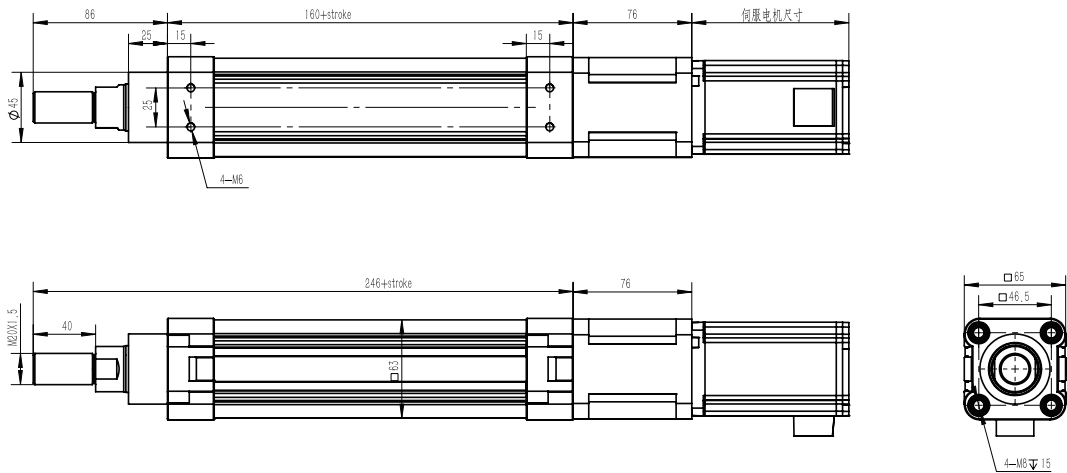

DE50-F-P

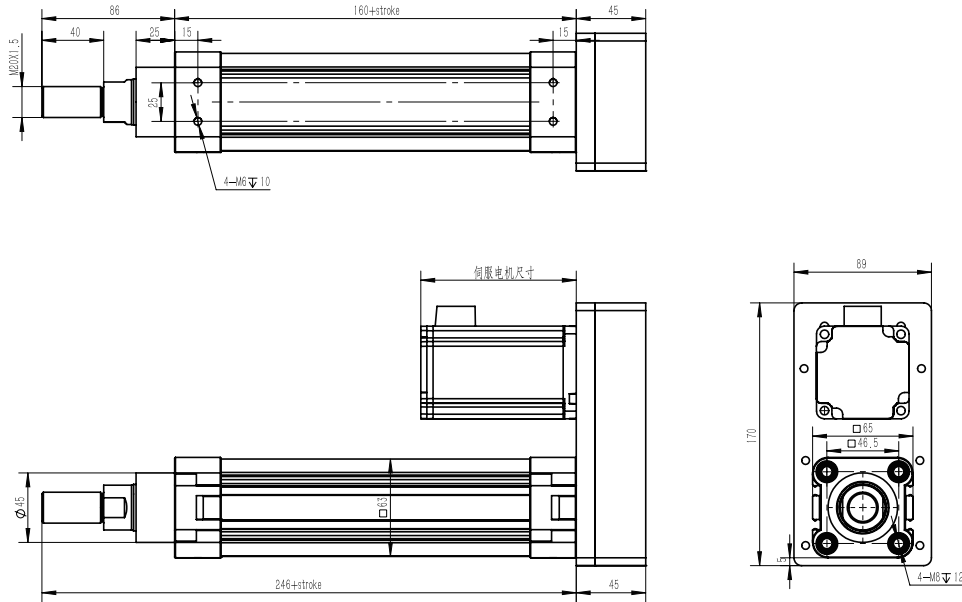

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DE40


DE50

DE63


DE80

DE125


DE50-FF-D

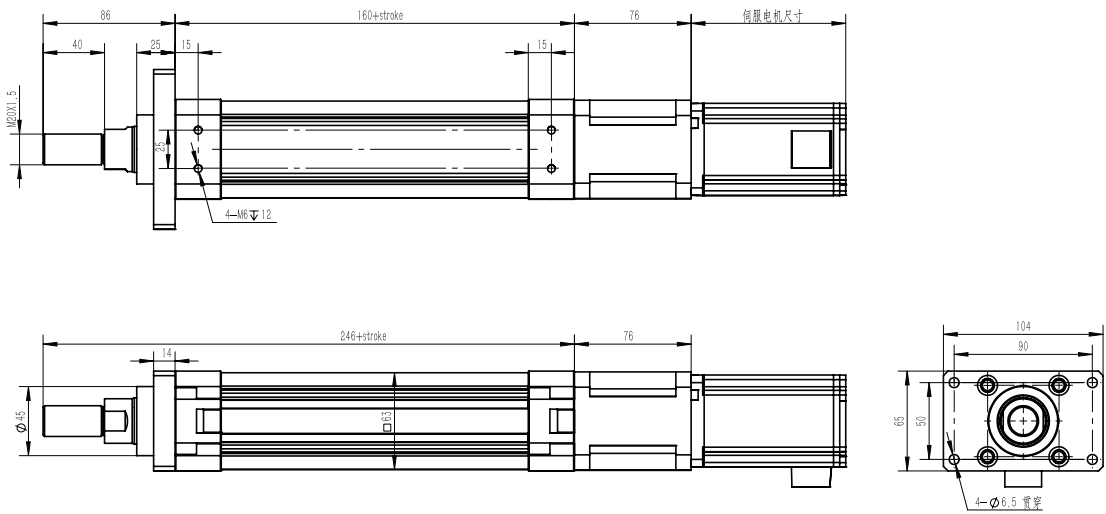


DE50-LB-D

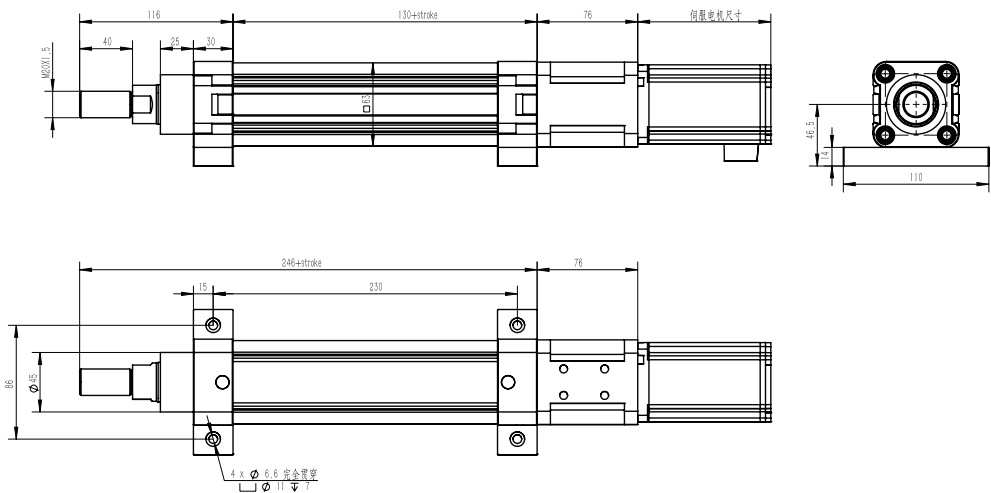

DE50-FF-P

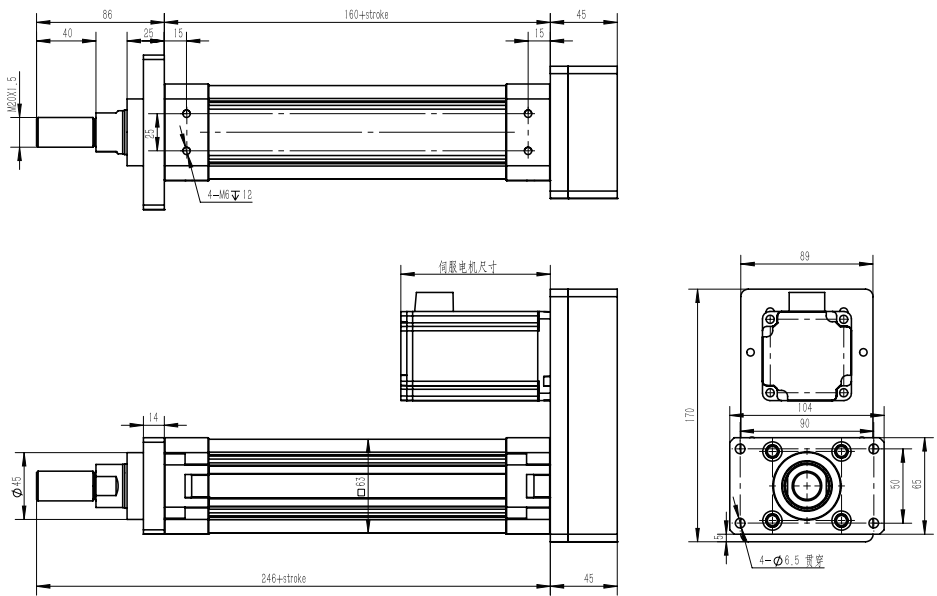

DE50-LB-P

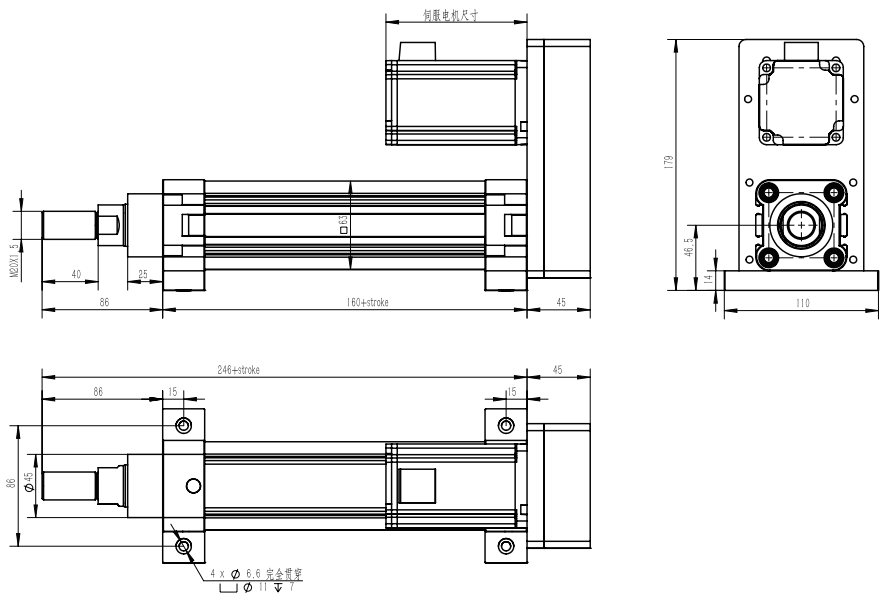

DK

DTH

DS

DC

DB

DE


DE40

DE50

DE63

DE80

DE125

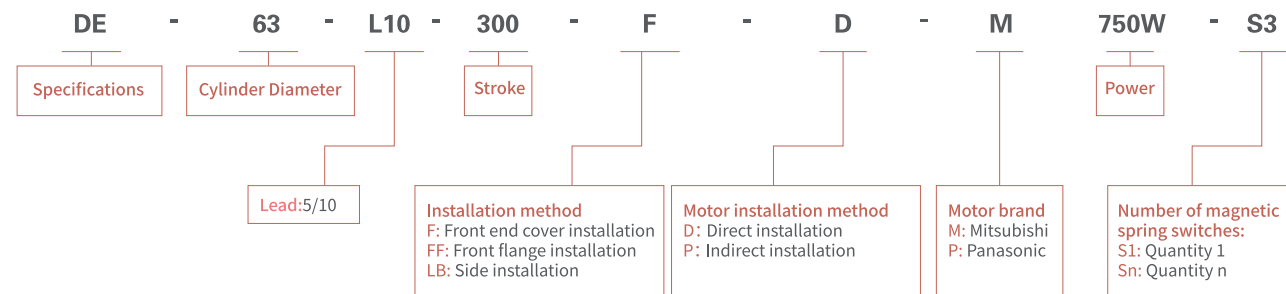 DE63-L10-300-F-D-M75-S3


※ Specification

Power (unit: W)	750		750	
Rated torque (unit: N.M)	2.4		2.4	
Screw specifications	2005	2010	2505	2510
Maximum thrust (unit: N)	2560	1280	2560	1280
Maximum speed (unit: MM/S)	250	500	250	500
Longest Journey (Unit: MM)	1200			
Repetitive positioning accuracy (unit: MM)	±0.02			
Maximum load (KG)	500KG			
Screw grade	C7轧制级			
Piston rotation angle	±0.7°			
Maximum torque (in N.M)	12			
Basic 0 travel weight (unit: KG)	3.01			
Increase weight per 100 trips (unit: KG)	0.82			
Magnetic switch				


✖ Product Drawing



DE63-F-D

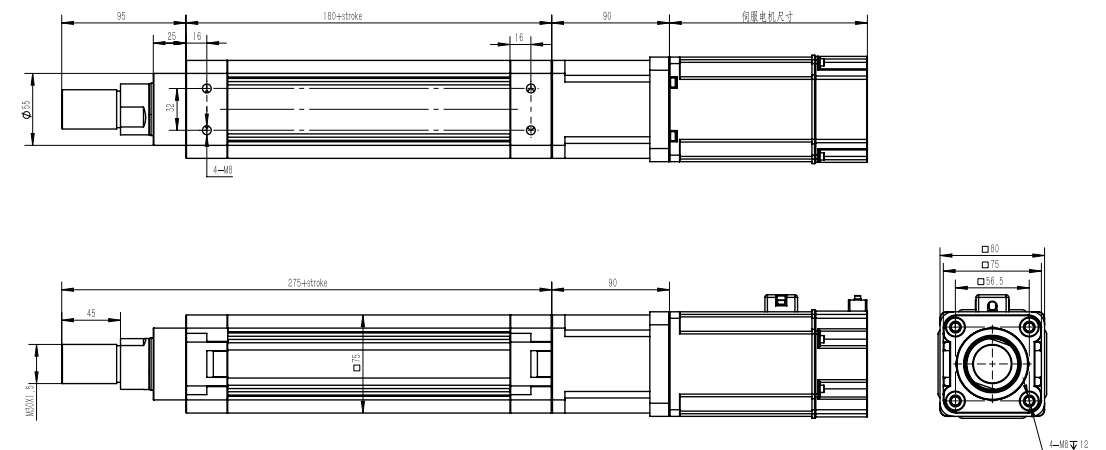

DE63-F-P

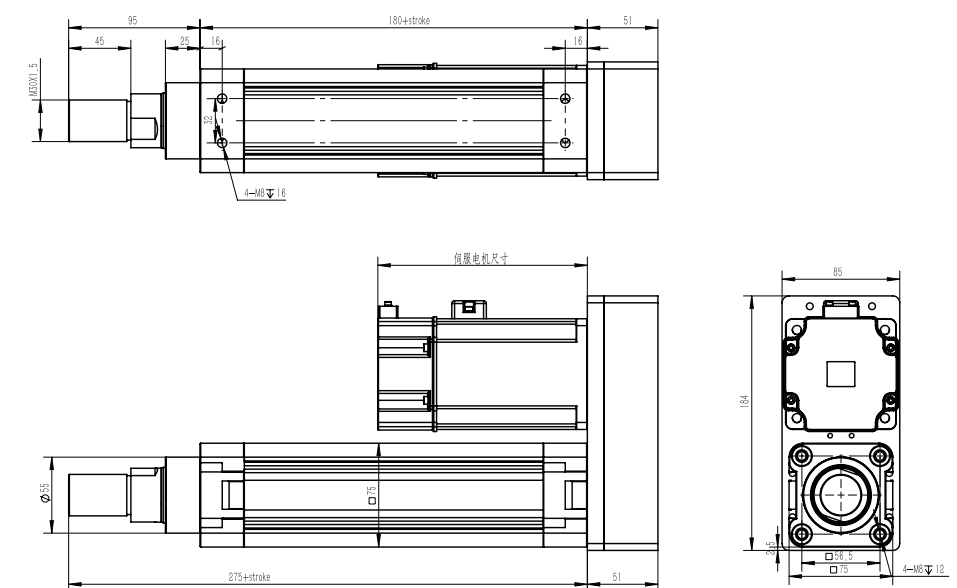


This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.


DE

DE125


DE63-FF-D

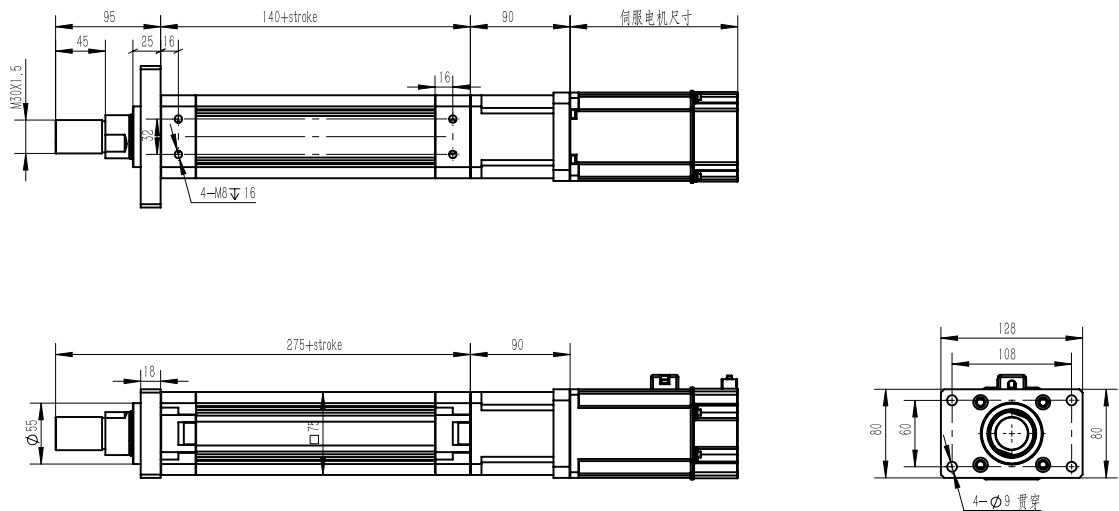


DE63-LB-D

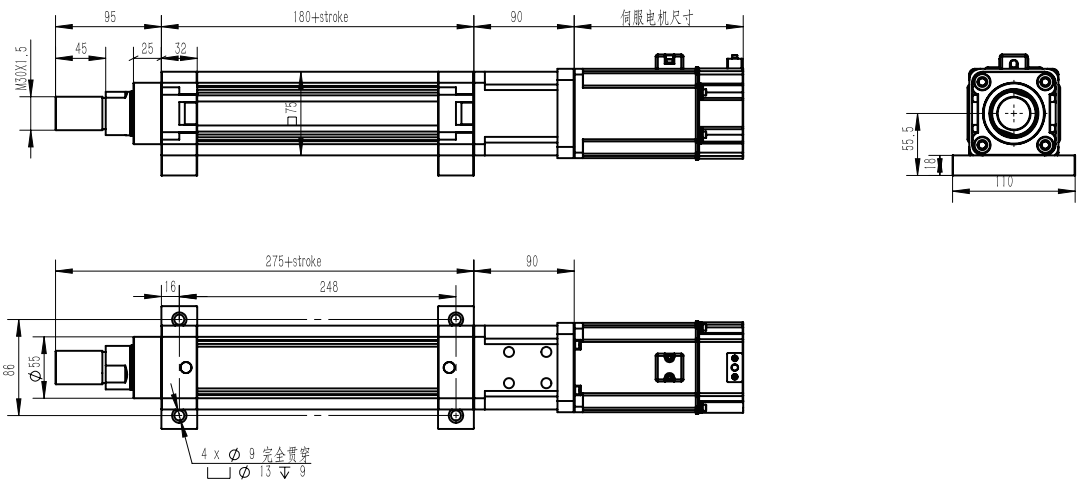

DE63-FF-P

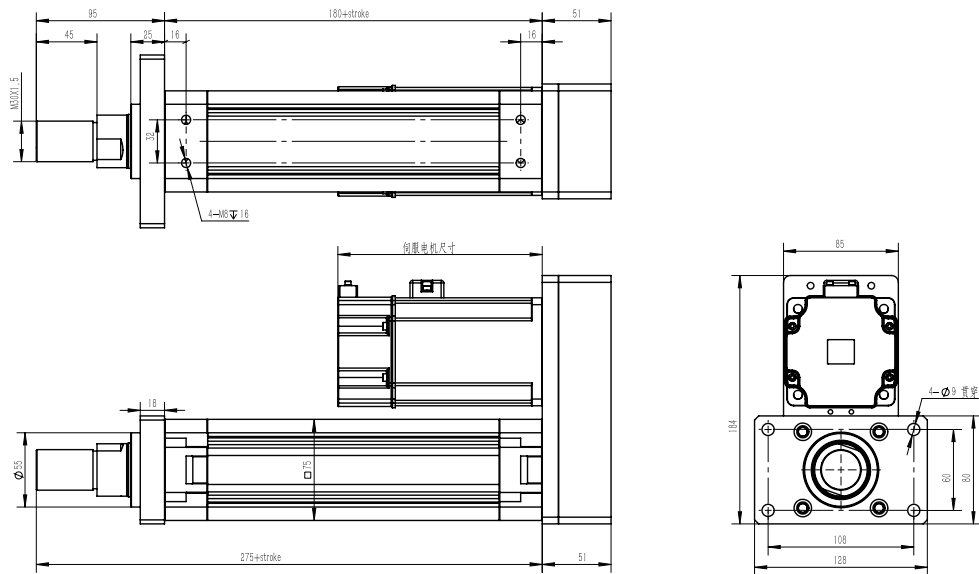

DE63-LB-P

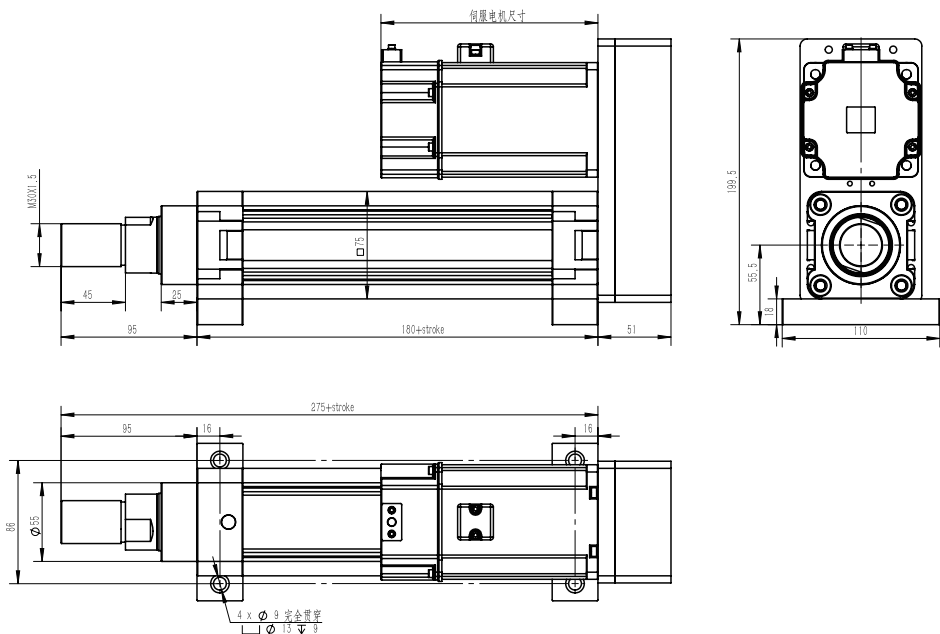

DK

DTH

DS

DC

DB

DE

DE40


DE50

DE63

DE80

DE125

DE80-L10-300-FF-KN-D-M150W-S3

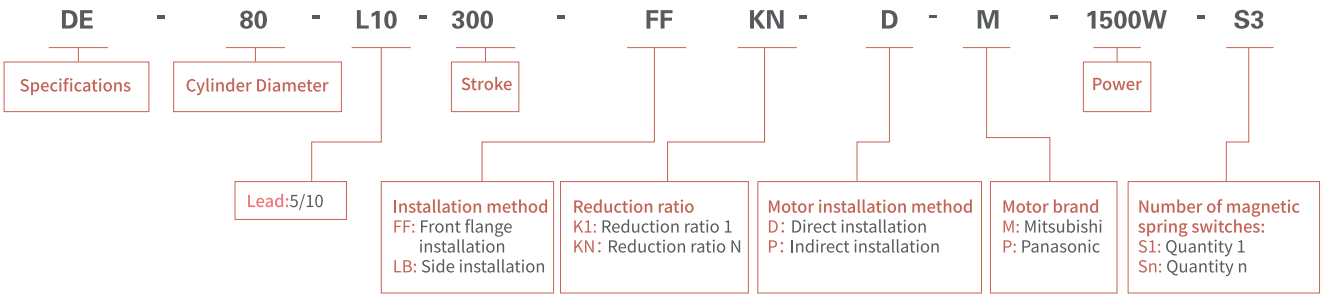

※ Specification

Lead (unit: MM)	5MM,10MM
Repetitive positioning accuracy (unit: MM)	±0.02MM
Maximum speed (unit: MM/S)	333MM/S
Rated load (KN)	15KN
Maximum load (KN)	30KN
Standard itinerary (unit: N.M)	50-800MM
AC servo motor (power: W)	1500W/2000W/3000W
Rated speed of motor (unit: RPM/MIN)	2000RPM/MIN


※ Product Drawing



1.DE80-FF-D



3.DE80-LB-D

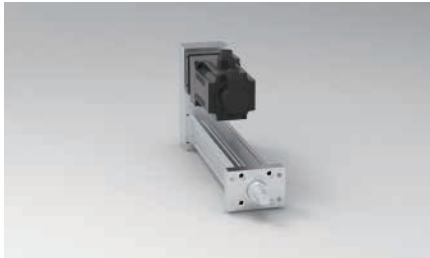

2.DE80-FF-P



4.DE80-LB-P

※ DE80 servo cylinder parameter performance table servo motor speed is 2000RPM/min

PRODUCT MODEL	DE80-L10-stroke-FF-D-M1500W-S3
Lead (MM)	10
speed ratio	1
Rated output (KN)	3.8
Rated speed (MM/S)	333

PRODUCT MODEL	DE80-L10-stroke-FF-D-M2000W-S3
Lead (MM)	10
speed ratio	1
Rated output (KN)	5.09
Rated speed (MM/S)	333


PRODUCT MODEL	DE80-L10-stroke-FF-D-M3000W-S3
Lead (MM)	10
speed ratio	1
Rated output (KN)	7.6
Rated speed (MM/S)	333

PRODUCT MODEL	DE80-L10-stroke-FF-KN-D-M1500W-S3
Lead (MM)	10
speed ratio	34530
Rated output (KN)	11.5151941.6
Rated speed (MM/S)	111.183.366.6

PRODUCT MODEL	DE80-L10-stroke-FF-KN-D-M2000W-S3-KN
Lead (MM)	10
speed ratio	345
Rated output (KN)	152025.5
Rated speed (MM/S)	111.183.366.6

PRODUCT MODEL	DE80-L10-stroke-FF-KN-D-M3000W-S3-KN
Lead (MM)	10
speed ratio	34
Rated output (KN)	2230
Rated speed (MM/S)	111.183.3


DE80-FF-D

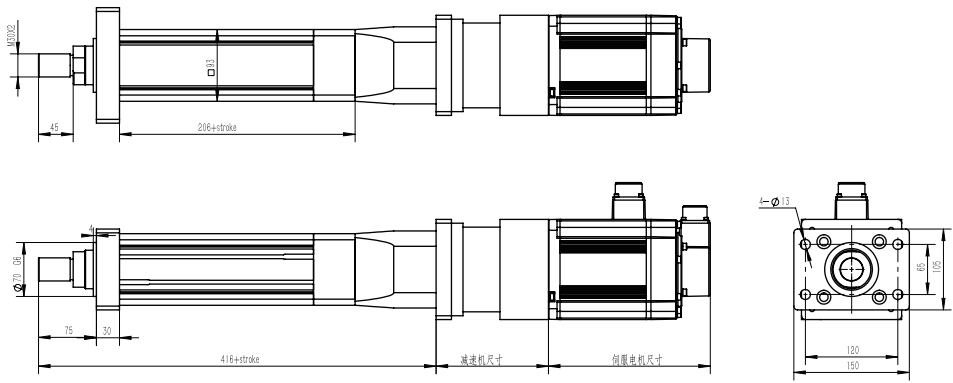

Stroke	50	100	150	200	250	300	350	400	450	500	550	600
L	451	501	551	601	651	701	751	801	851	901	951	1001
A	256	306	356	406	456	506	556	606	656	706	756	806
Weight (kg)	26	27	28	29	30	31	32	33	34	35	36	37


This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DE80-FF-P

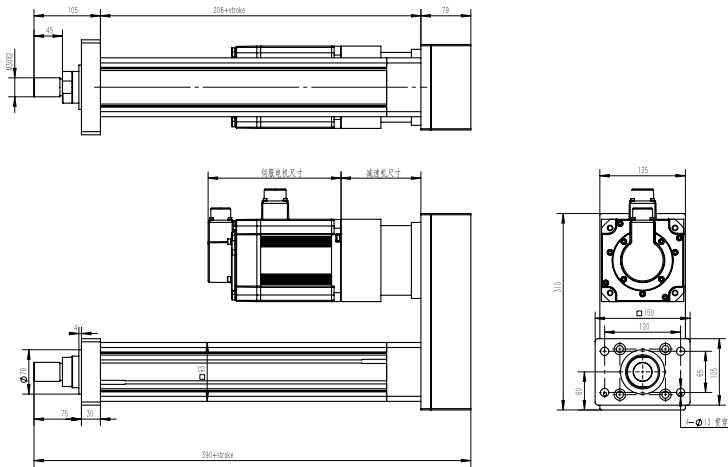

Stroke	50	100	150	200	250	300	350	400	450	500	550	600
L	440	490	540	590	640	690	740	790	840	890	940	990
A	256	306	356	406	456	506	556	606	656	706	756	806
Weight (kg)	29	30	31	32	33	34	35	36	37	38	39	40


DE80-LB-P

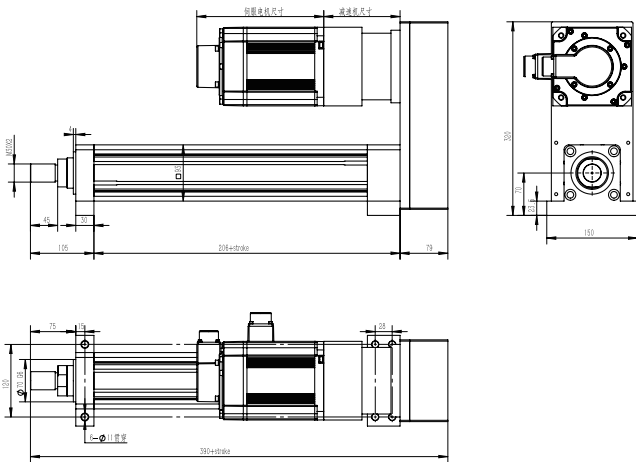

Stroke	50	100	150	200	250	300	350	400	450	500	550	600
L	440	490	540	590	640	690	740	790	840	890	940	990
A	230	280	330	380	430	480	530	580	630	680	730	780
Weight (kg)	30	31	32	33	34	35	36	37	38	39	40	41

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DE80-LB-D

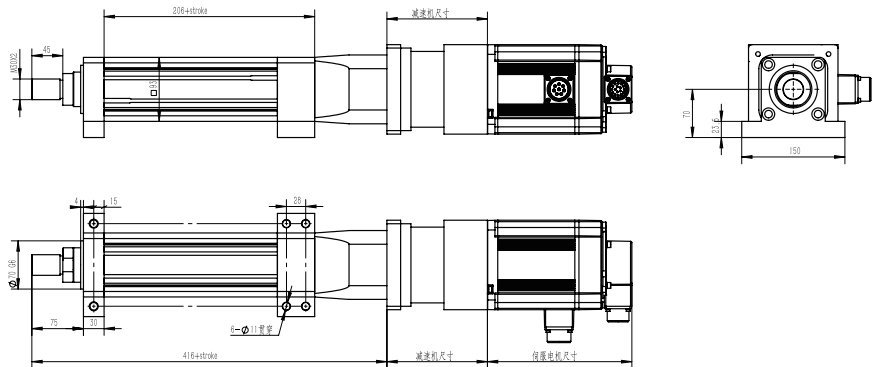

Stroke	50	100	150	200	250	300	350	400	450	500	550	600
L	451	501	551	601	651	701	751	801	851	901	951	1001
A	230	280	330	380	430	480	530	580	630	680	730	780
Weight (kg)	27	28	29	30	31	32	33	34	35	36	37	38

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DE40


DE50

DE63

DE80

DE125

⚙️ DE125-L10-300-FF-KN-D-M150-S3

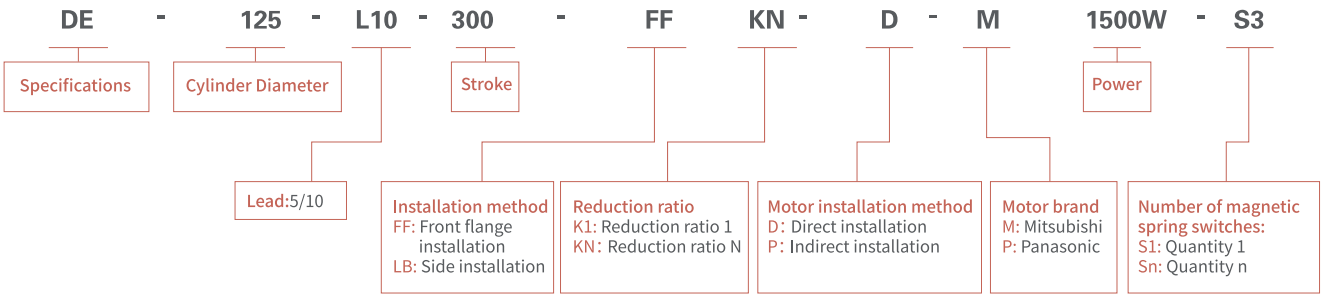

※ Specification

Lead (unit: MM)	10MM
Repetitive positioning accuracy (unit: MM)	±0.02MM
Maximum speed (unit: MM/S)	333MM/S
Rated load (KN)	50KN
Maximum load (KN)	60KN
Standard itinerary (unit: N.M)	50-800MM
AC servo motor (power: W)	1500W/2000W/3000W
Rated speed of motor (unit: RPM/MIN)	2000RPM/MIN

※ Product Drawing



1.DE125-FF-D



3.DE125-LB-D



2.DE125-FF-P



4.DE125-LB-P


※ DE80 servo cylinder parameter performance table servo motor speed is 2000RPM/min

PRODUCT MODEL	DE125-L10-stroke-FF-KN-D-M1500W-S3				
Lead (MM)	10				
speed ratio	3	4	5	8	10
Rated output (KN)	11.5	15	19	30	38
Rated speed (MM/S)	111.1	83.3	66.6	41.6	33.3

PRODUCT MODEL	DE125-L10-stroke-FF-KN-D-M2000W-S3-KN				
Lead (MM)	10				
speed ratio	3	4	5	8	10
Rated output (KN)	15	20	25.5	40	51
Rated speed (MM/S)	111.1	83.3	66.6	41.6	33.3

PRODUCT MODEL	DE125-L10-stroke-FF-KN-D-M3000W-S3-KN				
Lead (MM)	10				
speed ratio	3	5	8	10	
Rated output (KN)	11.5	19	30	38	
Rated speed (MM/S)	111.1	66.6	41.6	33.3	


DE125-FF-D

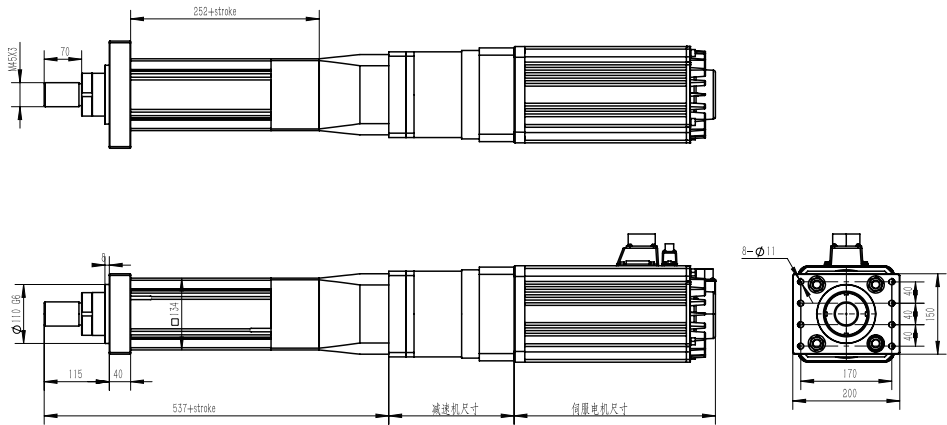

Stroke	50	100	150	200	250	300	350	400	450	500	550	600
L	582	632	682	732	782	832	882	932	982	1032	1082	1132
A	297	347	394	447	497	547	597	647	697	747	797	847
Weight (kg)	57	59.5	62	64.5	67	69.5	72	74.5	77	79.5	82	84.5


This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DE125-FF-P

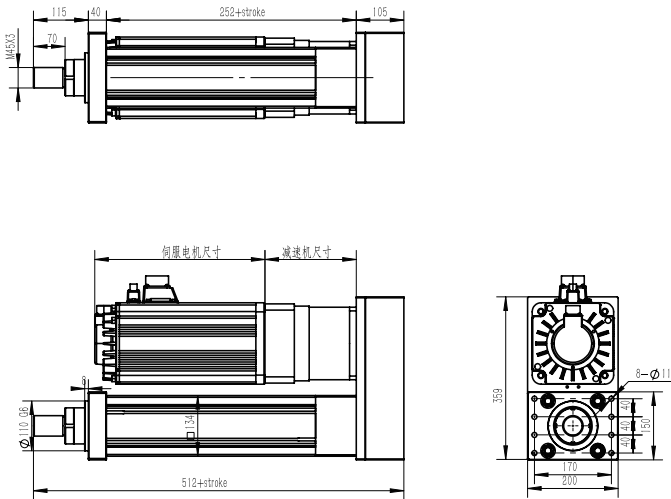

Stroke	50	100	150	200	250	300	350	400	450	500	550	600
L	531	571	631	681	731	781	831	881	931	981	1031	1081
A	297	347	397	447	497	547	597	647	697	747	797	847
Weight (kg)	55	57.5	60	62.5	65	67.5	70	72.5	75	77.5	80	82.5


DE125-LB-P

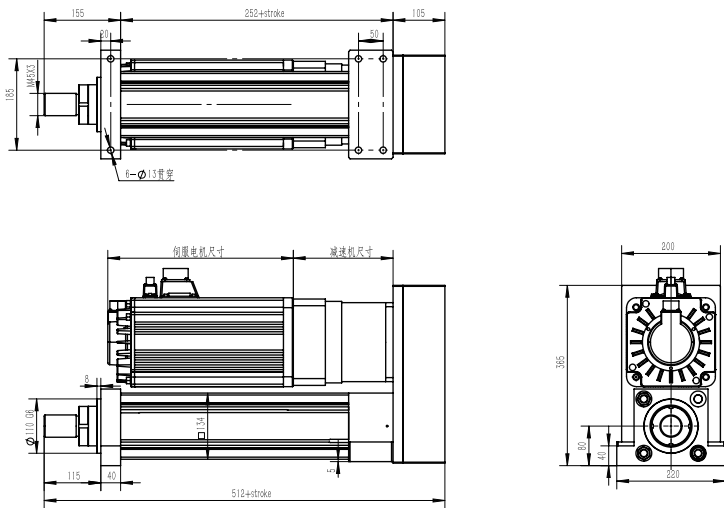

Stroke	50	100	150	200	250	300	350	400	450	500	550	600
L	531	571	631	681	731	781	831	881	931	981	1031	1081
A	249.5	299.5	349.5	399.5	449.5	499.5	549.5	599.5	649.5	699.5	749.5	799.5
Weight (kg)	57	59.5	62	64.5	67	69.5	72	74.5	77	79.5	82	84.5

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DE125-LB-D

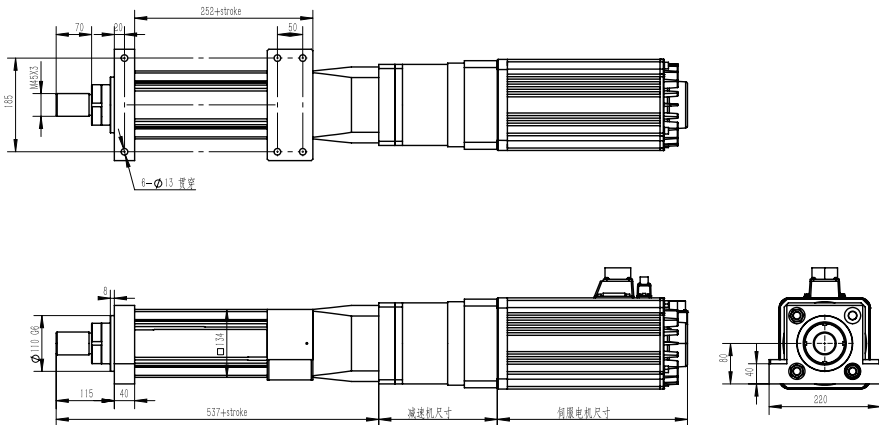

Stroke	50	100	150	200	250	300	350	400	450	500	550	600
L	582	632	682	732	782	832	882	932	982	1032	1082	1132
A	249.5	299.5	349.5	399.5	449.5	499.5	549.5	599.5	649.5	699.5	749.5	799.5
Weight (kg)	59	61.5	64	66.5	69	71.5	74	76.5	79	81.5	84	86.5

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DE40

DE50

DE63

DE80

DE125

1.DT-A combination



3.DT-C combination



2.DT-B combination



4.DT-D combination



5.DT-E combination



7.DT-E combination



6.DT-E combination

