



Screw drive

DE series

Piston rod servo electric cylinder

DE40

**Body width 52MM
maximum stroke 500MM
Maximum Load40KG**

DE80

**Body width 93MM
maximum stroke 800MM
Maximum Load3000KG**

DE50

**Body width 63MM
maximum stroke 600MM
Maximum Load100KG**


DE125

**Body width 134MM
maximum stroke 800MM
Maximum Load6000KG**

DE63

**Body width 75MM
maximum stroke 600MM
Maximum Load500KG**

DE40-L10-300-F-D-M20-S3

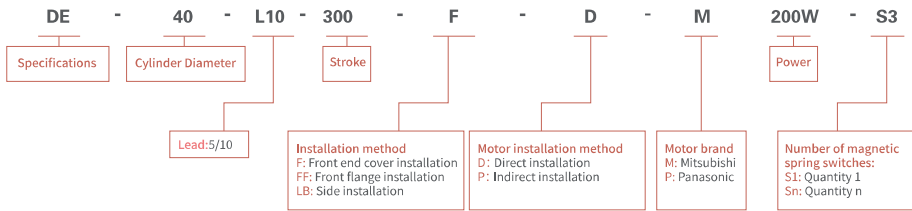


※ Specification

Power (unit: W)	100		200		400	
Rated torque (unit: N.M)	0.32		0.64		1.27	
Repetitive positioning accuracy (unit: MM)	±0.02					
Screw specifications	1205	1210	1210	1210	1205	1210
Maximum thrust (unit: N)	340	170	170	340	1280	690
Maximum speed (unit: MM/S)	250	500	500	500	250	500
Longest Journey (Unit: MM)	500					
Maximum load (KG)	40KG					
Screw grade	C7 Rolling Grade					
Piston rotation angle	±0.7°					
Maximum torque (in N.M)	1.8					
Basic 0 travel weight (unit: KG)	1.35					
Increase weight per 100 trips (unit: KG)	0.47					
Magnetic switch						


※ Product Drawing



DE40-F-D

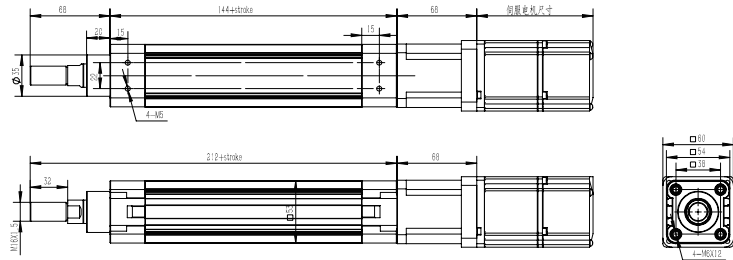

DE40-F-P

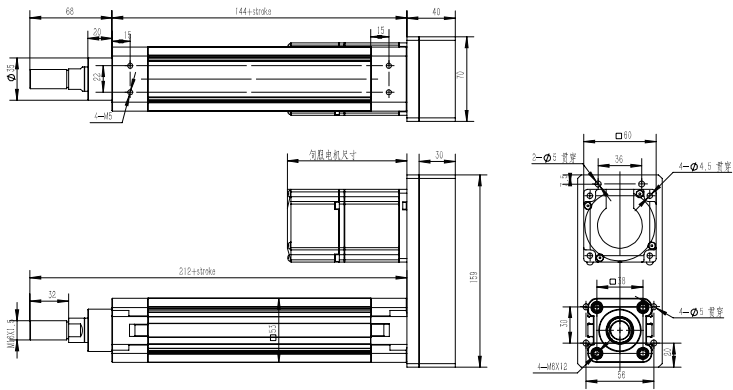

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DE40


DE50

DE63


DE80

DE125


DE40-FF-D

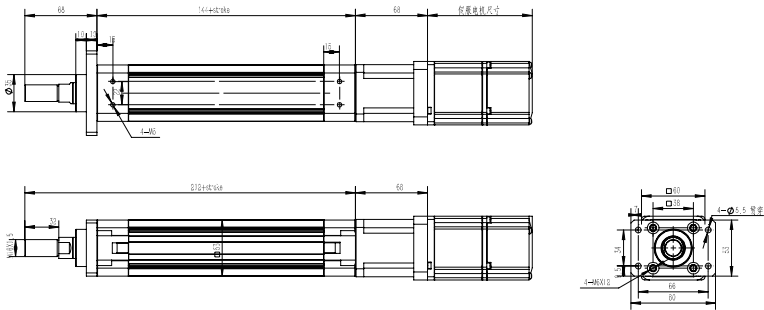


DE40-LB-D

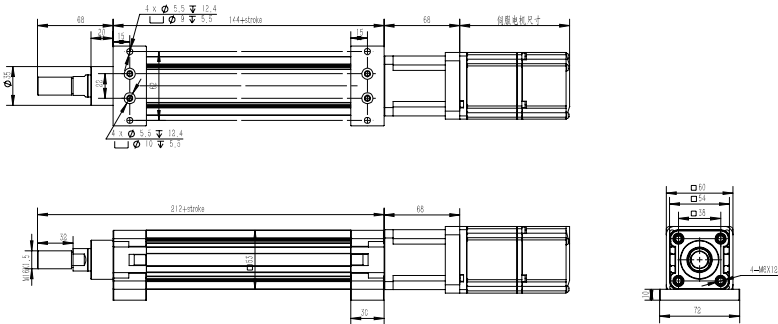

DE40-FF-P

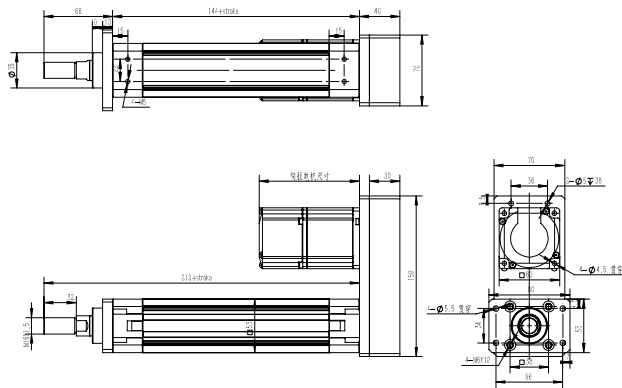

DE40-LB-P

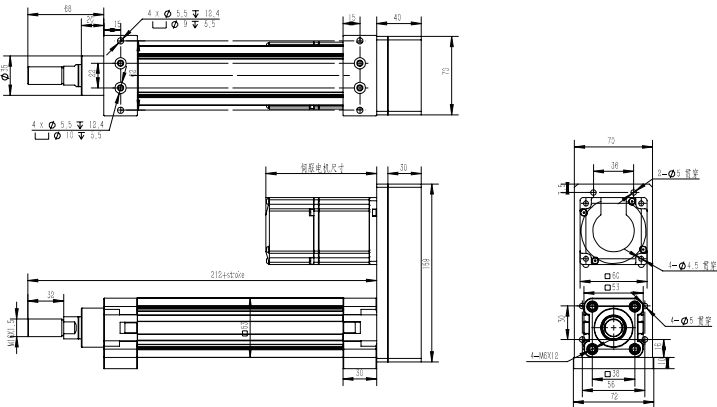

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DE40


DE50

DE63

DE80

DE125

DE50-L10-300-F-D-M40-S3

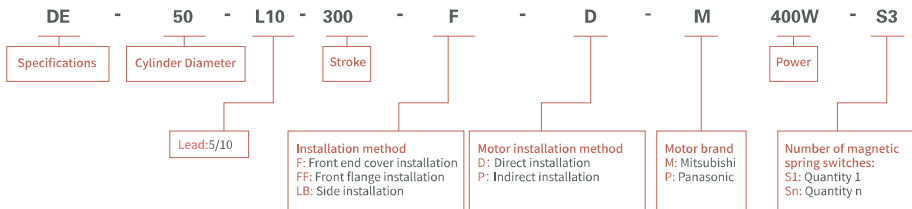


※ Specification

Power (unit: W)	400		750	
Rated torque (unit: N.M)	1.32		2.4	
Screw specifications	1605	1610	1605	1610
Maximum thrust (unit: N)	1280	690	2560	1280
Maximum speed (unit: MM/S)	250	500	250	500
Longest Journey (Unit: MM)	600			
Repetitive positioning accuracy (unit: MM)	±0.02			
Maximum load (KG)	100KG			
Screw grade	C7軋制級			
Piston rotation angle	±0.7°			
Maximum torque (in N.M)	6			
Basic 0 travel weight (unit: KG)	2.1			
Increase weight per 100 trips (unit: KG)	0.62			
Magnetic switch				


※ Product Drawing



DE50-F-D

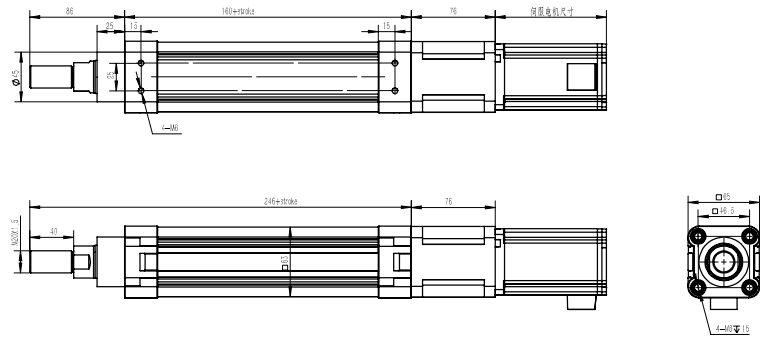

DE50-F-P

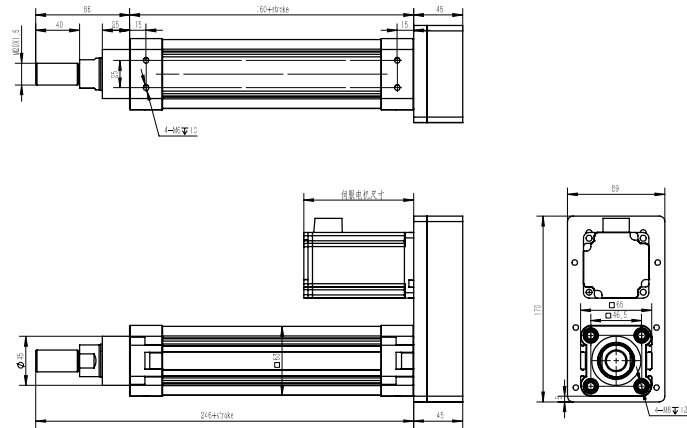

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DE40


DE50

DE63


DE80

DE125


DE50-FF-D

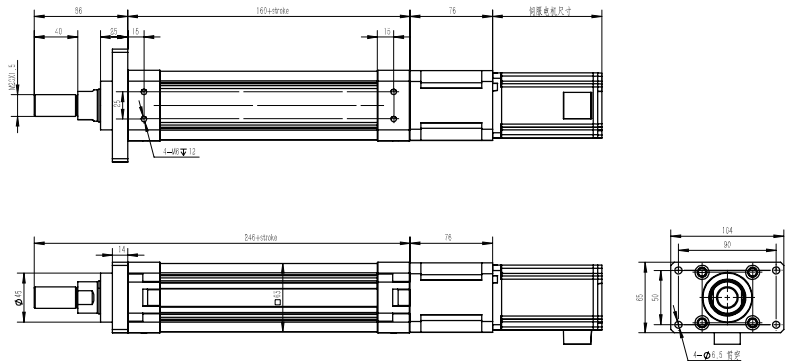


DE50-LB-D

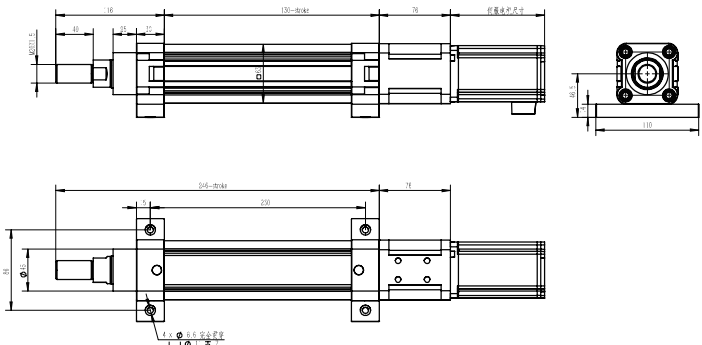

DE50-FF-P

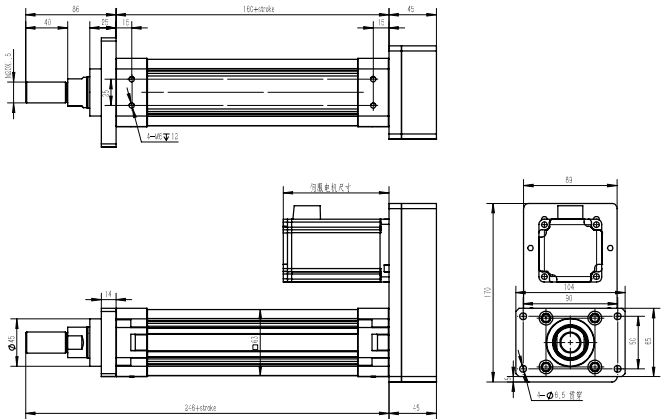

DE50-LB-P

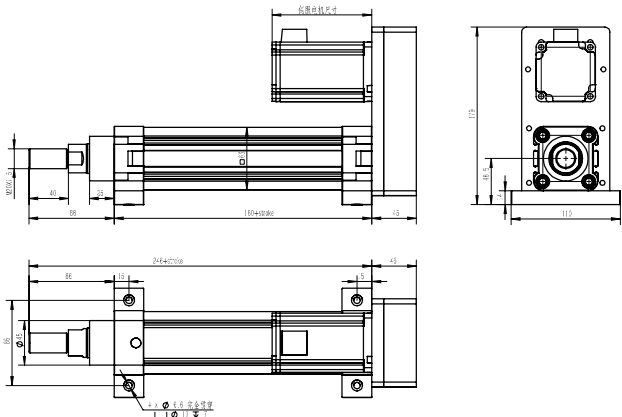

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE


DE40

DE50

DE63

DE80

DE125

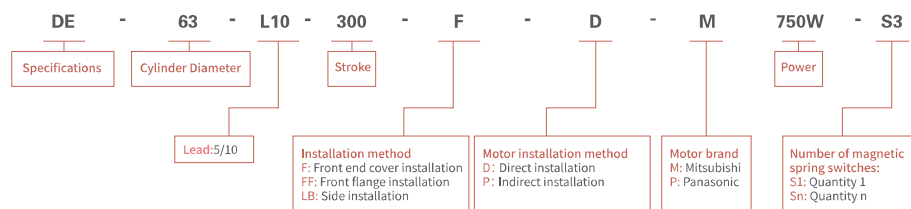 DE63-L10-300-F-D-M75-S3


✖ Specification

Power (unit: W)	750		750	
Rated torque (unit: N.M)	2.4		2.4	
Screw specifications	2005	2010	2505	2510
Maximum thrust (unit: N)	2560	1280	2560	1280
Maximum speed (unit: MM/S)	250	500	250	500
Longest Journey (Unit: MM)	1200			
Repetitive positioning accuracy (unit: MM)	±0.02			
Maximum load (KG)	500KG			
Screw grade	C7轧制级			
Piston rotation angle	±0.7°			
Maximum torque (in N.M)	12			
Basic 0 travel weight (unit: KG)	3.01			
Increase weight per 100 trips (unit: KG)	0.82			
Magnetic switch				


✖ Product Drawing



DE63-F-D

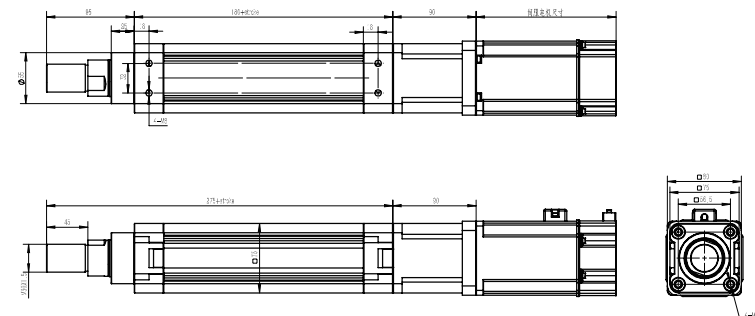

DE63-F-P

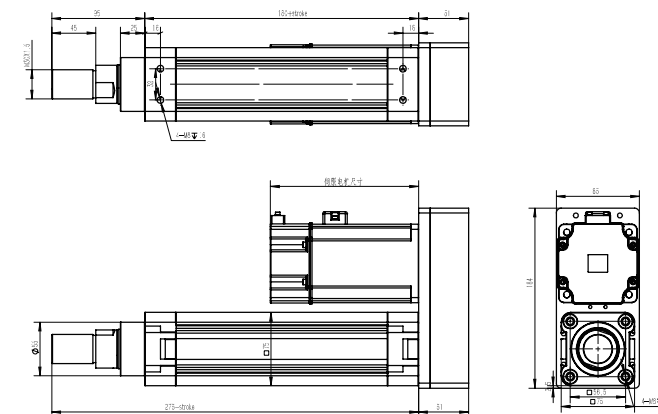

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DE40


DE50

DE63


DE80

DE125


DE63-FF-D

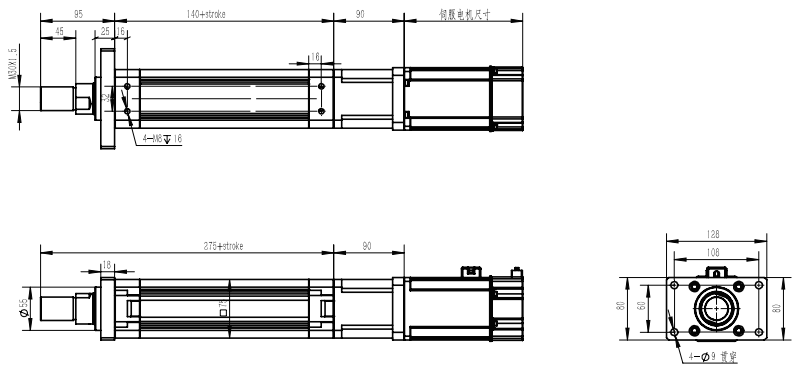


DE63-LB-D

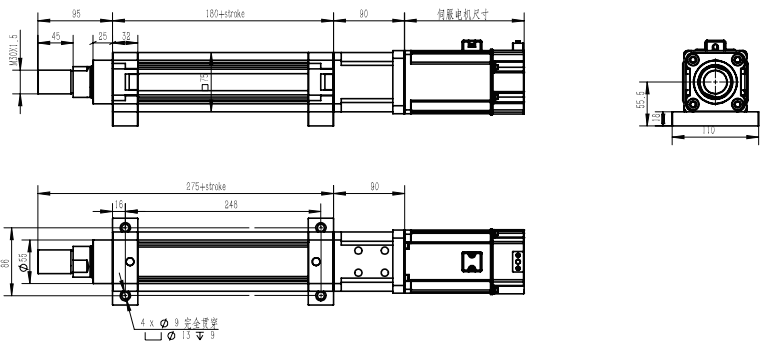

DE63-FF-P

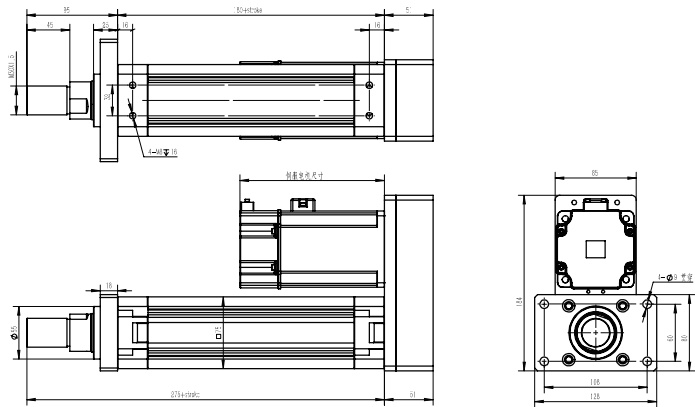

DE63-LB-P

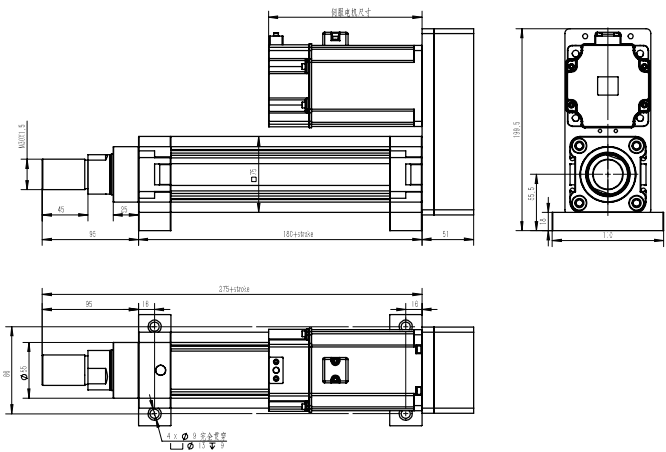

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DE40


DE50

DE63

DE80

DE125

DE80-L10-300-FF-KN-D-M150W-S3

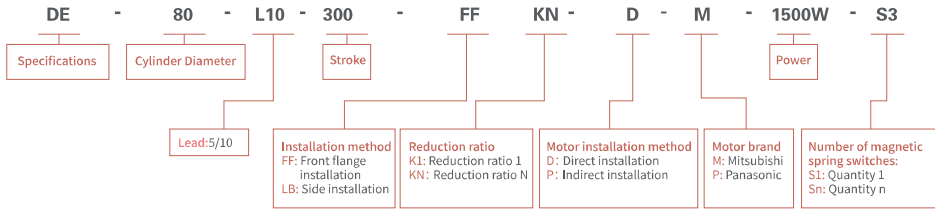

※ Specification

Lead (unit: MM)	5MM,10MM
Repetitive positioning accuracy (unit: MM)	±0.02MM
Maximum speed (unit: MM/S)	333MM/S
Rated load (KN)	15KN
Maximum load (KN)	30KN
Standard itinerary (unit: N.M)	50-800MM
AC servo motor (power: W)	1500W/2000W/3000W
Rated speed of motor (unit: RPM/MIN)	2000RPM/MIN

※ Product Drawing



1.DE80-FF-D



3.DE80-LB-D



2.DE80-FF-P



4.DE80-LB-P


※ DE80 servo cylinder parameter performance table servo motor speed is 2000RPM/min

PRODUCT MODEL	DE80-L10-stroke-FF-D-M1500W-S3	PRODUCT MODEL	DE80-L10-stroke-FF-D-M2000W-S3
Lead (MM)	10	Lead (MM)	10
speed ratio	1	speed ratio	1
Rated output (KN)	3.8	Rated output (KN)	5.09
Rated speed (MM/S)	333	Rated speed (MM/S)	333

PRODUCT MODEL	DE80-L10-stroke-FF-D-M3000W-S3	PRODUCT MODEL	DE80-L10-stroke-FF-KN-D-M1500W-S3
Lead (MM)	10	Lead (MM)	10
speed ratio	1	speed ratio	3 4 5 30
Rated output (KN)	7.6	Rated output (KN)	11.5 15 19 41.6
Rated speed (MM/S)	333	Rated speed (MM/S)	111.1 83.3 66.6

PRODUCT MODEL	DE80-L10-stroke-FF-KN-D-M2000W-S3-KN	PRODUCT MODEL	DE80-L10-stroke-FF-KN-D-M3000W-S3-KN
Lead (MM)	10	Lead (MM)	10
speed ratio	3 4 5	speed ratio	3 4
Rated output (KN)	15 20 25.5	Rated output (KN)	22 30
Rated speed (MM/S)	111.1 83.3 66.6	Rated speed (MM/S)	111.1 83.3

DE80-FF-D

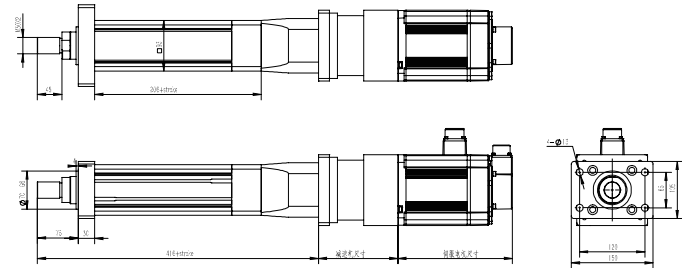

Stroke	50	100	150	200	250	300	350	400	450	500	550	600
L	451	501	551	601	651	701	751	801	851	901	951	1001
A	256	306	356	406	456	506	556	606	656	706	756	806
Weight (kg)	26	27	28	29	30	31	32	33	34	35	36	37

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DE40


DE50

DE63

DE80


DE125

DE80-FF-P

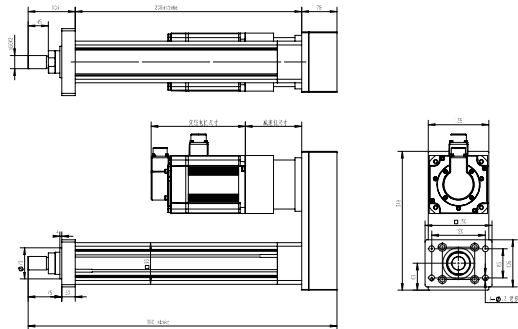

Stroke	50	100	150	200	250	300	350	400	450	500	550	600
L	440	490	540	590	640	690	740	790	840	890	940	990
A	256	306	356	406	456	506	556	606	656	706	756	806
Weight (kg)	29	30	31	32	33	34	35	36	37	38	39	40


DE80-LB-P

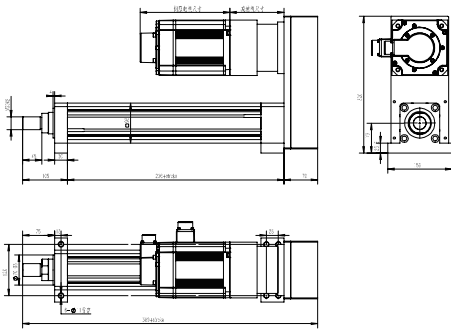

Stroke	50	100	150	200	250	300	350	400	450	500	550	600
L	440	490	540	590	640	690	740	790	840	890	940	990
A	230	280	330	380	430	480	530	580	630	680	730	780
Weight (kg)	30	31	32	33	34	35	36	37	38	39	40	41

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DE80-LB-D

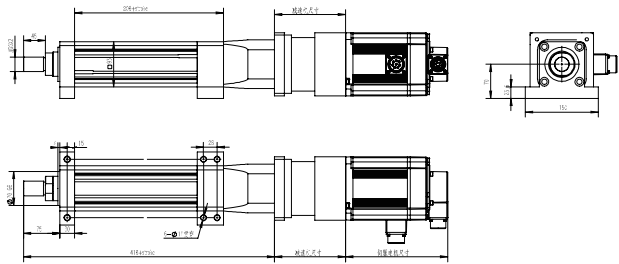

Stroke	50	100	150	200	250	300	350	400	450	500	550	600
L	451	501	551	601	651	701	751	801	851	901	951	1001
A	230	280	330	380	430	480	530	580	630	680	730	780
Weight (kg)	27	28	29	30	31	32	33	34	35	36	37	38

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DE40


DE50

DE63

DE80

DE125

⚙️ DE125-L10-300-FF-KN-D-M150W-S3

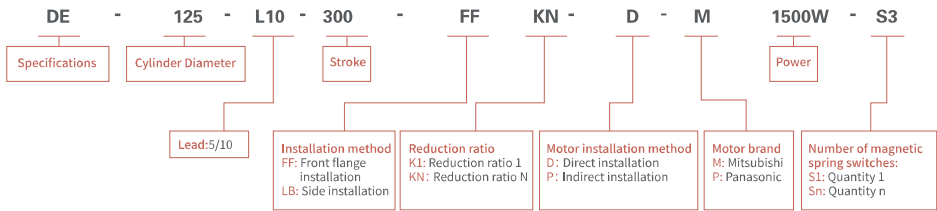

※ Specification

Lead (unit: MM)	10MM
Repetitive positioning accuracy (unit: MM)	±0.02MM
Maximum speed (unit: MM/S)	333MM/S
Rated load (KN)	50KN
Maximum load (KN)	60KN
Standard itinerary (unit: N.M)	50-800MM
AC servo motor (power: W)	1500W/2000W/3000W
Rated speed of motor (unit: RPM/MIN)	2000RPM/MIN

※ Product Drawing



1.DE125-FF-D



3.DE125-LB-D



2.DE125-FF-P



4.DE125-LB-P


※ DE80 servo cylinder parameter performance table servo motor speed is 2000RPM/min

PRODUCT MODEL	DE125-L10-stroke-FF-KN-D-M1500W-S3				
Lead (MM)	10				
speed ratio	3	4	5	8	10
Rated output (KN)	11.5	15	19	30	38
Rated speed (MM/S)	111.1	83.3	66.6	41.6	33.3

PRODUCT MODEL	DE125-L10-stroke-FF-KN-D-M2000W-S3-KN				
Lead (MM)	10				
speed ratio	3	4	5	8	10
Rated output (KN)	15	20	25.5	40	51
Rated speed (MM/S)	111.1	83.3	66.6	41.6	33.3

PRODUCT MODEL	DE125-L10-stroke-FF-KN-D-M3000W-S3-KN				
Lead (MM)	10				
speed ratio	3	5	8	10	
Rated output (KN)	11.5	19	30	38	
Rated speed (MM/S)	111.1	66.6	41.6	33.3	

DE125-FF-D

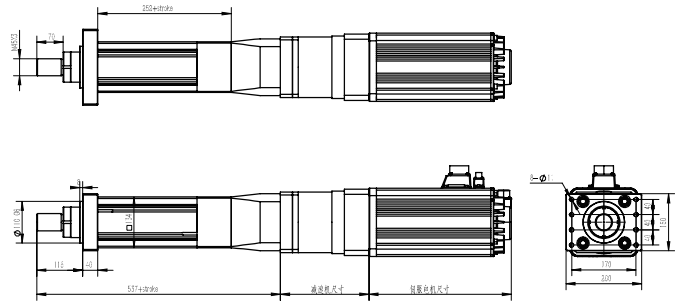

Stroke	50	100	150	200	250	300	350	400	450	500	550	600
L	582	632	682	732	782	832	882	932	982	1032	1082	1132
A	297	347	394	447	497	547	597	647	697	747	797	847
Weight (kg)	57	59.5	62	64.5	67	69.5	72	74.5	77	79.5	82	84.5

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DE40


DE50

DE63

DE80


DE125

DE125-FF-P

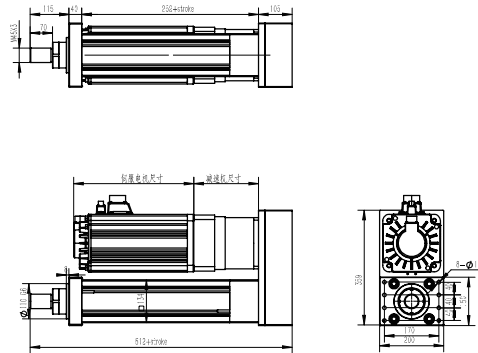

Stroke	50	100	150	200	250	300	350	400	450	500	550	600
L	531	571	631	681	731	781	831	881	931	981	1031	1081
A	297	347	397	447	497	547	597	647	697	747	797	847
Weight (kg)	55	57.5	60	62.5	65	67.5	70	72.5	75	77.5	80	82.5


DE125-LB-D

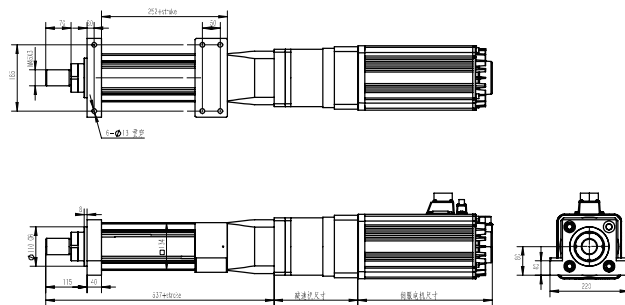

Stroke	50	100	150	200	250	300	350	400	450	500	550	600
L	582	632	682	732	782	832	882	932	982	1032	1082	1132
A	249.5	299.5	349.5	399.5	449.5	499.5	549.5	599.5	649.5	699.5	749.5	799.5
Weight (kg)	59	61.5	64	66.5	69	71.5	74	76.5	79	81.5	84	86.5

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DE125-LB-P

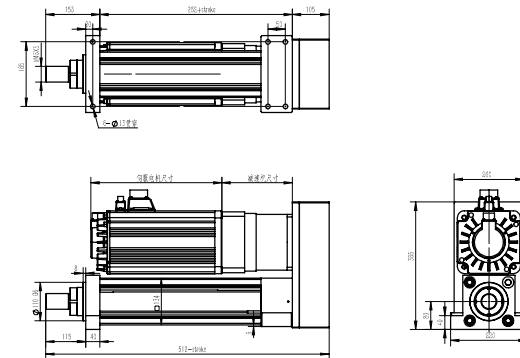

Stroke	50	100	150	200	250	300	350	400	450	500	550	600
L	531	571	631	681	731	781	831	881	931	981	1031	1081
A	249.5	299.5	349.5	399.5	449.5	499.5	549.5	599.5	649.5	699.5	749.5	799.5
Weight (kg)	57	59.5	62	64.5	67	69.5	72	74.5	77	79.5	82	84.5

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DE40

DE50

DE63

DE80