



Screw drive

DK series
KK module

DK40

**Body width 40MM
Maximum track length 200MM
Maximum Load 3KG**

DK86

**Body width 86MM
Maximum track length 940MM
Maximum Load 50KG**

DK50

**Body width 50MM
Maximum track length 300MM
Maximum Load 12KG**



DK100

**Body width 100MM
Maximum track length 1380MM
Maximum Load 80KG**

DK60

**Body width 60MM
Maximum track length 600MM
Maximum Load 20KG**

DK 模组产品型号

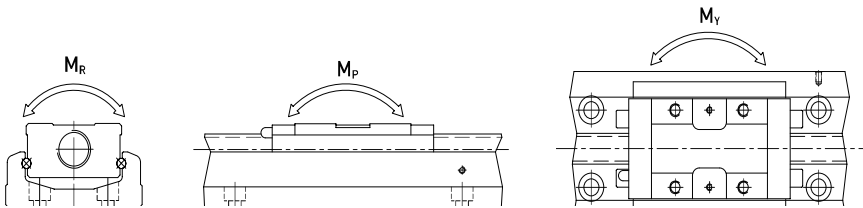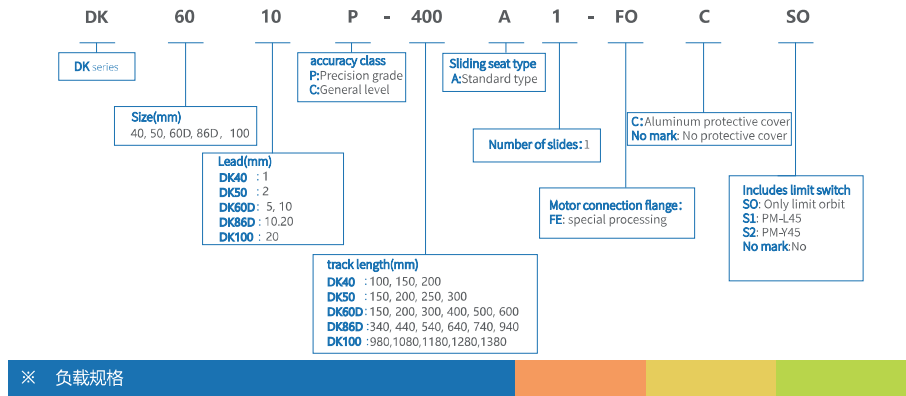

Model		Ball screw				linear guideway															
		Screw outer diameter (mm)	screw lead (mm)	Basic dynamic rated load (N)	Basic static rated load (N)	Basic dynamic rated load (N)	Basic static rated load (N)	Allowable static moment													
								pitch M _p (N-m)				yaw M _y (N-m)				roll M _r (N-m)					
								slide A	slide S	slide A	slide S	slide A1	slide A2	slide S1	slide S2	slide A1	slide A2	slide S1	slide S2	slide A1	slide S2
DK4001	Precision grade	8	1	735	1538	3920	-	6468	-	33	182	-	-	33	182	-	-	81	162	-	-
	General level			676	1284																
DK5002	Precision grade	8	2	2136	3489	8007	-	12916	-	116	545	-	-	116	545	-	-	222	444	-	-
	General level			1813	2910																
DK6005	Precision grade	12	5	3744	6243	13230	7173	21462	11574	152	760	72	367	152	760	72	367	419	838	241	482
	General level			3377	5625																
DK6010	Precision grade	12	10	2410	3743	13230	7173	21462	11574	152	760	72	367	152	760	72	367	419	838	241	482
	General level			2107	3234																
DK8610	Precision grade	15	10	7144	12642	31458	21051	50764	29475	622	3050	228	1309	622	3050	228	1309	1507	3014	847	1694
	General level			6429	11387																
DK8620	Precision grade	15	20	4645	7655	31458	21051	50764	29475	622	3050	228	1309	622	3050	228	1309	1507	3014	847	1694
	General level			4175	6889																
DK10020	Precision grade	20	20	7046	12544	39200	-	63406	-	960	4763	-	-	960	4763	-	-	2205	4410	-	-
	General level			4782	9163																

※ accuracy class

Model	Length of guide rail	Localization reproducibility		positioning accuracy		Walking parallelism		Maximum starting torque (N-cm)	
		Precision grade	General level	Precision grade	General level	Precision grade	General level	Precision grade	General level
DK40	100	±0.003	±0.01	0.020	-	0.010	-	1.2	0.8
	150								
	200								
DK50	150	±0.003	±0.01	0.020	-	0.010	-	4	2
	200								
	250								
	300								
DK60	150	±0.003	±0.01	0.020	-	0.010	-	15	7
	200								
	300								
	400								
	500								
	600								
DK86	340	±0.003	±0.01	0.025	-	0.015	-	15	10
	440								
	540								
	640								
	740								
DK100	940	±0.003	±0.01	0.040	-	0.030	-	25	10
	980								
	1080								
	1180								
	1280			0.045	-	0.035	-	23	15
	1380								
				0.05		0.04		25	

DK

DTH

DS

DC

DB


DE

DK060

※ maximum speed

Model	Ball screw lead (mm)	Rail length L2 (mm)	Speed (mm/sec)	
			Precision grade	General level
DK40	01	100	190	190
		150	190	190
		200	190	190
DK50	02	150	270	270
		200	270	270
		250	270	270
		300	270	270
DK60	05	150	550	390
		200	550	390
		300	550	390
		400	550	390
		500	550	390
		600	340	340
	10	150	1100	790
		200	1100	790
		300	1100	790
		400	1100	790
		500	1100	790
		600	670	670
DK86	10	340	740	520
		440	740	520
		540	740	520
		640	740	520
		740	740	520
		940	610	430
	20	340	1480	1050
		440	1480	1050
		540	1480	1050
		640	1480	1050
DK100	20	980	1120	800
		1080	980	800
		1180	750	750
		1280	630	630
		1380	530	530


DK40 Excluding protective cover

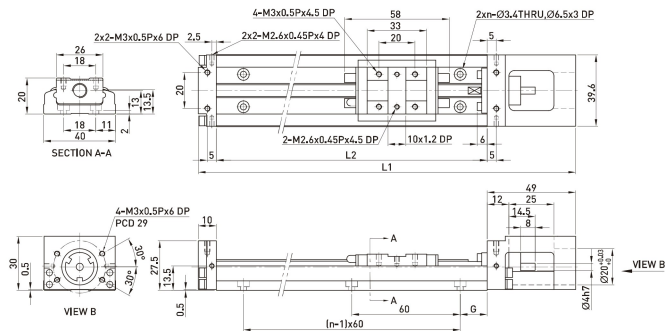

unit:mm

Rail length L2 (mm)	Full length L1 (mm)	Maximum travel (mm)		G (mm)	N	Weight (kg)	
		A1 slide	A2 slide			A1 slide	A2 slide
100	159	36	-	20	2	0.48	-
150	209	86	34	15	3	0.6	0.67
200	259	136	84	40	3	0.72	0.79

DK40 Including protective cover

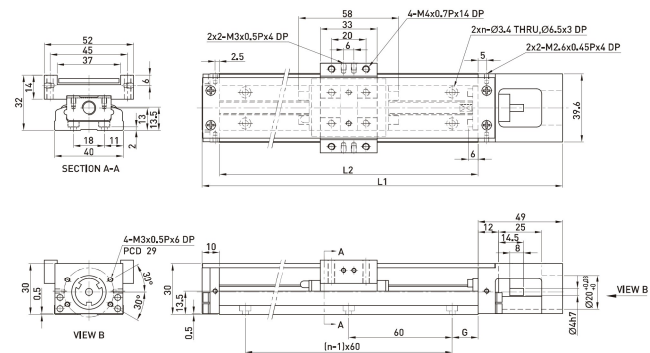

unit:mm

Rail length L2 (mm)	Full length L1 (mm)	Maximum travel (mm)		G (mm)	N	Weight (kg)	
		A1 slide	A2 slide			A1 slide	A2 slide
100	159	36	-	20	2	0.55	-
150	209	86	34	15	3	0.68	0.76
200	259	136	84	40	3	0.82	0.89

This drawing is for reference only. Actual dimensions are based on the 2D/3D drawings provided. Product styles and appearance specifications may change without prior notice

DK

DTH

DS


DC

DB

DE

DK060


DK50 Excluding protective cover

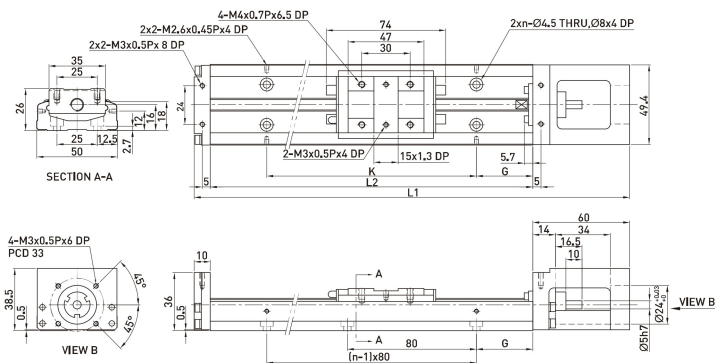

unit:mm

Rail length L2(mm)	Full length L1 (mm)	Maximum travel (mm)		G (mm)	K(mm)	N	Weight (kg)	
		A1 slide	A2 slide				A1 slide	A2 slide
150	220	70	-	35	80	2	1	-
200	270	120	55	20	160	3	1.2	1.4
250	320	170	105	45	160	3	1.4	1.6
300	370	220	155	30	240	4	1.6	1.8


DK60D Excluding protective cover

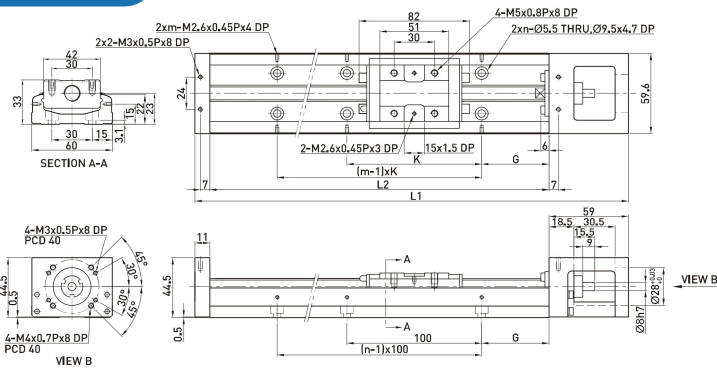

unit:mm

Rail length L2(mm)	Full length L1 (mm)	Maximum travel (mm)		G (mm)	K(mm)	N	M	Weight (kg)	
		A1 slide	A2 slide					A1 slide	A2 slide
150	220	60	-	25	100	2	2	1.5	-
200	270	110	-	50	100	2	2	1.8	-
300	370	210	135	50	200	3	2	2.4	2.7
400	470	310	235	50	100	4	4	3	3.3
500	570	410	335	50	200	5	3	3.6	3.9
600	670	510	435	50	100	6	6	4.2	4.6


DK50 Including protective cover

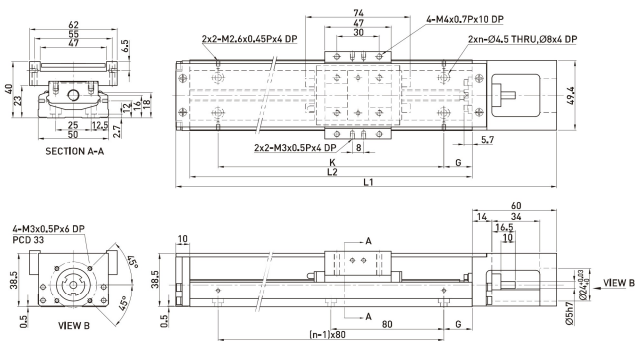

unit:mm

Rail length L2(mm)	Full length L1 (mm)	Maximum travel (mm)		G (mm)	K(mm)	N	Weight (kg)	
		A1 slide	A2 slide				A1 slide	A2 slide
150	220	70	-	35	80	2	1.1	-
200	270	120	55	20	160	3	1.3	1.5
250	320	170	105	45	160	3	1.6	1.8
300	370	220	155	30	240	4	1.8	2.0


DK60D Including protective cover

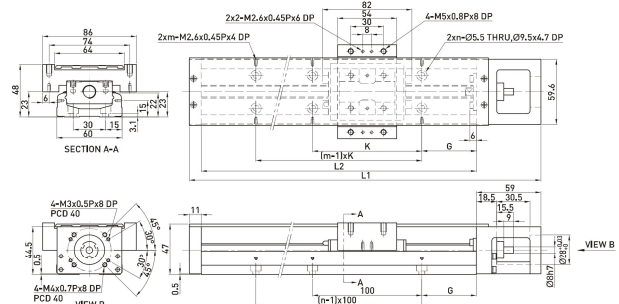

unit:mm


Rail length L2(mm)	Full length L1 (mm)	Maximum travel (mm)		G (mm)	K(mm)	N	M	Weight (kg)	
		A1 slide	A2 slide					A1 slide	A2 slide
150	220	60	-	25	100	2	2	1.7	-
200	270	110	-	50	100	2	2	2.1	-
300	370	210	135	50	200	3	2	2.7	3.0
400	470	310	235	50	100	4	4	3.3	3.6
500	570	410	335	50	200	5	3	3.9	4.2
600	670	510	435	50	100	6	6	4.6	5.0

DK86D Excluding protective cover

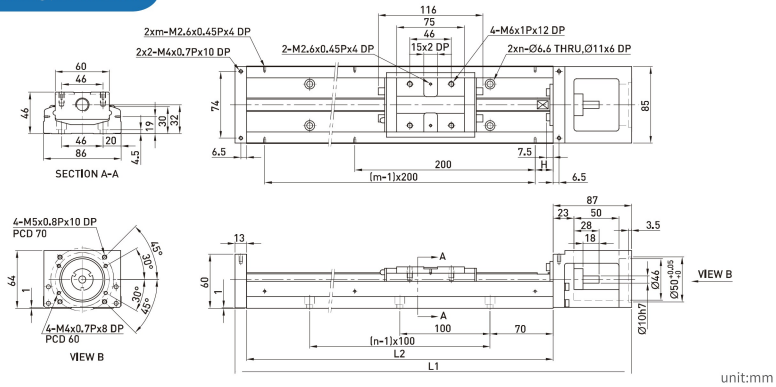


Rail length L2(mm)	Full length L1 (mm)	Maximum travel (mm)		H (mm)	N	M	Weight (kg)	
		A1 slide	A2 slide				A1 slide	A2 slide
340	440	216.5	108.5	70	3	2	5.7	6.5
440	540	316.5	208.5	20	4	3	6.9	7.7
540	640	416.5	308.5	70	5	3	8.0	8.8
640	740	516.5	408.5	20	6	4	9.2	10.0
740	840	616.5	508.5	70	7	4	10.4	11.2
940	1040	816.5	708.5	70	9	5	11.6	12.4

DK100 Excluding protective cover

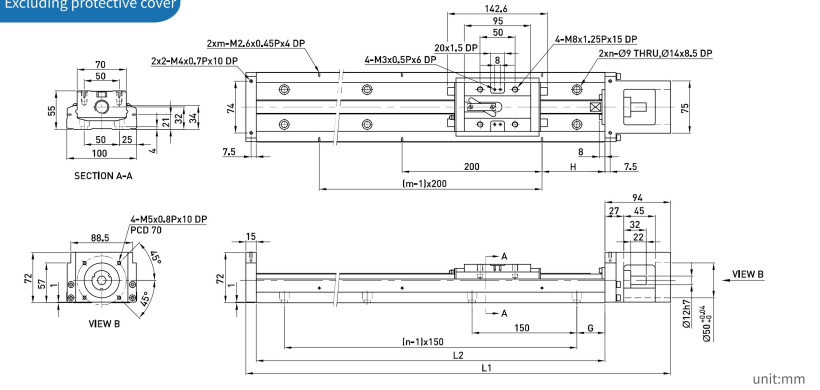

Rail length L2(mm)	Full length L1 (mm)	Maximum travel (mm)		G(mm)	H (mm)	N	M	Weight (kg)	
		A1slide	A2 slide					A1slide	A2 slide
980	1089	828	700	40	90	7	5	18.6	20.3
1080	1189	928	800	15	40	8	6	20.3	22.0
1180	1289	1028	900	65	90	8	6	22.0	23.7
1280	1389	1128	1000	40	40	9	7	23.6	25.3
1380	1489	1228	1100	15	90	10	7	25.3	27.0


DK86D Including protective cover

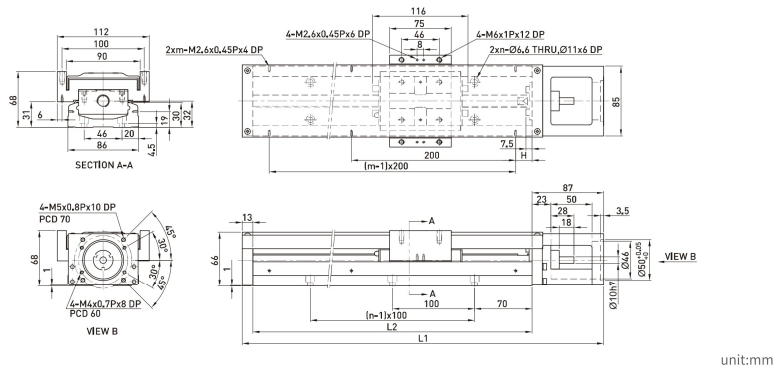

Rail length L2(mm)	Full length L1 (mm)	Maximum travel (mm)		H (mm)	N	M	Weight (kg)	
		A1slide	A2slide				A1 slide	A2 slide
340	440	216.5	108.5	70	3	2	6.5	7.3
440	540	316.5	208.5	70	4	3	7.8	8.6
540	640	416.5	308.5	70	5	3	9.0	9.8
640	740	516.5	408.5	70	6	4	10.3	11.3
740	840	616.5	508.5	70	7	4	11.6	12.4
940	1040	816.5	708.5	70	9	5	13.0	13.8

This drawing is for reference only. Actual dimensions are based on the 2D/3D drawings provided. Product styles and appearance specifications may change without prior notice.

DK100 Including protective cover

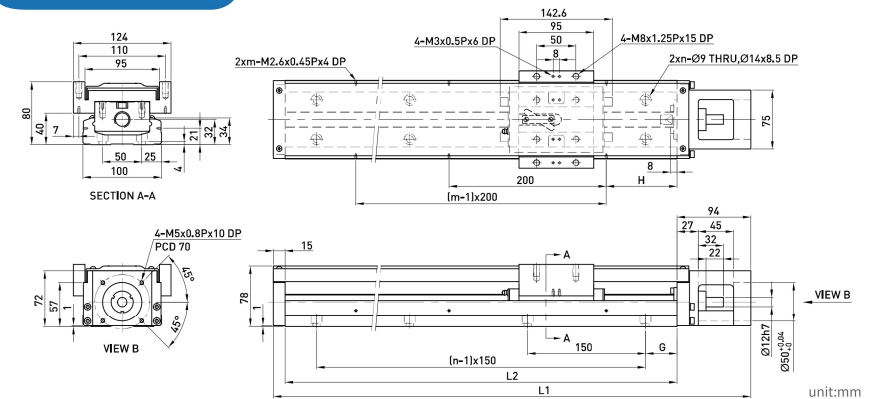

Rail length L2(mm)	Full length L1 (mm)	Maximum travel (mm)		G(mm)	H (mm)	N	M	Weight (kg)	
		A1slide	A2 slide					A1 slide	A2 slide
980	1089	828	700	40	90	7	5	20.4	22.1
1080	1189	928	800	15	40	8	6	22.2	23.9
1180	1289	1028	900	65	90	8	6	24.0	25.7
1280	1389	1128	1000	40	40	9	7	25.7	27.4
1380	1489	1228	1100	15	90	10	7	27.5	29.2

This drawing is for reference only. Actual dimensions are based on the 2D/3D drawings provided. Product styles and appearance specifications may change without prior notice.

DK

DTH

DS

DC

DB

DE

DK060

※ Motor seat and motor connection flange

Mitsubishi servo motor

Output power	Motor	Weight (kg)	Applicable flanges					Brake attachment (kg)	Driver	Weight (kg)	Notes
			DK40	DK50	DK60D	DK86D	DK100				
50W	HF-KP053	0.35	F1	F1	F1	F2	-	0.75	MR-J3S-10A	0.8	220V
100W	HF-KP13	0.56	F1	F1	F1	F2	-	0.89	MR-J3S-10A	0.8	220V
200W	HF-KP23	0.94	-	-	-	F0	F0	1.6	MR-J3S-20A	0.8	220V
400W	HF-KP43	1.5	-	-	-	F0	F0	2.1	MR-J3S-40A	1	220V
750W	HF-KP73	2.9	-	-	-	-	F1	4	MR-J3S-70A	1.4	220V

Panasonic servo motor

Output power	Motor	Weight (kg)	Applicable flanges					Brake attachment (kg)	Driver	Weight (kg)	Notes
			kk40	KK50	KK60D	KK86D	KK100				
50W	MSMD5AZP1	0.32	F2	F2	F2	F3	-	0.53	MADDT1105	0.8	110V
50W	MSMD5AZP1	0.32	F2	F2	F2	F3	-	0.53	MADDT1205	0.8	220V
100W	MSMD011P1	0.47	F2	F2	F2	F3	-	0.68	MADDT1107	0.8	110V
100W	MSMD012P1	0.47	F2	F2	F2	F3	-	0.68	MADDT1205	0.8	220V
200W	MSMD021P1	0.82	-	-	-	F1	-	1.3	MADDT2110	1.1	110V
200W	MSMD022P1	0.82	-	-	-	F1	-	1.3	MADDT1207	0.8	220V
400W	MSMD041P1	1.2	-	-	-	F1	-	1.7	MADDT3120	1.5	110V
400W	MSMD042P1	1.2	-	-	-	F1	-	1.7	MADDT2210	1.1	220V
750W	MSMD082S1	2.3	-	-	-	F4	F2	3.1	MADDT3520	1.5	220V


Yaskawa servo motor

Output power	Motor	Weight (kg)	Applicable flanges					Brake attachment (kg)	Driver	Weight (kg)	Notes
			kk40	KK50	KK60D	KK86D	KK100				
50W	SGMAV-A5ADA61	0.3	F1	F1	F1	F2	-	-	SGDV-R70A01A	0.9	There are buttons
50W	SGMAV-A5ADA2C	0.3	F1	F1	F1	F2	-	-	SGDV-R70A01A	0.9	No buttons
50W	SGMAV-A5ADA21	0.3	F1	F1	F1	F2	-	0.75	SGDV-R70A01A	0.9	Medium inertia
100W	SGMAV-01ADA64	0.4	F1	F1	F1	F2	-	0.89	SGDV-R90A01A	0.9	
200W	SGMAV-02ADA65	0.9	-	-	-	F0	F0	1.6	SGDV-1R6A01A	0.9	
400W	SGMAV-04ADA66	1.2	-	-	-	F0	F0	2.1	SGDV-2R8A01A	1	
750W	SGMAV-08ADA67	2.6	-	-	-		F1	4	SGDV-5R5A01A	1.5	


※ Motor seat and motor connection flange

- **DK40**


Motor seat F0



Motor connection flange F1




Motor connection flange F2




- **DK50**


Motor seat F0




Motor connection flange F1




Motor connection flange F2




Motor connection flange F3




Transfer fixed seat H0

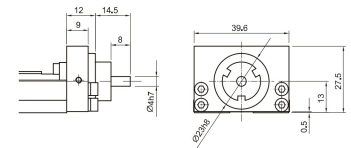

Motor connection flange F3

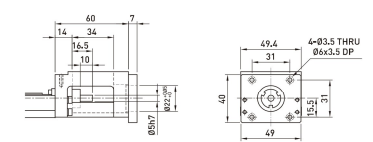

Transfer fixed seat H0

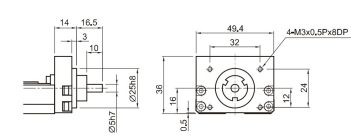

DK

DTH

DS

DC

DB


DE

DK060


※ Motor seat and motor connection flange

• DK100


Motor seat F0

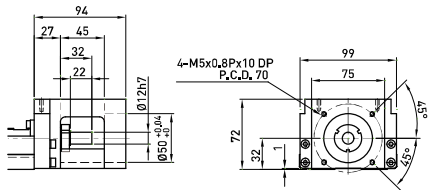


Motor connection flange F3

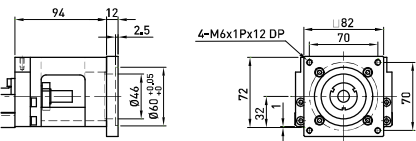


Motor connection flange F1

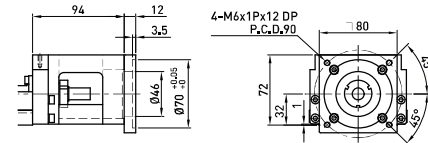


Motor connection flange F4

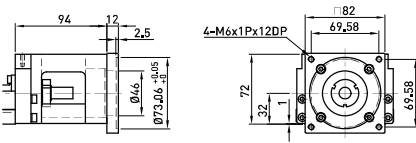

Motor connection flange F2


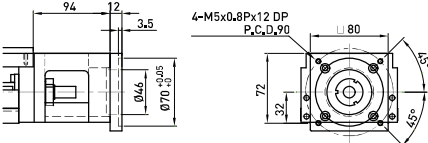


Transfer fixed seat H0

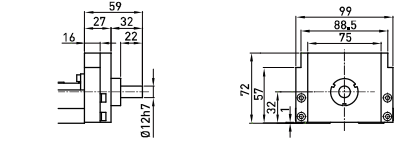


※ Limit switch

• Extreme guide rail

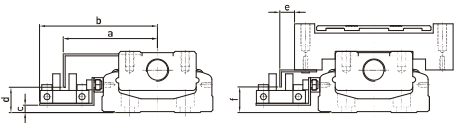

Size	A	B	C	D	E	F
DK40	41.5	54.1	0.5	10.8	15.3	12
DK50	45.5	59	1	10	15	11
DK60D	51	63.8	4	14.5	8	13
DK86D	63.5	76.7	8	18	8	18
DK100	71	84	10	20	9	20

Limit switch S1: PM-L45

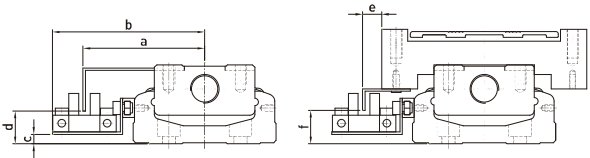

Size	A	B	C	D	E	F
DK40	36.5	44.3	1	9.8	10.5	12
DK50	41.3	48	1	10.5	10.2	11
DK60D	46.2	52.8	4	14	3.2	13
DK86D	59	65.7	8	18	3	18
DK100	66	73	10	20	4.2	20

Limit switch S2: PM-Y45

DK

DTH

DS

DC

DB

DE

DK060