


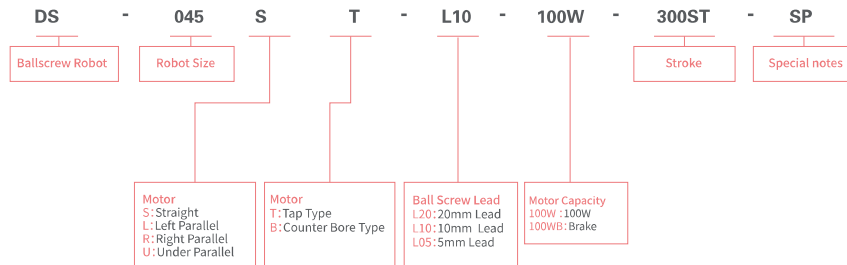

Sliding table series

DS series
screw drive

		General environmental application slide table	
DS045	Body width 46MM maximum stroke 700MM Maximum Load10KG	DS120	Body width 126MM maximum stroke 1200MM Maximum Load50KG
DS050	Body width 57MM maximum stroke 1000MM Maximum Load24KG	DS160	Body width 158MM maximum stroke 1600MM Maximum Load80KG
DS070	Body width 74MM maximum stroke 600MM Maximum Load24KG	DS200	Body width 198MM maximum stroke 1600MM Maximum Load120KG
DS090	Body width 87MM maximum stroke 1000MM Maximum Load24KG		

 DS-045ST-L10-100W-300ST-SP

✖ Specification

Servo Motor Output/rpm		100W/3000RPM
Drive mechanism		Ball screw(C7, 연삭), 12 Lead 20MM(10MM)
Liner motion guide		One way, No.12, 2 block
Repeatability		±0.02MM
stroke(mm)		100-700MM
Payload(kg) Ta = 0.2s	Lead 20	H: 2
		V: 1.5
	Lead 10	H: 12
		V: 3.5
Moment of inertia of area		Ix=5.57E+04, Iy=1.49E+05

⌘ product



Straight joint



Right Parallel joint




Left Parallel joint




Under Parallel joint

DS-045ST

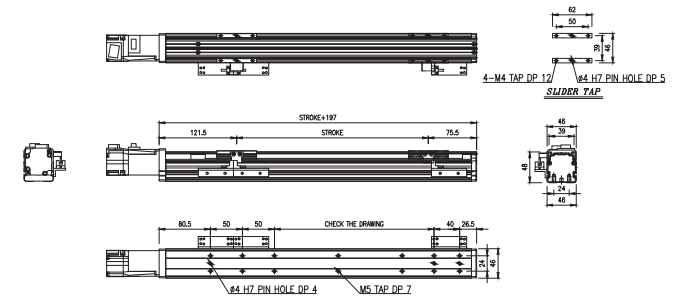[illegible]

DS-045SB

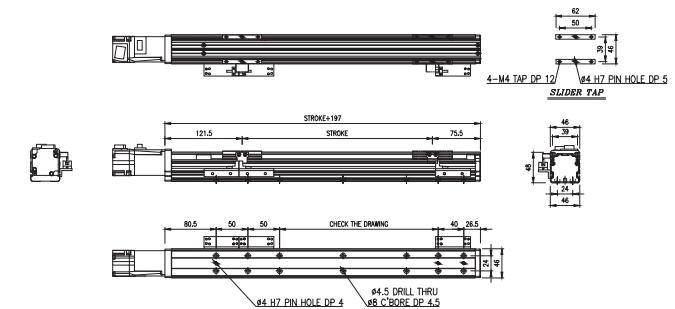

unit:mm								
Stroke(mm)		100	200	300	400	500	600	700
Max Speed (mm/sec)	Lead 20mm				1000			900
	Lead 10mm				500			450
Weight(kg)		2.71	3.03	3.35	3.67	3.99	4.31	4.64
Base & Slide		The weight of the model equipped with a brake is 0.2kg more heavier then this value.						
Aluminum Profile, 백색전착 유광								

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS050

DS070


DS090

DS120

DS160

DS200


DS-045LT

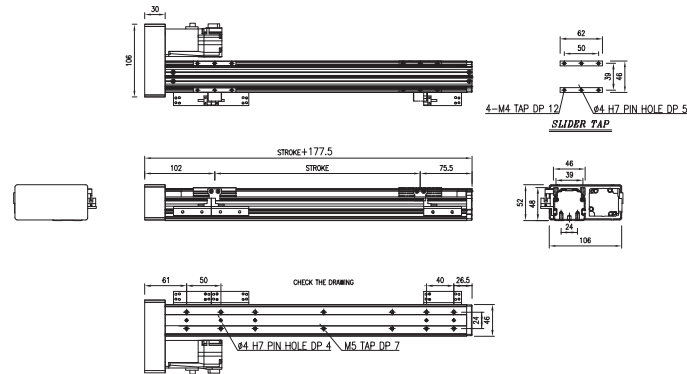

unit:mm

Stroke(mm)	100	200	300	400	500	600	700
Max. Speed (mm/sec)	Lead 20mm			1000			900
	Lead 10mm			500			450
Weight(kg)	2.86	3.18	3.5	3.82	4.14	4.46	4.78
Base & Slide	The weight of the model equipped with a brake is 0.2kg more heavier then this value. Aluminum Profile, 액세서리 유량						


DS-045RT

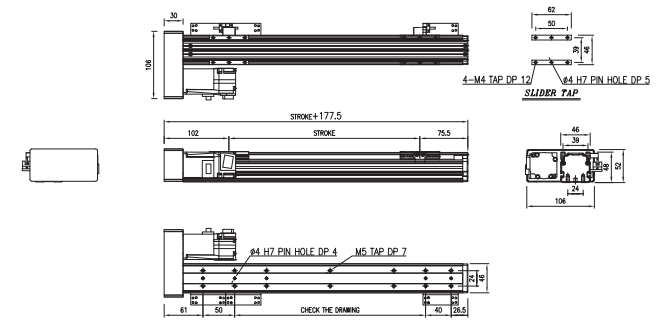

unit:mm

Stroke(mm)		100	200	300	400	500	600	700
Max. Speed (mm/sec)	Lead 20mm	1000					900	
	Lead 10mm	500					450	
Weight(kg)		2.86	3.18	3.5	3.82	4.14	4.46	4.78
Base & Slide		The weight of the model equipped with a brake is 0.2kg more heavier then this value. Aluminum Profile, 백색전력 유광						

DS-045LB

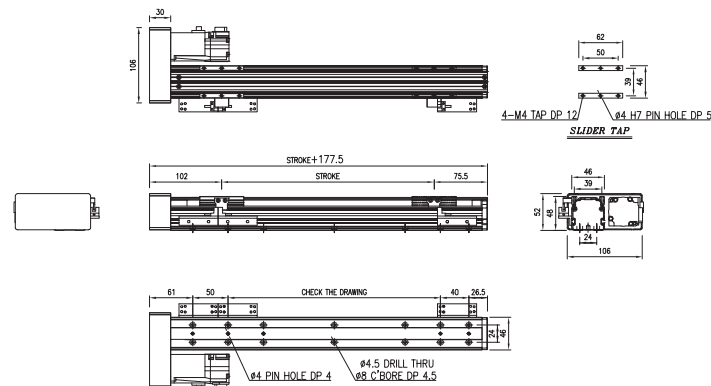


unit:mm

Stroke(mm)	100	200	300	400	500	600	700
Max. Speed (mm/sec)	Lead 20mm			1000			900
	Lead 10mm			500			450
Weight(kg)	2.86	3.18	3.5	3.82	4.14	4.46	4.78
Base & Slide	The weight of the model equipped with a brake is 0.2kg more heavier then this value. Aluminum Profile, 백색전차 유광						

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DS-045RB

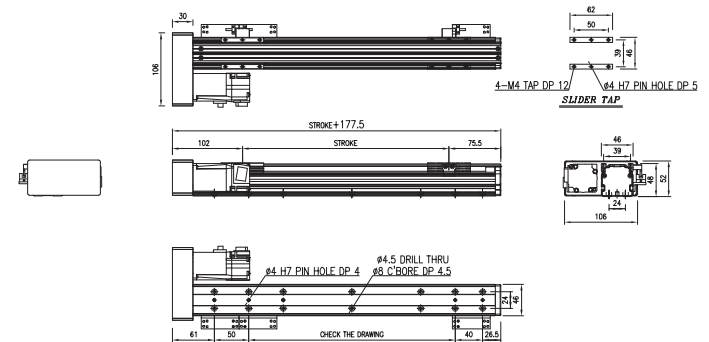

unit:mm

		Unit:mm						
Stroke(mm)		100	200	300	400	500	600	700
Max. Speed (mm/sec)	Lead 20mm	1000					900	
	Lead 10mm	500					450	
Weight(kg)		2.86	3.18	3.5	3.82	4.14	4.46	4.78
The weight of the model equipped with a brake is 0.2kg more heavier then this value.								
Aluminum Profile, 액셀전직 유관								
Base & Slide								

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS050

DS070


DS090

DS120

DS160


DS200

DS-045UT

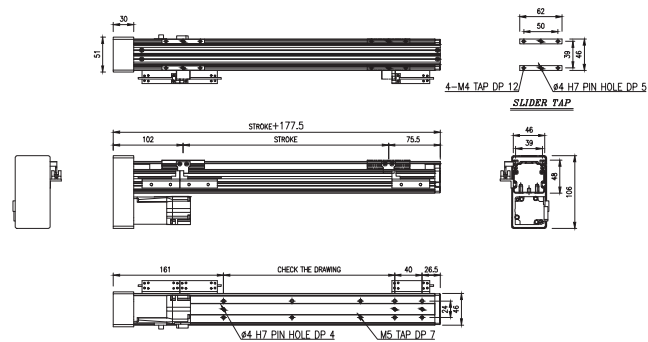

Stroke(mm)	100	200	300	400	500	600	700
Max. Speed(mm/sec)	Lead 20mm			1000			900
	Lead 10mm			500			450
Weight(kg)	2.86	3.18	3.5	3.82	4.14	4.46	4.78
Base & Slide	The weight of the model equipped with a brake is 0.2kg more heavier then this value. Aluminum Profile, 액세서리 유량						

DS-045UB

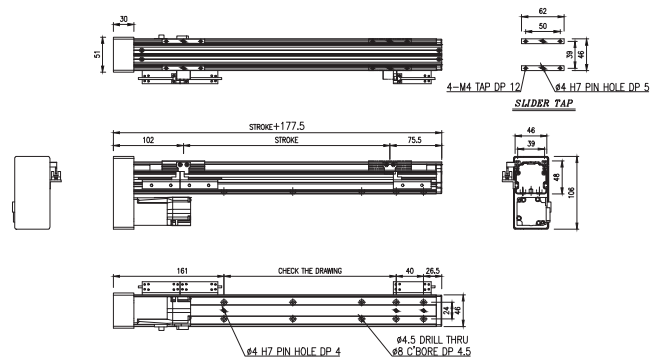

							unit:mm
Stroke(mm)	100	200	300	400	500	600	700
Max. Speed (mm/sec)	Lead 20mm			1000			900
	Lead 10mm			500			450
Weight(kg)	2.86	3.18	3.5	3.82	4.14	4.46	4.78
Base & Slide	The weight of the model equipped with a brake is 0.2kg more heavier than this value.						
Aluminum Profile, 액세서리 유상							

unit:mm

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS050

DS070


DS090

DS120

DS160

DS200

DS-050ST-L10-100W-300ST-SP

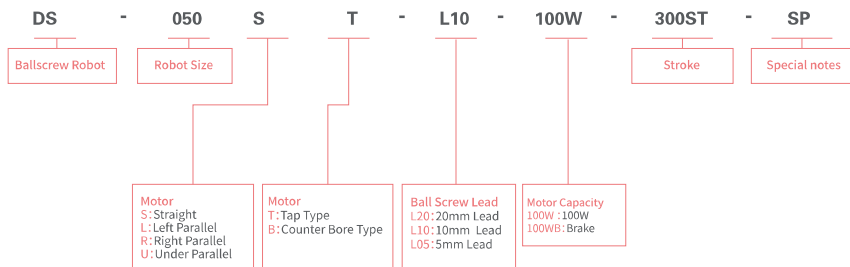

※ Specification

Servo Motor Output/rpm		100W/3000RPM
Drive mechanism		Ball screw(C7, 연삭), 15 Lead 20MM(10MM)
Liner motion guide		One way,15V, 2 block
Repeatability		±0.02MM
stroke(mm)		100-1000MM
Payload(kg) Ta = 0.2s	Lead 20	H: 4
		V: 3
	Lead 10	H: 24
		V: 7
Moment of inertia of area		Ix=5.95E+04, Iy=3.01E+05

※ product



Straight joint



Right Parallel joint




Left Parallel joint



Under Parallel joint


DS-050ST

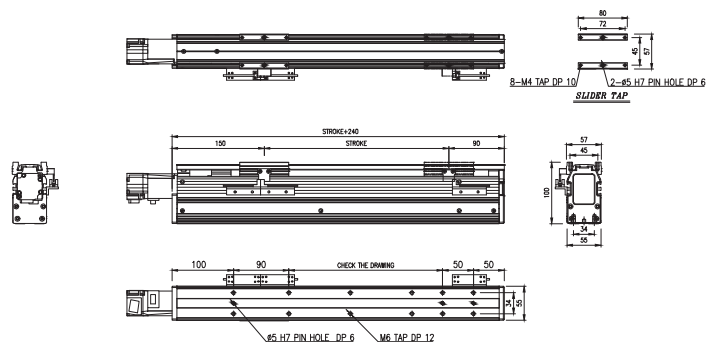

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	1000							850	680	560
	500							410	330	270
Weight(kg)	4.65	5.32	5.99	6.66	7.33	8.00	8.67	9.34	10.1	10.68
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광									

unit:mm

DS-050SB

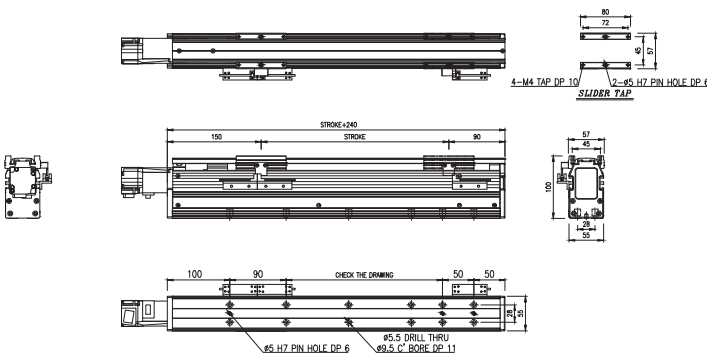

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	1000							850	680	560
	500							410	330	270
Weight(kg)	4.65	5.32	5.99	6.66	7.33	8.00	8.67	9.34	10.1	10.68
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광									

unit:mm

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS45

DS050

DS070


DS090

DS120

DS160

DS200


DS-050LT

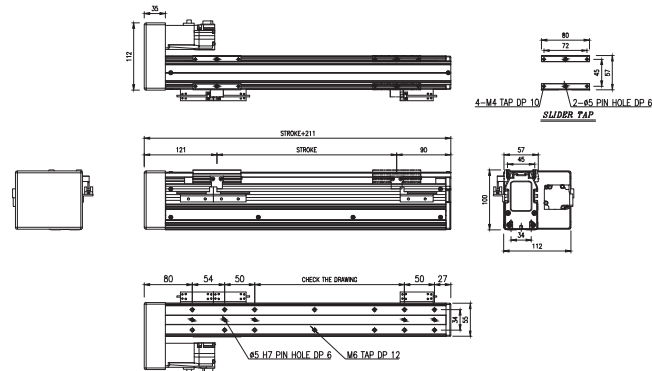

unit:mm

[illegible]


DS-050RT

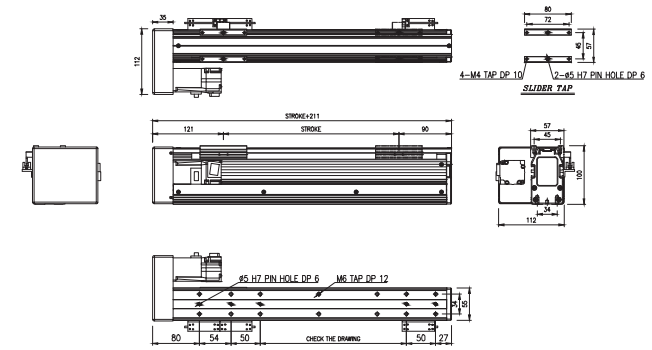

unit:mm

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm	1000							850	680	560
	Lead 10mm	500							410	330	270
Weight(kg)		4.89	5.56	6.23	6.90	7.57	8.24	8.90	9.57	10.24	10.91
Base & Slide		The weight of the model equipped with a brake is 0.35kg more heavier then this value.									
Aluminum Profile, 맥믹전력 유강											

DS-050LB

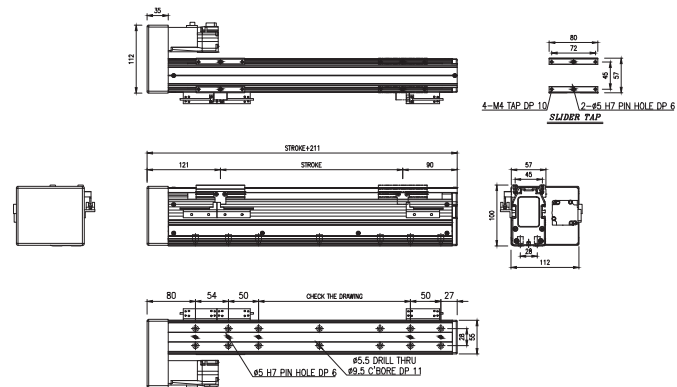

unit:mm


Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm			1000				850	680	560
	Lead 10mm			500				410	330	270
Weight(kg)	4.89	5.56	6.23	6.90	7.57	8.24	8.90	9.57	10.24	10.91

The weight of the model equipped with a brake is 0.35kg more heavier then this value.

Aluminum Profile, 액세서리 유량

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DS-050RB

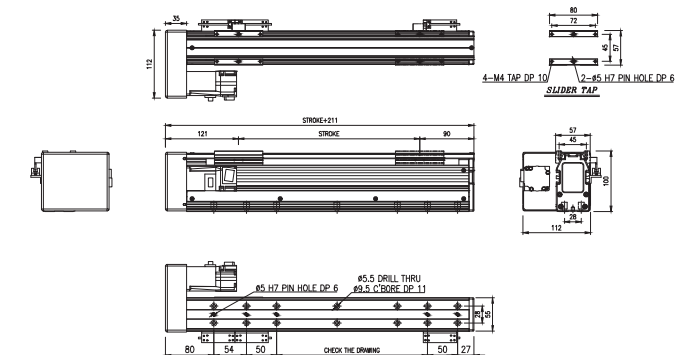

unit:mm

	Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm								850	680	560
	Lead 10mm								410	330	270
Weight(kg)		4.89	5.56	6.23	6.90	7.57	8.24	8.90	9.57	10.24	10.91
Base & Slide		The weight of the model equipped with a brake is 0.35kg more heavier than this value.									
		Aluminum Profile, 백색전지 유광									

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS050

DS070


DS090

DS120

DS160

DS200


DS-050UT

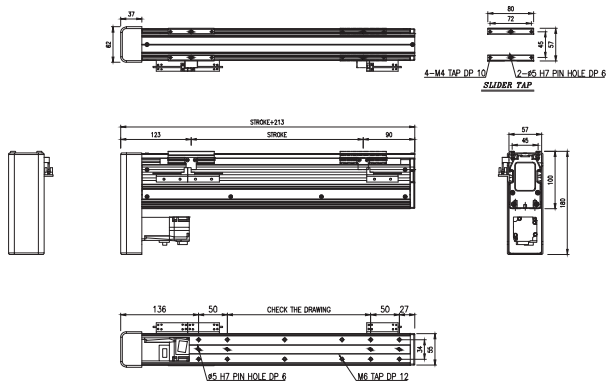

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	1000									
Lead 20mm	850									
Lead 10mm	410									
Weight(kg)	4.84	5.51	6.18	6.84	7.51	8.18	8.85	9.52	10.19	10.86
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광									

DS-050UB

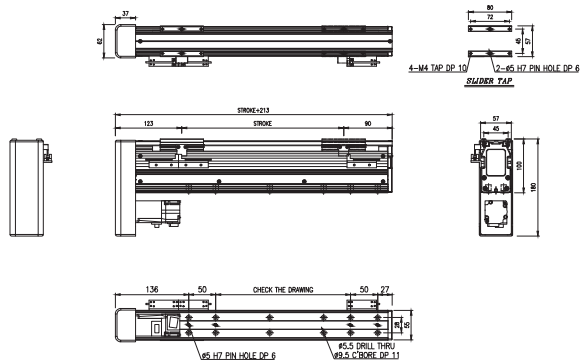

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	1000									
Lead 20mm	850									
Lead 10mm	410									
Weight(kg)	4.84	5.51	6.18	6.84	7.51	8.18	8.85	9.52	10.19	10.86
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광									

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS45

DS050

DS070


DS090

DS120

DS160

DS200

DS-070ST-L10-100W-300ST-SP

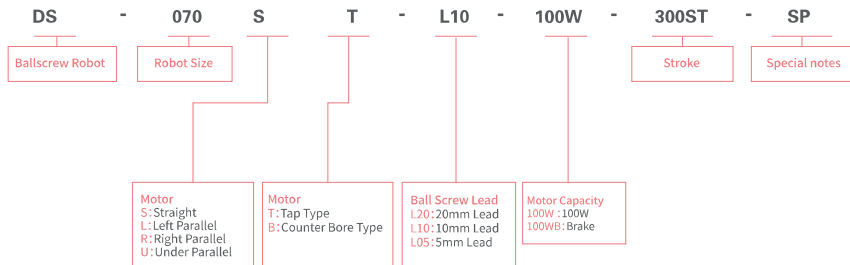

※ Specification

Servo Motor Output/rpm	100W/3000RPM
Drive mechanism	Ball screw(C7, 연삭), 15 Lead 20MM(10MM)
Liner motion guide	One way,No.24, 2 block
Repeatability	±0.02MM
stroke(mm)	100-600MM
Payload(kg) Ta = 0.2s	Lead 20 H: 4 V: 3
	Lead 10 H: 24 V: 7
Moment of inertia of area	Ix=1.65E+05, Iy=4.84E+05

※ product



Straight joint



Right Parallel joint




Left Parallel joint



Under Parallel joint


DS-070ST

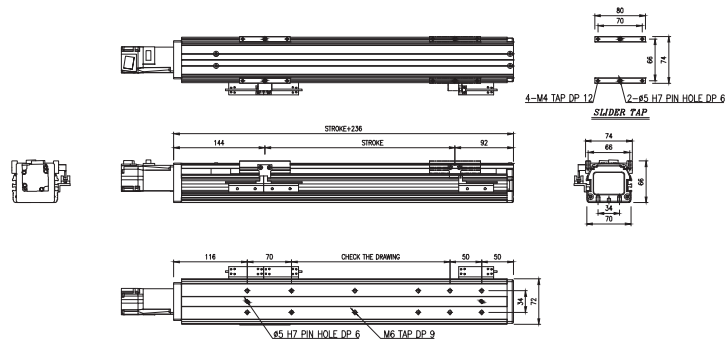

Stroke(mm)	100	200	300	400	500	600
Max. Speed (mm/sec)	1000					
Lead 20mm	500					
Lead 10mm						
Weight(kg)	4.09	4.67	5.25	5.83	6.41	6.99
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광					

unit:mm

DS-070SB

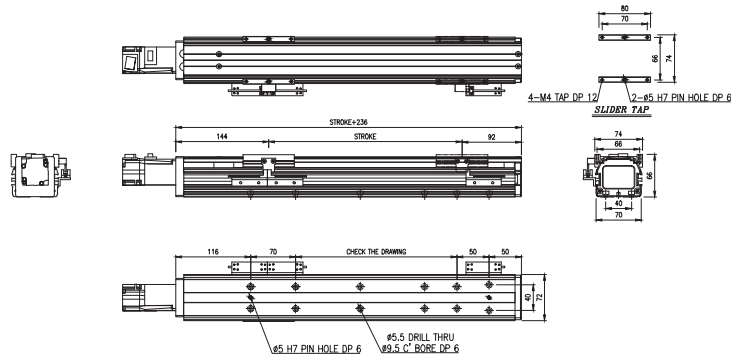

Stroke(mm)	100	200	300	400	500	600
Max. Speed (mm/sec)	1000					
Lead 20mm	500					
Lead 10mm						
Weight(kg)	4.09	4.67	5.25	5.83	6.41	6.99
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광					

unit:mm

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200


DS-070LT

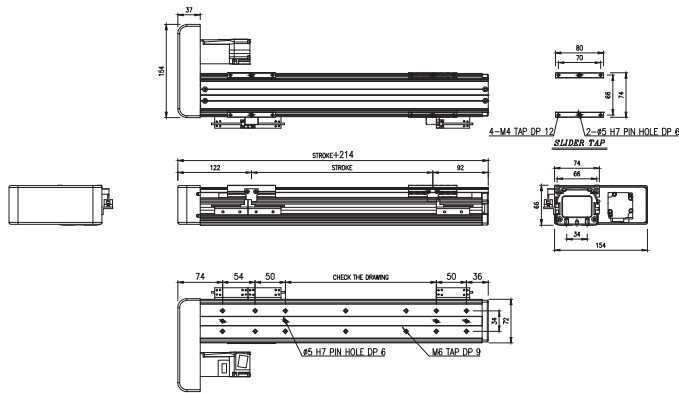

unit:mm

Stroke(mm)	100	200	300	400	500	600
Max. Speed (mm/sec)	Lead 20mm	1000				
	Lead 10mm	500				
Weight(kg)	4.37	4.94	5.51	6.09	6.66	7.23
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광					


DS-070RT

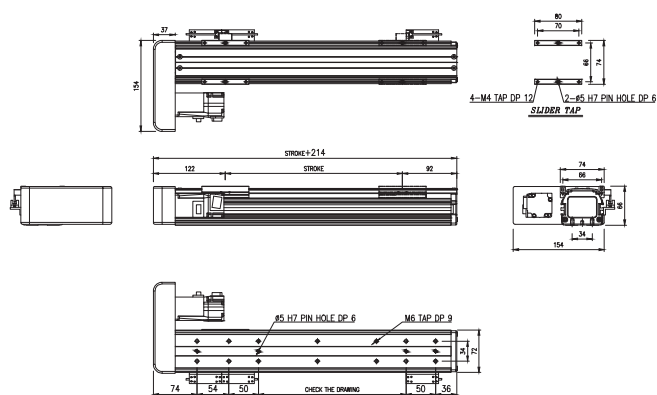

unit:mm

Stroke(mm)	100	200	300	400	500	600
Max. Speed (mm/sec)	Lead 20mm	1000				
	Lead 10mm	500				
Weight(kg)	4.37	4.94	5.51	6.09	6.66	7.23
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광					


DS-070LB

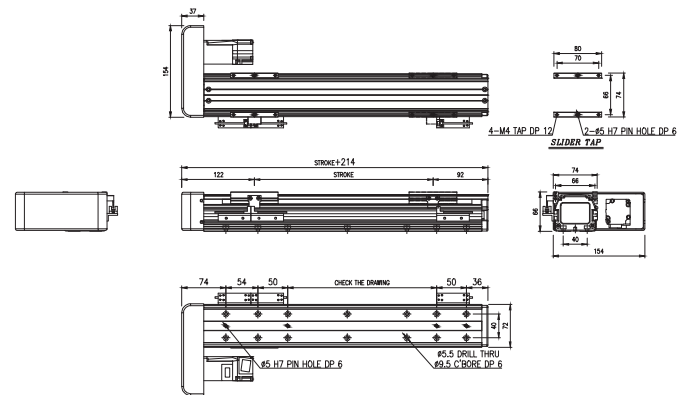

unit:mm

Stroke(mm)	100	200	300	400	500	600
Max. Speed (mm/sec)	Lead 20mm	1000				
	Lead 10mm	500				
Weight(kg)	4.37	4.94	5.51	6.09	6.66	7.23
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광					

DS-070RB

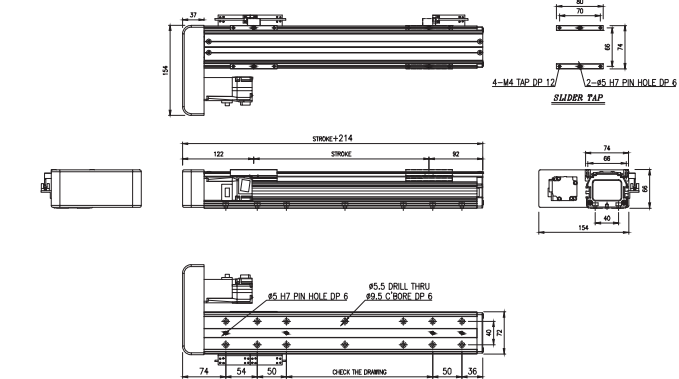

unit:mm

Stroke(mm)	100	200	300	400	500	600
Max. Speed (mm/sec)	Lead 20mm	1000				
	Lead 10mm	500				
Weight(kg)	4.37	4.94	5.51	6.09	6.66	7.23
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광					

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200


DS-070UT

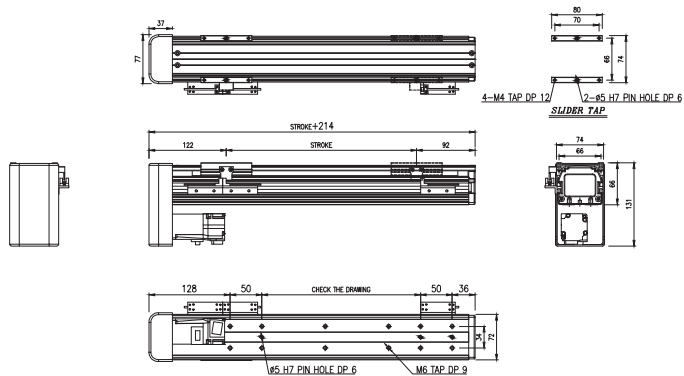

unit:mm

Stroke(mm)	100	200	300	400	500	600
Max. Speed (mm/sec)	Lead 20mm	1000				
	Lead 10mm	500				
Weight(kg)	4.38	4.95	5.52	6.09	6.67	7.24
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광					

DS-070UB

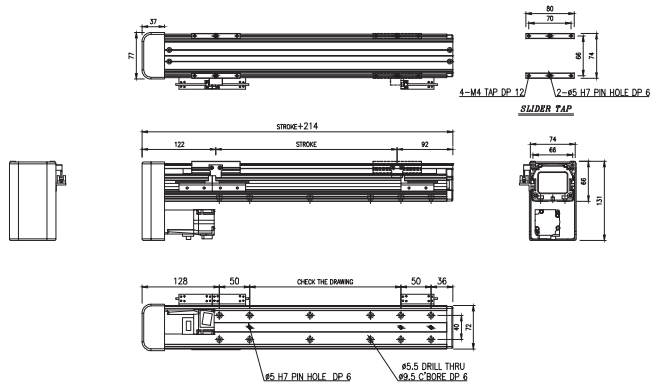

unit:mm

Stroke(mm)	100	200	300	400	500	600
Max. Speed (mm/sec)	Lead 20mm	1000				
	Lead 10mm	500				
Weight(kg)	4.38	4.95	5.52	6.09	6.67	7.24
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광					

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200

DS-090ST-L10-100W-300ST-SP

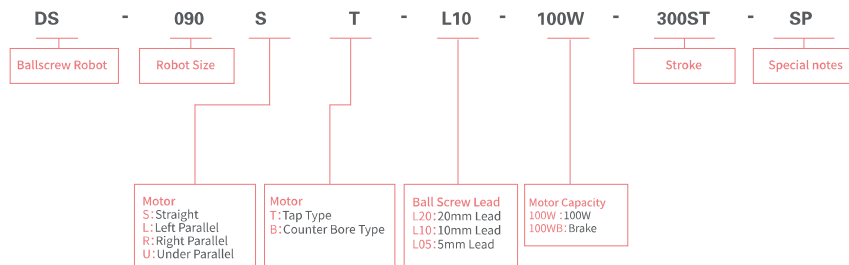

※ Specification

Servo Motor Output/rpm		100W/3000RPM
Drive mechanism		Ball screw(C7, 연삭), 15 Lead 20MM(10MM)
Liner motion guide		One way,No.42, 2 block
Repeatability		±0.02MM
stroke(mm)		100-1000MM
Payload(kg) Ta = 0.2s	Lead 20	H: 4
		V: 3
	Lead 10	H: 24
		V: 7
Moment of inertia of area		Ix=1.78E+05, Iy=1.09E+06

※ product



Straight joint



Right Parallel joint




Left Parallel joint



Under Parallel joint


DS-090ST

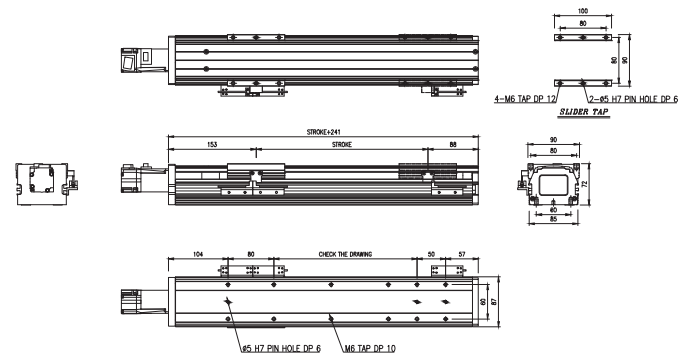

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm	1000									850
	Lead 10mm	500									420
Weight(kg)		5.01	5.83	6.65	7.48	8.3	9.12	9.95	10.77	11.59	12.41
Base & Slide		The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광									

unit: mm

DS-090SB

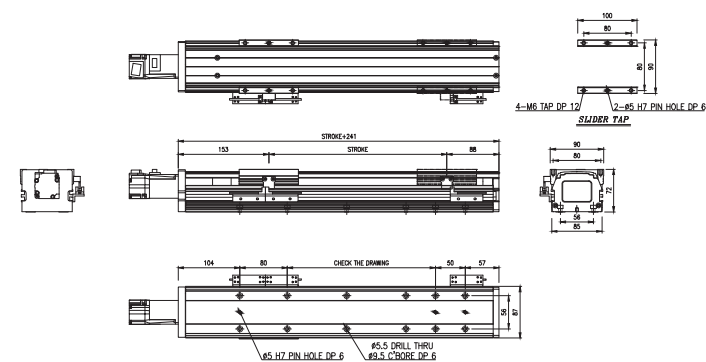

Stroke(mm)		100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm	1000									850
	Lead 10mm	500									420
Weight(kg)		5.01	5.83	6.65	7.48	8.3	9.12	9.95	10.77	11.59	12.41
Base & Slide		The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광									

unit: mm

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200


DS-090LT

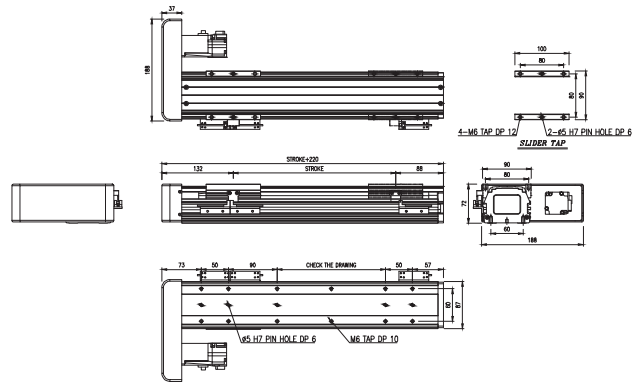

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm			1000				850	680	560
	Lead 10mm			500				410	330	270
Weight(kg)	4.65	5.32	5.99	6.66	7.34	8.01	8.68	9.35	10.03	10.7
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광									


DS-090RT

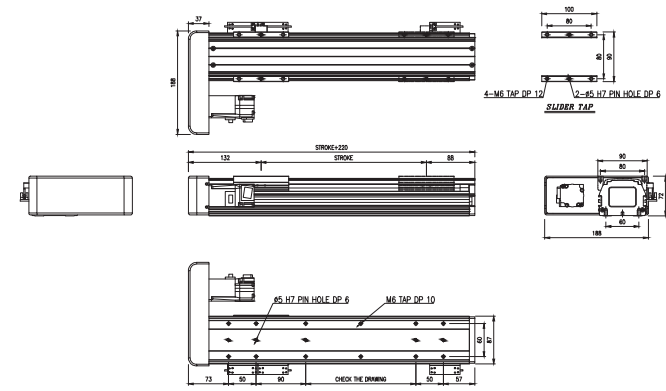

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm			1000				850	680	560
	Lead 10mm			500				410	330	270
Weight(kg)	4.65	5.32	5.99	6.66	7.34	8.01	8.68	9.35	10.03	10.7
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광									


DS-090LB

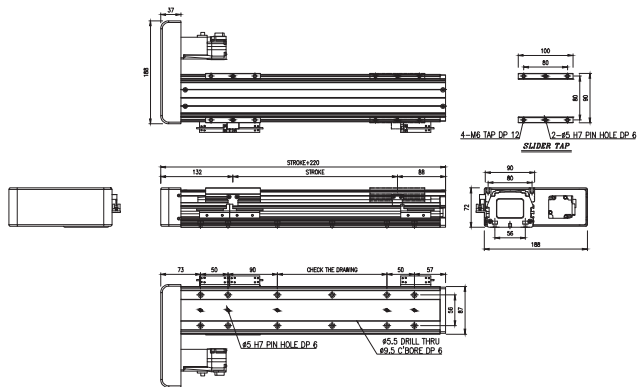

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm			1000				850	680	560
	Lead 10mm			500				410	330	270
Weight(kg)	4.65	5.32	5.99	6.66	7.34	8.01	8.68	9.35	10.03	10.7
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광									

DS-090RB

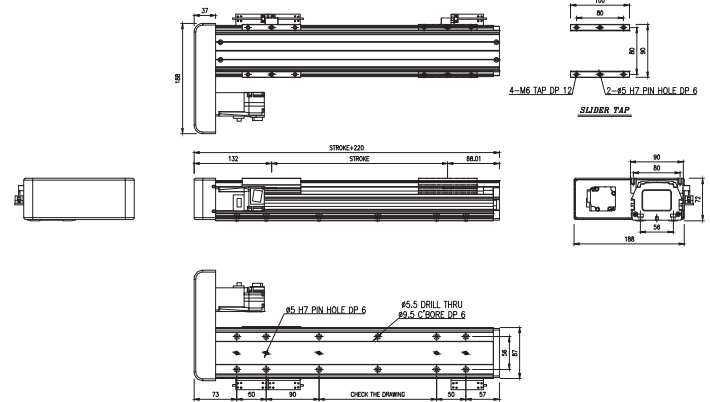

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm			1000				850	680	560
	Lead 10mm			500				410	330	270
Weight(kg)	4.65	5.32	5.99	6.66	7.34	8.01	8.68	9.35	10.03	10.7
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광									

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200


DS-090UT

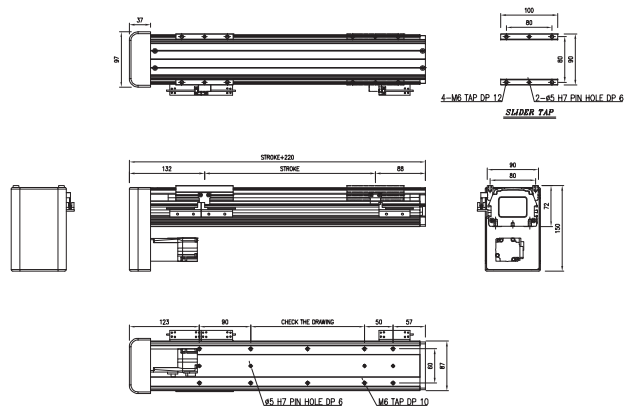

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	1000							850	680	560
Lead 20mm	500							410	330	270
Lead 10mm	4.63	5.31	5.98	6.65	7.33	8.00	8.67	9.34	10.02	10.6
Weight(kg)	The weight of the model equipped with a brake is 0.61kg more heavier then this value.									
Base & Slide	Aluminum Profile, 백색전착 유광									

DS-090UB

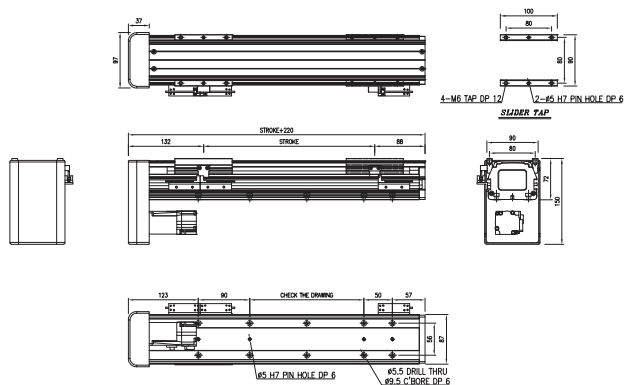

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	1000							850	680	560
Lead 20mm	500							410	330	270
Lead 10mm	4.63	5.31	5.98	6.65	7.33	8.00	8.67	9.34	10.02	10.6
Weight(kg)	The weight of the model equipped with a brake is 0.61kg more heavier then this value.									
Base & Slide	Aluminum Profile, 백색전착 유광									

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200

DS-090ST-L10-200W-300ST-SP

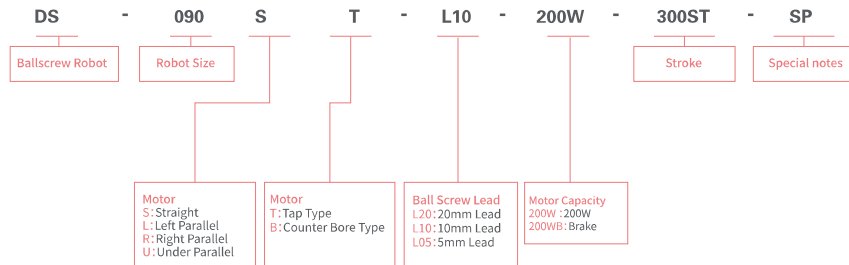

※ Specification

Servo Motor Output/rpm	200W/3000RPM
Drive mechanism	Ball screw(C7, 연삭), 15 Lead 20MM(10MM)
Liner motion guide	One way,No.42, 2 block
Repeatability	±0.02MM
stroke(mm)	100-1000MM
Payload(kg) Ta = 0.2s	Lead 20 H: 28 V: 8
	Lead 10 H: 30 V: 16
Moment of inertia of area	Ix=1.78E+05, Iy=1.09E+06

※ product



Straight joint



Right Parallel joint




Left Parallel joint



Under Parallel joint


DS-090ST

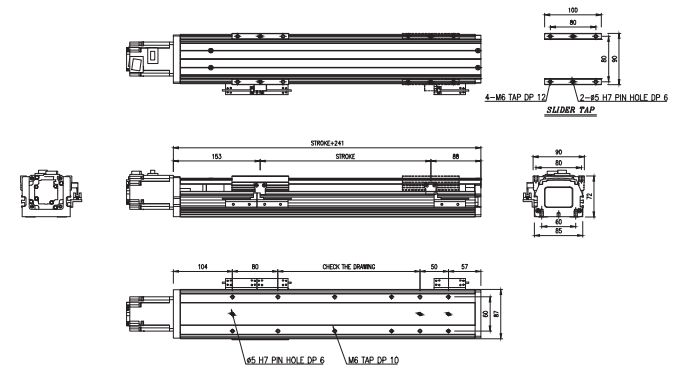

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	1000							850	680	560
	500							420	330	270
Weight(kg)	5.41	6.23	7.05	7.87	8.69	9.51	10.33	11.15	11.97	12.79
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광									

unit: mm

DS-090SB

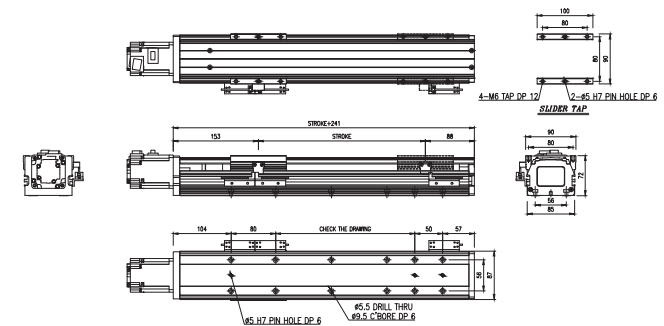

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	1000							850	680	560
	500							420	330	270
Weight(kg)	5.41	6.23	7.05	7.87	8.69	9.51	10.33	11.15	11.97	12.79
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광									

unit: mm

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200


DS-090LT

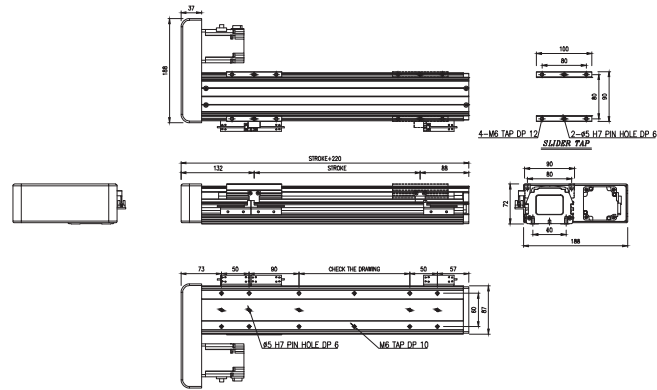

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm			1000				850	680	560
	Lead 10mm			500				420	330	270
Weight(kg)	5.05	5.72	6.39	7.06	7.73	8.40	9.07	9.74	10.41	11.08
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광									


DS-090RT

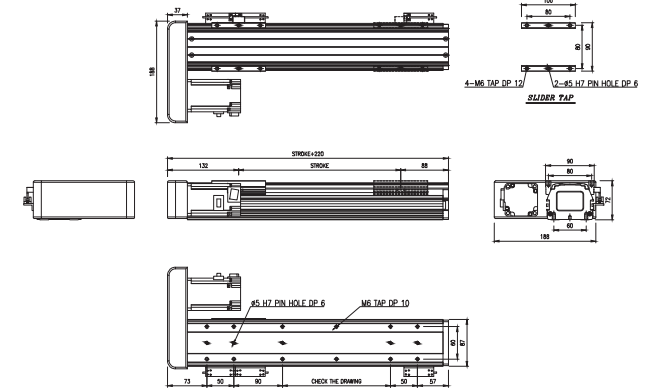

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm			1000				850	680	560
	Lead 10mm			500				420	330	270
Weight(kg)	5.05	5.72	6.39	7.06	7.73	8.40	9.07	9.74	10.41	11.08
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광									


DS-090LB

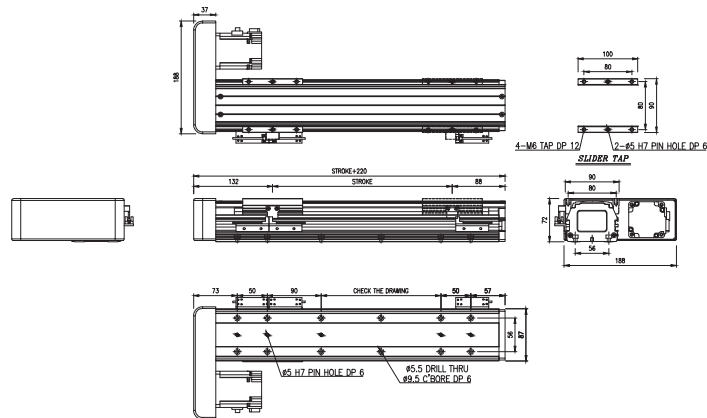

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm			1000				850	680	560
	Lead 10mm			500				420	330	270
Weight(kg)	5.05	5.72	6.39	7.06	7.73	8.40	9.07	9.74	10.41	11.08
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광									

DS-090RB

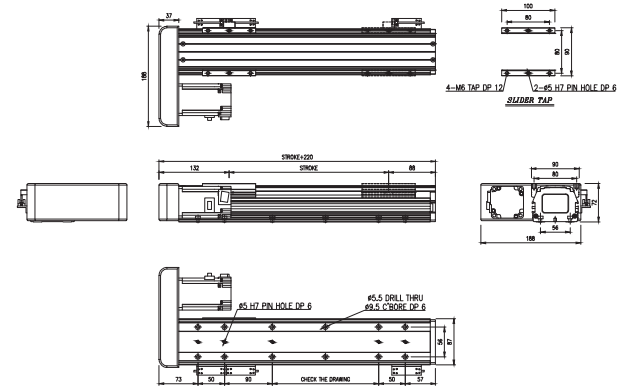

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm			1000				850	680	560
	Lead 10mm			500				420	330	270
Weight(kg)	5.05	5.72	6.39	7.06	7.73	8.40	9.07	9.74	10.41	11.08
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광									

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200


DS-090UT

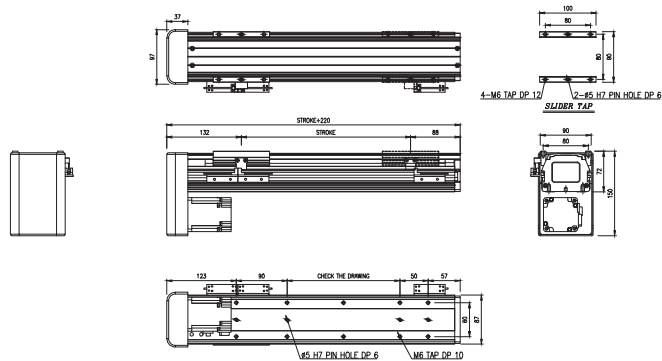

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	1000							850	680	560
Lead 20mm	500							420	330	270
Lead 10mm	5.03	5.71	6.39	7.07	7.75	8.43	9.11	9.79	10.47	11.15
Weight(kg)	The weight of the model equipped with a brake is 0.61kg more heavier then this value.									
Base & Slide	Aluminum Profile, 백색전착 유광									

DS-090UB

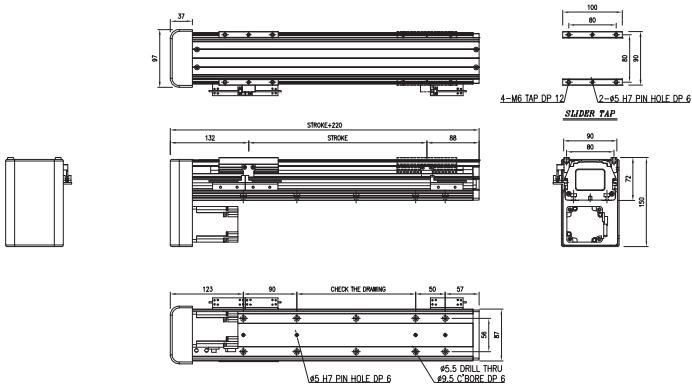

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	1000							850	680	560
Lead 20mm	500							420	330	270
Lead 10mm	5.03	5.71	6.39	7.07	7.75	8.43	9.11	9.79	10.47	11.15
Weight(kg)	The weight of the model equipped with a brake is 0.61kg more heavier then this value.									
Base & Slide	Aluminum Profile, 백색전착 유광									

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200

DS-120ST-L10-200W-300ST-SP

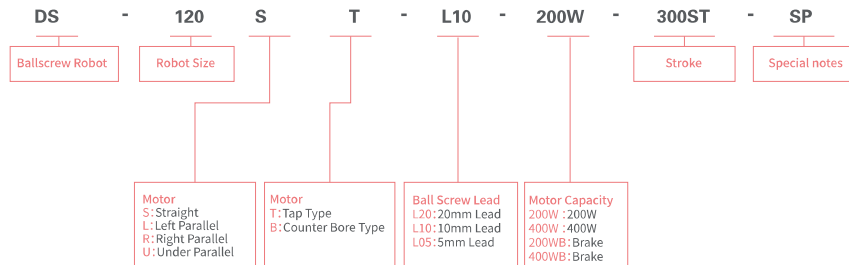

※ Specification

Drive mechanism		Ball screw (C7, 연삭), Ø15 Lead 20MM (10MM)	
Liner motion guide		Two way, 15w, 2 block	
Repeatability		±0.02MM	
stroke(mm)		100-1200MM	
Servo Motor Output/rpm		200W/3000RPM	400W/3000RPM
Payload(kg) Ta = 0.2s	Lead 10	H: 30	H: 40
		V: 8	V: 18
	Lead 20	H: 50	H: 50
		V: 10	V: 18
Moment of inertia of area		Ix = 4.86E+05, Iy = 4.45E +06	

※ product



Straight joint



Right Parallel joint




Left Parallel joint



Under Parallel joint


DS-120ST

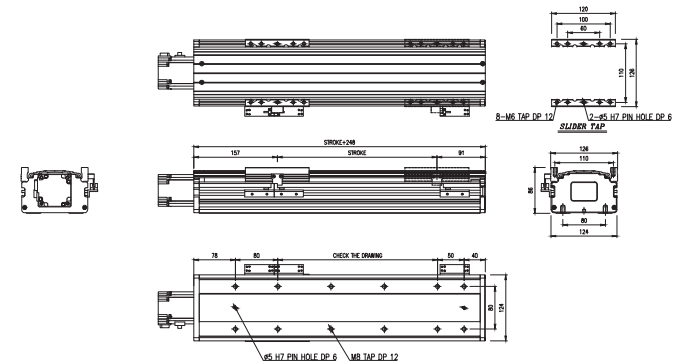

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000	1100	1200
Max. Speed (mm/sec)	1000											
Lead 20mm	500											
Lead 10mm	420											
Weight(kg)	6.13	7.10	8.06	9.03	9.99	10.96	11.92	12.89	13.85	14.82	15.78	16.75
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광											

unit:mm

DS-120SB

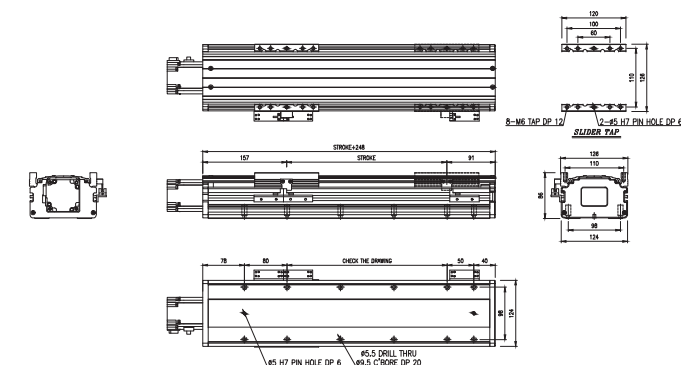

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000	1100	1200
Max. Speed (mm/sec)	1000											
Lead 20mm	500											
Lead 10mm	420											
Weight(kg)	6.13	7.10	8.06	9.03	9.99	10.96	11.92	12.89	13.85	14.82	15.78	16.75
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광											

unit:mm

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200


DS-120LT

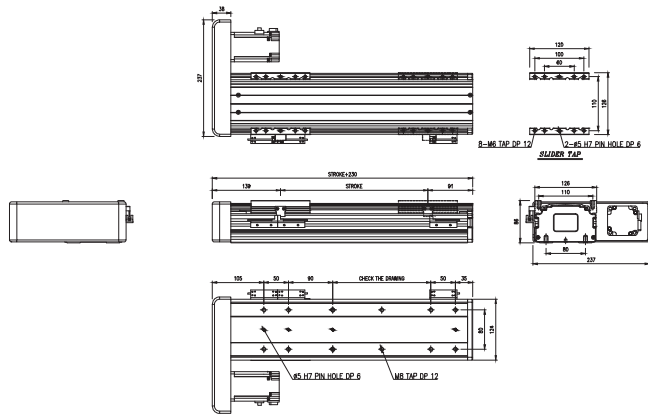

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000	1100	1200
Max. Speed (mm/sec)	1000							850	680	560	460	390
Lead 20mm	500							420	320	270	230	190
Lead 10mm	6.13	7.10	8.06	9.03	9.99	10.96	11.92	12.89	13.85	14.82	15.78	16.75
Weight(kg)	The weight of the model equipped with a brake is 0.61kg more heavier then this value.											
Base & Slide	Aluminum Profile, 백색전착 유광											


DS-120RT

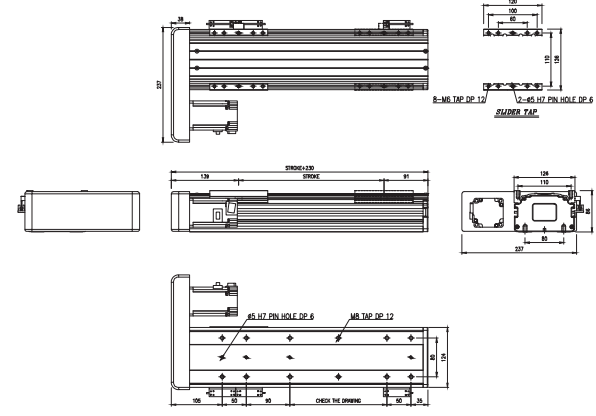

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000	1100	1200
Max. Speed (mm/sec)	1000							850	680	560	460	390
Lead 20mm	500							420	320	270	230	190
Lead 10mm	6.13	7.10	8.06	9.03	9.99	10.96	11.92	12.89	13.85	14.82	15.78	16.75
Weight(kg)	The weight of the model equipped with a brake is 0.61kg more heavier then this value.											
Base & Slide	Aluminum Profile, 백색전착 유광											


DS-120LB

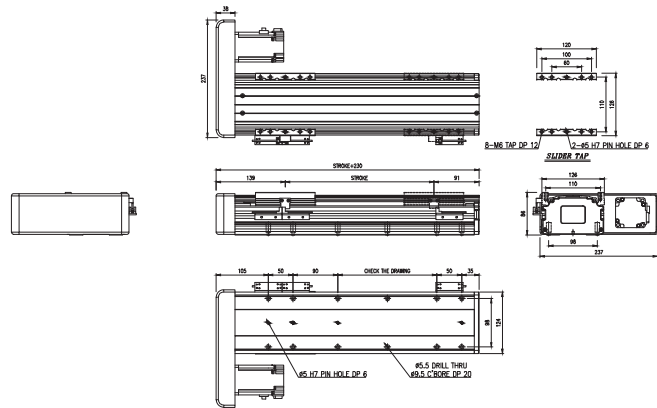

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000	1100	1200
Max. Speed (mm/sec)	1000							850	680	560	460	390
Lead 20mm	500							420	320	270	230	190
Lead 10mm	6.13	7.10	8.06	9.03	9.99	10.96	11.92	12.89	13.85	14.82	15.78	16.75
Weight(kg)	The weight of the model equipped with a brake is 0.61kg more heavier then this value.											
Base & Slide	Aluminum Profile, 백색전착 유광											

DS-120RB

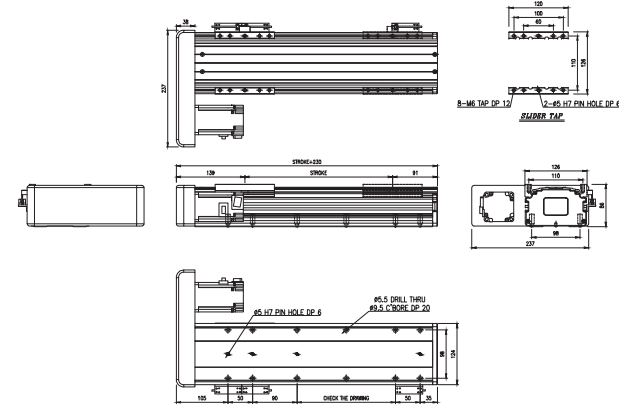

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000	1100	1200
Max. Speed (mm/sec)	1000							850	680	560	460	390
Lead 20mm	500							420	320	270	230	190
Lead 10mm	6.13	7.10	8.06	9.03	9.99	10.96	11.92	12.89	13.85	14.82	15.78	16.75
Weight(kg)	The weight of the model equipped with a brake is 0.61kg more heavier then this value.											
Base & Slide	Aluminum Profile, 백색전착 유광											

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200

DS-160ST-L10-400W-300ST-SP

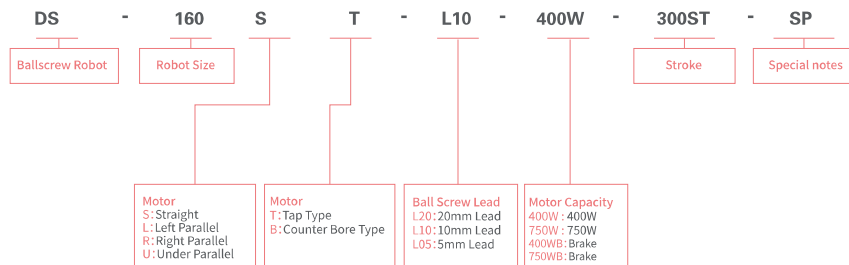

※ Specification

Drive mechanism	Ball screw(C7, 연삭), 15(20) Lead 20MM(10MM)	
Liner motion guide	Two way, 20w, 2 block	
Repeatability	±0.02MM	
stroke(mm)	100-1600MM	
Servo Motor Output/rpm	400W/3000RPM	750W/3000RPM
Payload(kg) Ta = 0.2s	Lead 20	H: 50 V: 18
	Lead 10	H: 60 V: 24
		H: 80 V: 80
Moment of inertia of area	Ix=9.38E+05, Iy=1.05E+07	

※ product



Straight joint



Right Parallel joint




Left Parallel joint



Under Parallel joint


DS-160ST

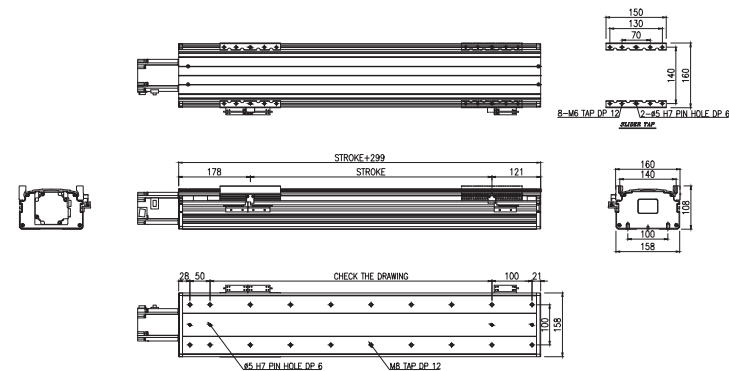

unit: mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
Max. Speed (mm/sec)					1000				910	750	620	530	450	390	340	300
Lead 20mm					500				460	380	320	270	230			
Lead 10mm																
Weight(kg)	14.48	16.19	17.90	19.60	21.31	23.02	24.72	26.43	28.14	29.84	31.55	33.26	34.96	36.67	38.8	40.08
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광															

DS-160SB

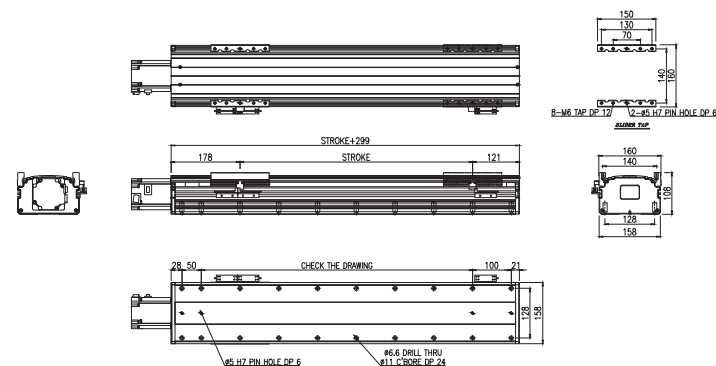

unit: mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
Max. Speed (mm/sec)					1000				910	750	620	530	450	390	340	300
Lead 20mm					500				460	380	320	270	230			
Lead 10mm																
Weight(kg)	14.48	16.19	17.90	19.60	21.31	23.02	24.72	26.43	28.14	29.84	31.55	33.26	34.96	36.67	38.8	40.08
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광															

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200


DS-160LT

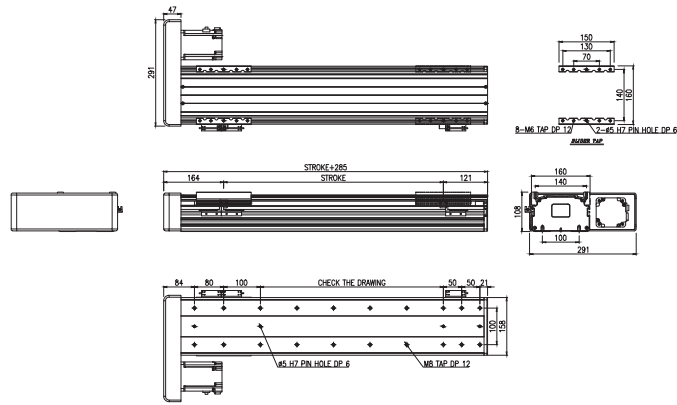

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
Max. Speed (mm/sec)	1000								910	750	620	530	450	390	340	300
Lead 20mm	500								460	380	320	270	230			
Lead 10mm	14.7	16.41	18.11	19.82	21.53	23.23	24.94	26.65	28.35	30.06	31.77	33.47	35.18	36.89	38.59	40.3
Weight(kg)	The weight of the model equipped with a brake is 0.61kg more heavier then this value.															
Base & Slide	Aluminum Profile, 백색전착 유광															


DS-160RT

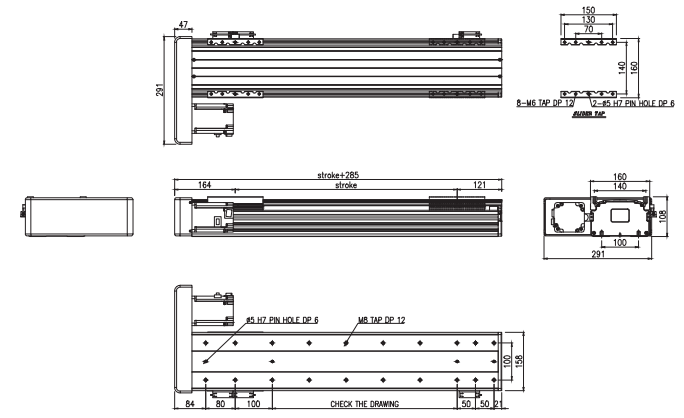

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
Max. Speed (mm/sec)	1000								910	750	620	530	450	390	340	300
Lead 20mm	500								460	380	320	270	230			
Lead 10mm	14.7	16.41	18.11	19.82	21.53	23.23	24.94	26.65	28.35	30.06	31.77	33.47	35.18	36.89	38.59	40.3
Weight(kg)	The weight of the model equipped with a brake is 0.61kg more heavier then this value.															
Base & Slide	Aluminum Profile, 백색전착 유광															


DS-160LB

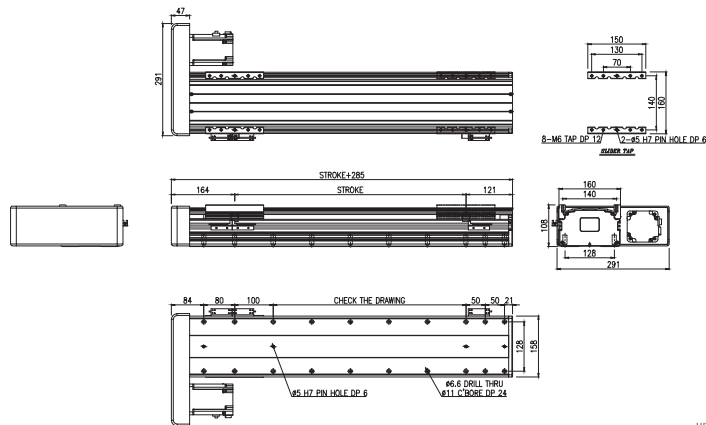

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
Max. Speed (mm/sec)	1000								910	750	620	530	450	390	340	300
Lead 20mm	500								460	380	320	270	230			
Lead 10mm	14.7	16.41	18.11	19.82	21.53	23.23	24.94	26.65	28.35	30.06	31.77	33.47	35.18	36.89	38.59	40.3
Weight(kg)	The weight of the model equipped with a brake is 0.61kg more heavier then this value.															
Base & Slide	Aluminum Profile, 백색전착 유광															

DS-160RB

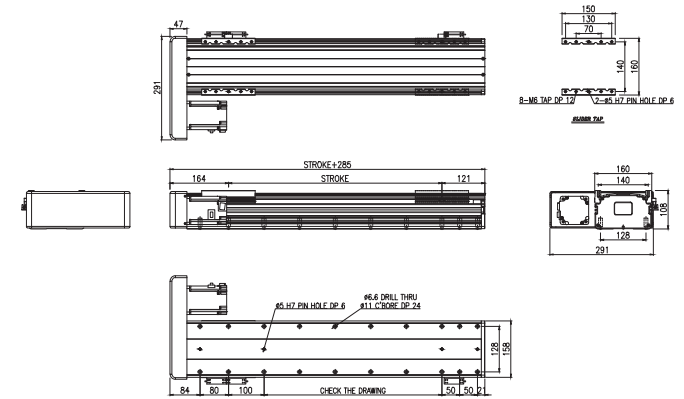

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
Max. Speed (mm/sec)	1000								910	750	620	530	450	390	340	300
Lead 20mm	500								460	380	320	270	230			
Lead 10mm	14.7	16.41	18.11	19.82	21.53	23.23	24.94	26.65	28.35	30.06	31.77	33.47	35.18	36.89	38.59	40.3
Weight(kg)	The weight of the model equipped with a brake is 0.61kg more heavier then this value.															
Base & Slide	Aluminum Profile, 백색전착 유광															

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200


DS-160UT

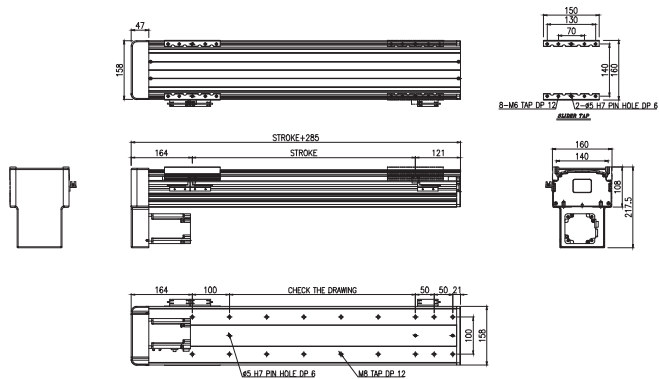

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
Max. Speed (mm/sec)	1000								910	750	620	530	450	390	340	300
Lead 20mm	500								460	380	320	270	230	35.29	36.79	38.5
Lead 10mm	14.61	16.31	18.02	19.23	21.43	23.14	24.85	26.55	28.26	29.97	31.67	33.38	35.29	36.79	38.5	40.21
Weight(kg)	The weight of the model equipped with a brake is 0.61kg more heavier then this value.															
Base & Slide	Aluminum Profile, 백색전착 유광															

DS-160UB

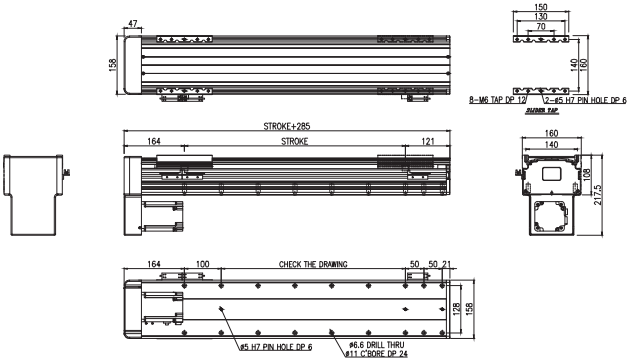

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
Max. Speed (mm/sec)	1000								910	750	620	530	450	390	340	300
Lead 20mm	500								460	380	320	270	230	35.29	36.79	38.5
Lead 10mm	14.61	16.31	18.02	19.23	21.43	23.14	24.85	26.55	28.26	29.97	31.67	33.38	35.29	36.79	38.5	40.21
Weight(kg)	The weight of the model equipped with a brake is 0.61kg more heavier then this value.															
Base & Slide	Aluminum Profile, 백색전착 유광															

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200

DS-200ST-L10-750W-300ST-SP

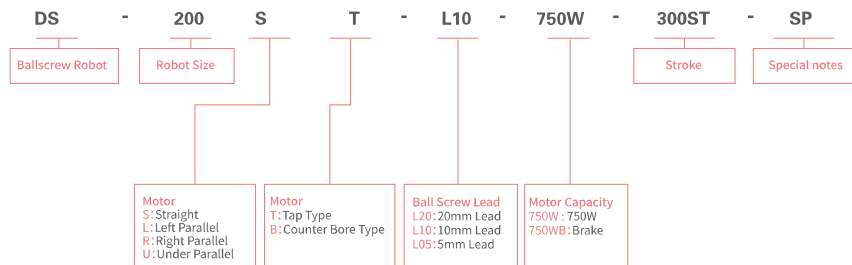

※ Specification

Servo Motor Output/rpm	750W/3000RPM
Drive mechanism	Ball screw(C7, 연삭), 20(25) Lead 20MM(10MM)
Liner motion guide	Two way, 25w, 2 block
Repeatability	±0.02MM
stroke(mm)	100-1600MM
Payload(kg) Ta = 0.2s	Lead 10 H: 100 V: 30
	Lead 20 H: 120 V: 55
Moment of inertia of area	Ix=1.79E+06, Iy=2.631E+07

※ product



Straight joint



Right Parallel joint




Left Parallel joint



Under Parallel joint


DS-200ST

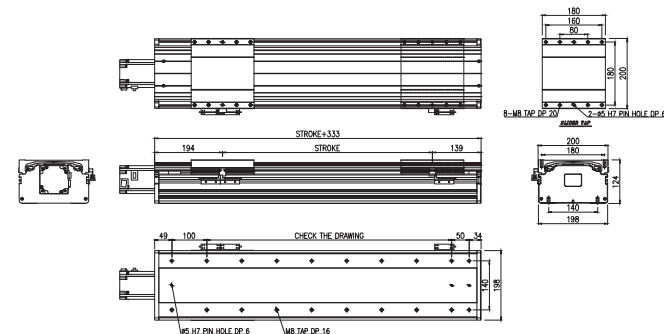

unit: mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
Max. Speed (mm/sec)					1000				910	750	620	530	450	390	340	300
Lead 20mm					500				460	380	320	270	230			
Lead 10mm																
Weight(kg)	24.25	26.82	29.39	31.96	34.54	37.11	39.68	42.25	44.83	47.40	49.97	52.54	55.12	57.69	60.26	62.83
Base & Slide	The weight of the model equipped with a brake is 1.0kg more heavier then this value. Aluminum Profile, 백색전착 유광															

DS-200SB

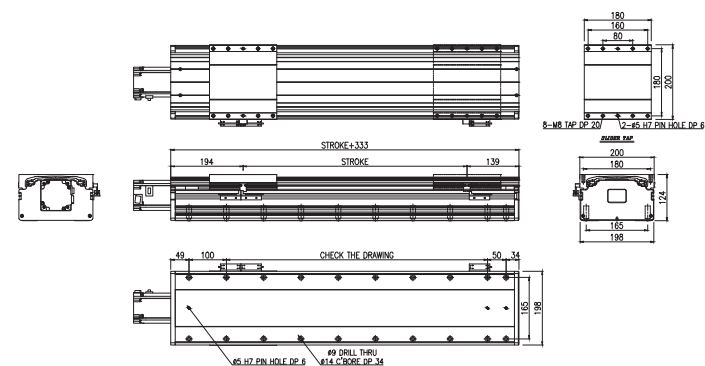

unit: mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
Max. Speed (mm/sec)					1000				910	750	620	530	450	390	340	300
Lead 20mm					500				460	380	320	270	230			
Lead 10mm																
Weight(kg)	24.25	26.82	29.39	31.96	34.54	37.11	39.68	42.25	44.83	47.40	49.97	52.54	55.12	57.69	60.26	62.83
Base & Slide	The weight of the model equipped with a brake is 1.0kg more heavier then this value. Aluminum Profile, 백색전착 유광															

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200


DS-200LT

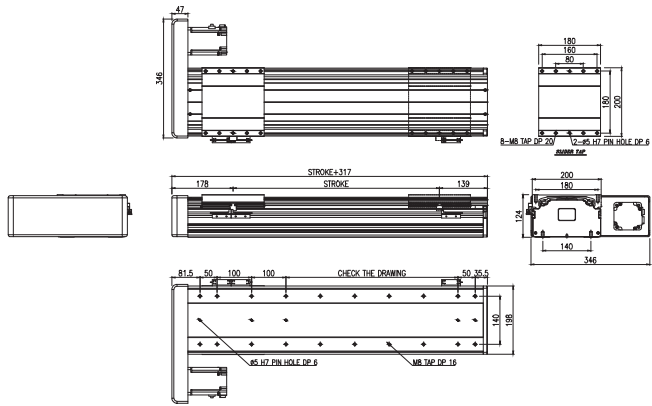

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
Max. Speed (mm/sec)	1000								910	750	620	530	450	390	340	300
Lead 20mm	500								460	380	320	270	230			
Lead 10mm	23.20	25.77	28.34	30.91	33.49	36.06	38.63	41.20	43.78	46.35	48.92	51.50	54.07	55.64	59.21	61.79
Weight(kg)	The weight of the model equipped with a brake is 1.0kg more heavier then this value.															
Base & Slide	Aluminum Profile, 백색전착 유광															


DS-200RT

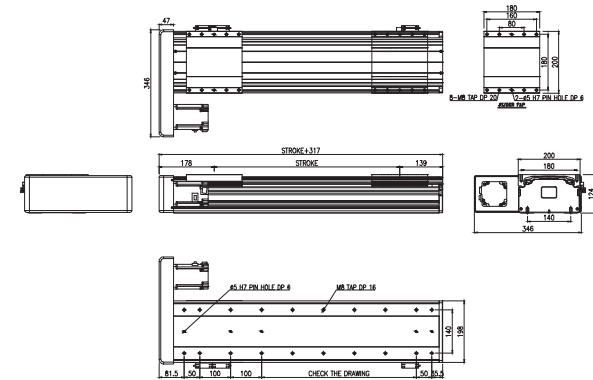

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
Max. Speed (mm/sec)	1000								910	750	620	530	450	390	340	300
Lead 20mm	500								460	380	320	270	230			
Lead 10mm	23.20	25.77	28.34	30.91	33.49	36.06	38.63	41.20	43.78	46.35	48.92	51.50	54.07	55.64	59.21	61.79
Weight(kg)	The weight of the model equipped with a brake is 1.0kg more heavier then this value.															
Base & Slide	Aluminum Profile, 백색전착 유광															


DS-200LB

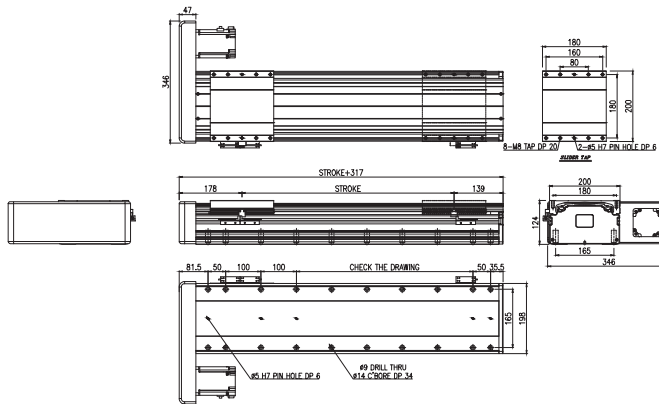

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
Max. Speed (mm/sec)	1000								910	750	620	530	450	390	340	300
Lead 20mm	500								460	380	320	270	230			
Lead 10mm	23.20	25.77	28.34	30.91	33.49	36.06	38.63	41.20	43.78	46.35	48.92	51.50	54.07	55.64	59.21	61.79
Weight(kg)	The weight of the model equipped with a brake is 1.0kg more heavier then this value.															
Base & Slide	Aluminum Profile, 백색전착 유광															

DS-200RB

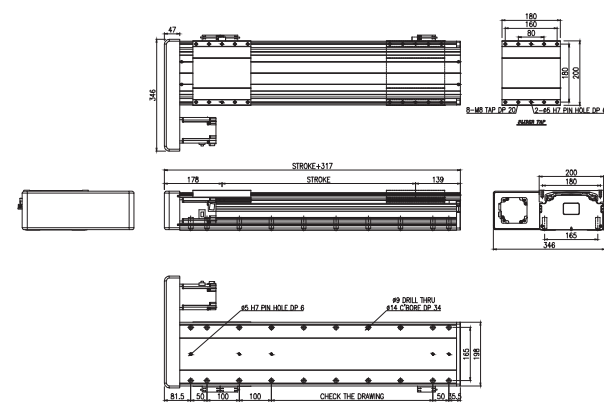

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
Max. Speed (mm/sec)	1000								910	750	620	530	450	390	340	300
Lead 20mm	500								460	380	320	270	230			
Lead 10mm	23.20	25.77	28.34	30.91	33.49	36.06	38.63	41.20	43.78	46.35	48.92	51.50	54.07	55.64	59.21	61.79
Weight(kg)	The weight of the model equipped with a brake is 1.0kg more heavier then this value.															
Base & Slide	Aluminum Profile, 백색전착 유광															

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070


DS090

DS120

DS160

DS200


DS-200UT

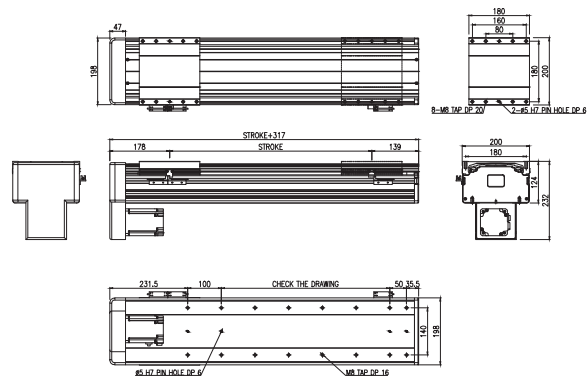

unit:mm

[illegible]

DS-200UB

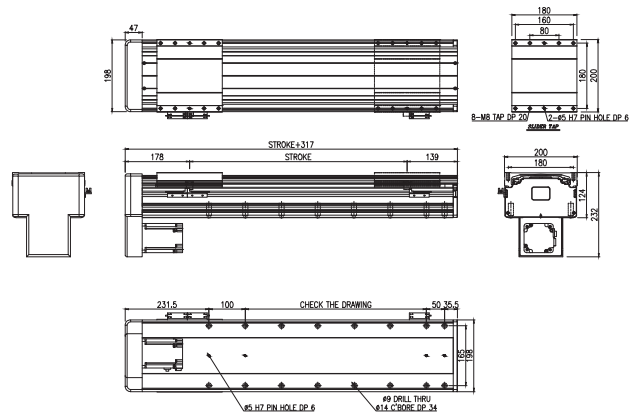

unit:mm

[illegible]

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DS045

DS050

DS070

DS090

DS120

DS160




Sliding table series

DC series
screw drive

Cleaning environment application slide table			
DC070	Body width 74MM maximum stroke 800MM Maximum Load20KG	DC160	Body width 158MM maximum stroke 1400MM Maximum Load80KG
DC090	Body width 87MM maximum stroke 1000MM Maximum Load24KG	DC200	Body width 198MM maximum stroke 1400MM Maximum Load120KG
DC120	Body width 126MM maximum stroke 1200MM Maximum Load50KG		

DC-070S-L10-100W-300ST-SP

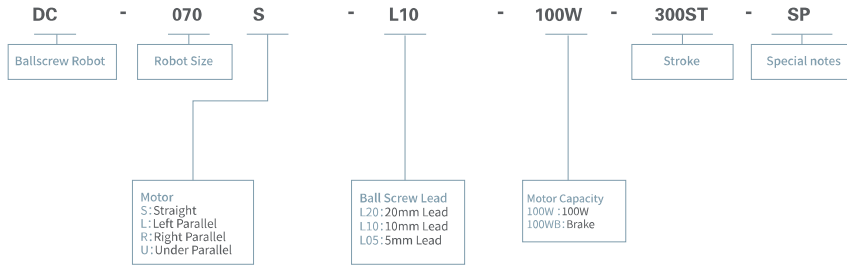

※ Specification

Servo Motor Output/rpm		100W/3000RPM
Drive mechanism		Ball screw(C7, 연삭),15 Lead 20MM(10MM)
Liner motion guide		One way,No.24, 2 block
Repeatability		± 0.02MM
stroke(mm)		100-800MM
Payload(kg) Ta = 0.2s	Lead 20	H:3
		V:2
	Lead 10	H:20
		V:5
Moment of inertia of area		Ix=2.97E+05, Iy=7.26E+05

※ product



Straight joint



Right Parallel joint




Left Parallel joint



Under Parallel joint


DC-070S

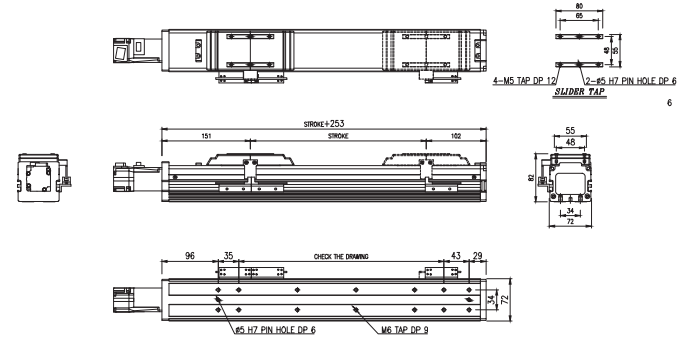

Stroke(mm)	100	200	300	400	500	600	700	800
Max. Speed (mm/sec)	Lead 20mm	1000						
	Lead 10mm	500						
Weight(kg)	5.16	5.78	6.41	7.03	7.66	8.28	8.90	9.53
Base & Slide	The weight of the model equipped with a brake is 0.2kg more heavier then this value. Aluminum Profile, 백색전력 유광							

unit:mm

DC-070L

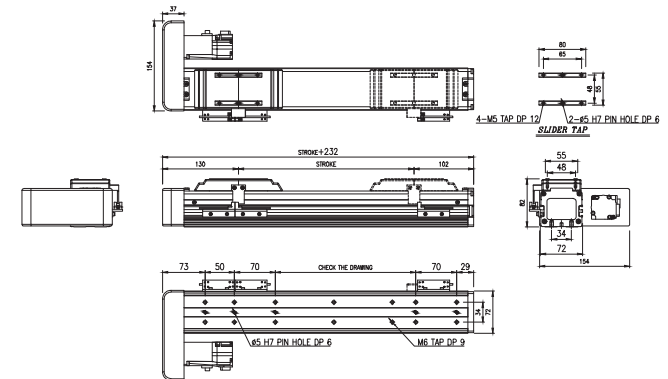

Stroke(mm)	100	200	300	400	500	600	700	800
Max. Speed (mm/sec)	Lead 20mm	1000						
	Lead 10mm	500						
Weight(kg)	5.67	5.67	6.93	7.56	8.9	8.82	9.45	10.08
Base & Slide	The weight of the model equipped with a brake is 0.2kg more heavier then this value. Aluminum Profile, 백색전력 유광							

unit:mm

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DC070


DC090

DC120

DS160

DS200


DC-070R

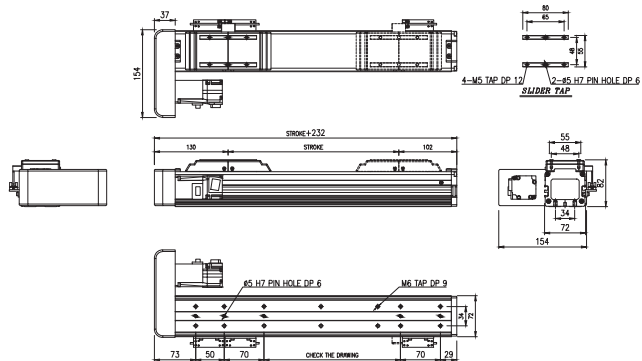

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800
Max. Speed (mm/sec)	Lead 20mm							800
	Lead 10mm							400
Weight(kg)	5.67	6.30	6.93	7.56	8.19	8.82	9.45	10.08
Base & Slide	The weight of the model equipped with a brake is 0.2kg more heavier then this value. Aluminum Profile, 백색전착 유광							

DC-070U

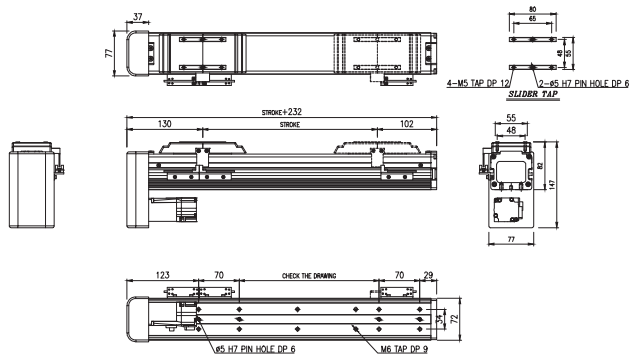

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800
Max. Speed (mm/sec)	Lead 20mm							800
	Lead 10mm							400
Weight(kg)	5.67	6.30	6.93	7.56	8.9	8.82	9.45	10.08
Base & Slide	The weight of the model equipped with a brake is 0.2kg more heavier then this value. Aluminum Profile, 백색전착 유광							

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DC070


DC090

DC120

DS160

DS200

DC-090S-L10-100W-300ST-SP

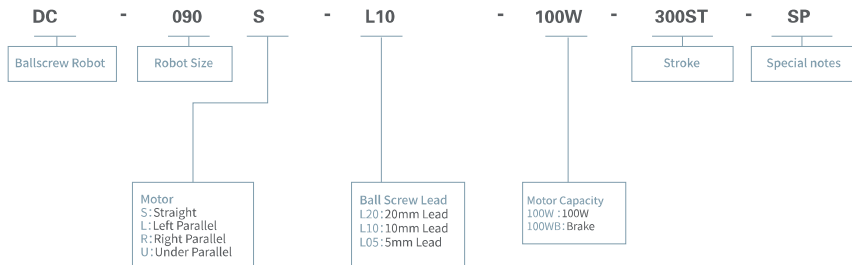

※ Specification

Servo Motor Output/rpm		100W/3000RPM
Drive mechanism		Ball screw(C7, 연삭),15 Lead 20MM(10MM)
Liner motion guide		One way,No.42, 2 block
Repeatability		±0.02MM
stroke(mm)		100-1000MM
Payload(kg) Ta = 0.2s	Lead 20	H:4
		V:3
	Lead 10	H:24
		V:7
Moment of inertia of area		Ix=5.02E+05, Iy=1.43E+06

※ product



Straight joint



Right Parallel joint




Left Parallel joint



Under Parallel joint


DC-090S-10

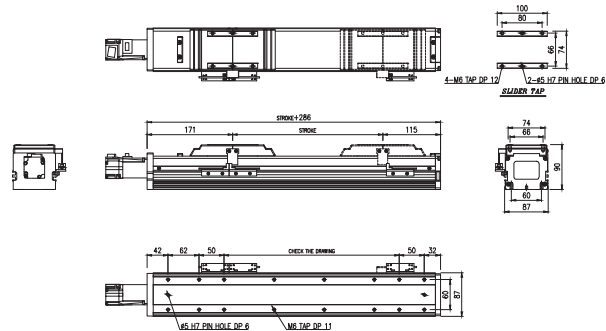

										unit:mm
Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm	1000						760	620	500
	Lead 10mm	500						380	310	250
Weight(kg)	7.01	7.90	8.79	9.69	10.58	11.47	12.36	13.25	14.14	15.03
Base & Slide	The weight of the model equipped with a brake is 0.4kg more heavier then this value.									
Aluminum Profile, 백색전착 유광										

unit:mm

DC-090L

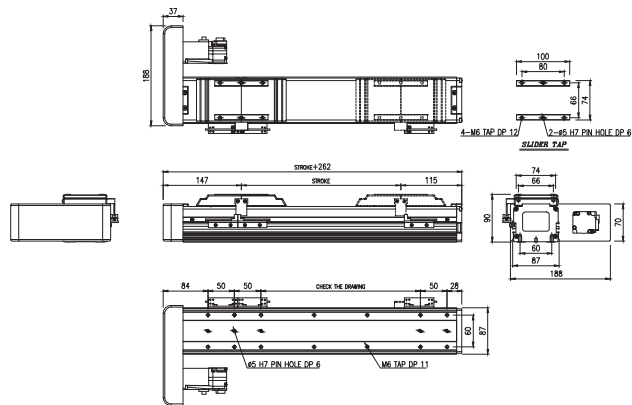

										unit:mm
Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	1000							760	620	500
	500							380	310	250
Lead 20mm	7.27	8.16	9.05	9.94	10.83	11.72	12.61	13.50	14.39	15.28
Lead 10mm										
Weight(kg)	The weight of the model equipped with a brake is 0.4kg more heavier then this value.									
Base & Slide	Aluminum Profile, 백색전착 유광									

unit:mm

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DC070


DC090

DC120

DS160

DS200


DC-090R

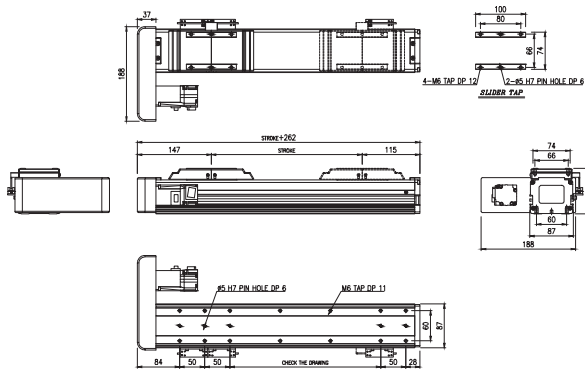

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm			1000				760	620	500
	Lead 10mm			500				380	310	250
Weight(kg)	7.27	8.16	9.05	9.94	10.83	11.72	12.61	13.50	14.39	15.28
The weight of the model equipped with a brake is 0.4kg more heavier then this value.										
Aluminum Profile, 백색전착 유광										
Base & Slide										

DC-090U

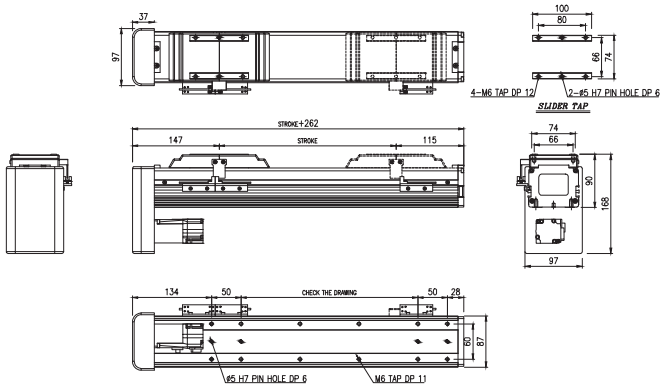

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm			1000				760	620	500
	Lead 10mm			500				380	310	250
Weight(kg)	7.27	8.16	9.05	9.94	10.83	11.72	12.61	13.50	14.39	15.28
The weight of the model equipped with a brake is 0.4kg more heavier then this value.										
Aluminum Profile, 백색전착 유광										
Base & Slide										

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DC070


DC090

DC120

DS160

DS200

DC-090S-L20-200W-300ST-SP

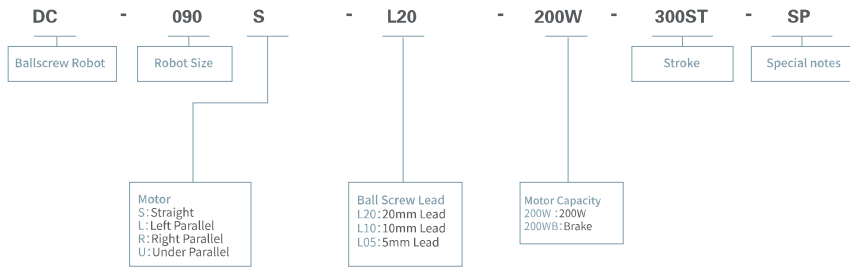

※ Specification

Servo Motor Output/rpm		200W/3000RPM
Drive mechanism		Ball screw(C7, 연삭),15 Lead 20MM(10MM)
Liner motion guide		One way,No.42, 2 block
Repeatability		±0.02MM
stroke(mm)		100-1000MM
Payload(kg) Ta = 0.2s	Lead 20	H:28
		V:8
	Lead 10	H:30
		V:16
Moment of inertia of area		Ix=5.02E+05, Iy=1.43E+06

※ product



Straight joint



Right Parallel joint




Left Parallel joint



Under Parallel joint


DC-090S

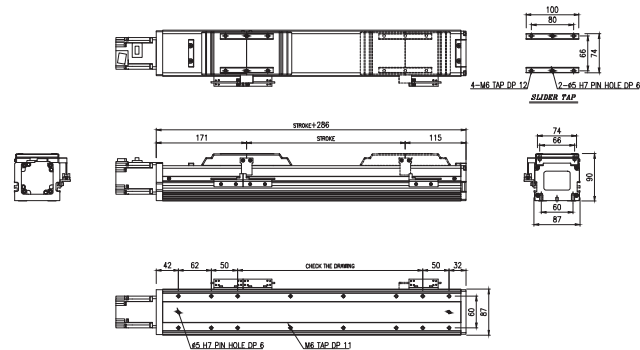

										unit:mm
Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	1000							760	620	500
Lead 20mm	500							380	310	250
Lead 10mm								14.11	15.00	15.89
Weight(kg)	7.87	8.76	9.65	10.55	11.44	12.33	13.22	The weight of the model equipped with a brake is 0.4kg more heavier then this value.		
Base & Slide	Aluminum Profile, 백색전착 유광									

unit:mm

DC-090L

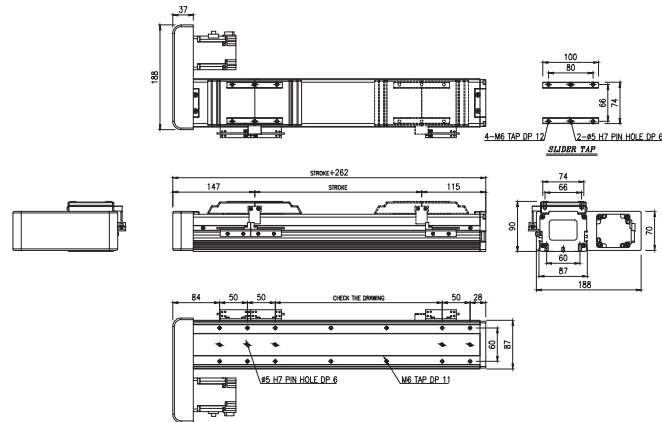

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm	1000						760	620	500
	Lead 10mm	500						380	310	250
Weight(kg)	7.27	8.16	9.05	9.94	10.83	11.72	12.61	13.50	14.39	15.28
Base & Slide	The weight of the model equipped with a brake is 0.4kg more heavier then this value.									
	Aluminum Profile, 백색전착 유광									

unit:mm

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DC070


DC090

DC120

DS160

DS200


DC-090R

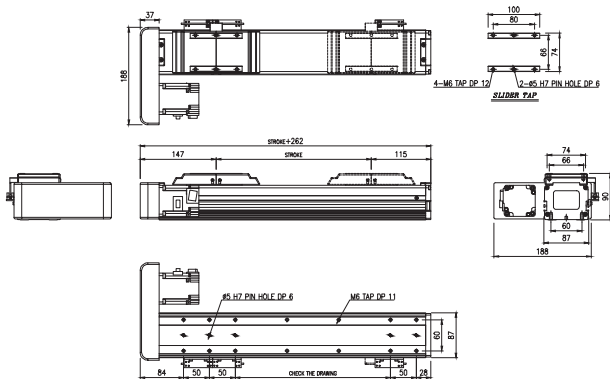

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm			1000				760	620	500
	Lead 10mm			500				380	310	250
Weight(kg)	7.27	8.16	9.05	9.94	10.83	11.72	12.61	13.50	14.39	15.28
Base & Slide	The weight of the model equipped with a brake is 0.4kg more heavier then this value. Aluminum Profile, 백색전착 유광									

DC-090U

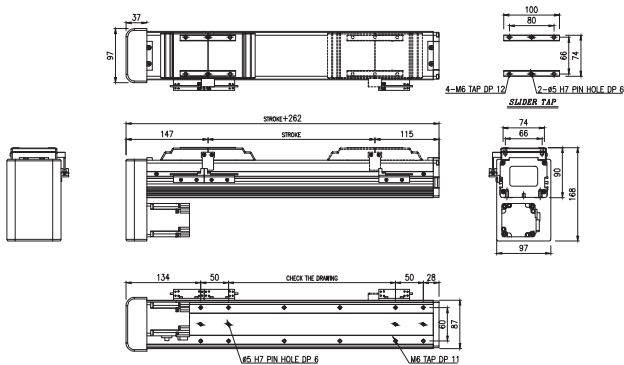

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000
Max. Speed (mm/sec)	Lead 20mm			1000				760	620	500
	Lead 10mm			500				380	310	250
Weight(kg)	7.27	8.16	9.05	9.94	10.83	11.72	12.61	13.50	14.39	15.28
Base & Slide	The weight of the model equipped with a brake is 0.4kg more heavier then this value. Aluminum Profile, 백색전착 유광									

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DC070


DC090

DC120

DS160

DS200

DC-120S-L10-200W-300ST-SP

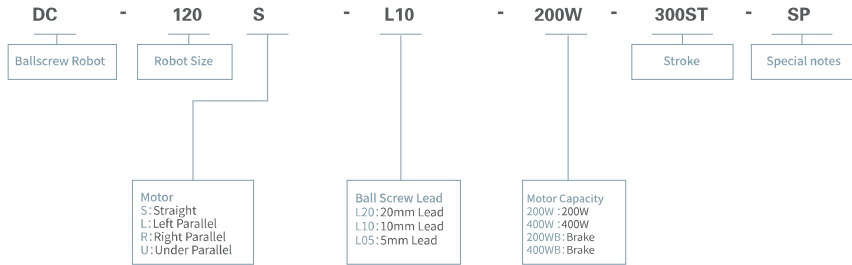

※ Specification

Drive mechanism		Ball screw (C7, 연삭) , Ø15 Lead 20MM (10MM)	
Liner motion guide		Two way, 15w, 2 block	
Repeatability		±0.02MM	
stroke(mm)		100-1200MM	
Servo Motor Output/rpm		200W/3000RPM	400W/3000RPM
Payload(kg) Ta = 0.2s	Lead 10	H: 30	H: 40
		V: 8	V: 18
	Lead 20	H: 50	H: 50
		V: 10	V: 18
Moment of inertia of area		Ix = 4.86E+05, Iy = 4.45E +06	

※ product



Straight joint



Right Parallel joint




Left Parallel joint



Under Parallel joint


DC-120S

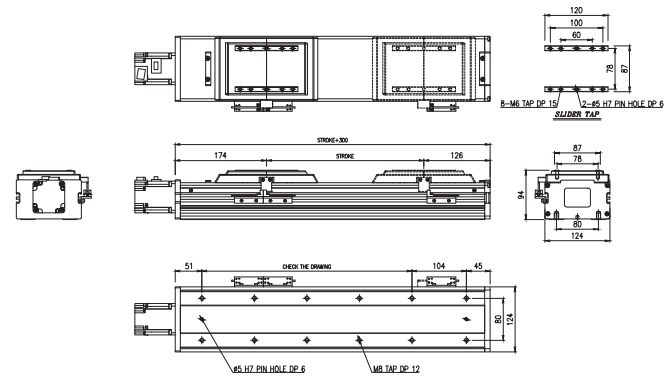

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000	1100	1200
Max. Speed (mm/sec)				1000		620		760	620	500	420	360
				500		380		310	250	210	180	
Weight(kg)	10.94	12.70	13.2	14.34	15.47	16.61	17.74	18.87	20.01	21.14	22.28	23.41
The weight of the model equipped with a brake is 0.4kg more heavier then this value.												
Base & Slide Aluminum Profile, 백색전착 유광												

DC-120L

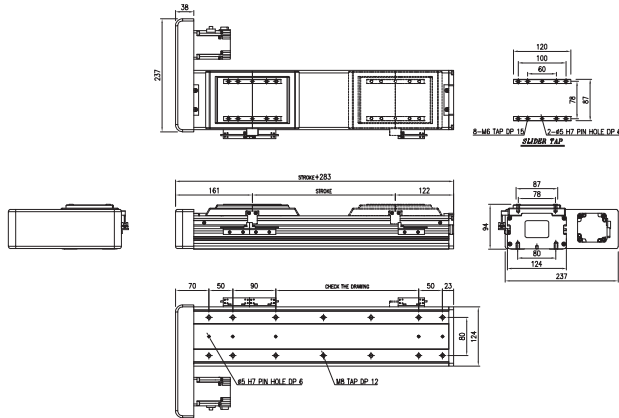

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000	1100	1200
Max. Speed (mm/sec)				1000		620		760	620	500	420	360
				500		380		310	250	210	180	
Weight(kg)	11.29	12.42	13.55	14.68	15.81	16.94	18.07	19.20	20.33	21.46	22.59	23.72
The weight of the model equipped with a brake is 0.4kg more heavier then this value.												
Base & Slide Aluminum Profile, 백색전착 유광												

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DC070


DC090

DC120

DS160

DS200


DC-120R

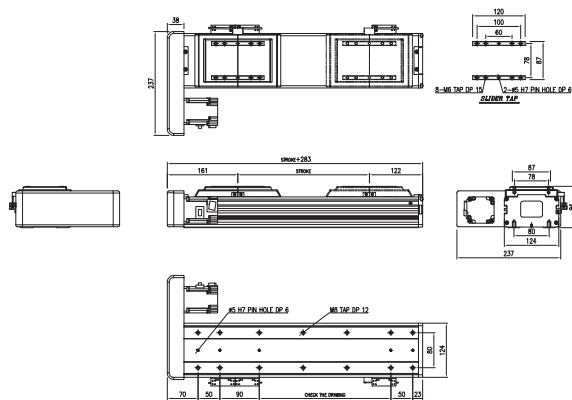

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000	1100	1200
Max. Speed (mm/sec)	Lead 20mm							760	620	500	420	360
	Lead 10mm							380	310	250	210	180
Weight(kg)	11.29	12.42	13.55	14.68	15.81	16.94	18.07	19.20	20.33	21.46	22.59	23.72
The weight of the model equipped with a brake is 0.4kg more heavier then this value.												
Aluminum Profile, 백색전착 유광												
Base & Slide												

DC-120U

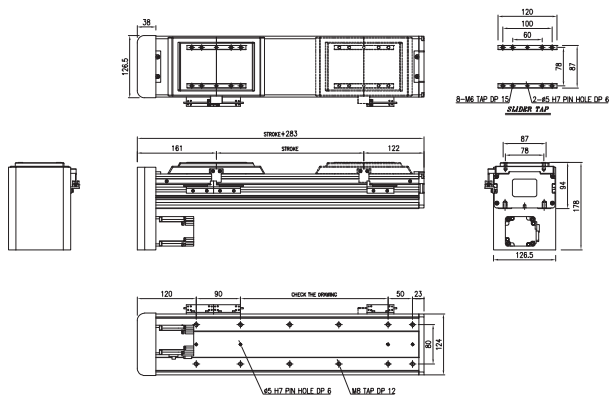

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000	1100	1200
Max. Speed (mm/sec)	Lead 20mm							760	620	500	420	360
	Lead 10mm							380	310	250	210	180
Weight(kg)	11.29	12.42	13.55	14.68	15.81	16.94	18.07	19.20	20.33	21.46	22.59	23.72
The weight of the model equipped with a brake is 0.4kg more heavier then this value.												
Aluminum Profile, 백색전착 유광												
Base & Slide												

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE


DC070

DC090

DC120

DS160

DS200

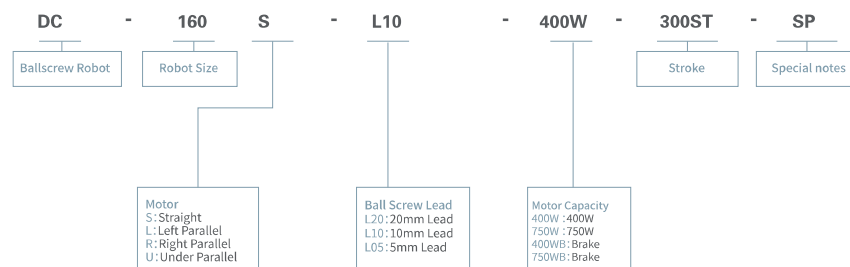 DC-160S-L10-400W-300ST-SP

✖ Specification

Drive mechanism		Ball screw(C7, 연삭), Ø20 Lead 20MM(10MM)	
Liner motion guide		Two way,No.20w, 2 block	
Repeatability		±0.02MM	
stroke(mm)		100-1400MM	
Servo Motor Output/rpm		400W/3000RPM	750W/3000RPM
Payload(kg) Ta = 0.2s	Lead 20	H: 2	H:60
		V: 1.5	V:24
	Lead 10	H: 12	H:80
		V: 3.5	V:40
Moment of inertia of area		Ix=5.57E+04, Iy=1.49E+05	

⌘ product



Straight joint



Right Parallel joint




Left Parallel joint




Under Parallel joint

DC-160S

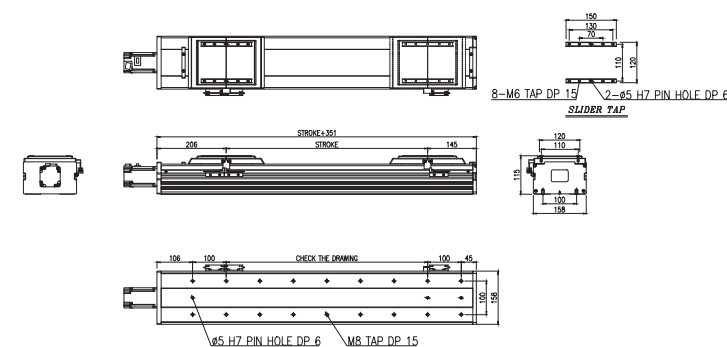

															unit:mm
Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400
Max Speed (mm/sec)	Lead 20mm									840	700	580	480	420	360
	Lead 10mm									420	350	290	240	210	180
		18.35	19.82	21.29	22.76	24.23	25.7	27.17	28.64	30.11	31.58	32.05	34.52	35.09	37.46
Weight(kg)		The weight of the model equipped with a brake is 1kg more heavier than this value.													
Base & Slide		Aluminum Profile, 알루미늄 슬라이드													

DC-160L

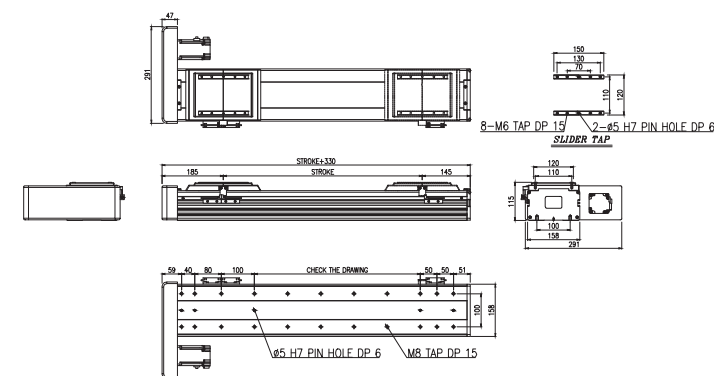

															unit:mm
Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400
Max Speed (mm/sec)	Lead 20mm					1000				840	700	580	480	420	360
	Lead 10mm					500				420	350	290	240	210	180
		18.24	19.72	21.2	22.68	24.16	25.64	27.12	28.60	30.08	31.56	32.04	34.52	36	37.48
Weight(kg)		The weight of the model equipped with a brake is 1kg more heavier then this value.													
Base & Slide		Aluminum Profile, 맥퍼전식 유압													

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DC070


DC090

DC120

DS160

DS200


DC-160R

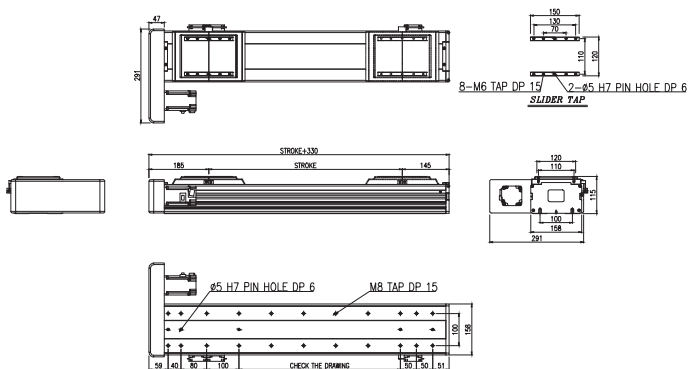

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400
Max. Speed (mm/sec)	1000								840	700	580	480	420	360
	500								420	350	290	240	210	180
Weight(kg)	18.24	19.72	21.2	22.68	24.16	25.64	27.12	28.60	30.08	31.56	32.04	34.52	36	37.48
Base & Slide	The weight of the model equipped with a brake is 1kg more heavier then this value. Aluminum Profile, 백색전착 유광													

DC-160U

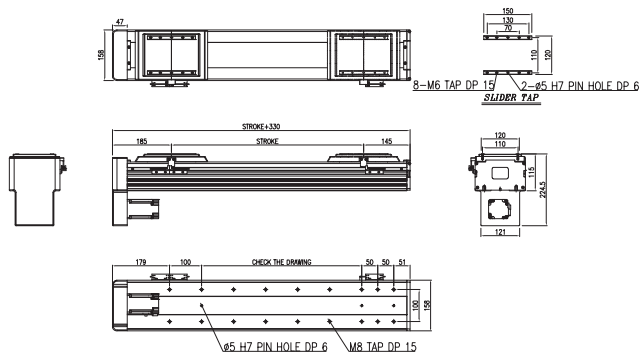

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400
Max. Speed (mm/sec)	1000								840	700	580	480	420	360
	500								420	350	290	240	210	180
Weight(kg)	18.24	19.72	21.2	22.68	24.16	25.64	27.12	28.60	30.08	31.56	32.04	34.52	36	37.48
Base & Slide	The weight of the model equipped with a brake is 1kg more heavier then this value. Aluminum Profile, 백색전착 유광													

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE


DC070

DC090

DC120

DS160

DS200

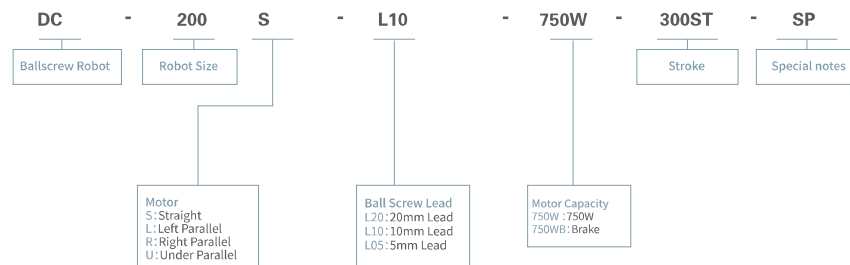 DC-200S-L10-750W-300ST-SP

✧ Specification

Servo Motor Output/rpm		750W/3000RPM
Drive mechanism		Ball screw(C7, 연삭), 20 Lead 20MM(10MM)
Liner motion guide		Two way,No.25w, 2 block
Repeatability		±0.02MM
stroke(mm)		100-1400MM
Payload(kg) Ta = 0.2s	Lead 20	H:100
		V:30
	Lead 10	H:120
		V:55
Moment of inertia of area		Ix=2.39E+06, Iy=2.66E+07

⌘ product



Straight joint



Right Parallel joint




Left Parallel joint




Under Parallel joint

DC-200S

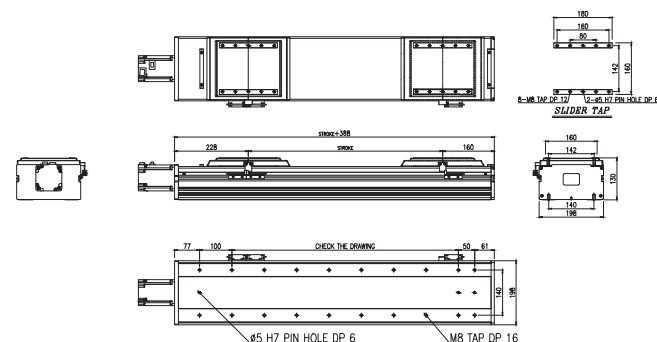

															unit:mm
Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400
Max Speed (mm/sec)	Lead 20mm					1000				840	700	580	480	420	360
	Lead 10mm					500				420	350	290	240	210	180
		26.59	28.77	30.95	33.13	35.31	37.49	39.07	41.85	44.03	46.21	48.39	50.57	52.75	54.93
Weight(kg)		The weight of the model equipped with a brake is 1kg more heavier then this value.													
Base & Slide		Aluminum Profile, 블랙전력 유광													

DC-200L

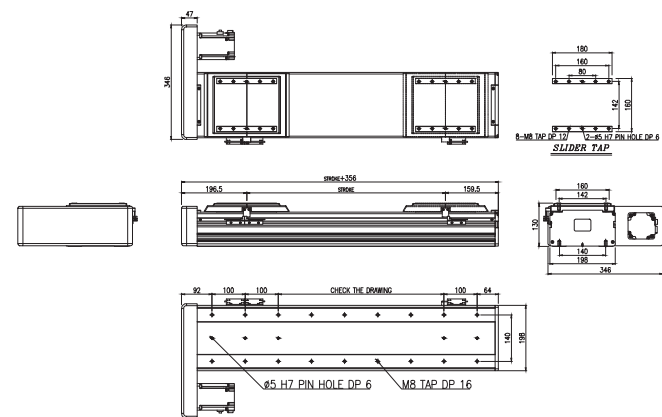

		gmm													
Stroke(mm)		100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400
Max. Speed (mm/sec)	Lead 20mm					1000				840	700	580	480	420	360
	Lead 10mm					500				420	350	290	240	210	180
Weight(kg)		26.65	27.83	30.01	32.19	34.37	36.55	38.73	40.91	43.09	45.27	47.45	49.63	51.81	53.99
The weight of the model equipped with a brake is 1kg more heavier then this value.															
Base & Slide		Aluminum Profile, 백색전직 유광													

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DC070


DC090

DC120

DS160

DS200


DC-200R

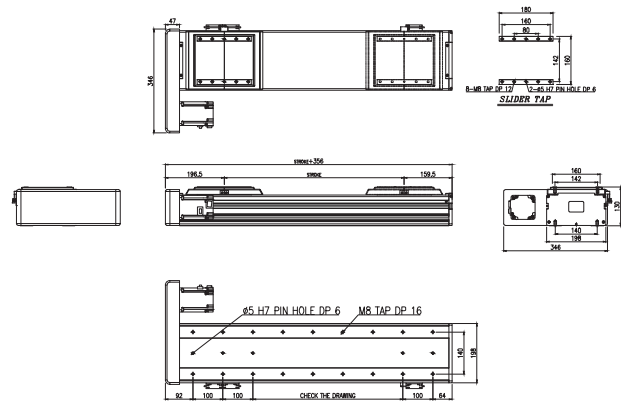

unit:mm

[illegible]

DC-200U

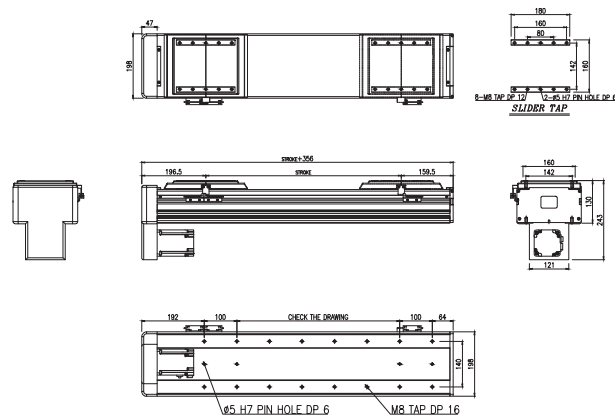

unit:mm

Stroke(mm)	100	200	300	400	500	600	700	800	900	1000	1100	1200	1300	1400
Max. Speed (mm/sec)	Lead 20mm	1000						840		700	580	480	420	360
	Lead 10mm	500						420		350	290	240	210	180
Weight(kg)	26.65	27.83	30.01	32.19	34.37	36.55	38.73	40.91	43.09	45.27	47.45	49.63	51.81	53.99
The weight of the model equipped with a brake is 1kg more heavier than this value.														
Base & Slide	Aluminum Profile, 블랙진착 유장													

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DC070

DC090

DC120

DS160




Sliding table series

DB series
Synchronous belt pulley transmission

General environmental application slide table			
DB090	Body width 87MM maximum stroke 2000MM Maximum Load24.8KG	DB160	Body width 158MM maximum stroke 2000MM Maximum Load45.5KG
DB120	Body width 126MM maximum stroke 2000MM Maximum Load40.7KG	DB200	Body width 198MM maximum stroke 2000MM Maximum Load31.5KG

DB-090DLT-200W-600ST-SP

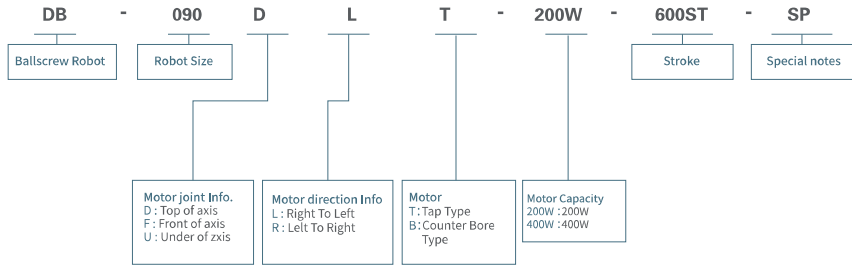


※ Specification

Drive mechanism	Joint Timing PulleyDrive Pulley & Belt	
Joint Pulley Ratio / rpm	1 : 2 / 1500RPM	
Drive Pulley P.C.D	23.87	
Belt Info.	T5, 25W	
Liner Guide(LM-Guide)	One Way, 42-2UU	
Repeatability(mm)Ta = 0.2s	±0.1MM	
Lead 20mm		
Servo Motor Output/rpm	200W/3000RPM	400W/3000RPM
Payload(kg)	H : 14.2	H : 24.8
Moment of inertia of area	Ix = 1.65E+05, Iy = 4.84E +05	

※ product




DB-090DLT

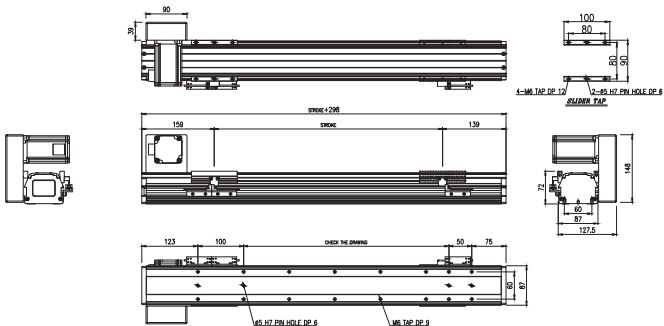

Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	11.5	12.20	12.90	13.6	14.3	15.9	16.3	17	17.7	18.4	19.1
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-090DLB

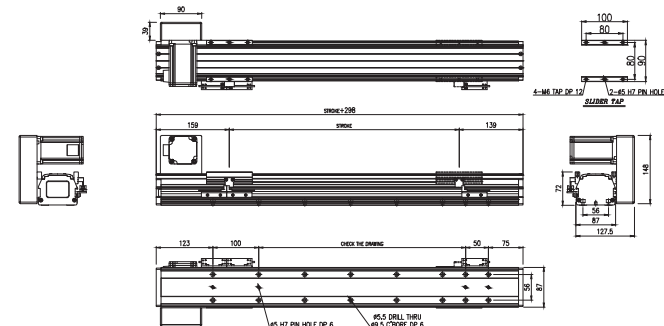

Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	11.5	12.20	12.90	13.6	14.3	15.9	16.3	17	17.7	18.4	19.1
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE


DB090

DB120

DB160


DB200

DB-090FLT

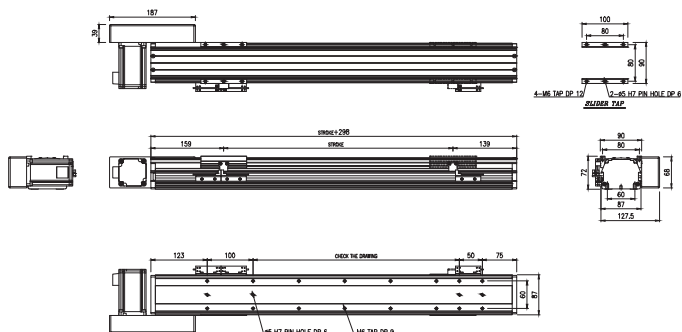


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	11.5	12.20	12.90	13.6	14.3	15.9	16.3	17	17.7	18.4	19.1
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-090ULT

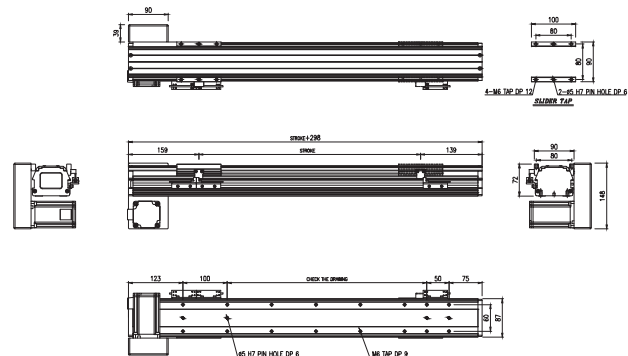


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	11.5	12.20	12.90	13.6	14.3	15.9	16.3	17	17.7	18.4	19.1
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-090FLB

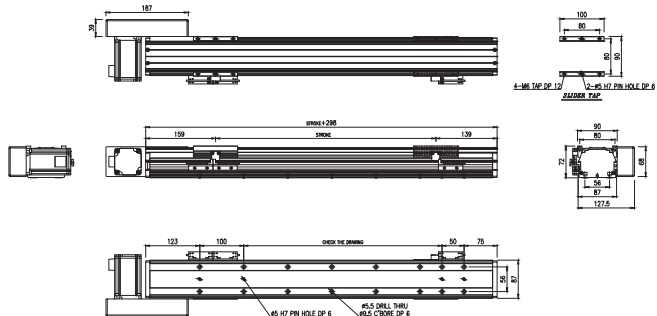


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	11.5	12.20	12.90	13.6	14.3	15.9	16.3	17	17.7	18.4	19.1
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-090ULB

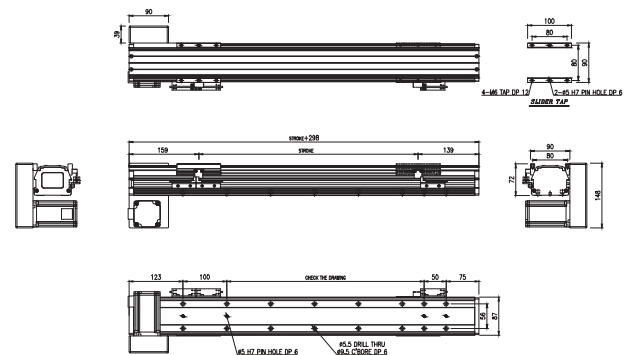


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	11.5	12.20	12.90	13.6	14.3	15.9	16.3	17	17.7	18.4	19.1
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-090DRT

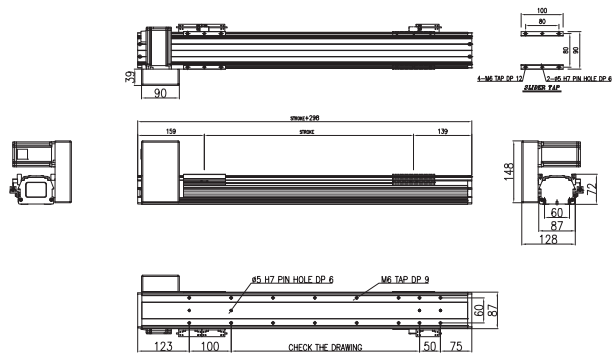


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	11.5	12.20	12.90	13.6	14.3	15.9	16.3	17	17.7	18.4	19.1
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-090FRT

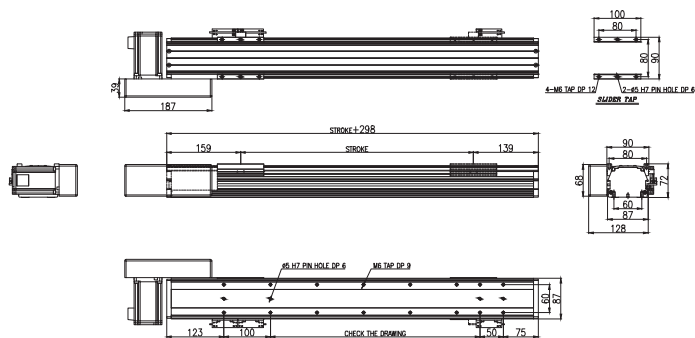


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	11.5	12.20	12.90	13.6	14.3	15.9	16.3	17	17.7	18.4	19.1
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-090DRB

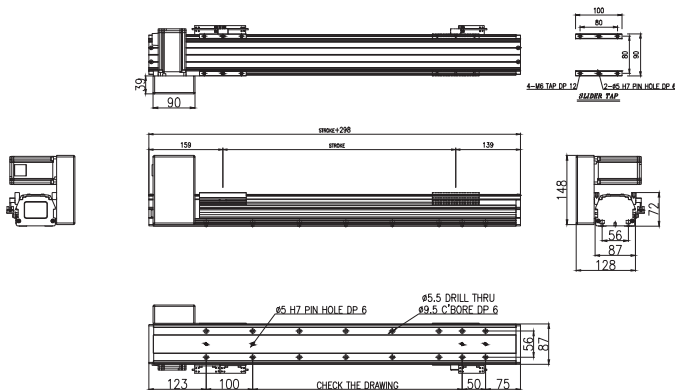


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	11.5	12.20	12.90	13.6	14.3	15.9	16.3	17	17.7	18.4	19.1
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-090FRB

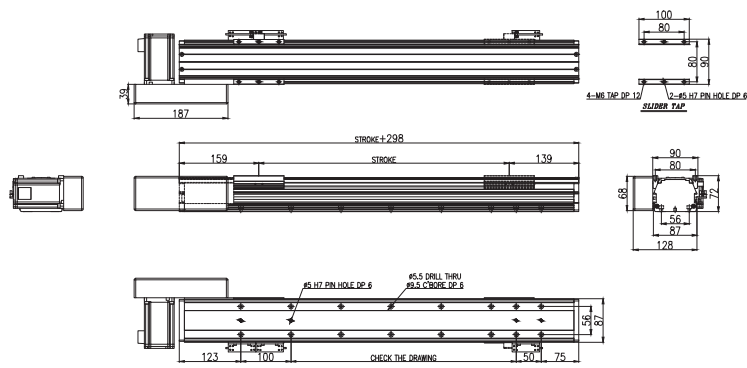


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	11.5	12.20	12.90	13.6	14.3	15.9	16.3	17	17.7	18.4	19.1
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-090URT

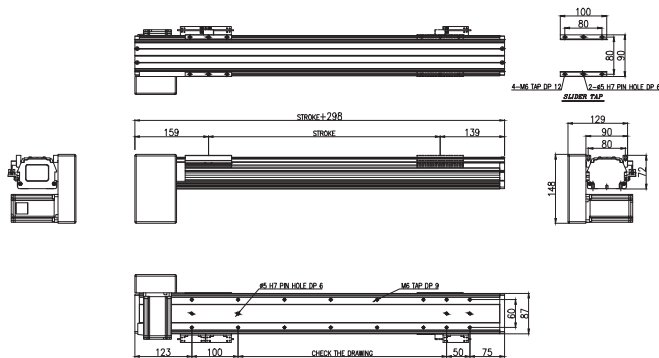


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	11.5	12.20	12.90	13.6	14.3	15.9	16.3	17	17.7	18.4	19.1
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-090URB

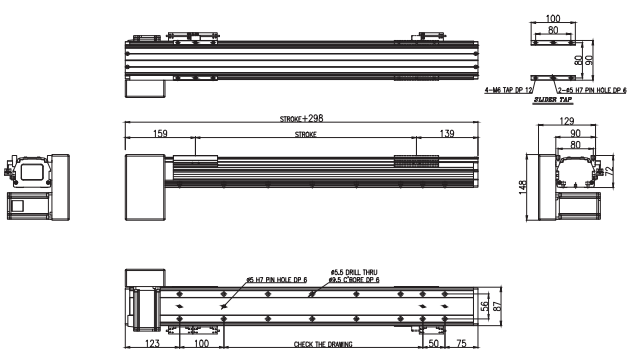

Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	11.5	12.20	12.90	13.6	14.3	15.9	16.3	17	17.7	18.4	19.1
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-120DLT-400W-600ST-SP

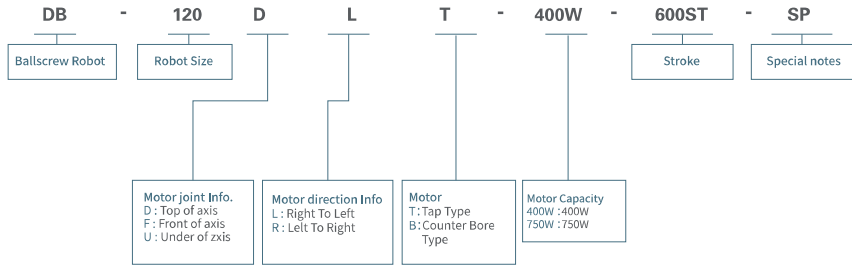

※ Specification

Drive mechanism	Joint Timing Pulley Drive Pulley & Belt	
Joint Pulley Ratio / rpm	1 : 2.5 / 1200RPM 1 : 2 / 1500RPM	
Drive Pulley P.C.D	33.42	
Belt Info.	S5M, 25W	
Liner Guide(LM-Guide)	Two Way, 15W-2UU	
Repeatability(mm)Ta = 0.2s	±0.1MM	
Lead 20mm		
Servo Motor Output/rpm	400W/3000RPM	750W/3000RPM
Payload(kg)	H : 16.7	H : 40.7
Moment of inertia of area	Ix = 4.86E+05, Iy = 4.45E +06	

※ product



1.DB120DL



2.DB120-FL



3.DB120-UL



4.DB120-DR




5.DB120-FR




6.DB120-UR

DB-120DLT

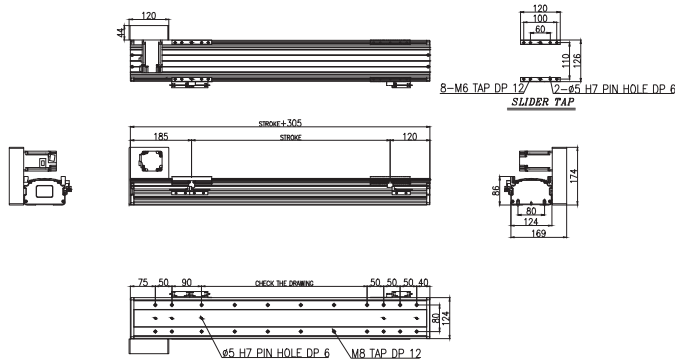

Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	17.5	18.5	19.5	20.4	21.4	22.4	23.4	25.3	26.3	27.2	28.2
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-120DLB

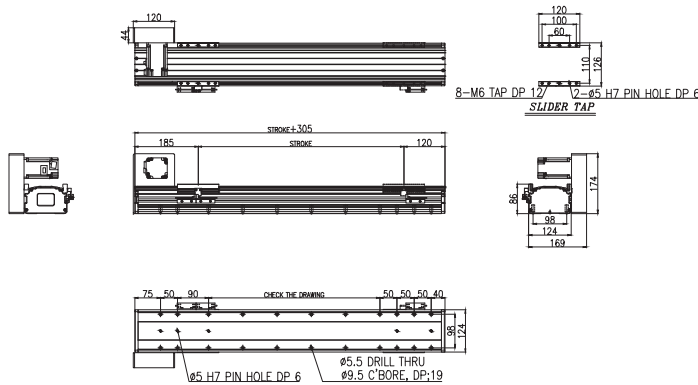

Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	17.5	18.5	19.5	20.4	21.4	22.4	23.4	25.3	26.3	27.2	28.2
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광										

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE


DB090

DB120

DB160


DB200

DB-120FLT

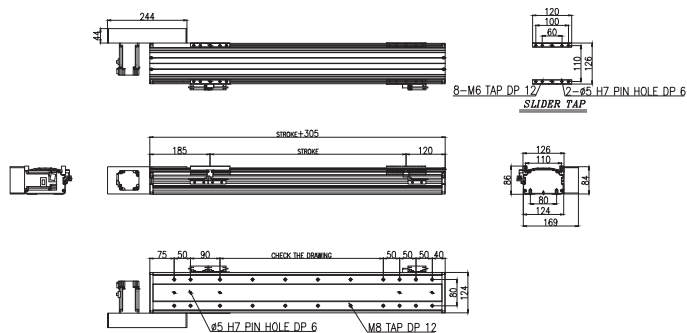


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	17.5	18.5	19.5	20.4	21.4	22.4	23.4	25.3	26.3	27.2	28.2
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-120ULT

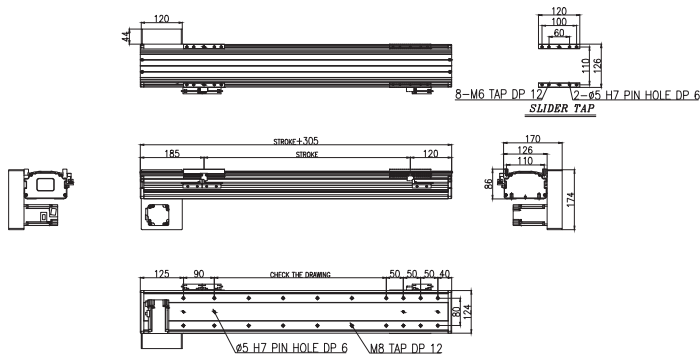


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	17.5	18.5	19.5	20.4	21.4	22.4	23.4	25.3	26.3	27.2	28.2
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-120FLB

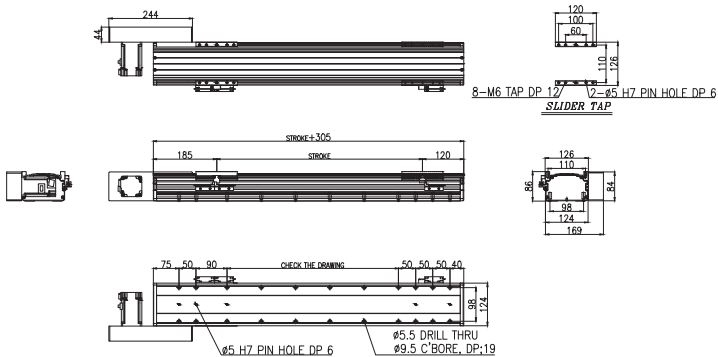


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	17.5	18.5	19.5	20.4	21.4	22.4	23.4	25.3	26.3	27.2	28.2
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-120ULB

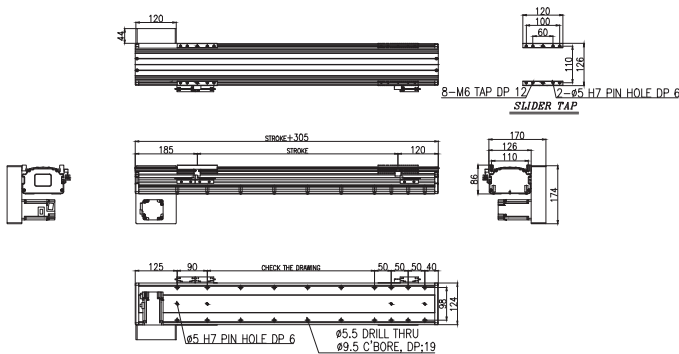


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	17.5	18.5	19.5	20.4	21.4	22.4	23.4	25.3	26.3	27.2	28.2
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-120DRT

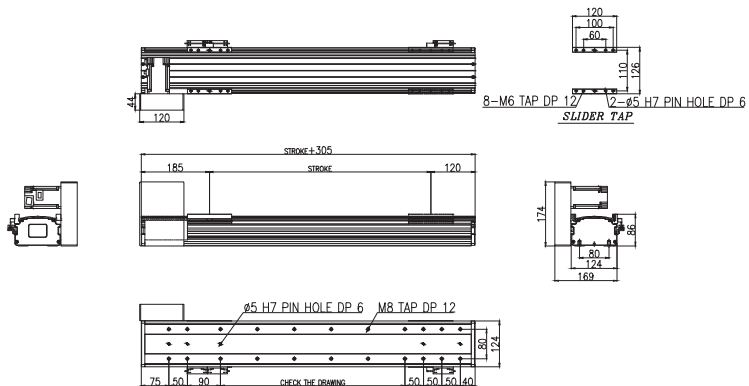


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	17.5	18.5	19.5	20.4	21.4	22.4	23.4	25.3	26.3	27.2	28.2
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-120FRT

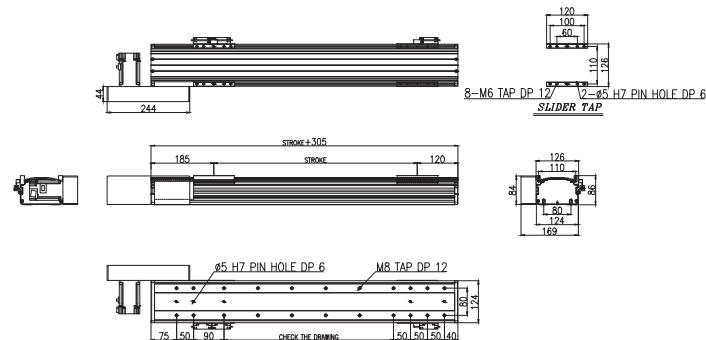


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	17.5	18.5	19.5	20.4	21.4	22.4	23.4	25.3	26.3	27.2	28.2
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-120DRB

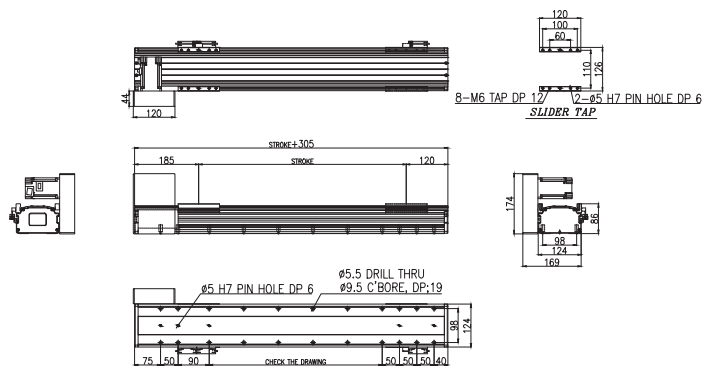


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	17.5	18.5	19.5	20.4	21.4	22.4	23.4	25.3	26.3	27.2	28.2
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-120FRB

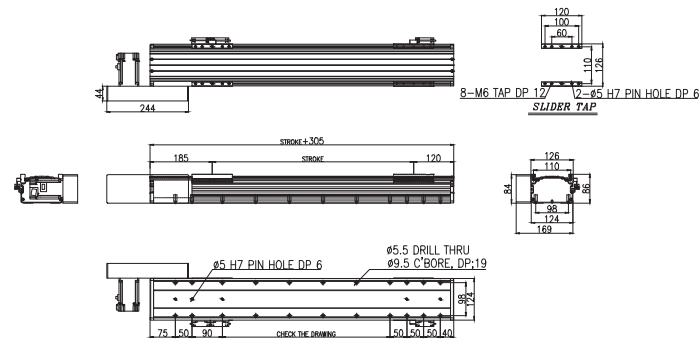


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	17.5	18.5	19.5	20.4	21.4	22.4	23.4	25.3	26.3	27.2	28.2
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-120URT

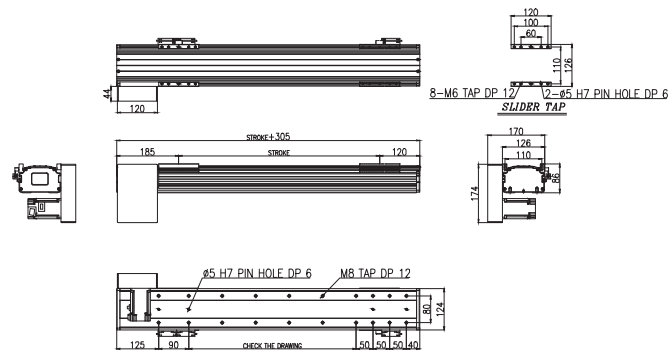[illegible]

DB-120URB

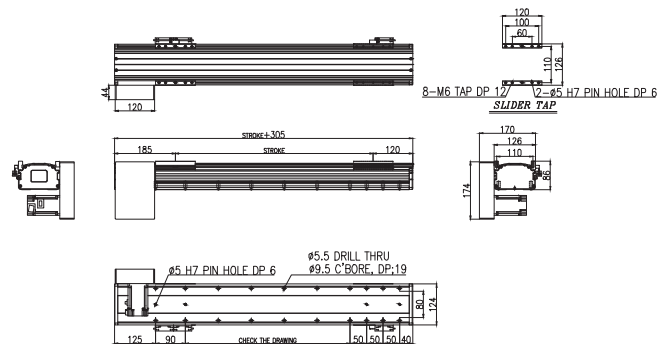[illegible]

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE


DB090

DB120

DB160

DB200


DB-160DLT

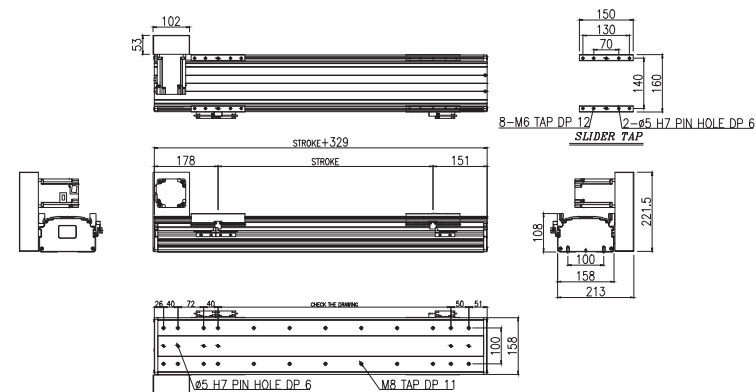

Stroke(mm)	1000	
------------	------	--

[illegible]

DB-160DLB

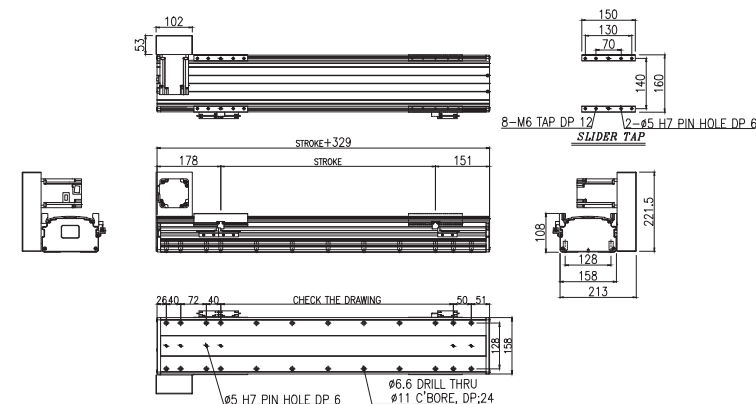[illegible]

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

✖ Specification

Drive mechanism	Joint Timing Pulley Drive Pulley & Belt	
Joint Pulley Ratio / rpm	1 : 2.5 / 1200RPM	
Drive Pulley P.C.D	33.42	
Belt Info.	S5M, 30W	
Liner Guide(LM-Guide)	Two Way, 20W-2UU	
Repeatability(mm)Ta = 0.2s Lead 20mm	± 0.1MM	
Servo Motor Output/rpm	400W/3000RPM	750W/3000RPM
Payload(kg)	H : 17.4	H : 45.5
Moment of inertia of area	Ix = 9.38E+05, Iy = 1.05E +07	

⌘ product



3.DB160-UL



6.DB160-UR

DK

DTH

DS

DC

DB

DE


DB090

DB120


DB160

DB200

DB-160FLT

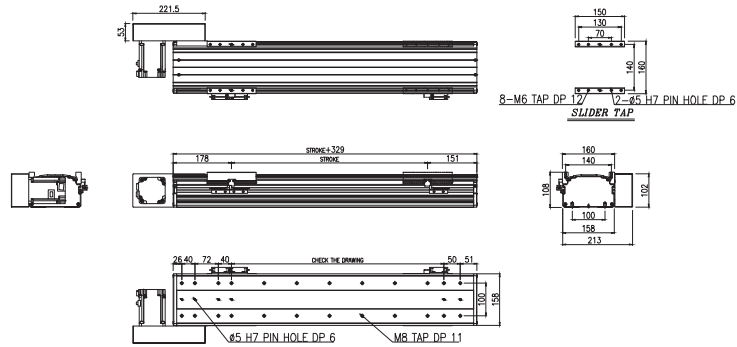
[illegible]

DB-160ULT

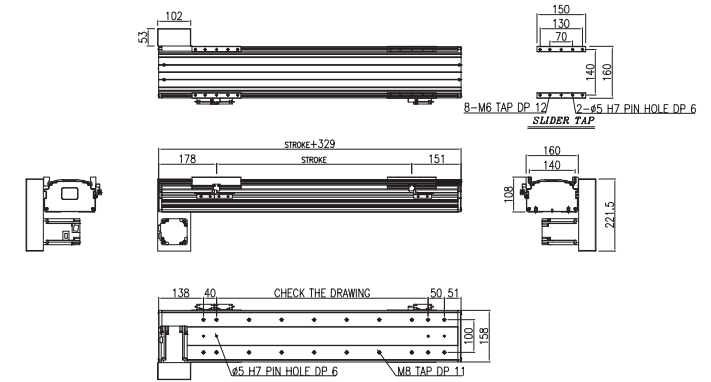


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	26.2	27.6	29.1	30.6	32	33.6	35.1	36.6	38.1	41.1	42.6
The weight of the model equipped with a brake is 0.61kg more heavier than this value.											
Base & Slide	Aluminum Profile, 맥퀵적 유장										

DB-160FLB

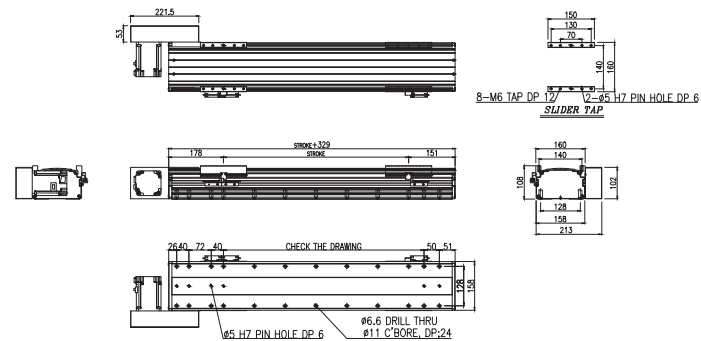[illegible]

DB-160ULB

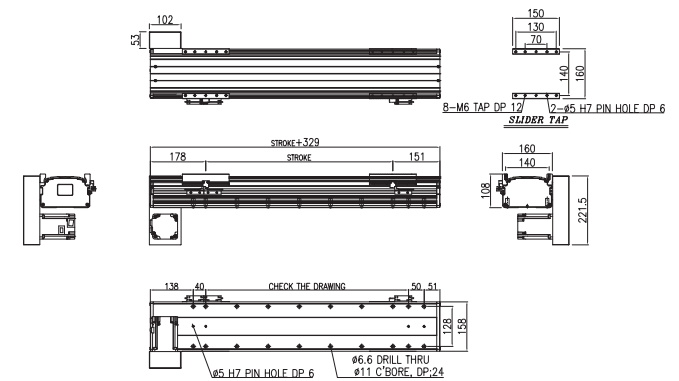[illegible]

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB


DE

DB090

DB120


DB200

DB-160DRT

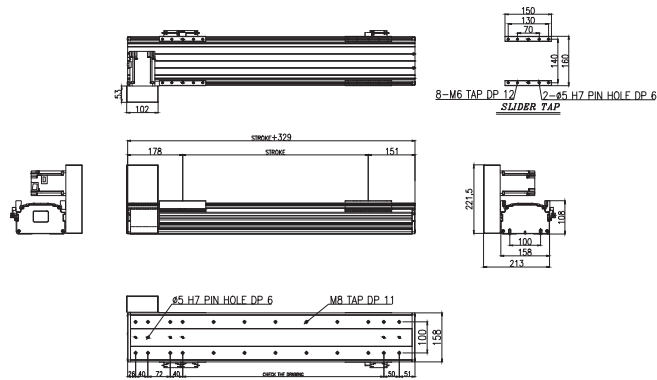


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	26.2	27.6	29.1	30.6	32	33.6	35.1	36.6	38.1	41.1	42.6
The weight of the model equipped with a brake is 0.61kg more heavier then this value.											
Base & Slide	Aluminum Profile, 백색전착 유광										

DB-160FRT

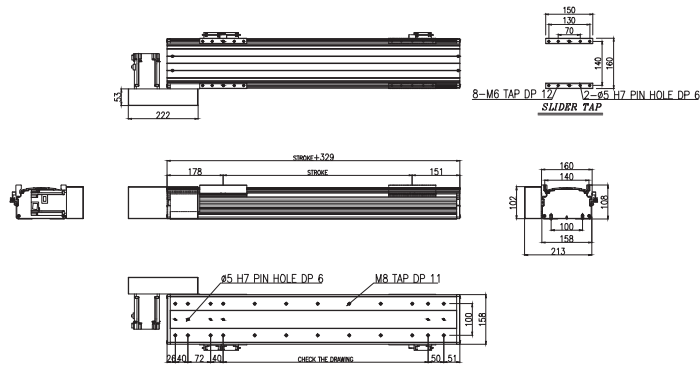


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	26.2	27.6	29.1	30.6	32	33.6	35.1	36.6	38.1	41.1	42.6
The weight of the model equipped with a brake is 0.61kg more heavier then this value.											
Base & Slide	Aluminum Profile, 백색전착 유광										

DB-160DRB

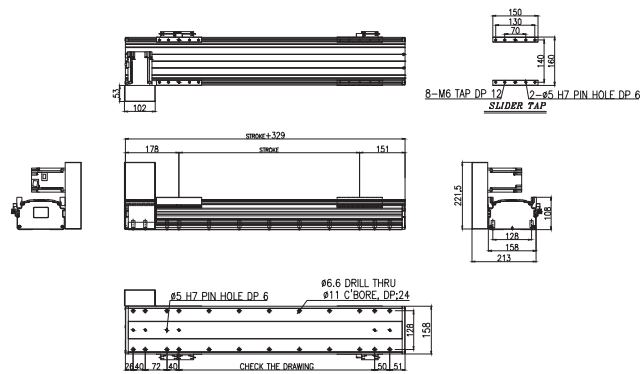


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	26.2	27.6	29.1	30.6	32	33.6	35.1	36.6	38.1	41.1	42.6
The weight of the model equipped with a brake is 0.61kg more heavier then this value.											
Base & Slide	Aluminum Profile, 백색전착 유광										

DB-160FRB

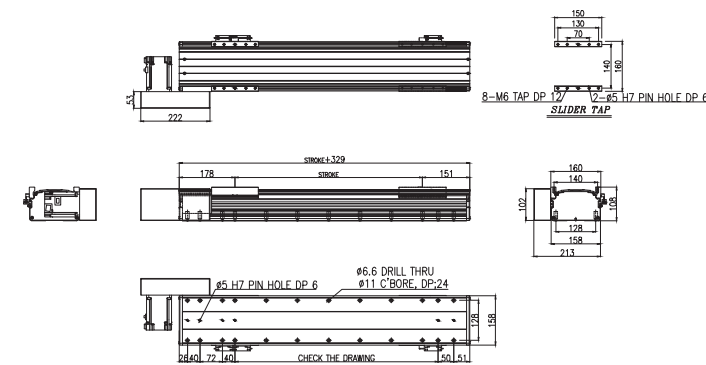


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	26.2	27.6	29.1	30.6	32	33.6	35.1	36.6	38.1	41.1	42.6
The weight of the model equipped with a brake is 0.61kg more heavier then this value.											
Base & Slide	Aluminum Profile, 백색전착 유광										

DB-160URT

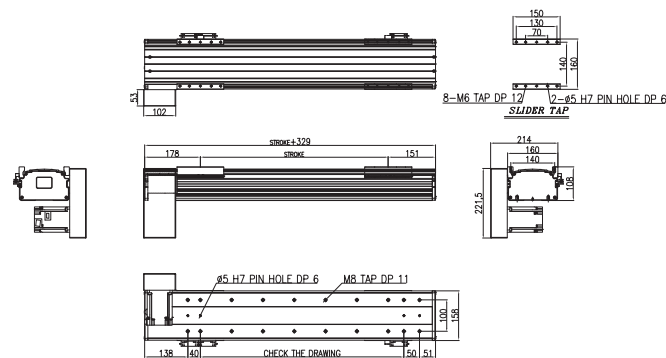

Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	26.2	27.6	29.1	30.6	32	33.6	35.1	36.6	38.1	41.1	42.6
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-160URB

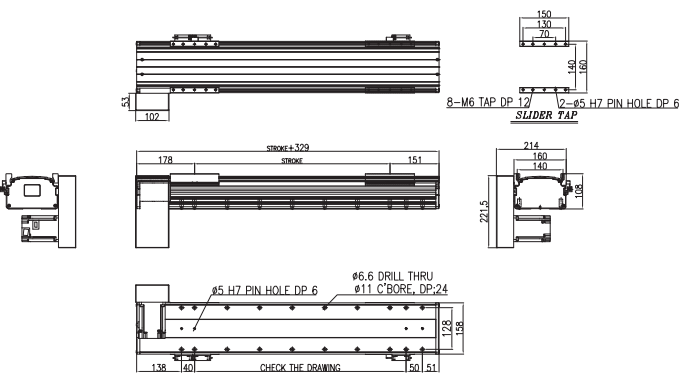

Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	26.2	27.6	29.1	30.6	32	33.6	35.1	36.6	38.1	41.1	42.6
Base & Slide	The weight of the model equipped with a brake is 0.61kg more heavier then this value. Aluminum Profile, 백색전착 유광										

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE


DB090

DB120


DB160

DB200

DB-200DLT



DB-200DLB

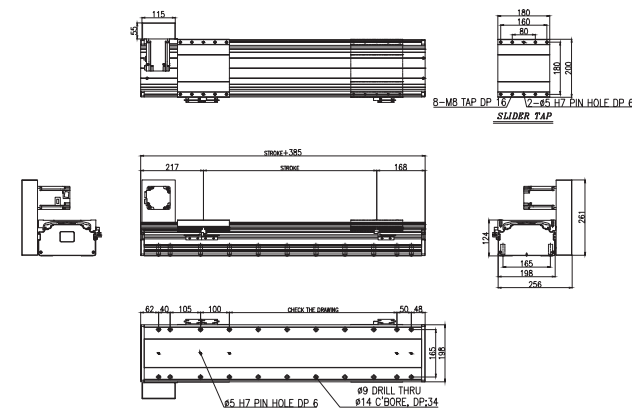[illegible]

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

✖ Specification

Drive mechanism	Joint Timing Pulley Drive Pulley & Belt	
Joint Pulley Ratio / rpm	1 : 3 / 1200RPM	
Drive Pulley P.C.D	42.97	
Belt Info.	S5M, 50W	
Liner Guide(LM-Guide)	Two Way, 25W-2UU	
Repeatability(mm)Ta = 0.2s Lead 20mm	± 0.1MM	
Servo Motor Output/rpm	400W/3000RPM	750W/3000RPM
Payload(kg)	H : 23.6	H : 31.5
Moment of inertia of area	Ix = 1.79E+06, Iy = 2.63E +07	

⌘ product



3.DB200-UL



6.DB200-UR

DK

DTH


DS

DC

DB


DE

DB-200FLT

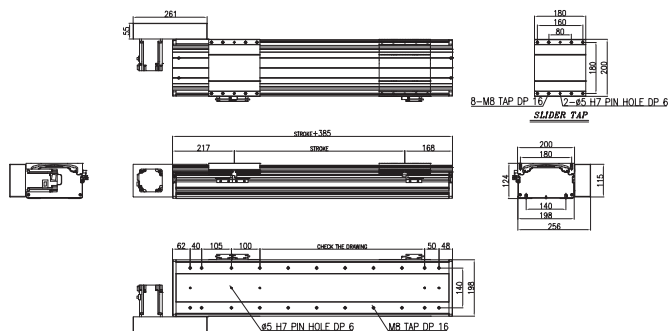


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	45	47.3	49.6	51.9	54.2	56.5	58.8	61.1	63.4	65.7	68
The weight of the model equipped with a brake is 0.35kg more heavier then this value.											
Base & Slide	Aluminum Profile, 백색전착 유광										

DB-200ULT

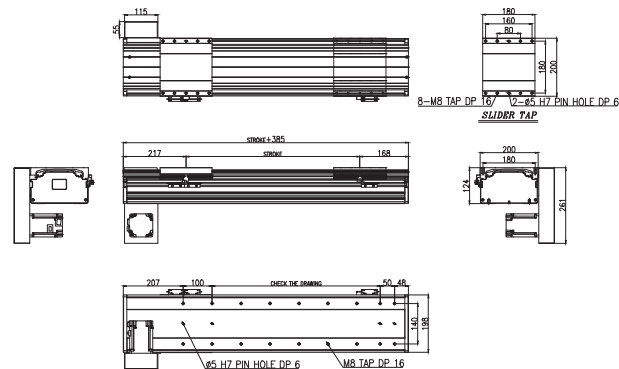


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	45	47.3	49.6	51.9	54.2	56.5	58.8	61.1	63.4	65.7	68
The weight of the model equipped with a brake is 0.35kg more heavier then this value.											
Base & Slide	Aluminum Profile, 백색전착 유광										

DB-200FLB

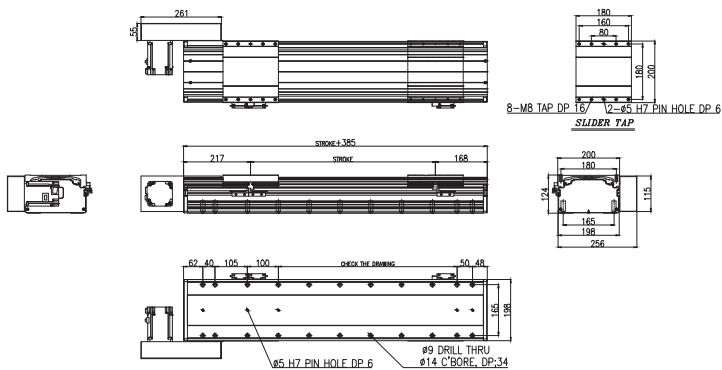


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	45	47.3	49.6	51.9	54.2	56.5	58.8	61.1	63.4	65.7	68
The weight of the model equipped with a brake is 0.35kg more heavier then this value.											
Base & Slide	Aluminum Profile, 백색전착 유광										

DB-200ULB

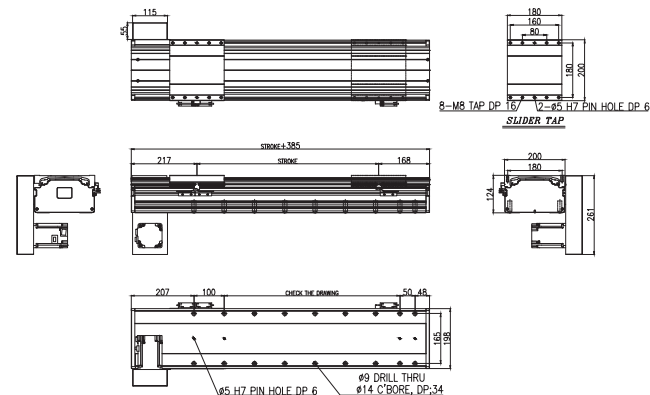


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	45	47.3	49.6	51.9	54.2	56.5	58.8	61.1	63.4	65.7	68
The weight of the model equipped with a brake is 0.35kg more heavier then this value.											
Base & Slide	Aluminum Profile, 백색전착 유광										

DB-200DRT

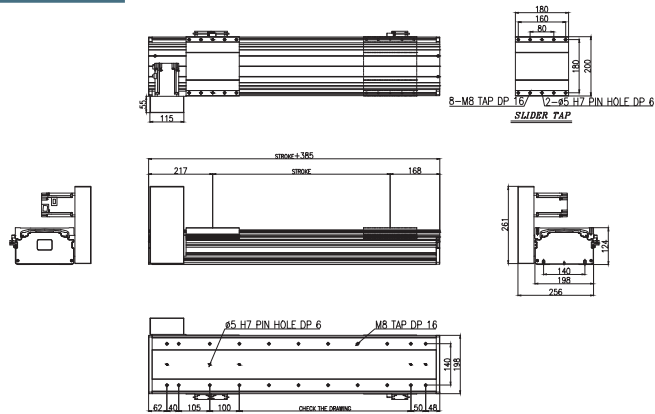


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	45	47.3	49.6	51.9	54.2	56.5	58.8	61.1	63.4	65.7	68
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-200FRT

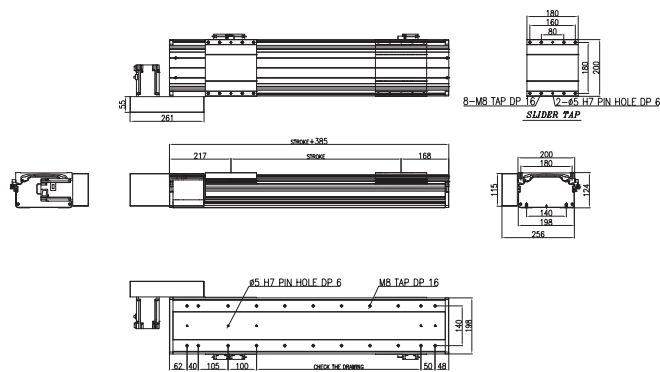


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	45	47.3	49.6	51.9	54.2	56.5	58.8	61.1	63.4	65.7	68
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-200DRB

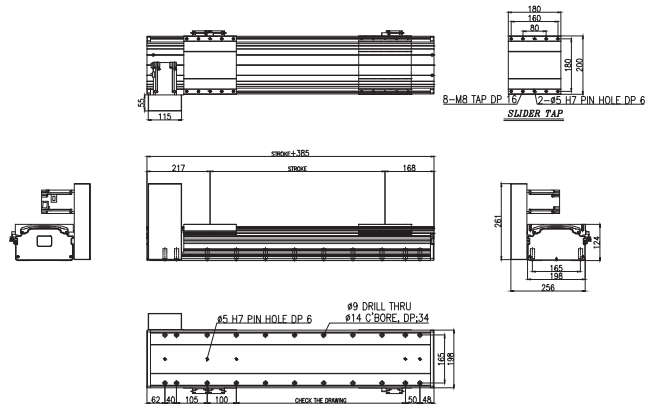


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	45	47.3	49.6	51.9	54.2	56.5	58.8	61.1	63.4	65.7	68
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-200FRB

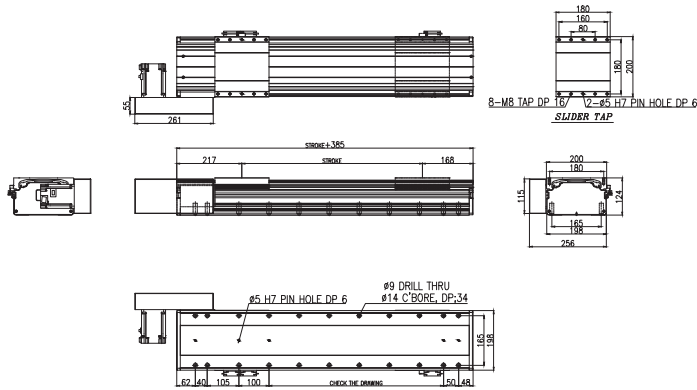


Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	45	47.3	49.6	51.9	54.2	56.5	58.8	61.1	63.4	65.7	68
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-200URT

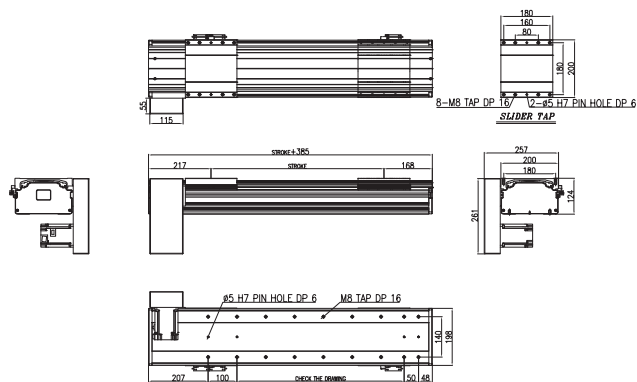

Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	45	47.3	49.6	51.9	54.2	56.5	58.8	61.1	63.4	65.7	68
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

DB-200URB

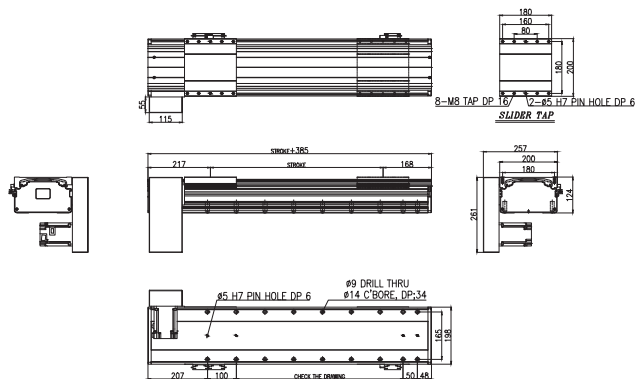

Stroke(mm)	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
Weight(kg)	45	47.3	49.6	51.9	54.2	56.5	58.8	61.1	63.4	65.7	68
Base & Slide	The weight of the model equipped with a brake is 0.35kg more heavier then this value. Aluminum Profile, 백색전착 유광										

This drawing is for reference only, and the actual dimensions are subject to the 2D/3D drawings provided. Changes in product style, appearance, and specifications will not be notified separately.

DK

DTH

DS

DC

DB

DE

DB090

DB120

DB160

DB200