



Screw drive

DTH series

slideway with embedded screw

DTH4

**Body width 44MM
maximum stroke 500MM
Maximum Load25KG**

DTH8

**Body width 82MM
maximum stroke 1100MM
Maximum Load50KG**


DTH5

**Body width 54MM
maximum stroke 800MM
Maximum Load30KG**

DTH12

**Body width 120MM
maximum stroke 1100MM
Maximum Load110KG**

DTH4

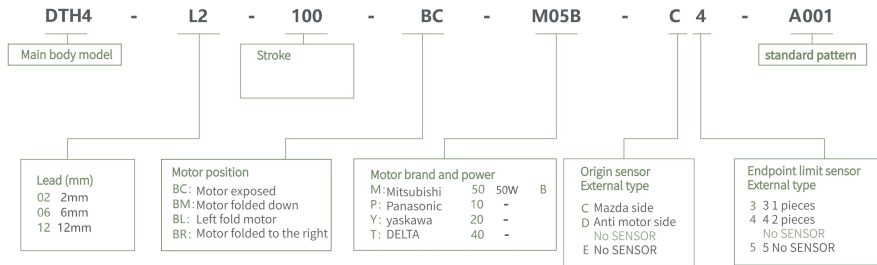

※ Basic style


specifications	Repetitive positioning accuracy: mm		±0.01		
	Screw lead mm		2	6	12
	Maximum speed mm/s		100	300	600
	Maximum load mass kg	Horizontal use	25	20	12
		Vertical use	8	5	2
	Freeze thrust N		424	141	71
Parts	Standard travel mm		50-800MM/50 interval		
	AC servo motor capacity W		50		
	Ball screw outer diameter mm		C7 φ 10		
	Coupling mm		7x8		
	Origin sensor	External cheat	PM-Y45(NPN)		

When the travel exceeds 750, there will be screw deflection. Please refer to page 14 of the table of contents. Set the motor acceleration and deceleration to 0.2 seconds.

※ Allowable load torque table

※ Static allowable load inertia


(Unit : mm)




(Unit : mm)



(Unit : mm)



(Unit : N.m)




Horizontal installation		A	B	C
screw lead 2	12kg	1000	55	80
	18kg	750	35	50
	25kg	500	23	32
screw lead 6	10kg	550	53	70
	15kg	350	32	45
	20kg	250	22	31
screw lead 12	8kg	305	59	75
	10kg	240	45	57
	12kg	195	37	47

Side hanging installation		A	B	C
screw lead 2	12kg	80	55	1000
	18kg	50	35	750
	25kg	32	23	500
screw lead 6	10kg	72	52	550
	15kg	45	32	345
	20kg	31	22	250
screw lead 12	8kg	75	59	300
	10kg	58	45	240
	12kg	47	37	190

Vertical installation		A	C	MY	79
screw lead 2	4kg	200	200	MP	79
	8kg	100	100	MR	116
	-	-	-		
screw lead 6	3kg	200	200		
	5kg	120	120		
	-	-	-		
screw lead 12	1.5kg	350	350		
	2kg	260	260		
	-	-	-		

The data represented by the force distance table represents the center of gravity. Under normal use in accordance with the catalog specifications, the guaranteed lifespan is 10000 kilometers. Inverted hanging cannot be used according to standard specifications. If you have any requirements, please contact our business


Motor exposed

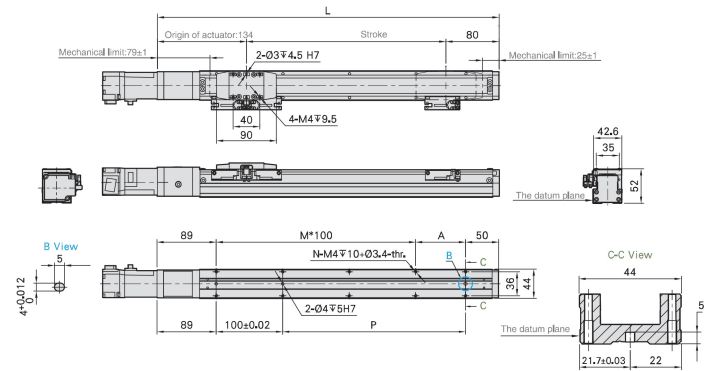

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	264	314	364	414	464	514	564	614	664	714	764	814	864	914	964	1014
A	25	75	25	75	25	75	25	75	25	75	25	75	25	75	25	75
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20
P	25	75	125	175	225	275	325	375	425	475	525	575	625	675	725	775
KG	0.95	1.12	1.29	1.47	1.65	1.83	2.01	2.19	2.37	2.55	2.73	2.91	3.09	3.27	3.45	3.63

unit:mm

Motor folded down

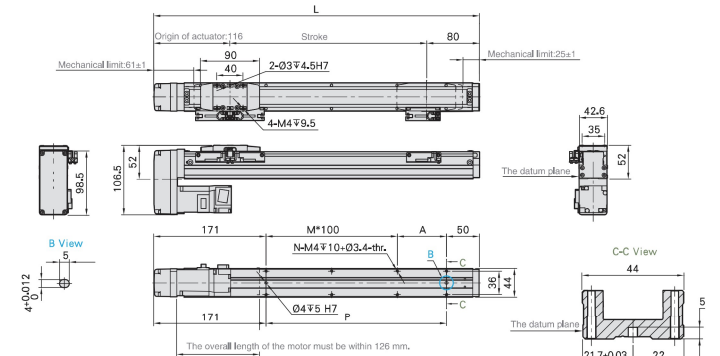

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	246	296	346	396	446	496	546	596	646	696	746	796	846	896	946	996
A	25	75	25	75	25	75	25	75	25	75	25	75	25	75	25	75
M	0	0	1	1	2	2	3	3	4	4	5	5	6	6	7	7
N	4	4	6	6	8	8	10	10	12	12	14	14	16	16	18	18
P	25	75	125	175	225	275	325	375	425	475	525	575	625	675	725	775
KG	1.04	1.22	1.40	1.58	1.76	1.94	2.12	2.30	2.48	2.66	2.84	3.02	3.20	3.38	3.56	3.74

unit:mm

This drawing is for reference only. Actual dimensions are based on the 2D/3D drawings provided. Product styles and appearance specifications may change without prior notice

DK

DTH

DS

DC

DB

DE


DTH4

DTH5

DTH8

DTH12


Left fold motor

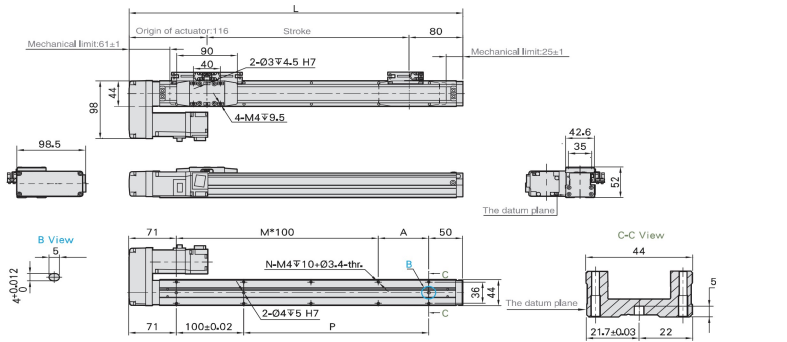

unit:mm

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	246	296	346	396	446	496	546	596	646	696	746	796	846	896	946	996
A	25	75	25	75	25	75	25	75	25	75	25	75	25	75	25	75
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20
P	25	75	125	175	225	275	325	375	425	475	525	575	625	675	725	775
KG	1.04	1.22	1.40	1.58	1.76	1.94	2.12	2.30	2.48	2.66	2.84	3.02	3.20	3.38	3.56	3.74

Motor folded to the right

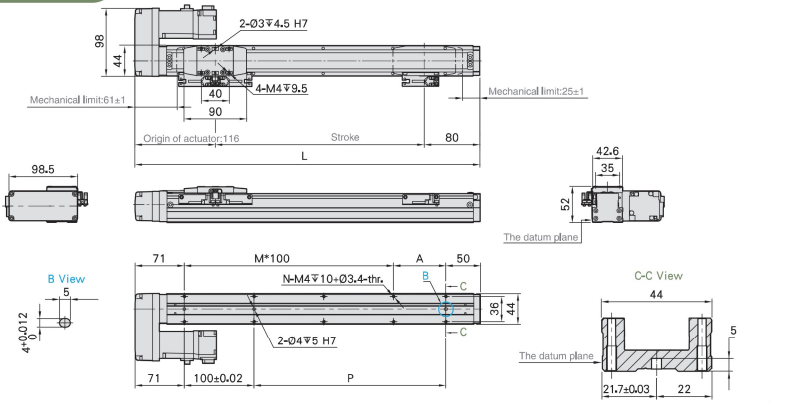

unit:mm

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	246	296	346	396	446	496	546	596	646	696	746	796	846	896	946	996
A	25	75	25	75	25	75	25	75	25	75	25	75	25	75	25	75
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20
P	25	75	125	175	225	275	325	375	425	475	525	575	625	675	725	775
KG	1.04	1.22	1.40	1.58	1.76	1.94	2.12	2.30	2.48	2.66	2.84	3.02	3.20	3.38	3.56	3.74

This drawing is for reference only. Actual dimensions are based on the 2D/3D drawings provided. Product styles and appearance specifications may change without prior notice

DK

DTH

DS

DC

DB

DE


DTH4

DTH5

DTH8

DTH12

 DTH5

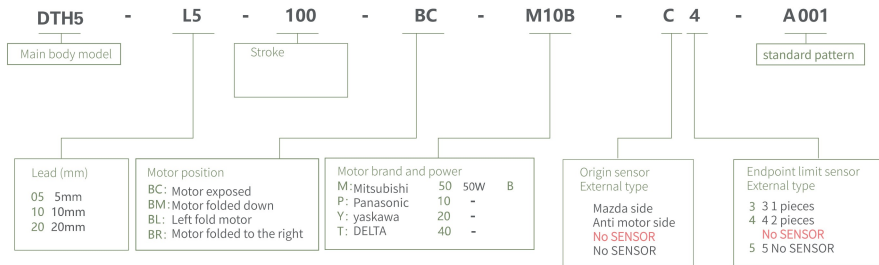

※ Basic style


specifications	Repetitive positioning accuracy: mm		±0.01	
	Screw lead mm		5	20
	Maximum speed mm/s		250	1000
	Maximum load mass kg	Horizontal use	30	10
		Vertical use	10	2.5
Parts	Freeze thrust N		341	85
	Standard travel mm		50-800MM/50 interval	
	AC servo motor capacity W		100	
	Ball screw outer diameter mm		C7 φ 12	
	Coupling mm		7x8	
Origin sensor		External cheat		PM-Y45(NPN)

When the travel exceeds 750, there will be screw deflection. Please refer to page 14 of the table of contents. Set the motor acceleration and deceleration to 0.2 seconds.

※ Allowable load torque table

※ Static allowable load inertia

(Unit : mm)




Horizontal installation		A	B	C
screw lead 05	10kg	650	75	100
	20kg	440	32	45
	30kg	270	19	25
screw lead 10	5kg	600	145	185
	10kg	370	70	85
	15kg	250	42	52
screw lead 20	5kg	320	120	130
	8kg	220	70	80
	10kg	175	55	60

(Unit : mm)




Side hanging installation		A	B	C
screw lead 05	10kg	100	75	650
	20kg	45	32	420
	30kg	25	19	260
screw lead 10	5kg	180	145	600
	10kg	85	68	370
	15kg	52	42	250
screw lead 20	5kg	130	120	320
	8kg	75	70	220
	10kg	60	55	170

(Unit : mm)



Vertical installation		A	C
screw lead 05	6kg	145	145
	8kg	110	110
	10kg	90	90
screw lead 10	1kg	800	800
	3kg	260	260
	5kg	155	155
screw lead 20	1kg	600	600
	2kg	300	300
	2.5kg	250	250


(Unit : N.m)



MY	103
MP	103
MR	144


The data represented by the force distance table represents the center of gravity. Under normal use in accordance with the catalog specifications, the guaranteed lifespan is 10000 kilometers. Inverted hanging cannot be used according to standard specifications. If you have any requirements, please contact our business

Motor exposed

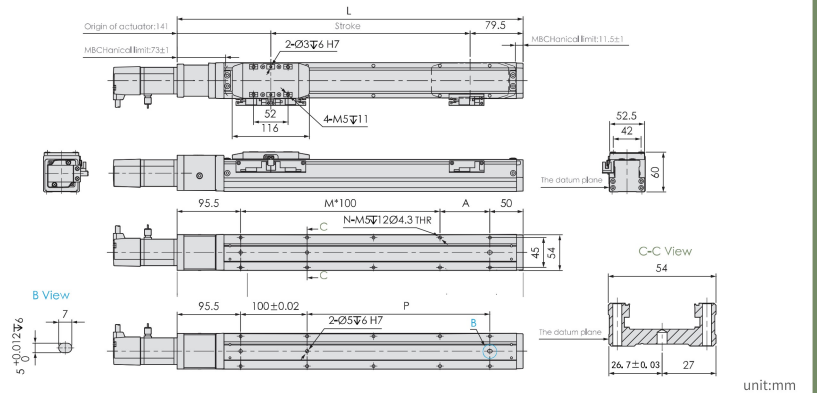

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	270.5	320.5	370.5	420.5	470.5	520.5	570.5	620.5	670.5	720.5	770.5	820.5	870.5	920.5	970.5	1020.5
A	25	75	25	75	25	75	25	75	25	75	25	75	25	75	25	75
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20
P	25	75	125	175	225	275	325	375	425	475	525	575	625	675	725	775
KG	1.65	1.79	1.92	2.11	2.39	2.50	2.52	2.75	2.86	2.95	3.15	3.28	3.44	3.58	3.71	4.09

Motor folded down

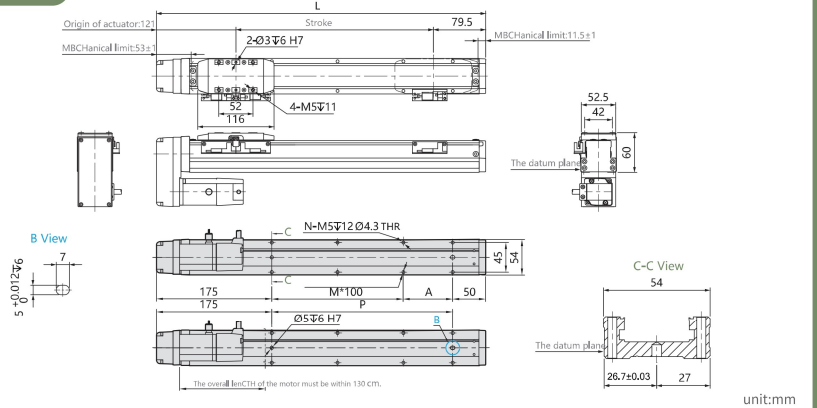

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000
A	25	75	25	75	25	75	25	75	25	75	25	75	25	75	25	75
M	0	0	1	1	2	2	3	3	4	4	5	5	6	6	7	7
N	4	4	6	6	8	8	10	10	12	12	14	14	16	16	18	18
P	25	75	125	175	225	275	325	375	425	475	525	575	625	675	725	775
KG	1.68	1.80	2.03	2.14	2.42	2.53	2.58	2.78	2.89	2.98	3.18	3.31	3.47	3.60	3.74	4.12

This drawing is for reference only. Actual dimensions are based on the 2D/3D drawings provided. Product styles and appearance specifications may change without prior notice

DK

DTH

DS

DC

DB

DE


DTH4

DTH5

DTH8


DTH12

Left fold motor

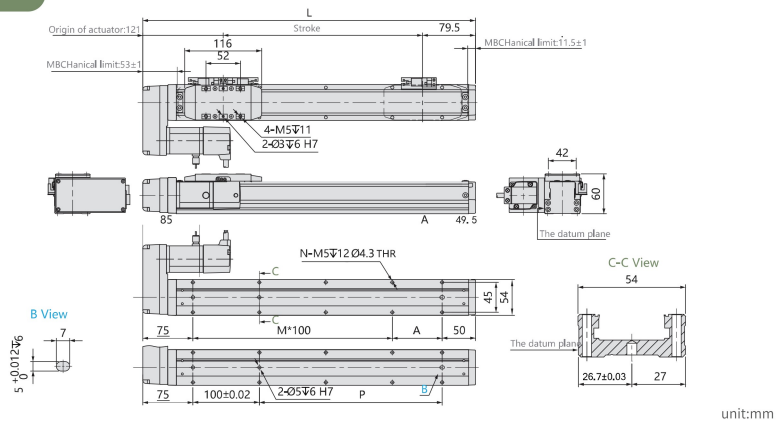

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000
A	25	75	25	75	25	75	25	75	25	75	25	75	25	75	25	75
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20
P	25	75	125	175	225	275	325	375	425	475	525	575	625	675	725	775
KG	1.68	1.80	2.03	2.14	2.42	2.53	2.58	2.78	2.89	2.98	3.18	3.31	3.47	3.60	3.74	4.12

Motor folded to the right

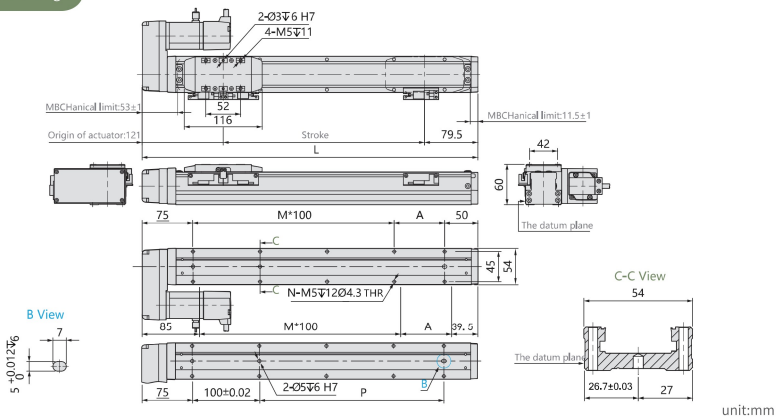

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800
L	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000
A	25	75	25	75	25	75	25	75	25	75	25	75	25	75	25	75
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20
P	25	75	125	175	225	275	325	375	425	475	525	575	625	675	725	775
KG	1.68	1.80	2.03	2.14	2.42	2.53	2.58	2.78	2.89	2.98	3.18	3.31	3.47	3.60	3.74	4.12

This drawing is for reference only. Actual dimensions are based on the 2D/3D drawings provided. Product styles and appearance specifications may change without prior notice

DK

DTH

DS

DC

DB

DE


DTH4

DTH5

DTH8

DTH12

DTH8

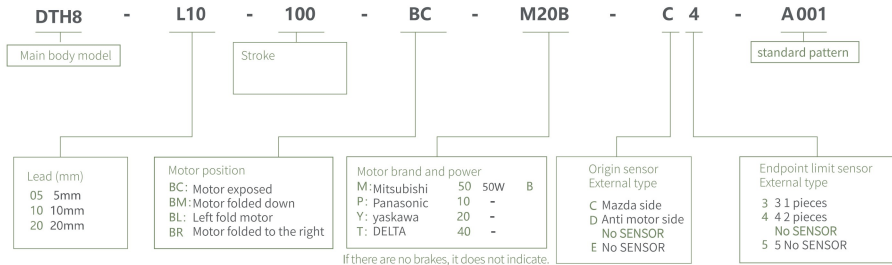

※ Basic style


specifications	Repetitive positioning accuracy: mm		±0.01		
	Screw lead mm		5	10	20
	Maximum speed mm/s		250	500	1000
	Maximum load mass kg	Horizontal use	50	30	18
		Vertical use	15	8	3
Parts	Freeze thrust N		683	341	174
	Standard travel mm		50-1100MM/50 interval		
	AC servo motor capacity W		200		
	Ball screw outer diameter mm		C7 φ 16		
	Coupling mm		10x14/11 [※]		
	Origin sensor		PM-Y45(NPN)		
	External cheat				

When the travel exceeds 750, there will be screw deflection. Please refer to page 14 of the table of contents. Set the motor acceleration and deceleration to 0.2 seconds.
Note 1: When using a Panasonic 200W motor, the motor axis is 11; Other brands have a motor axis of 14.

※ Allowable load torque table

※ Static allowable load inertia

(Unit : mm)




Horizontal installation		A	B	C
screw lead 05	20kg	1560	153	237
	35kg	890	81	126
	50kg	550	53	82
screw lead 10	10kg	1730	286	412
	20kg	839	136	196
	30kg	541	86	124
screw lead 20	6kg	1213	403	493
	9kg	800	264	323
	18kg	592	194	238

(Unit : mm)




Side hanging installation		A	B	C
screw lead 05	20kg	214	153	1435
	35kg	113	81	845
	50kg	74	53	506
screw lead 10	10kg	370	286	1400
	20kg	176	136	800
	30kg	112	86	495
screw lead 20	6kg	444	403	760
	9kg	292	264	650
	18kg	214	194	544

(Unit : mm)



Vertical installation		A	C
screw lead 05	10kg	331	331
	15kg	220	220
	-	-	-
screw lead 10	5kg	589	589
	8kg	368	368
	-	-	-
screw lead 20	3kg	935	935
	-	-	-
	-	-	-


(Unit : N.m)



MY	318
MP	318
MR	626


The data represented by the force distance table represents the center of gravity. Under normal use in accordance with the catalog specifications, the guaranteed lifespan is 10000 kilometers. Inverted hanging cannot be used according to standard specifications. If you have any requirements, please contact our business

Motor exposed

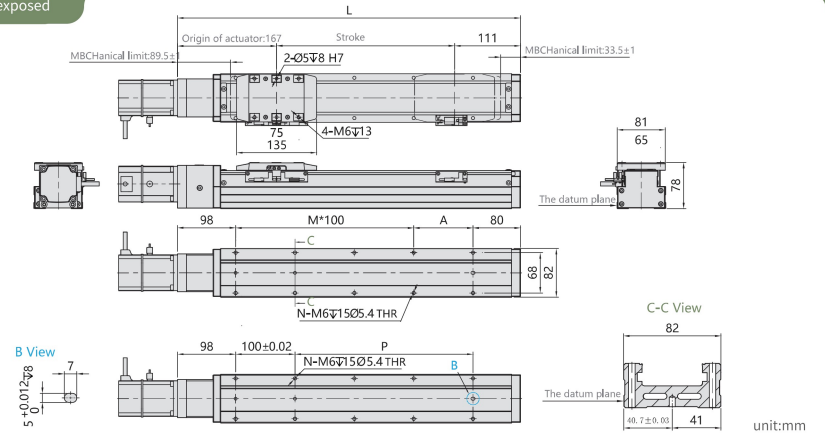

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100
L	328	378	428	478	528	578	628	678	728	778	828	878	928	978	1028	1078	1128	1178	1228	1278	1328	1378
A	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26
P	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100
KG	3.91	4.29	4.70	5.00	5.35	5.68	6.00	6.35	6.64	6.97	7.41	7.71	8.12	8.41	8.65	8.96	9.37	9.62	10.01	10.28	10.70	11.12

Motor folded down

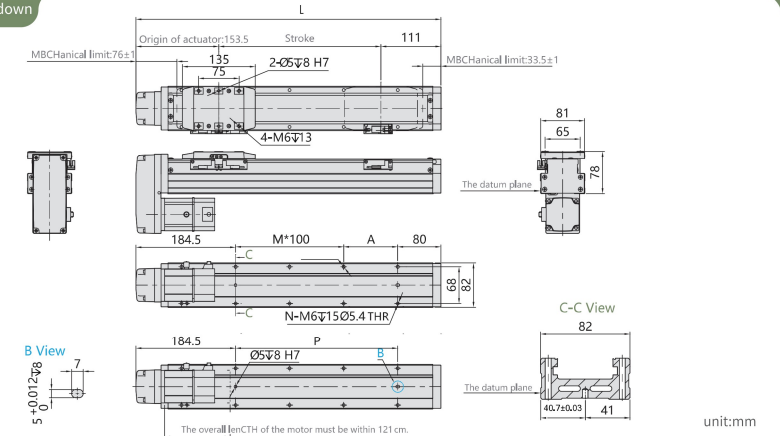

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100
L	314.5	364.5	414.5	464.5	514.5	564.5	614.5	664.5	714.5	764.5	814.5	864.5	914.5	964.5	1014.5	1064.5	1114.5	1164.5	1214.5	1264.5	1314.5	1364.5
A	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100
M	0	0	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10
N	4	4	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24
P	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100
KG	3.95	4.33	4.74	5.09	5.39	5.72	6.04	6.39	6.68	7.01	7.45	7.75	8.16	8.45	8.69	9.00	9.41	9.66	10.08	10.32	10.74	11.16

This drawing is for reference only. Actual dimensions are based on the 2D/3D drawings provided. Product styles and appearance specifications may change without prior notice

DK

DTH

DS

DC

DB

DE

DTH4

DTH5

DTH8

DTH12

DK

DTH


DS

DC

DB


DE

Left fold motor

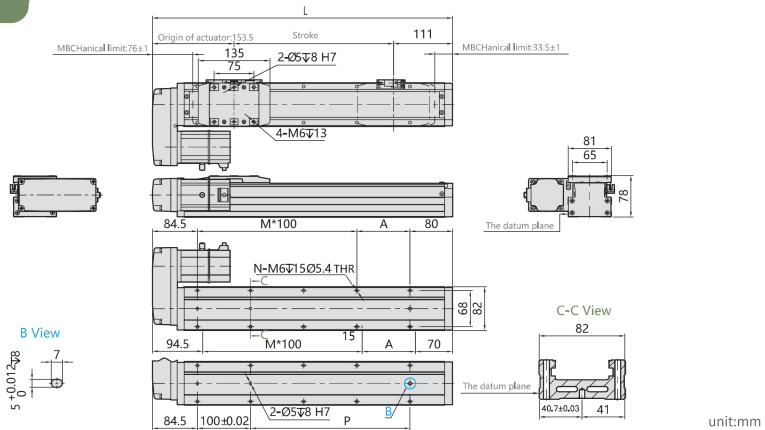

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100
L	314.5	364.5	414.5	464.5	514.5	564.5	614.5	664.5	714.5	764.5	814.5	864.5	914.5	964.5	1014.5	1064.5	1114.5	1164.5	1214.5	1264.5	1314.5	1364.5
A	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26
P	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100
KG	3.95	4.33	4.74	5.09	5.39	5.72	6.04	6.39	6.68	7.01	7.45	7.75	8.16	8.45	8.69	9.00	9.41	9.66	10.08	10.32	10.74	11.16

Motor folded to the right

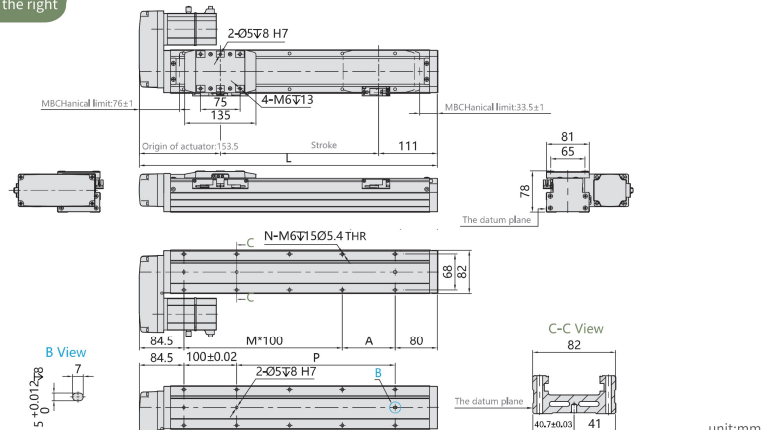

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100
L	314.5	364.5	414.5	464.5	514.5	564.5	614.5	664.5	714.5	764.5	814.5	864.5	914.5	964.5	1014.5	1064.5	1114.5	1164.5	1214.5	1264.5	1314.5	1364.5
A	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100
M	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11
N	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26
P	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100
KG	3.95	4.33	4.74	5.09	5.39	5.72	6.04	6.39	6.68	7.01	7.45	7.75	8.16	8.45	8.69	9.00	9.41	9.66	10.08	10.32	10.74	11.16

This drawing is for reference only. Actual dimensions are based on the 2D/3D drawings provided. Product styles and appearance specifications may change without prior notice


DTH4

DTH5

DTH8

DTH12

DTH12

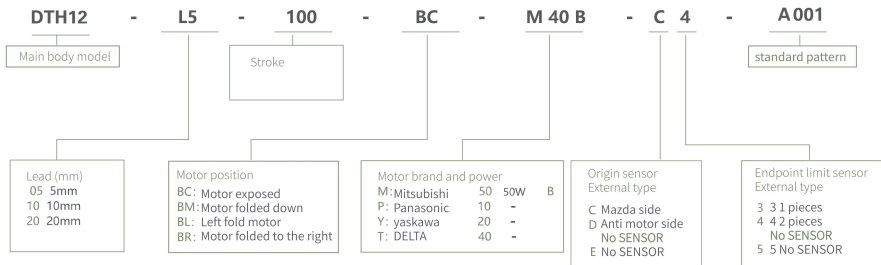

※ Basic style


Specifications	Repetitive positioning accuracy: mm		±0.01			
	Screw lead mm		5	10	20	32
	Maximum speed mm/s		250	500	1000	1600
	Maximum load mass kg	Horizontal use	110	88	40	30
		Vertical use	33	22	10	8
Parts	Freeze thrust N		1388	694	347	218
	Standard travel mm		50-1250 MM/50 interval			
	AC servo motor capacity W		400			
	Ball screw outer diameter mm		C7φ16			
	Coupling mm		10×14			
Origin sensor		External cheat	PM-Y45(NPN)			

When the travel exceeds 750, there will be screw deflection. Please refer to page 14 of the table of contents. Set the motor acceleration and deceleration to 0.2 seconds.

※ Allowable load torque table

※ Static allowable load inertia

(Unit : mm)




Horizontal installation		A	B	C
screw lead 5	60kg	2850	250	340
	80kg	2100	180	250
	110kg	1500	120	170
screw lead 10	30kg	2850	490	600
	50kg	1700	280	350
	88kg	950	140	190
screw lead 20	10kg	3400	1250	1400
	22kg	1650	550	620
	40kg	900	290	330
screw lead 32	15kg	1100	570	550
	25kg	620	330	320
	30kg	520	270	260

(Unit : mm)




Side hanging installation		A	B	C
screw lead 5	55kg	280	280	3300
	75kg	200	195	2400
	110kg	130	125	1550
screw lead 10	35kg	400	410	2500
	55kg	245	250	1550
	88kg	150	150	950
screw lead 20	12kg	900	1070	3000
	20kg	550	630	1800
	40kg	260	300	900
screw lead 32	15kg	440	570	1050
	30kg	210	270	520
	-	-	-	-

(Unit : mm)




Vertical installation		A	C
screw lead 5	15kg	1200	1200
	22kg	820	820
	33kg	550	550
screw lead 10	10kg	1600	1600
	14kg	1150	1150
	22kg	730	730
screw lead 20	7kg	1800	1800
	10kg	1250	1250
	-	-	-
screw lead 32	5kg	1600	1600
	8kg	1000	1000
	-	-	-

(Unit : N.m)




MY	606
MP	606
MR	1168

Motor exposed

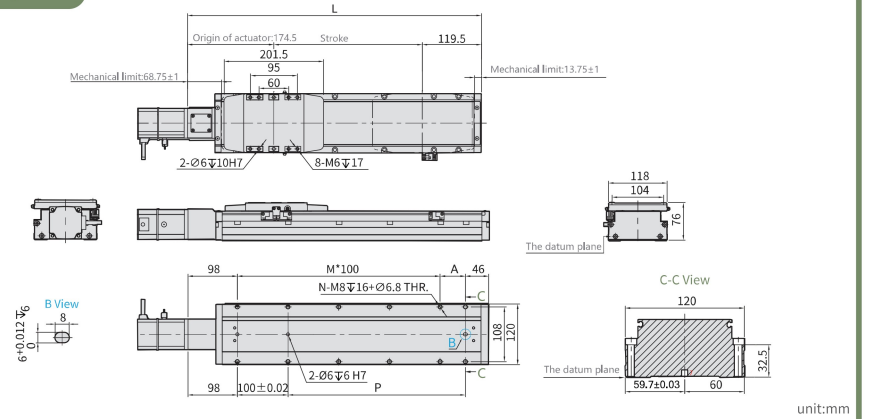

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250
L	344	394	444	494	544	594	644	694	744	794	844	894	944	994	1044	1094	1144	1194	1244	1294	1344	1394	1444	1494	1544
A	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100
M	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13
N	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30
P	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300
KG	5.05	5.4	5.75	6.1	6.45	6.8	7.15	7.5	7.85	8.2	8.55	8.9	9.25	9.6	9.95	10.3	10.65	11	11.35	11.7	12.05	12.4	12.75	13.1	13.45

Motor folded down

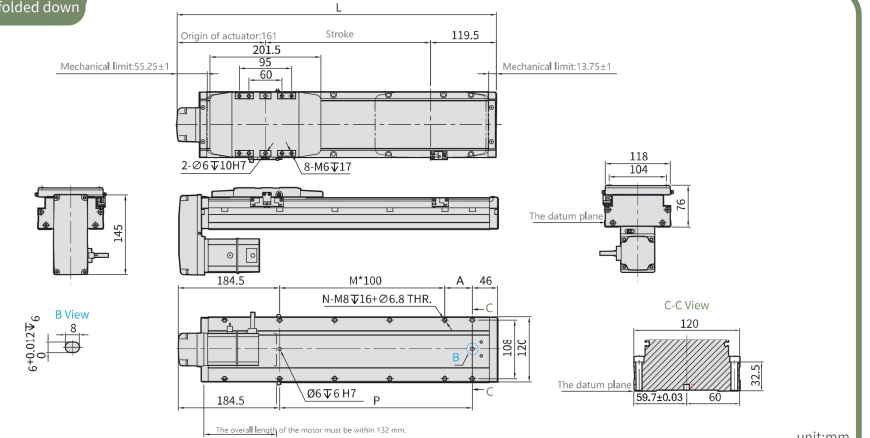

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250
L	330.5	380.5	430.5	480.5	530.5	580.5	630.5	680.5	730.5	780.5	830.5	880.5	930.5	980.5	1030.5	1080.5	1130.5	1180.5	1230.5	1280.5	1330.5	1380.5	1430.5	1480.5	1530.5
A	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100
M	0	1	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12
N	4	6	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28
P	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300
KG	5.21	5.56	5.91	6.26	6.61	6.96	7.31	7.66	8.01	8.36	8.71	9.06	9.41	9.76	10.11	10.46	10.81	11.16	11.51	11.86	12.21	12.56	12.91	13.26	13.61

This drawing is for reference only. Actual dimensions are based on the 2D/3D drawings provided. Product styles and appearance specifications may change without prior notice

DK

DTH

DS

DC

DB

DE


DTH4

DTH5

DTH8


DTH12

Left fold motor

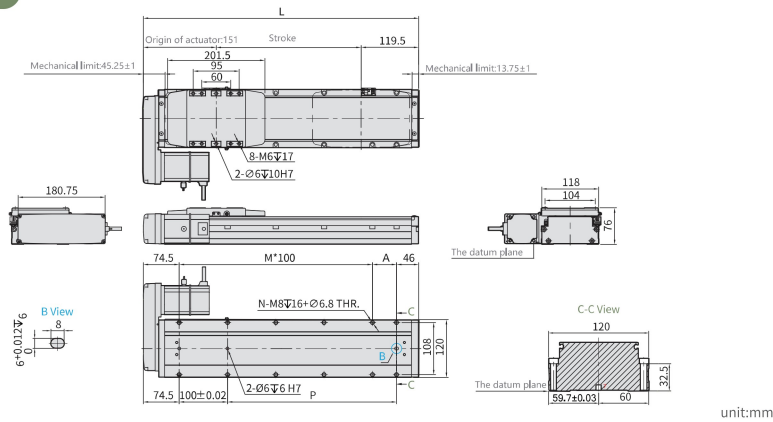

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250
L	320.5	370.5	420.5	470.5	520.5	570.5	620.5	670.5	720.5	770.5	820.5	870.5	920.5	970.5	1020.5	1070.5	1120.5	1170.5	1220.5	1270.5	1320.5	1370.5	1420.5	1470.5	1520.5
A	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100
M	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13
N	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30
P	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300
KG	5.25	5.6	5.95	6.3	6.65	7	7.35	7.7	8.05	8.4	8.75	9.1	9.45	9.8	10.15	10.85	11.2	11.55	11.9	12.25	12.6	12.56	12.91	13.26	13.61

Motor folded to the right

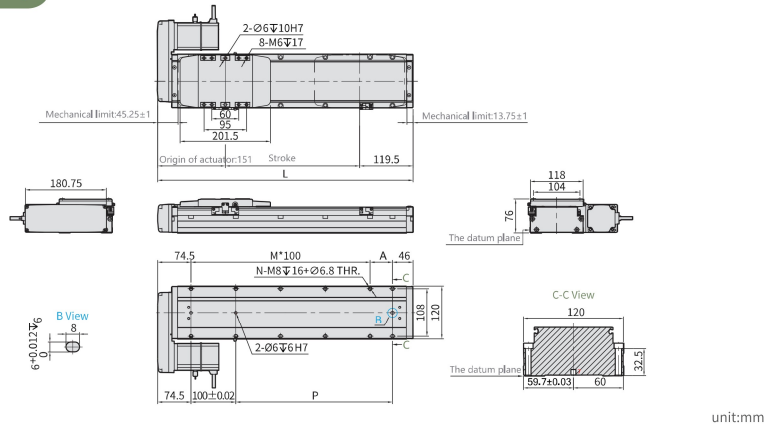

行程 Stroke	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250
L	320.5	370.5	420.5	470.5	520.5	570.5	620.5	670.5	720.5	770.5	820.5	870.5	920.5	970.5	1020.5	1070.5	1120.5	1170.5	1220.5	1270.5	1320.5	1370.5	1420.5	1470.5	1520.5
A	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100	50	100
M	1	2	2	3	3	4	4	5	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13
N	6	8	8	10	10	12	12	14	14	16	16	18	18	20	20	22	22	24	24	26	26	28	28	30	30
P	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300
KG	5.25	5.6	5.95	6.3	6.65	7	7.35	7.7	8.05	8.4	8.75	9.1	9.45	9.8	10.15	10.85	11.2	11.55	11.9	12.25	12.6	12.56	12.91	13.26	13.61

This drawing is for reference only. Actual dimensions are based on the 2D/3D drawings provided. Product styles and appearance specifications may change without prior notice

DK

DTH

DS

DC

DB

DE

DTH4

DTH5

DTH8

DTH12