




Product Catalogue

Cam Indexing Table

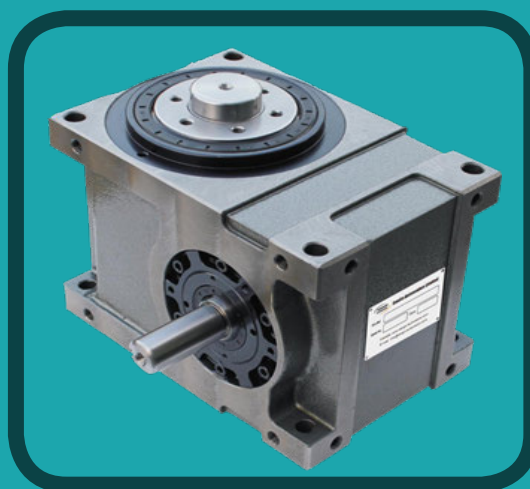

Sango Automation Limited

DF系列



DF凸缘型分割器


45DF,60DF,70DF,80DF,110DF,140DF,180DF,250DF

此机种具有重负荷特性，可承受较大之垂直径向，或轴向压力，为本公司专属设计工程师群，历经多年针对盘式结构需要设计而成，其输出轴为面盘式设计，有凸缘中心、盘面螺孔、定位、梢孔，固定面宽大，可使平面度及稳定性，更具坚实平稳。最能适用于较大负荷之回转式圆盘驱动场合，此系列机种被广泛使用在各类盘式加工机械，及类似机构之产业机械，自动化间歇驱动部，驱动圆盘。












凸缘/心轴型分割器型号代码

Model Code机种选购指定代号排列标示方法：

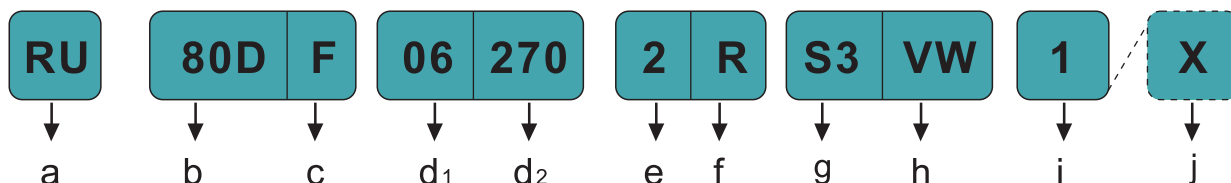


a 机种	b 规格	c 形式	d ₁ 分割等份 (s)	d ₂ 驱动角 (θ h)
RU 滚子凸轮	80D 80mm	F Type	06 6stop	270 270°
	出力轴与入力轴之间的距离 45D/60D/63D/ 70D/80D/83D/ 100D/110D/125D/ 140D/180D/250D/	F 凸缘型 S 心轴型 E 心轴凸缘型	定位分割等份 2.3.4.5.6. 8.10.12.16 定制规格 20.24.30. 32.36.40.48	入力凸轮驱动出力轴分割之角度 90° /120° 150° /180° 210° /240° 270° /300°

e 凸轮运动曲线	f 凸轮旋转方向	
2 Ms曲线	R 间歇驱动之右旋向凸轮	R, R2, R3, R4 右旋向凸轮
1, 2, 3 1 变形台形曲线MT (Modified Tropezoid) 2 变形正弦曲线MS (Modified Sine) 3 变形等速度曲线 MCV50 (Modified Constant Vclcity 50)	入力轴均可以正逆向旋转，如果入力轴无固定旋向要求，只需要变更马达旋转方向即可达到出力轴旋转方向的要求。请选择标准生产规格R旋向，R2-R4为入力轴一旋转，出力轴多次间歇分割等份，多用于16-60等份，R为入力轴一旋转，出力轴一次接卸分割等份，多用于2-12等份。 1Dwell 2Dwell 3Dwell 4Dwell 右旋向凸轮 R, R2, R3, R4 左旋向凸轮 L, L2, L3, L4	L, L2, L3, L4 左旋向凸轮

g入力轴组立方向	h本体安装螺丝孔面	i安装位置	j特殊规格说明
S3 T面及U面两端	VW	1	X
S1 只有T面 S2 只有U面 S3 T面及U面皆有	主壳及机体安装螺丝孔在V及W面皆有固定孔，此外，P、S、T、U也可以选择使用。	安装位置如下图	订购外部特殊指定要求 标准（不加符号） X 特别指定注明
S1  S2  S3 	1  GL(W) 2  GL(V) 3  GL(U) 4  GL(T) 5  GL(P) 6  GL(S)		

45DF

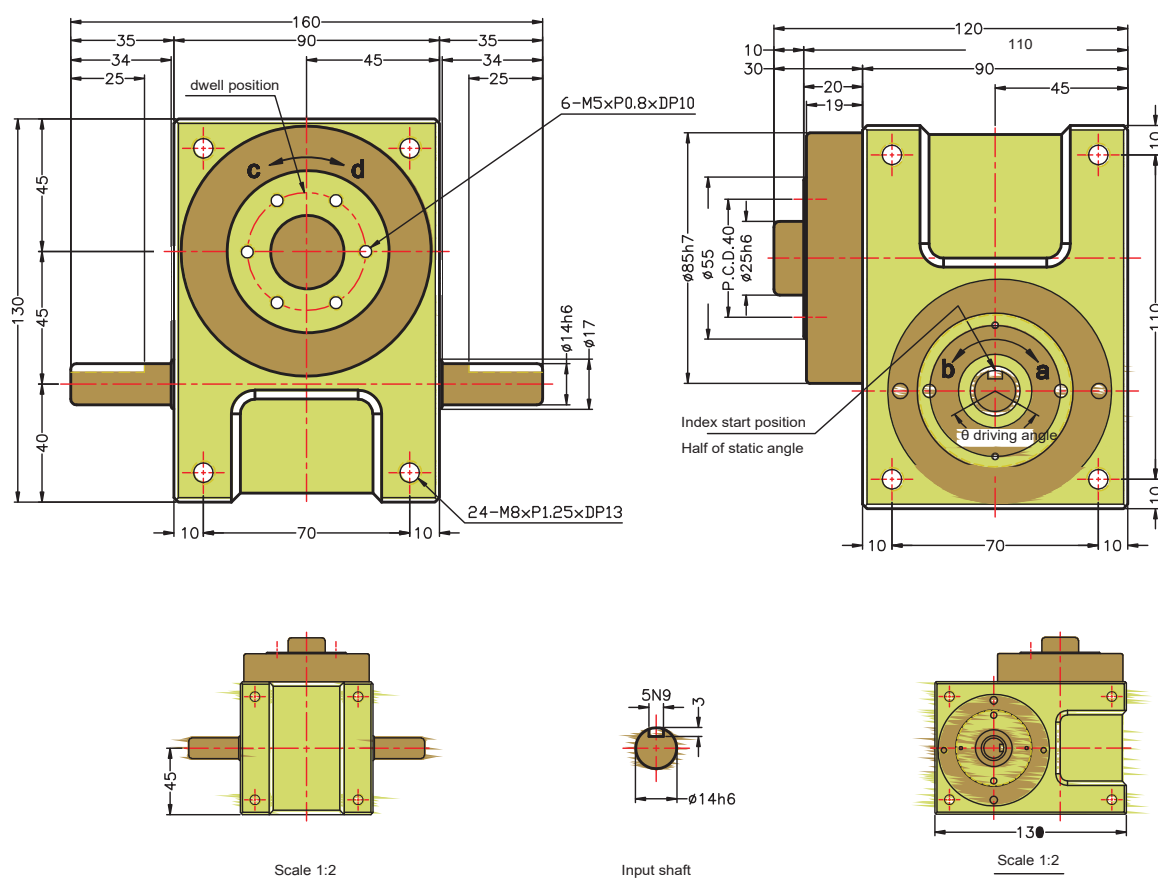


Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	130	Allowable radial load on input shaft	C3	Kgf	85	GD ² of input shaft (Note1)	C6	Kgf-m ²	3.2x10 ⁻⁴
Allowable axial load on output shaft	C2	Kgf	140	Max. bending force on input shaft	C4	Kgf	110	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	4	Weight		Kg	7

Note1:GD² of input shaft is a value in dwell range.

Note 2: Value of C1 to C5 are those obtained for safety factor=2.

60DF

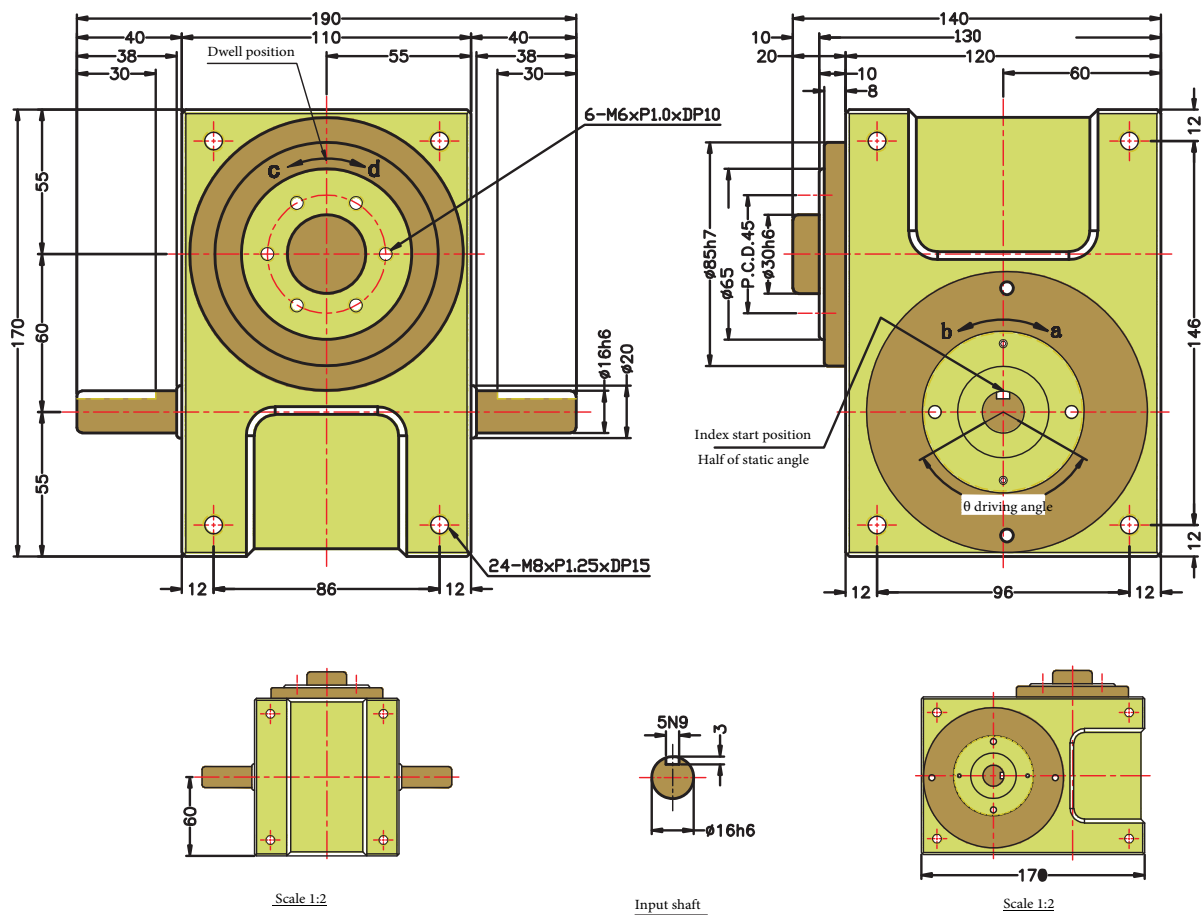


Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	140	Allowable radial load on input shaft	C3	Kgf	100	GD ² of input shaft (Note1)	C6	Kgf-m ²	1.9x10 ⁻³
Allowable axial load on output shaft	C2	Kgf	142	Max. bending force on input shaft	C4	Kgf	150	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	6	Weight		Kg	13

Note1:GD² of input shaft is a value in dwell range.

Note 2: Value of C1 to C5 are those obtained for safety factor=2.

70DF

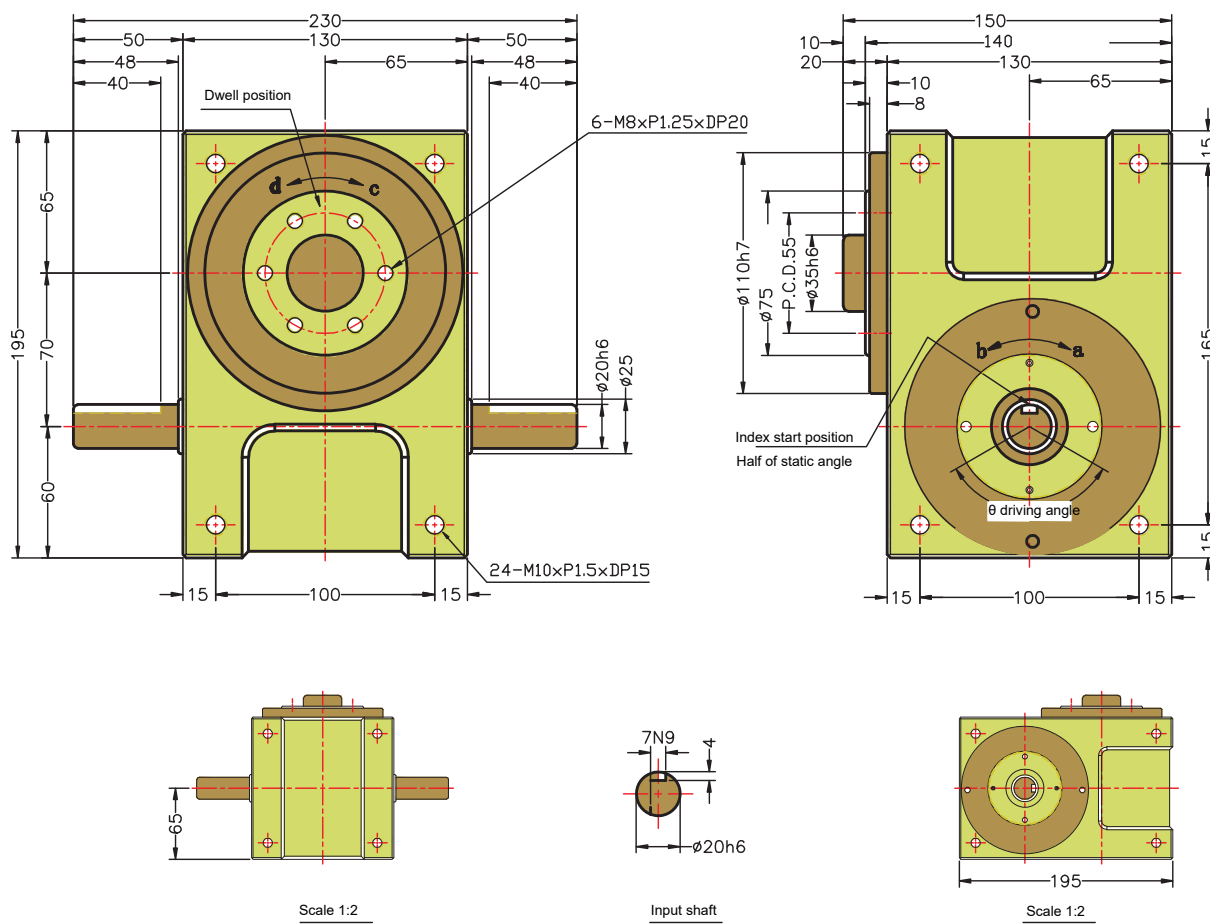


Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	220	Allowable radial load on input shaft	C3	Kgf	150	GD ² of input shaft (Note1)	C6	Kgf-m ²	6x10 ⁻³
Allowable axial load on output shaft	C2	Kgf	300	Max. bending force on input shaft	C4	Kgf	110	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	9.5	Weight		Kg	18

Note1:GD² of input shaft is a value in dwell range.

Note 2: Value of C1 to C5 are those obtained for safety factor=2.

80DF

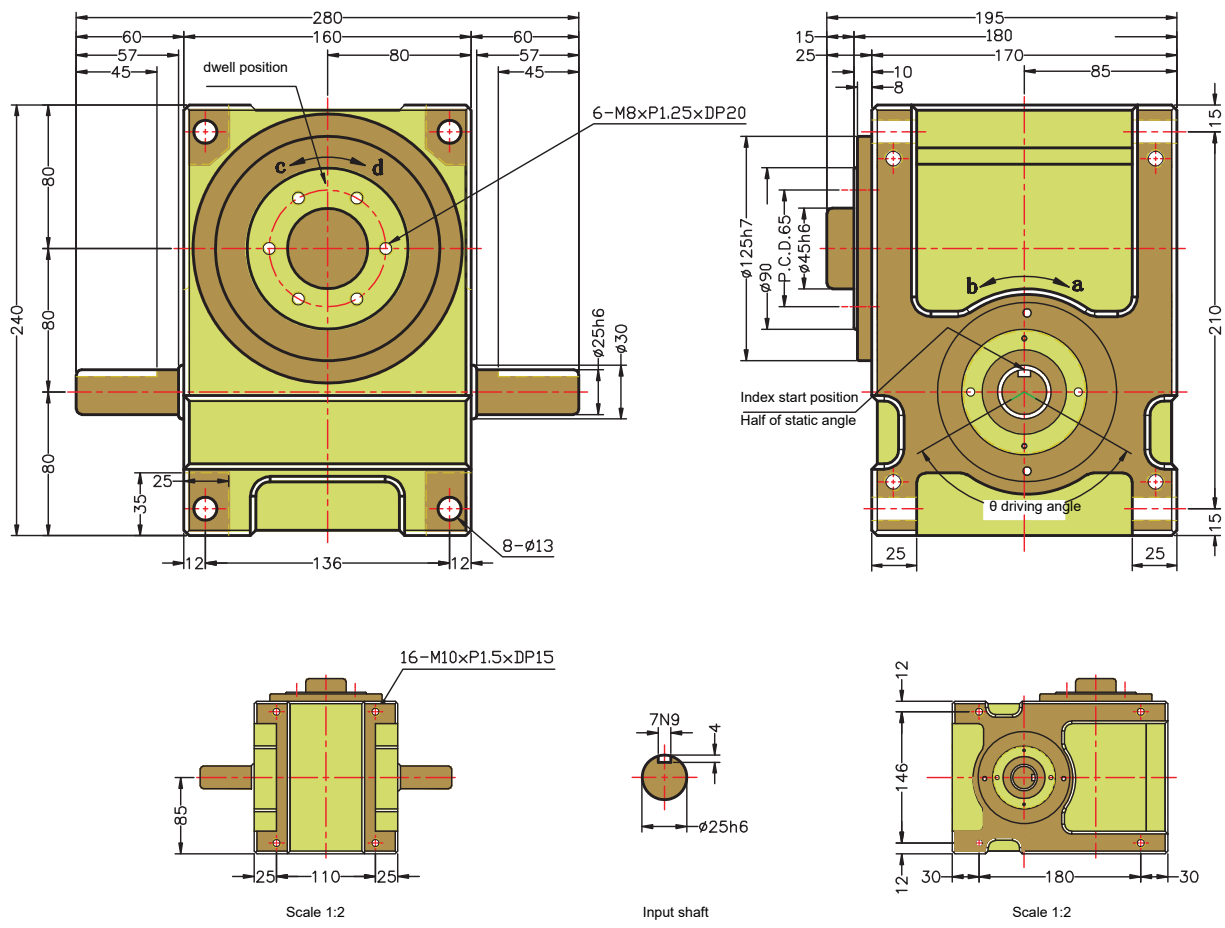


Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	330	Allowable radial load on input shaft	C3	Kgf	350	GD ² of input shaft (Note1)	C6	Kgf-m ²	9x10 ⁻³
Allowable axial load on output shaft	C2	Kgf	420	Max. bending force on input shaft	C4	Kgf	260	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	25	Weight		Kg	32

Note1:GD² of input shaft is a value in dwell range.

Note 2:Value of C1 to C5 are those obtained for safety factor=2.

110DF

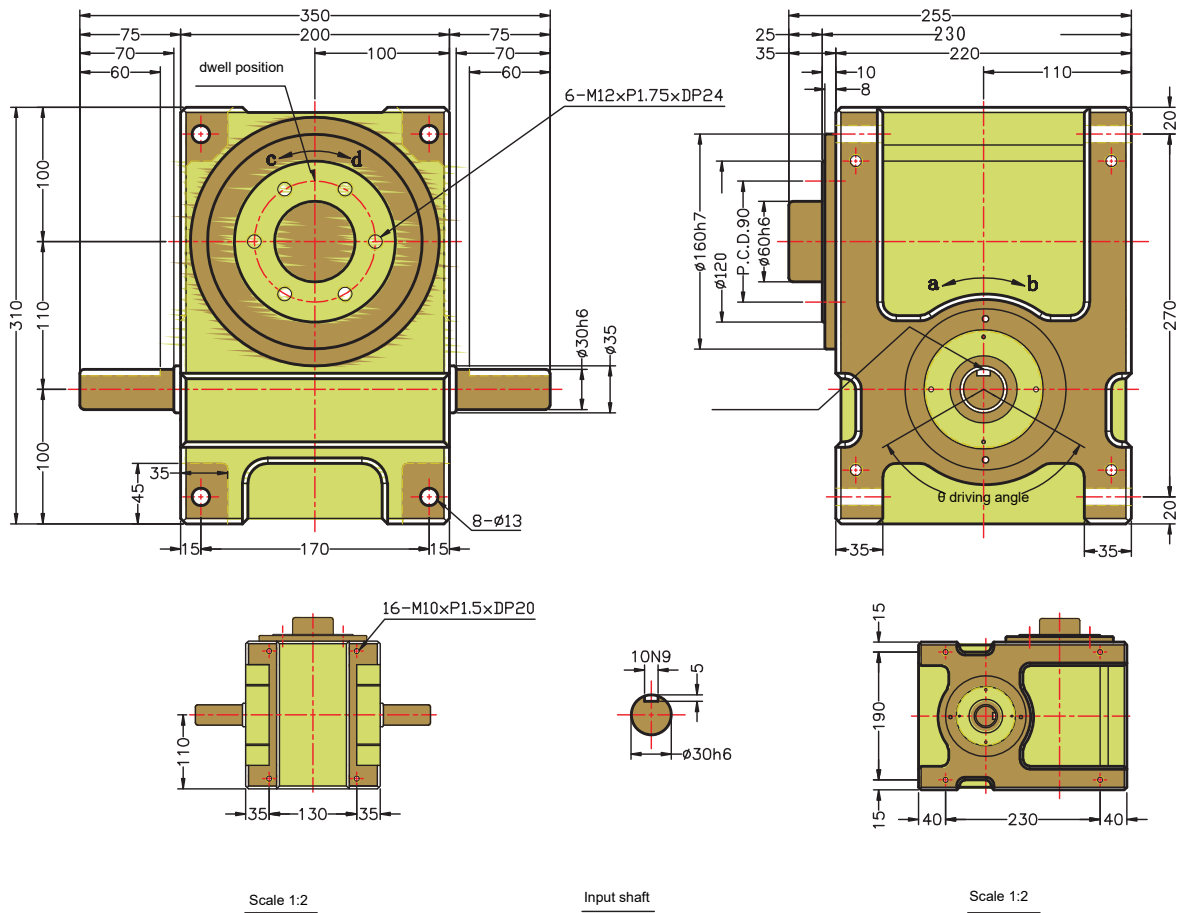


Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	560	Allowable radial load on input shaft	C3	Kgf	480	GD ² of input shaft (Note1)	C6	Kgf-m ²	2.8x10 ⁻²
Allowable axial load on output shaft	C2	Kgf	700	Max. bending force on input shaft	C4	Kgf	415	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	40	Weight		Kg	65

Note1:GD² of input shaft is a value in dwell range.

Note 2:Value of C1 to C5 are those obtained for safety factor=2.

140DF

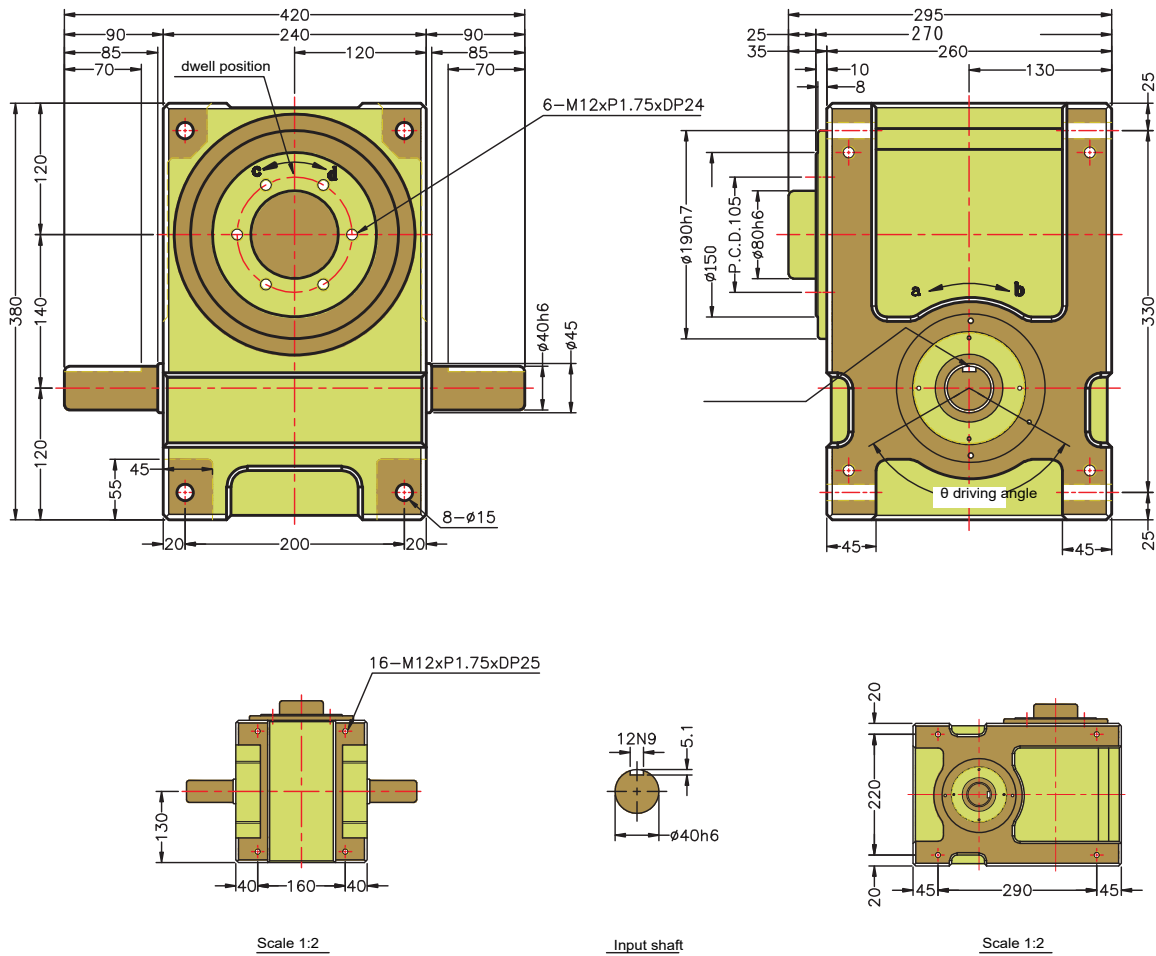


Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	760	Allowable radial load on input shaft	C3	Kgf	550	GD ² of input shaft (Note1)	C6	Kgf-m ²	0.11
Allowable axial load on output shaft	C2	Kgf	1000	Max. bending force on input shaft	C4	Kgf	710	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	100	Weight		Kg	90

Note1:GD² of input shaft is a value in dwell range.

Note 2:Value of C1 to C5 are those obtained for safety factor=2.

180DF





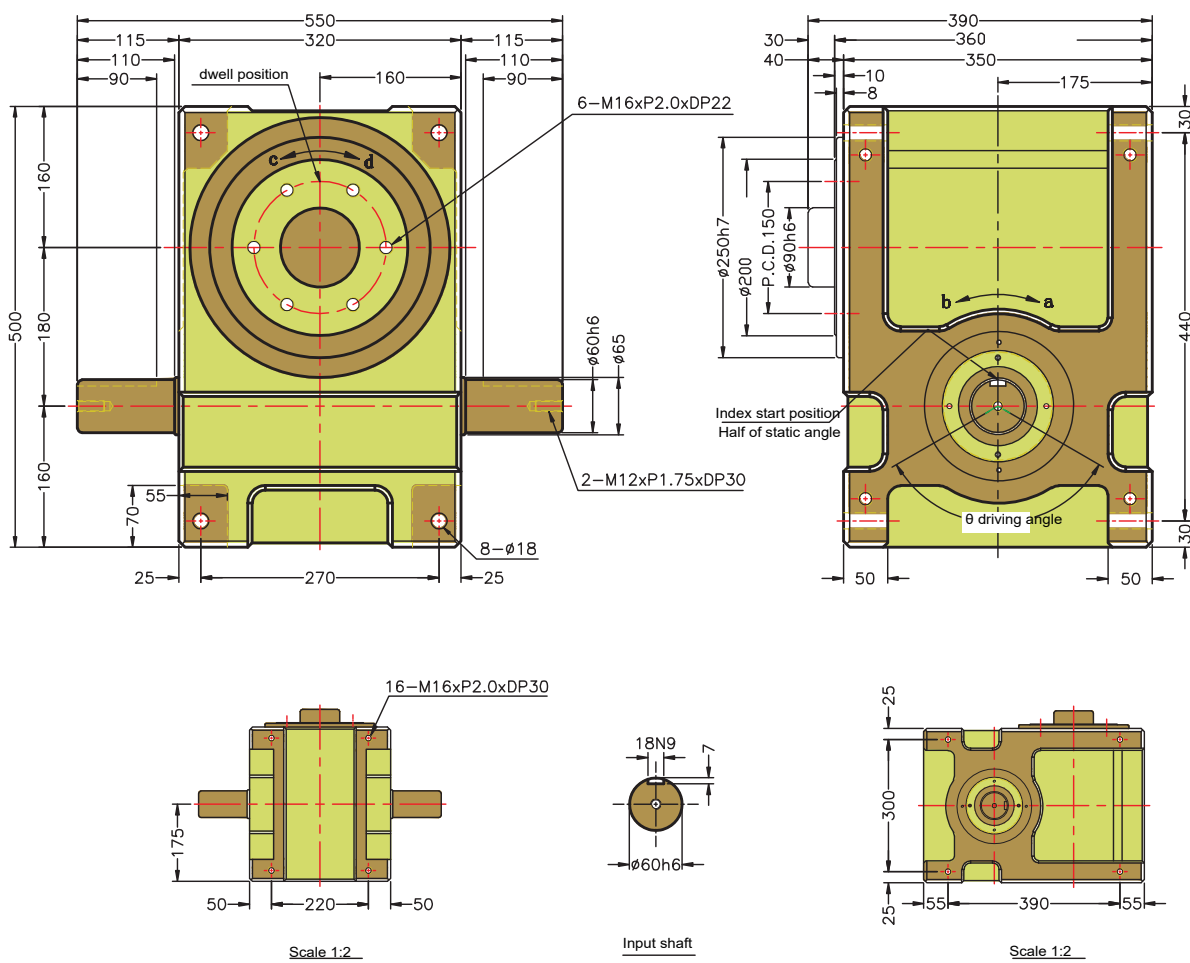


Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	1200	Allowable radial load on input shaft	C3	Kgf	1100	GD ² of input shaft (Note1)	C6	Kgf-m ²	0.39
Allowable axial load on output shaft	C2	Kgf	1500	Max. bending force on input shaft	C4	Kgf	1960	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	340	Weight		Kg	220

Note1:GD² of input shaft is a value in dwell range.

Note 2: Value of C1 to C5 are those obtained for safety factor=2.

250DF

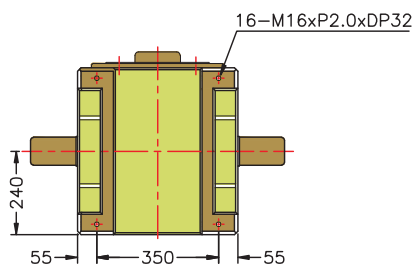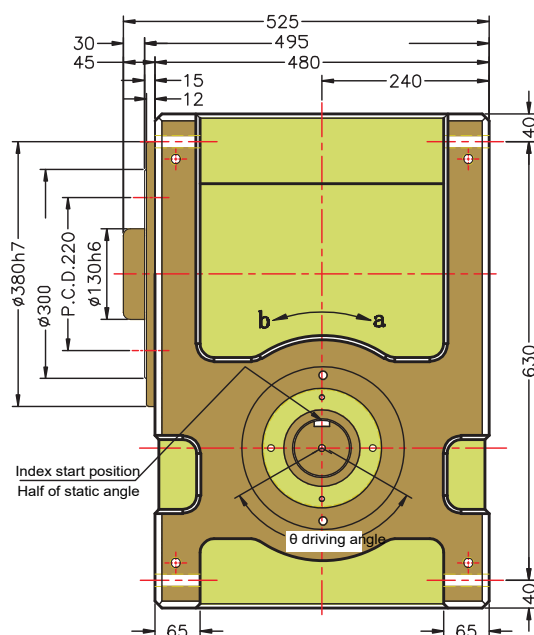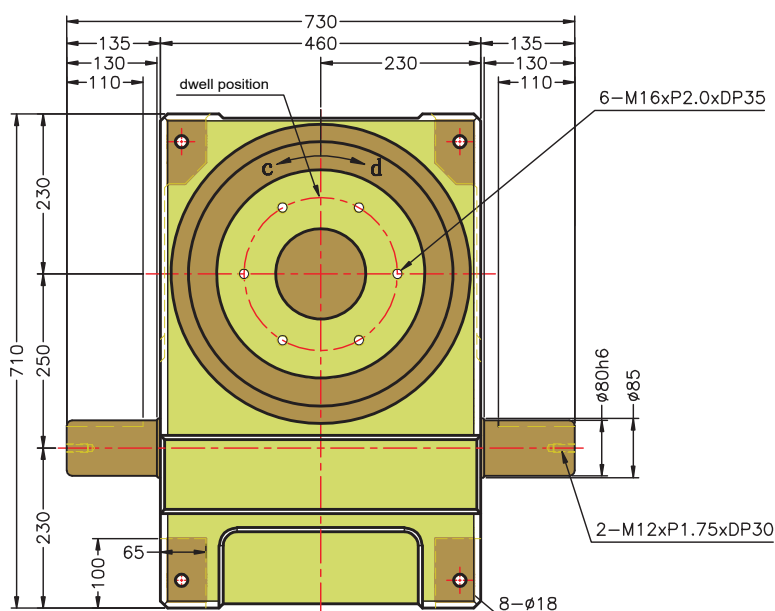

Scale 1:2

Input shaft

Scale 1:2

Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	3200	Allowable radial load on input shaft	C3	Kgf	1550	GD ² of input shaft (Note1)	C6	Kgf-m ²	1.98
Allowable axial load on output shaft	C2	Kgf	4150	Max. bending force on input shaft	C4	Kgf	3800	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	780	Weight		Kg	685

Note1:GD² of input shaft is a value in dwell range.

Note 2: Value of C1 to C5 are those obtained for safety factor=2.



DS系列



DS心轴型分割器概述


45DS,60DS,63DS,70DS,80DS,83DS,100DS,110DS,125DS,140DS,180DS

此系列机种为典型传统式心轴造型，其安装配件之加工安装配合齿轮、联轴器或联轴盘，需特别注重孔径公差(+0.015/-0)、及键槽公差(+0.015/-0)，其使用场合在输送带驱动、齿轮驱动、无间隙联轴器结合驱动居多。












凸缘/心轴型分割器型号代码

Model Code机种选购指定代号排列标示方法：



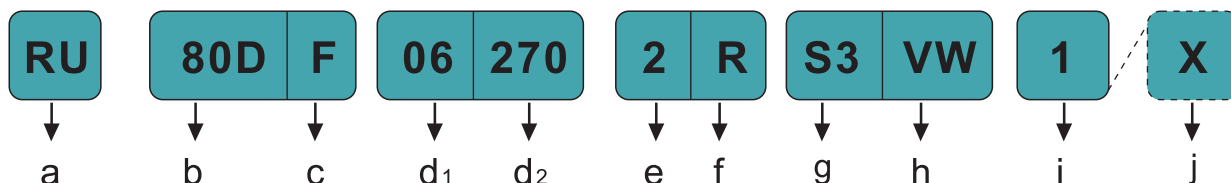


a 机种	b 规格	c 形式	d ₁ 分割等份 (s)	d ₂ 驱动角 (θ h)
RU 滚子凸轮	80D 80mm	F Type	06 6stop	270 270°
	出力轴与入力轴之间的距离 45D/60D/63D/ 70D/80D/83D/ 100D/110D/125D/ 140D/180D/250D/	F 凸缘型 S 心轴型 E 心轴凸缘型	定位分割等份 2.3.4.5.6. 8.10.12.16 定制规格 20.24.30. 32.36.40.48	入力凸轮驱动出力轴分割之角度 90° /120° 150° /180° 210° /240° 270° /300°


e 凸轮运动曲线	f 凸轮旋转方向	
2 Ms曲线	R 间歇驱动之右旋向凸轮	R, R2, R3, R4 右旋向凸轮
1, 2, 3 1 变形台形曲线MT (Modified Tropezoid) 2 变形正弦曲线MS (Modified Sine) 3 变形等速度曲线 MCV50 (Modified Constant Vclcity 50)	入力轴均可以正逆向旋转，如果入力轴无固定旋向要求，只需要变更马达旋转方向即可达到出力轴旋转方向的要求。请选择标准生产规格R旋向，R2-R4为入力轴一旋转，出力轴多次间歇分割等份，多用于16-60等份，R为入力轴一旋转，出力轴一次接卸分割等份，多用于2-12等份。 1Dwell 2Dwell 3Dwell 4Dwell 右旋向凸轮 R, R2, R3, R4 左旋向凸轮 L, L2, L3, L4	L, L2, L3, L4 左旋向凸轮

g入力轴组立方向	h本体安装螺丝孔面	i安装位置	j特殊规格说明
S3 T面及U面两端	VW	1	X
S1 只有T面 S2 只有U面 S3 T面及U面皆有	主壳及机体安装螺丝孔在V及W面皆有固定孔，此外，P、S、T、U也可以选择使用。	安装位置如下图	订购外部特殊指定要求 标准（不加符号） X 特别指定注明
S1  S2  S3 	1  GL(W) 2  GL(V) 3  GL(U) 4  GL(T) 5  GL(P) 6  GL(S)		


45DS

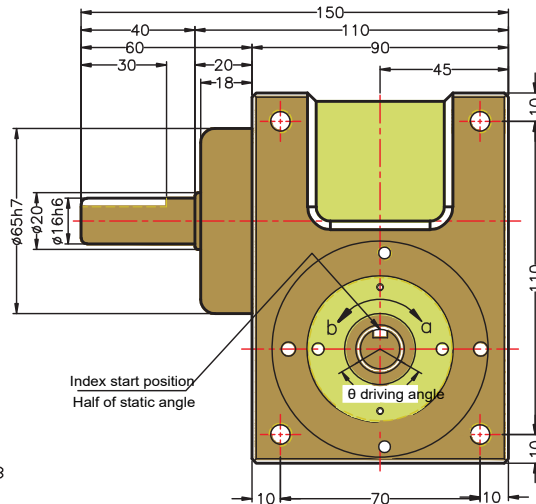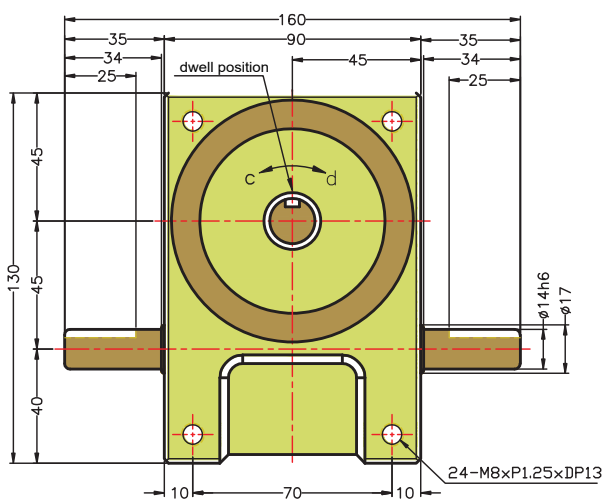


Scale 1:2



Input shaft



output shaft






Scale 1:2

Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	80	Allowable radial load on input shaft	C3	Kgf	85	GD ² of input shaft (Note1)	C6	Kgf-m ²	3.2x10 ⁻⁵
Allowable axial load on output shaft	C2	Kgf	72.5	Max. bending force on input shaft	C4	Kgf	75	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	4	Weight		Kg	7


Note1:GD² of input shaft is a value in dwell range.

Note 2:Value of C1 to C5 are those obtained for safety factor=2.


60DS

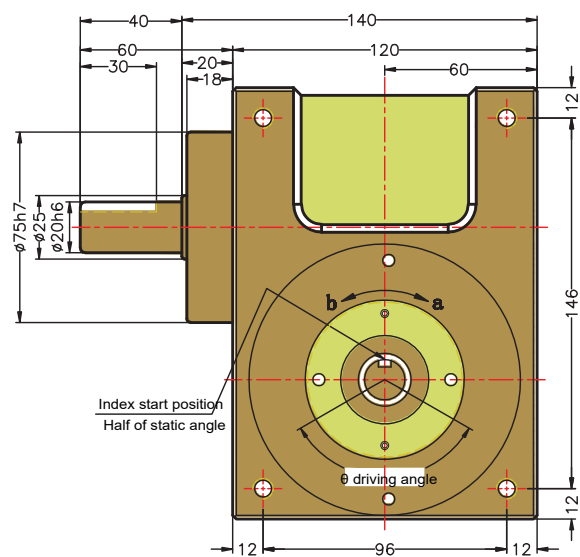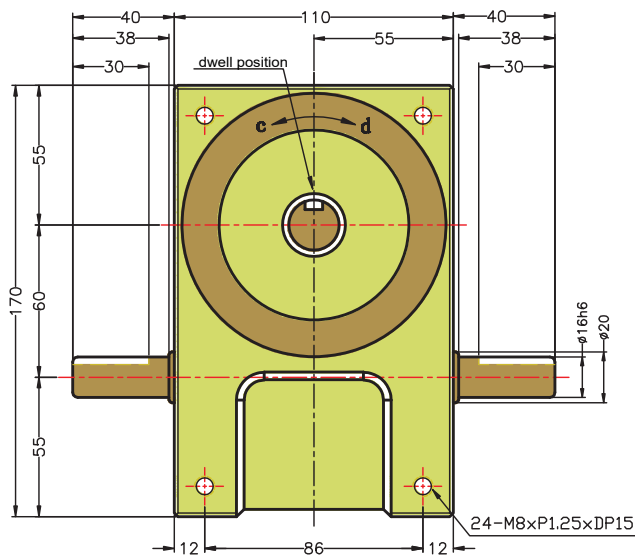


Scale 1:2



Input shaft



output shaft






Scale 1:2

Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	180	Allowable radial load on input shaft	C3	Kgf	100	GD ² of input shaft (Note1)	C6	Kgf-m ²	1.9x10 ⁻³
Allowable axial load on output shaft	C2	Kgf	150	Max. bending force on input shaft	C4	Kgf	95	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	6	Weight		Kg	13


Note1:GD² of input shaft is a value in dwell range.

Note 2:Value of C1 to C5 are those obtained for safety factor=2.


63DS

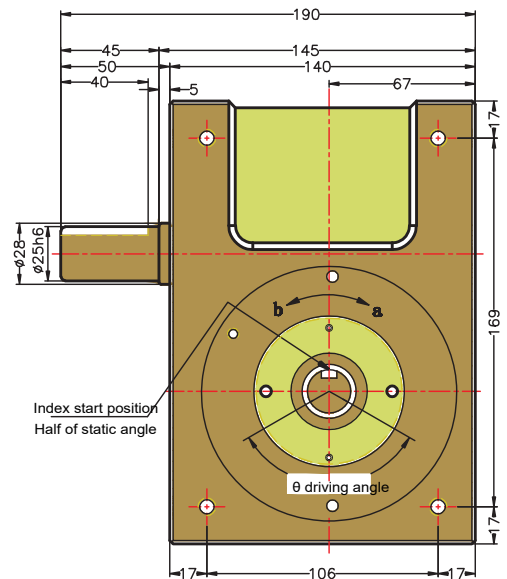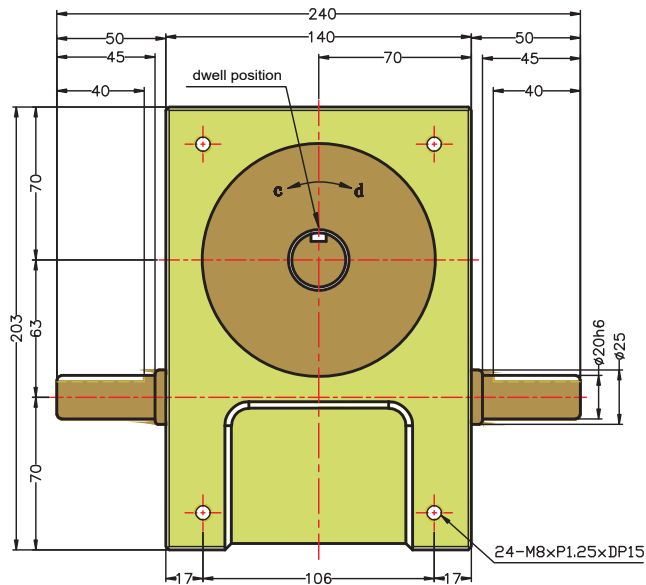


Scale 1:2



Input shaft



output shaft




Scale 1:2

Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	180	Allowable radial load on input shaft	C3	Kgf	100	GD ² of input shaft (Note1)	C6	Kgf-m ²	1.9x10 ⁻³
Allowable axial load on output shaft	C2	Kgf	150	Max. bending force on input shaft	C4	Kgf	95	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	6	Weight		Kg	15

Note1:GD² of input shaft is a value in dwell range.

Note 2:Value of C1 to C5 are those obtained for safety factor=2.

70DS



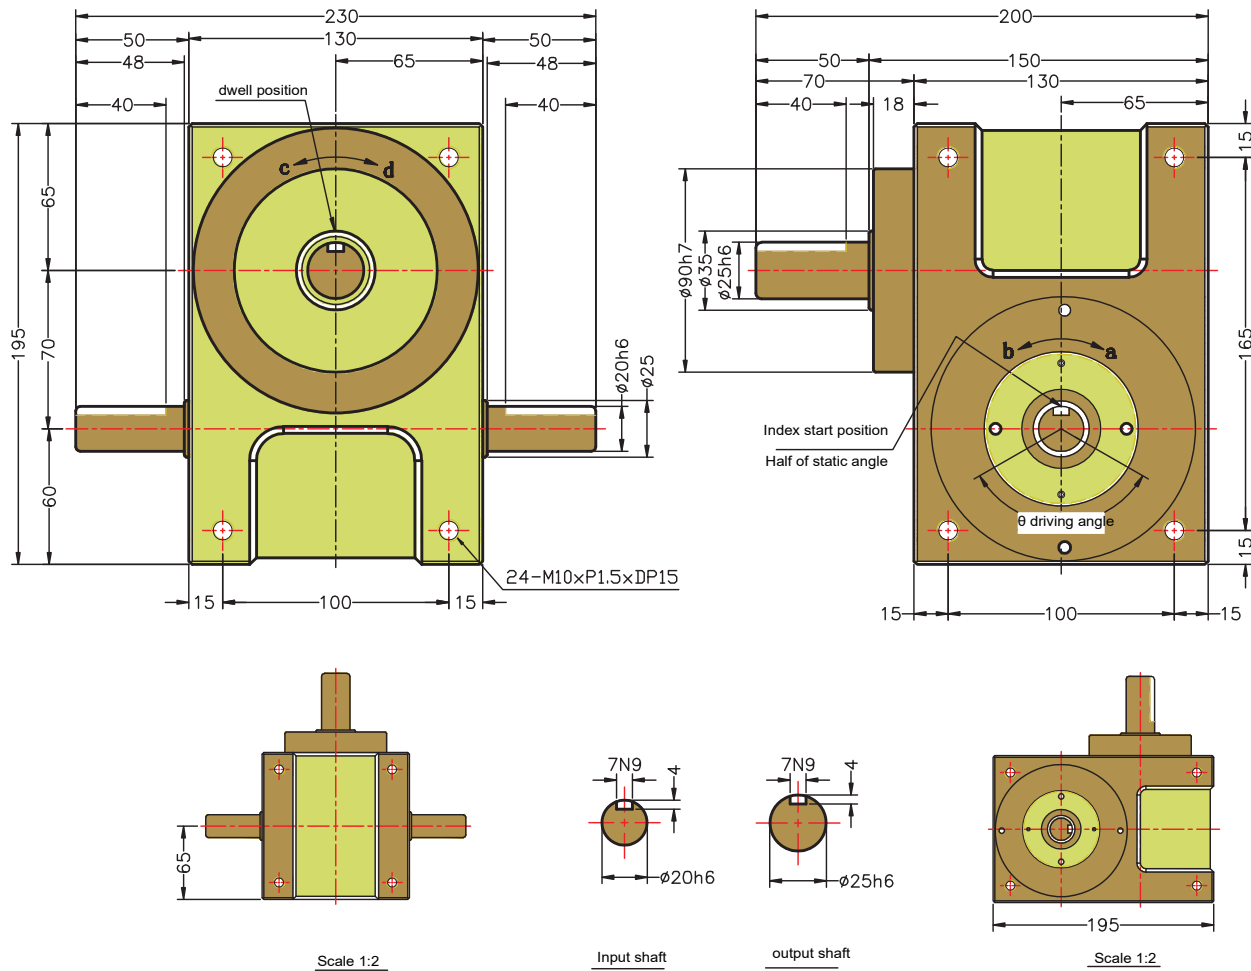


Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	220	Allowable radial load on input shaft	C3	Kgf	150	GD ² of input shaft (Note1)	C6	Kgf-m ²	6x10 ⁻³
Allowable axial load on output shaft	C2	Kgf	220	Max. bending force on input shaft	C4	Kgf	110	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	9.5	Weight		Kg	18


Note1:GD² of input shaft is a value in dwell range.

Note 2: Value of C1 to C5 are those obtained for safety factor=2.


80DS

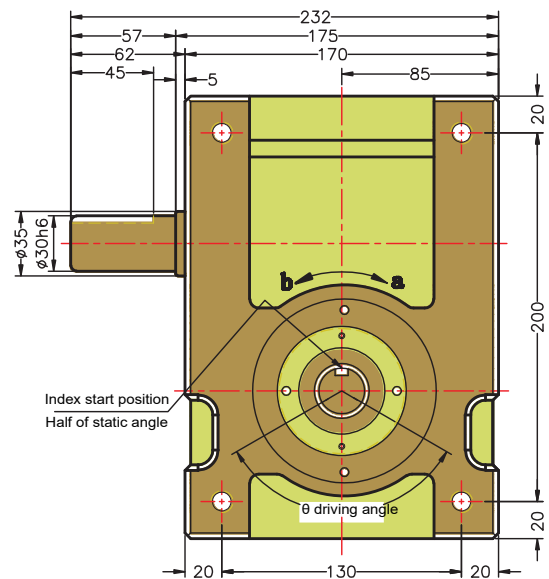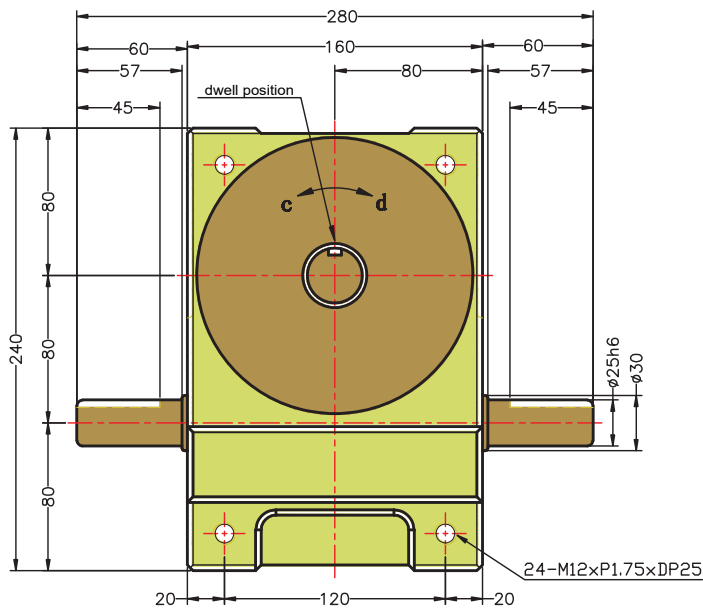


Scale 1:2



Input shaft



output shaft




Scale 1:2

Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	220	Allowable radial load on input shaft	C3	Kgf	210	GD ² of input shaft (Note1)	C6	Kgf-m ²	9x10 ⁻³
Allowable axial load on output shaft	C2	Kgf	220	Max. bending force on input shaft	C4	Kgf	190	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	18.5	Weight		Kg	32

Note1:GD² of input shaft is a value in dwell range.

Note 2: Value of C1 to C5 are those obtained for safety factor=2.

83DS

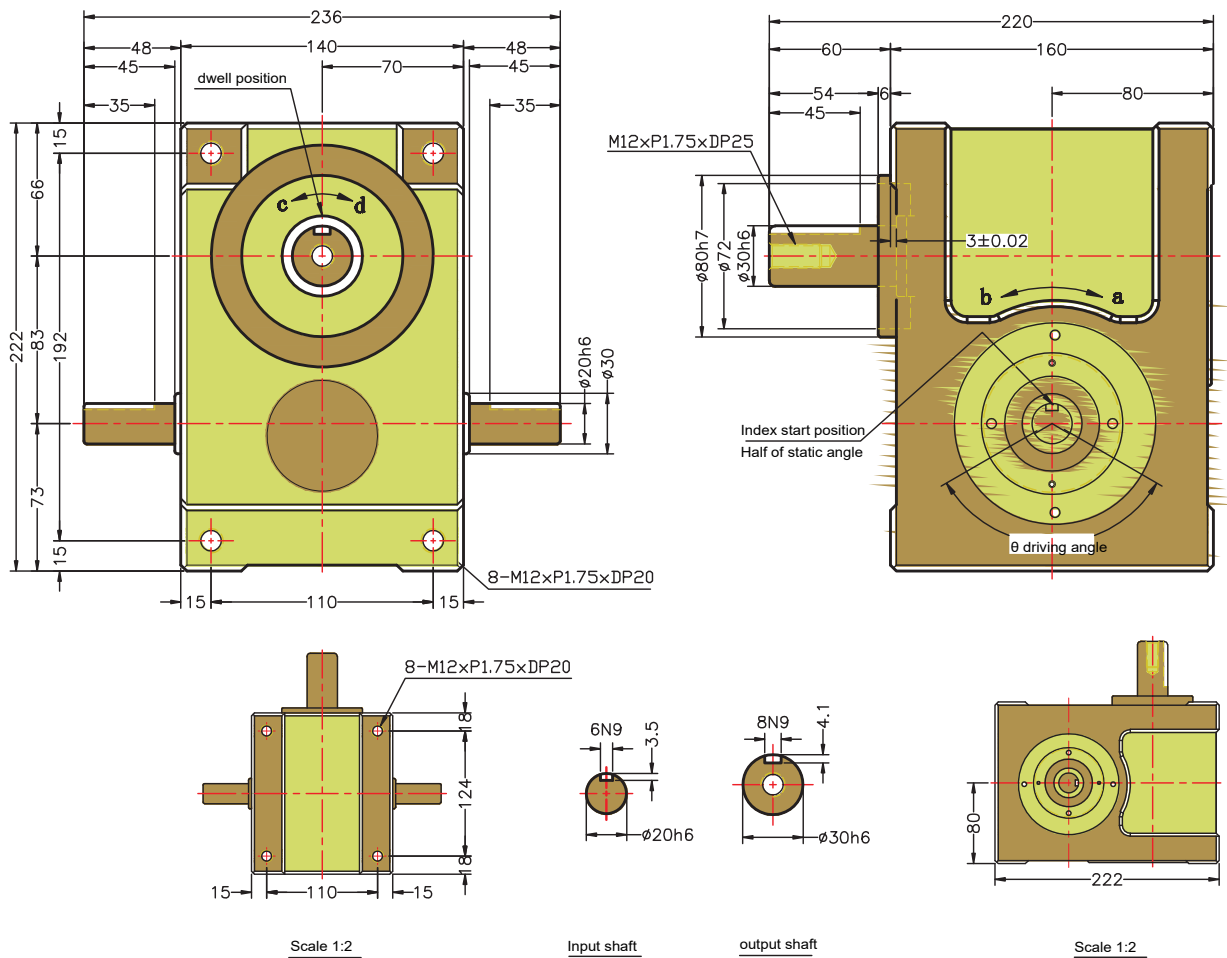


Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	330	Allowable radial load on input shaft	C3	Kgf	350	GD ² of input shaft (Note1)	C6	Kgf-m ²	9x10 ⁻³
Allowable axial load on output shaft	C2	Kgf	420	Max. bending force on input shaft	C4	Kgf	260	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	25	Weight		Kg	26.5

Note1:GD² of input shaft is a value in dwell range.

Note 2:Value of C1 to C5 are those obtained for safety factor=2.

100DS

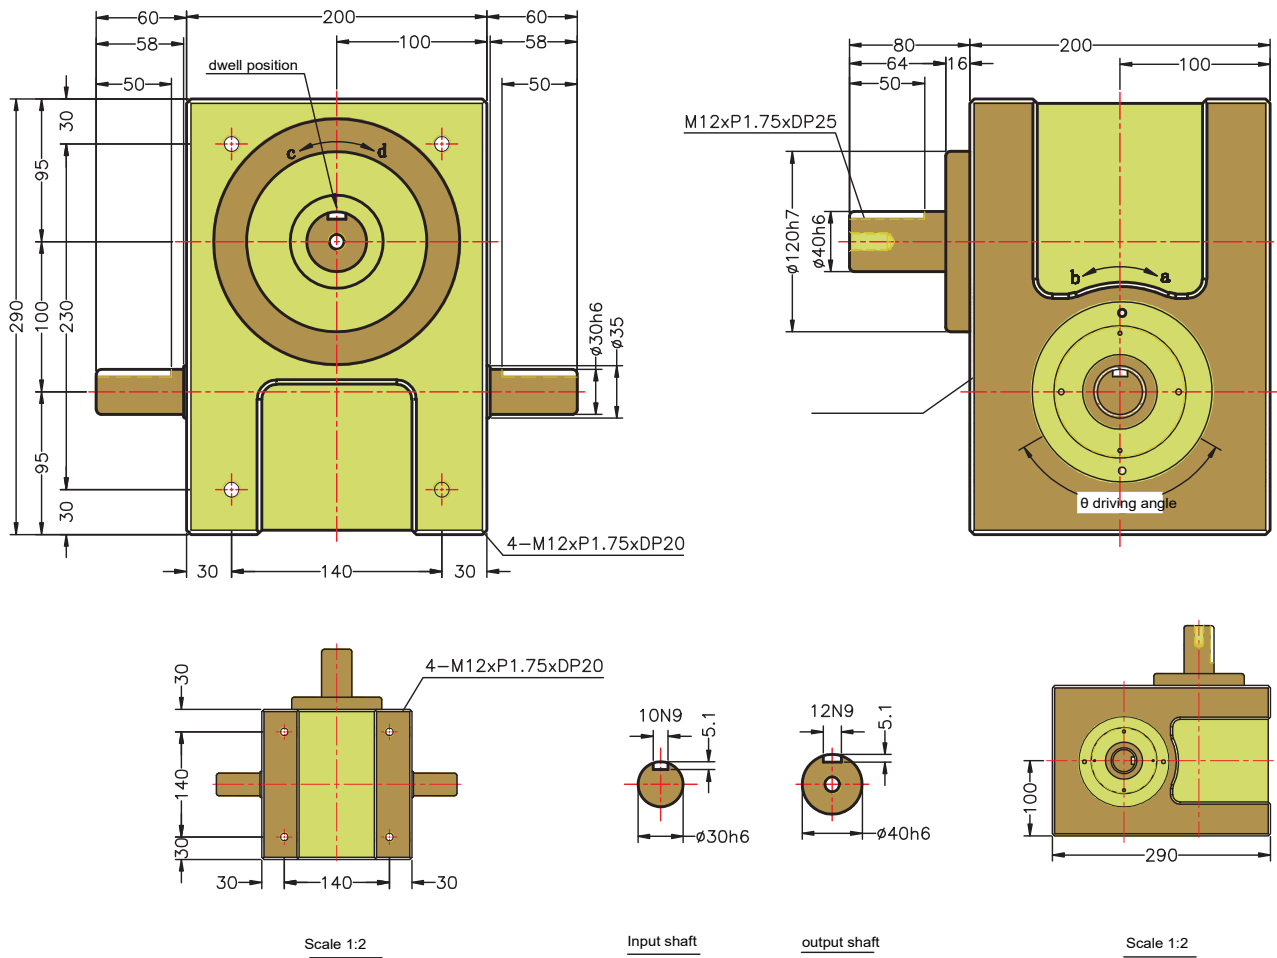


Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	400	Allowable radial load on input shaft	C3	Kgf	300	GD ² of input shaft (Note1)	C6	Kgf-m ²	4x10 ⁻²
Allowable axial load on output shaft	C2	Kgf	450	Max. bending force on input shaft	C4	Kgf	200	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	26	Weight		Kg	50

Note1:GD² of input shaft is a value in dwell range.

Note 2:Value of C1 to C5 are those obtained for safety factor=2.

110DS



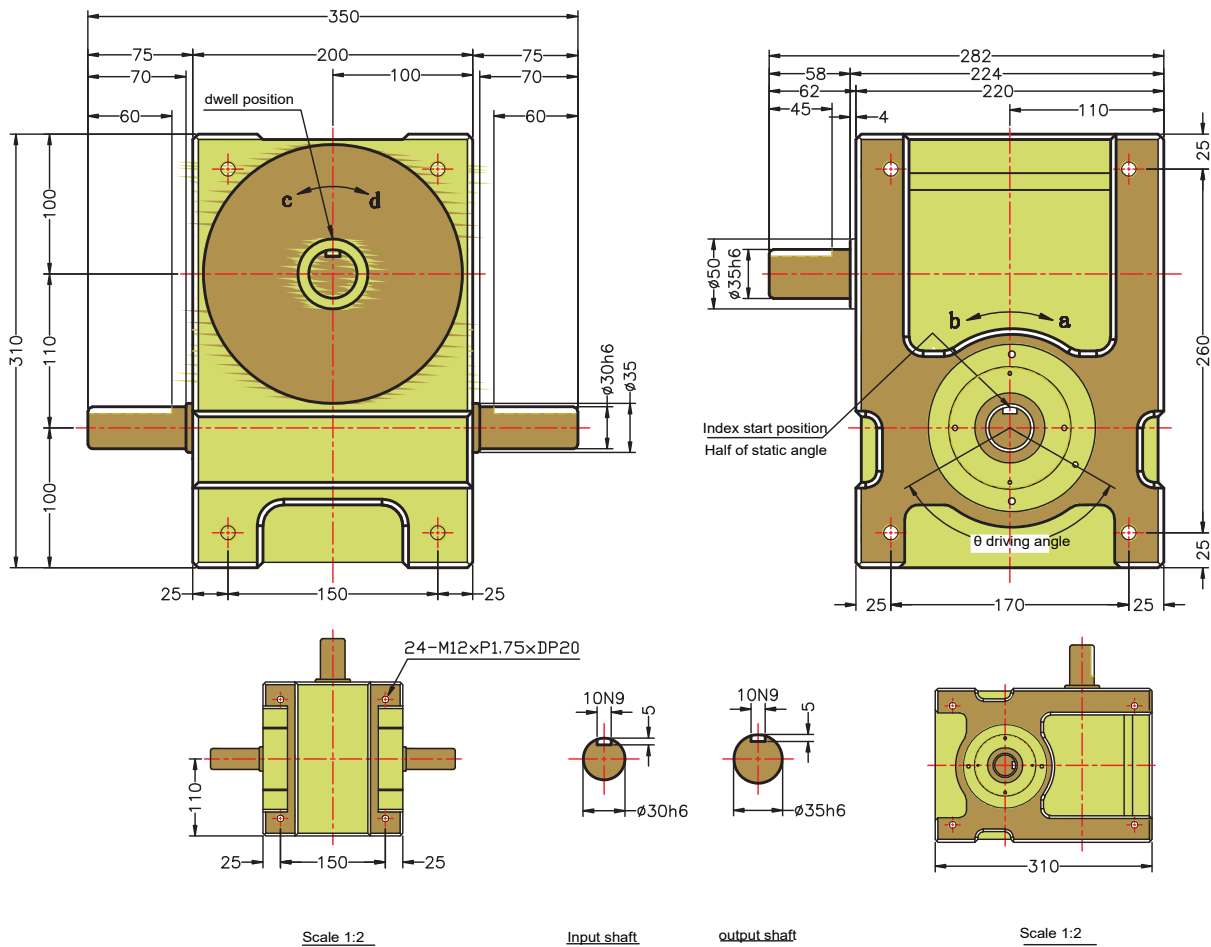


Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	500	Allowable radial load on input shaft	C3	Kgf	360	GD ² of input shaft (Note1)	C6	Kgf-m ²	2.8×10^{-2}
Allowable axial load on output shaft	C2	Kgf	550	Max. bending force on input shaft	C4	Kgf	290	Indexing accuracy		Sec.	± 30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	32	Weight		Kg	65


Note1: GD² of input shaft is a value in dwell range.

Note 2: Value of C1 to C5 are those obtained for safety factor=2.


125DS

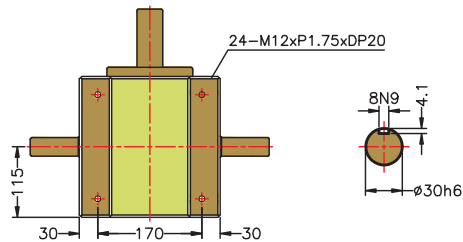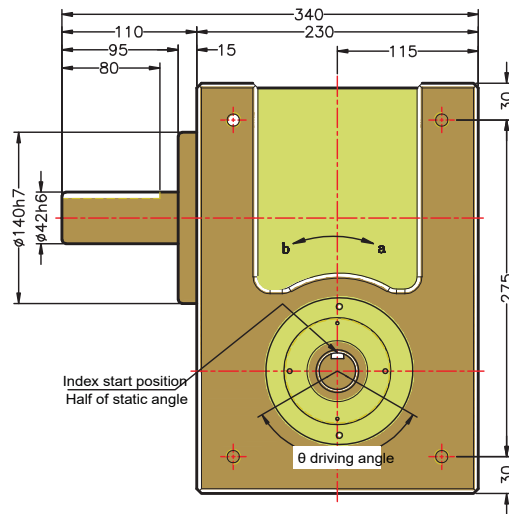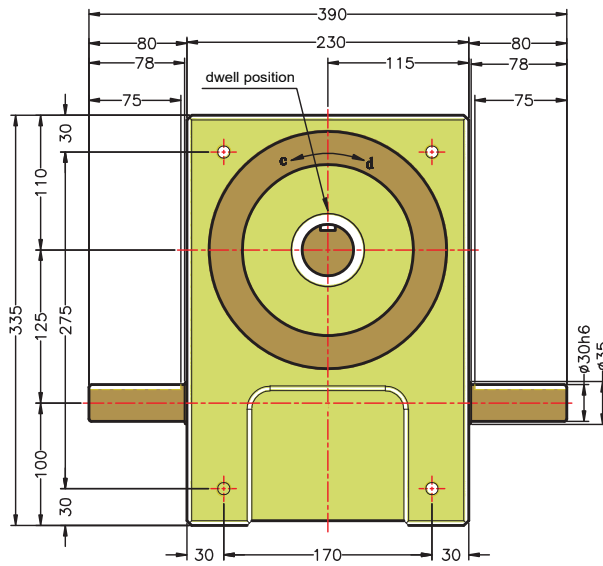


Scale 1:2



Input shaft



output shaft






Scale 1:2

Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	600	Allowable radial load on input shaft	C3	Kgf	400	GD ² of input shaft (Note1)	C6	Kgf-m ²	0.02
Allowable axial load on output shaft	C2	Kgf	630	Max. bending force on input shaft	C4	Kgf	420	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	50	Weight		Kg	75


Note1:GD² of input shaft is a value in dwell range.

Note 2:Value of C1 to C5 are those obtained for safety factor=2.


140DS

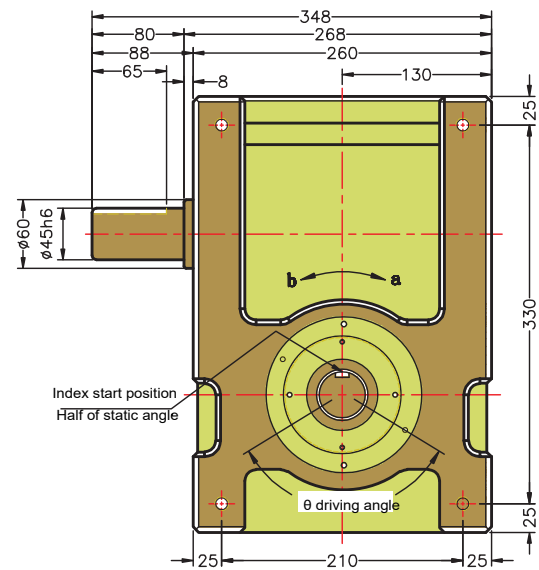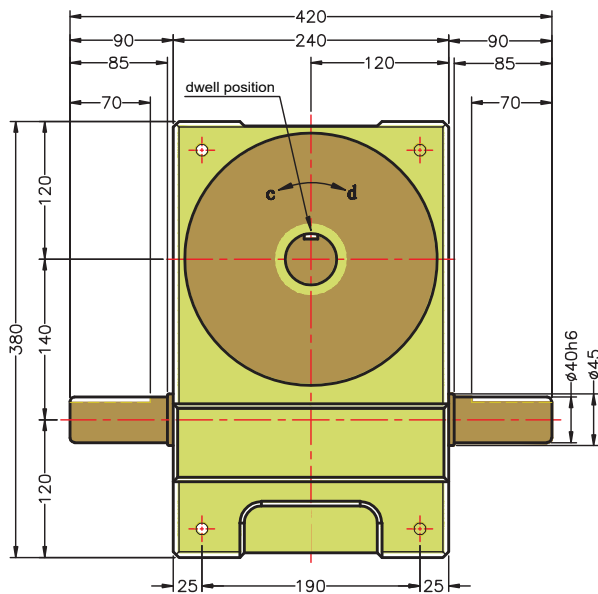


Scale 1:2



Input shaft



output shaft




Scale 1:2

Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	730	Allowable radial load on input shaft	C3	Kgf	440	GD ² of input shaft (Note1)	C6	Kgf-m ²	0.11
Allowable axial load on output shaft	C2	Kgf	860	Max. bending force on input shaft	C4	Kgf	560	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	75	Weight		Kg	90

Note1:GD² of input shaft is a value in dwell range.

Note 2:Value of C1 to C5 are those obtained for safety factor=2.

180DS

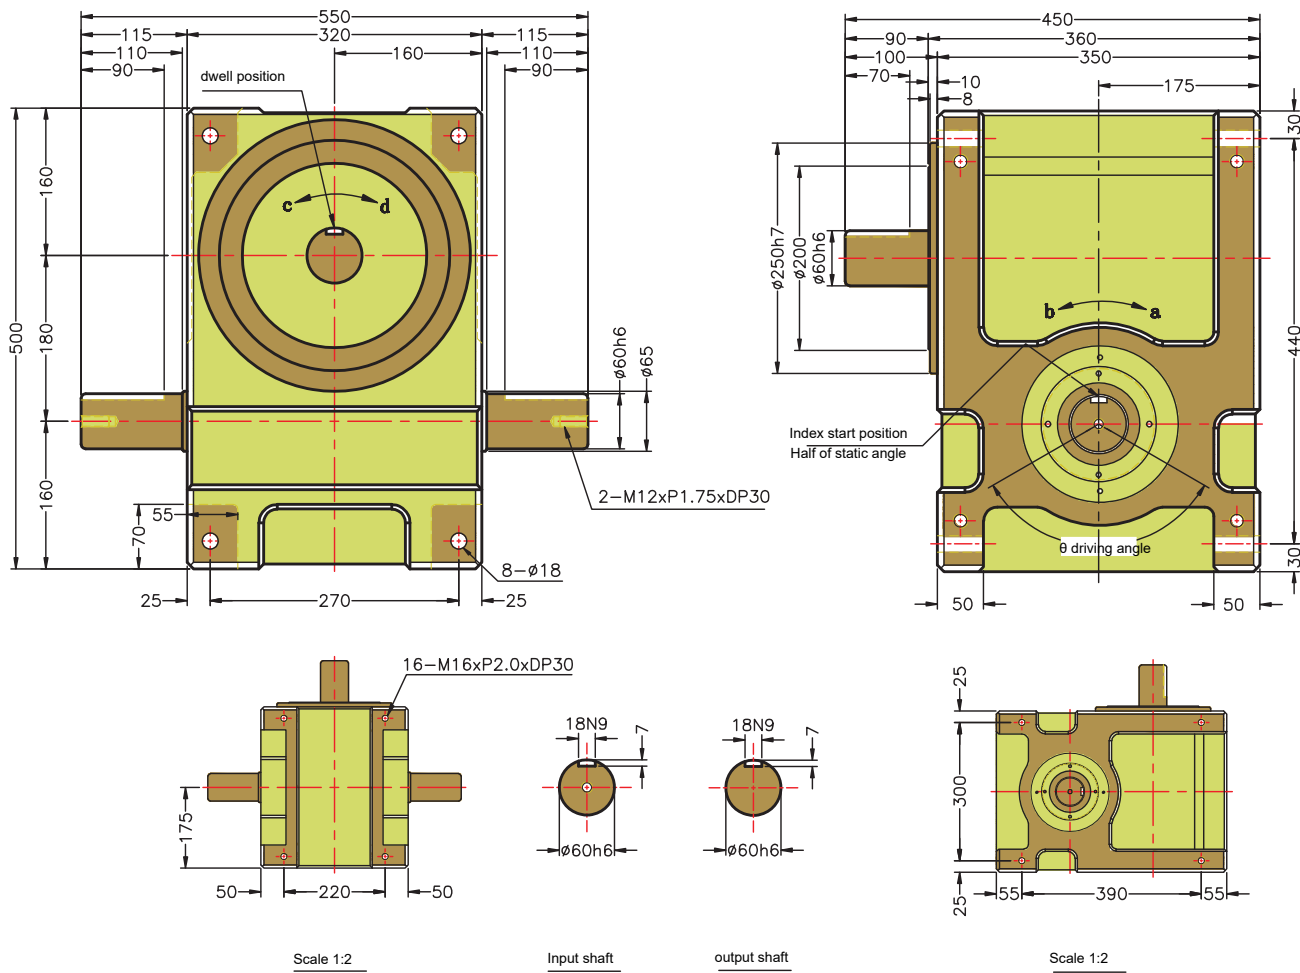

Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	1200	Allowable radial load on input shaft	C3	Kgf	590	GD ² of input shaft (Note1)	C6	Kgf-m ²	0.39
Allowable axial load on output shaft	C2	Kgf	1500	Max. bending force on input shaft	C4	Kgf	1045	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	147	Weight		Kg	220

Note1:GD² of input shaft is a value in dwell range.

Note 2:Value of C1 to C5 are those obtained for safety factor=2.

DE系列



DE心轴凸缘型分割器


45DE, 60DE, 70DE, 80DE, 110DE, 140DE, 180DE,

此系列机种具有心轴型和凸缘型一体的输出轴形式，以便工作台、摆臂或链轮等附件安装起来更简便，为客户选型提供了多元化的解决方案。












凸缘/心轴型分割器型号代码

Model Code机种选购指定代号排列标示方法：

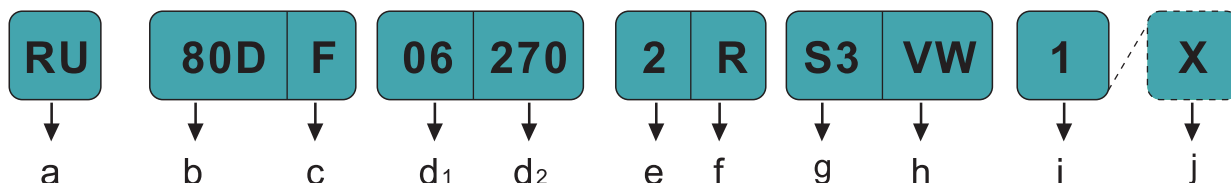


a 机种	b 规格	c 形式	d ₁ 分割等份 (s)	d ₂ 驱动角 (θ h)
RU 滚子凸轮	80D 80mm	F Type	06 6stop	270 270°
	出力轴与入力轴之间的距离 45D/60D/63D/ 70D/80D/83D/ 100D/110D/125D/ 140D/180D/250D/	F 凸缘型 S 心轴型 E 心轴凸缘型	定位分割等份 2,3,4,5,6, 8,10,12,16 定制规格 20,24,30, 32,36,40,48	入力凸轮驱动出力轴分割之角度 90° /120° 150° /180° 210° /240° 270° /300°

e 凸轮运动曲线	f 凸轮旋转方向	
2 Ms曲线	R 间歇驱动之右旋向凸轮	R, R2, R3, R4 右旋向凸轮
1, 2, 3 1 变形台形曲线MT (Modified Tropezoid) 2 变形正弦曲线MS (Modified Sine) 3 变形等速度曲线 MCV50 (Modified Constant Vclcity 50)	入力轴均可以正逆向旋转，如果入力轴无固定旋向要求，只需要变更马达旋转方向即可达到出力轴旋转方向的要求。请选择标准生产规格R旋向，R2-R4为入力轴一旋转，出力轴多次间歇分割等份，多用于16-60等份，R为入力轴一旋转，出力轴一次接卸分割等份，多用于2-12等份。 1Dwell 2Dwell 3Dwell 4Dwell 右旋向凸轮 R, R2, R3, R4 左旋向凸轮 L, L2, L3, L4	L, L2, L3, L4 左旋向凸轮

g入力轴组立方向	h本体安装螺丝孔面	i安装位置	j特殊规格说明
S3 T面及U面两端 S1 只有T面 S2 只有U面 S3 T面及U面皆有	VW 主壳及机体安装螺丝孔在V及W面皆有固定孔，此外，P、S、T、U也可以选择使用。	1 安装位置如下图	X 订购外部特殊指定要求 标准（不加符号） X 特别指定注明
S1  S2  S3 	1  GL(W) 2  GL(V) 3  GL(U) 4  GL(T) 5  GL(P) 6  GL(S)		

45DE

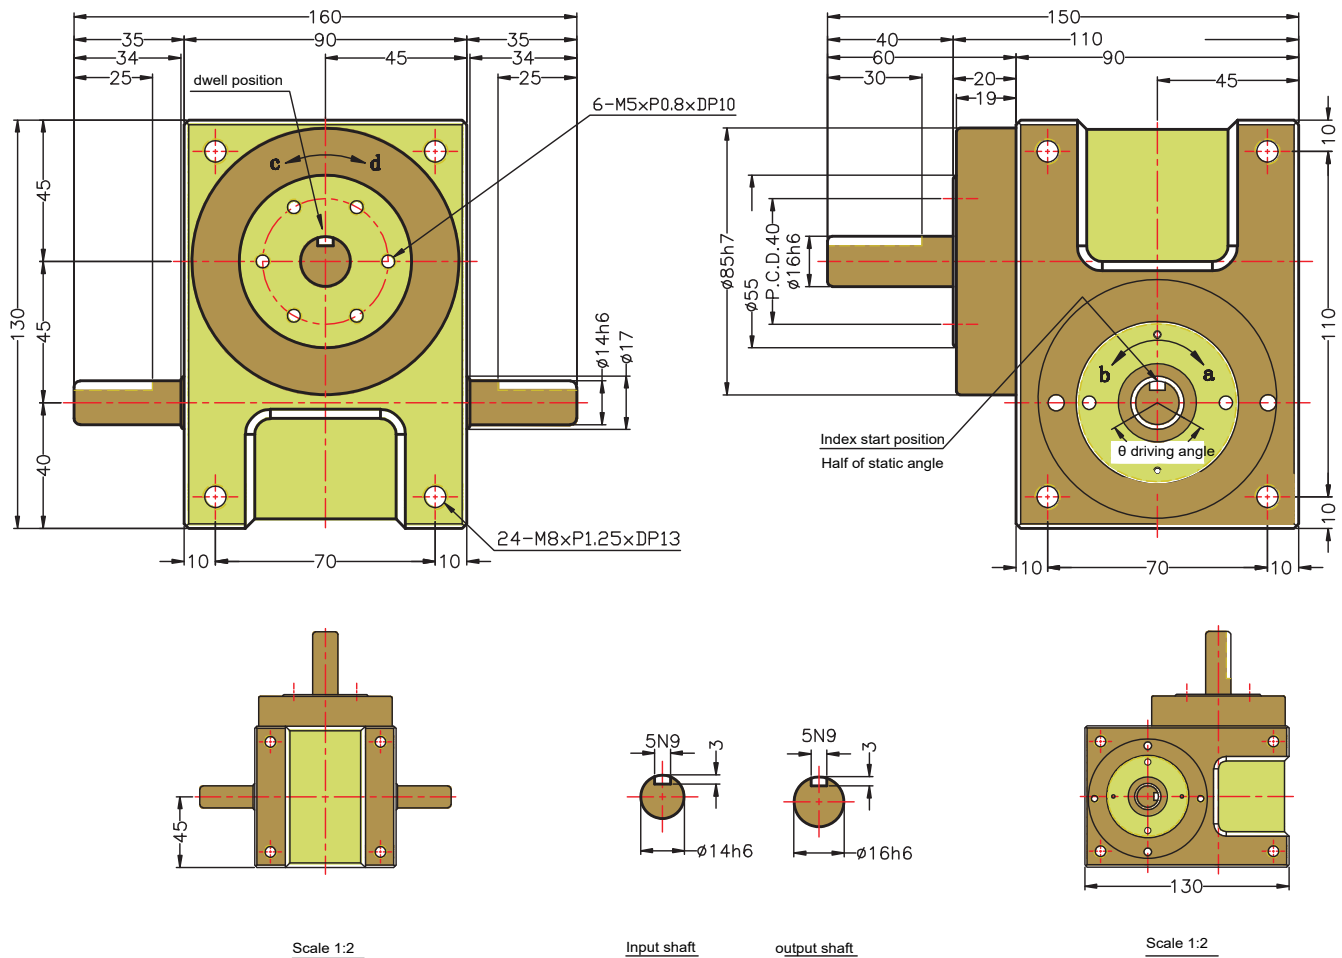


Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	130	Allowable radial load on input shaft	C3	Kgf	85	GD ² of input shaft (Note1)	C6	Kgf-m ²	3.2x10 ⁻⁴
Allowable axial load on output shaft	C2	Kgf	140	Max. bending force on input shaft	C4	Kgf	110	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	4	Weight		Kg	7

Note1:GD² of input shaft is a value in dwell range.

Note 2: Value of C1 to C5 are those obtained for safety factor=2.

70DE

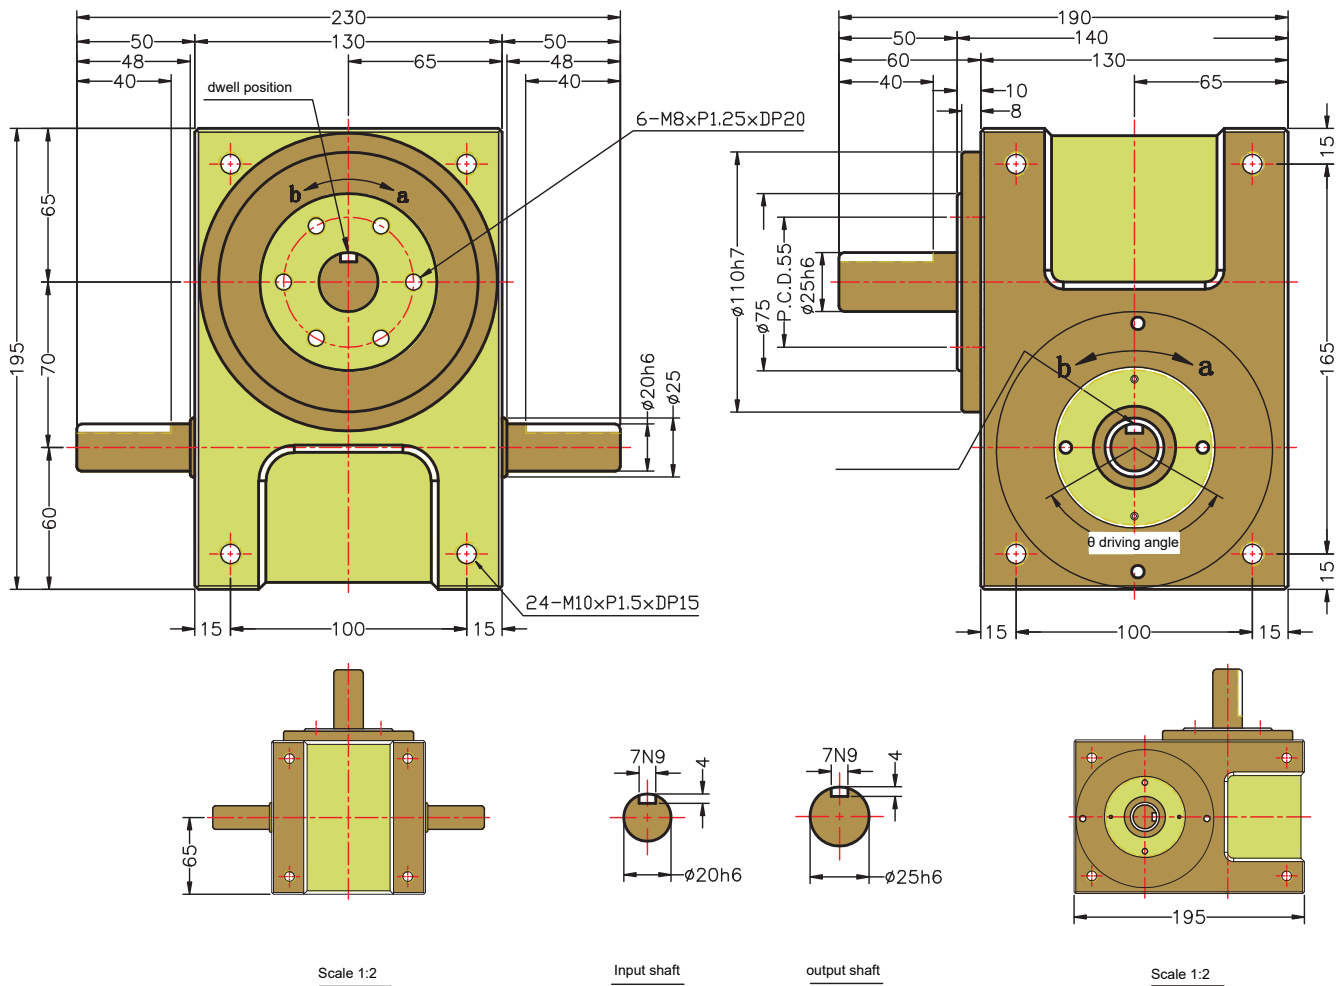


Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	220	Allowable radial load on input shaft	C3	Kgf	150	GD ² of input shaft (Note1)	C6	Kgf-m ²	6x10 ⁻³
Allowable axial load on output shaft	C2	Kgf	300	Max. bending force on input shaft	C4	Kgf	110	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	9.5	Weight		Kg	18

Note1:GD² of input shaft is a value in dwell range.

Note 2:Value of C1 to C5 are those obtained for safety factor=2.

80DE

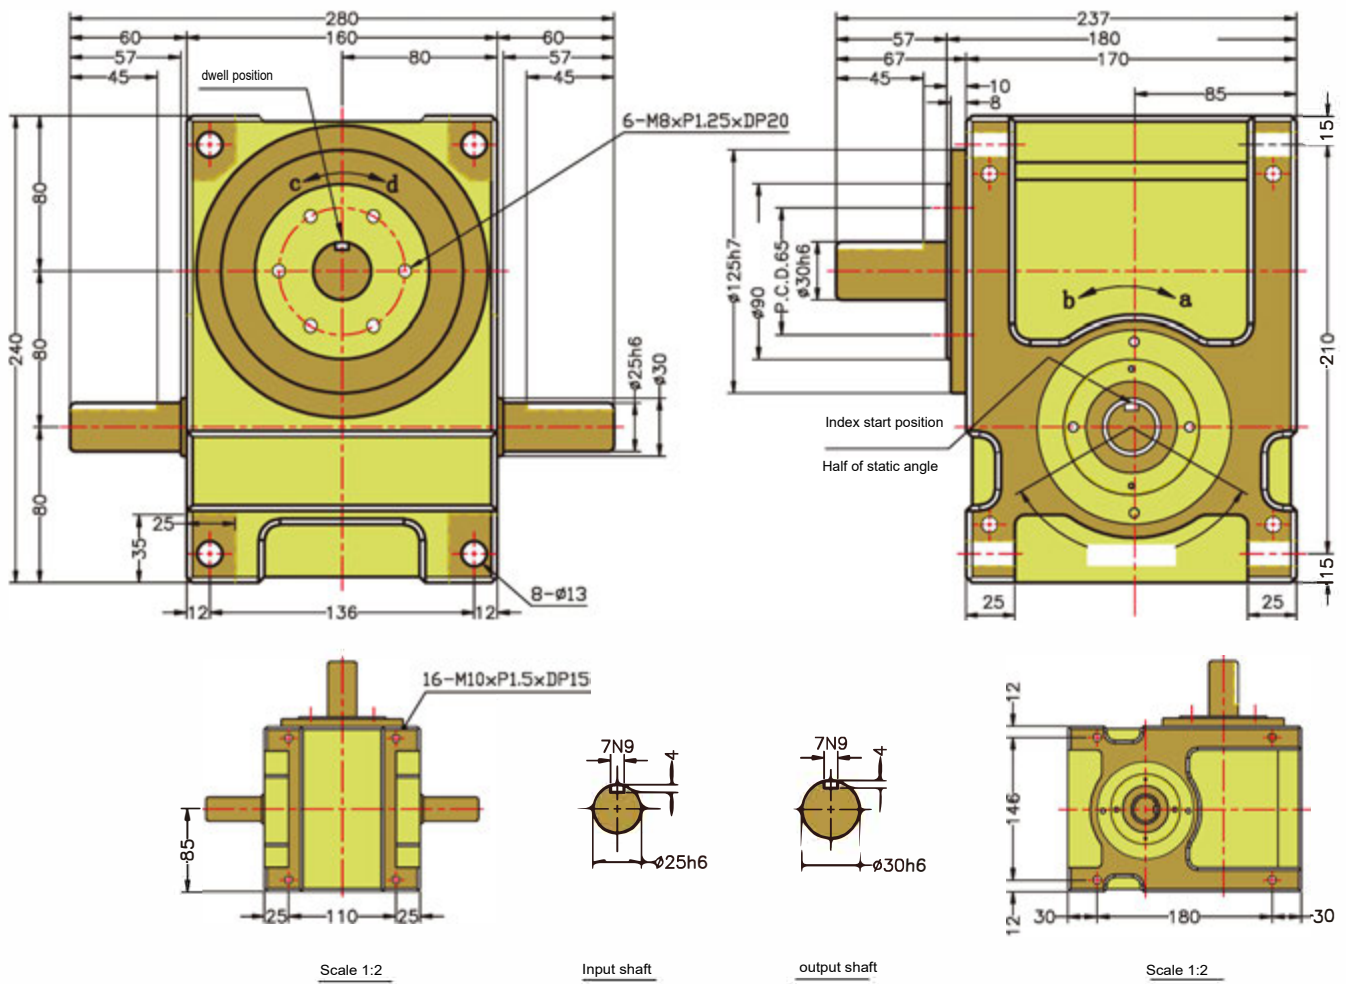


Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	330	Allowable radial load on input shaft	C3	Kgf	350	GD ² of input shaft (Note1)	C6	Kgf-m ²	9x10 ⁻³
Allowable axial load on output shaft	C2	Kgf	420	Max. bending force on input shaft	C4	Kgf	260	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	18.5	Weight		Kg	32

Note1:GD² of input shaft is a value in dwell range.

Note 2:Value of C1 to C5 are those obtained for safety factor=2.

110DE

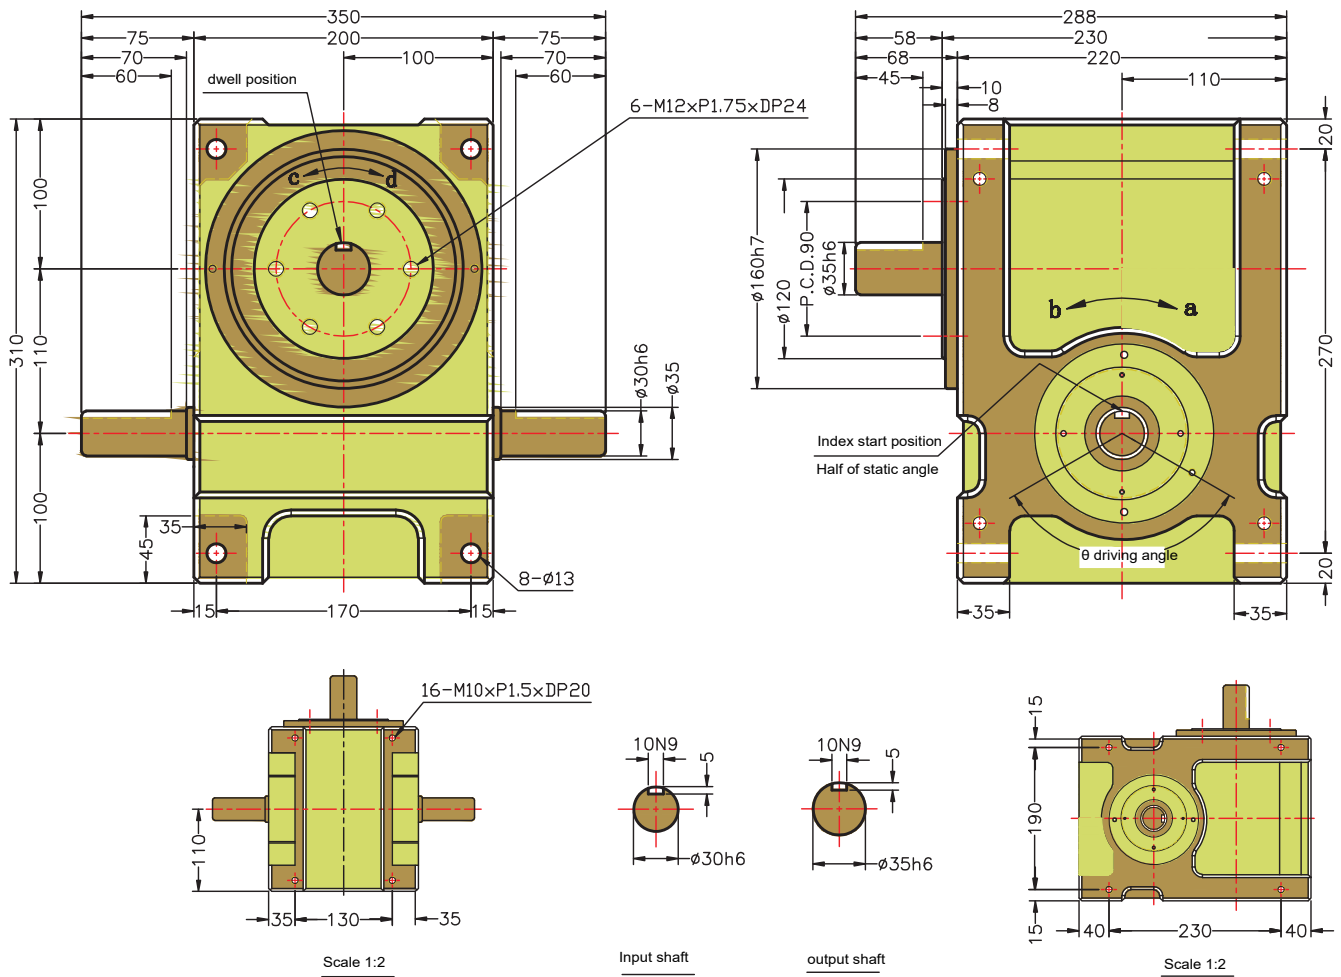


Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	560	Allowable radial load on input shaft	C3	Kgf	480	GD ² of input shaft (Note1)	C6	Kgf-m ²	2.8×10^{-2}
Allowable axial load on output shaft	C2	Kgf	700	Max. bending force on input shaft	C4	Kgf	415	Indexing accuracy		Sec.	± 30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	40	Weight		Kg	65

Note1: GD² of input shaft is a value in dwell range.

Note 2: Value of C1 to C5 are those obtained for safety factor=2.

140DE






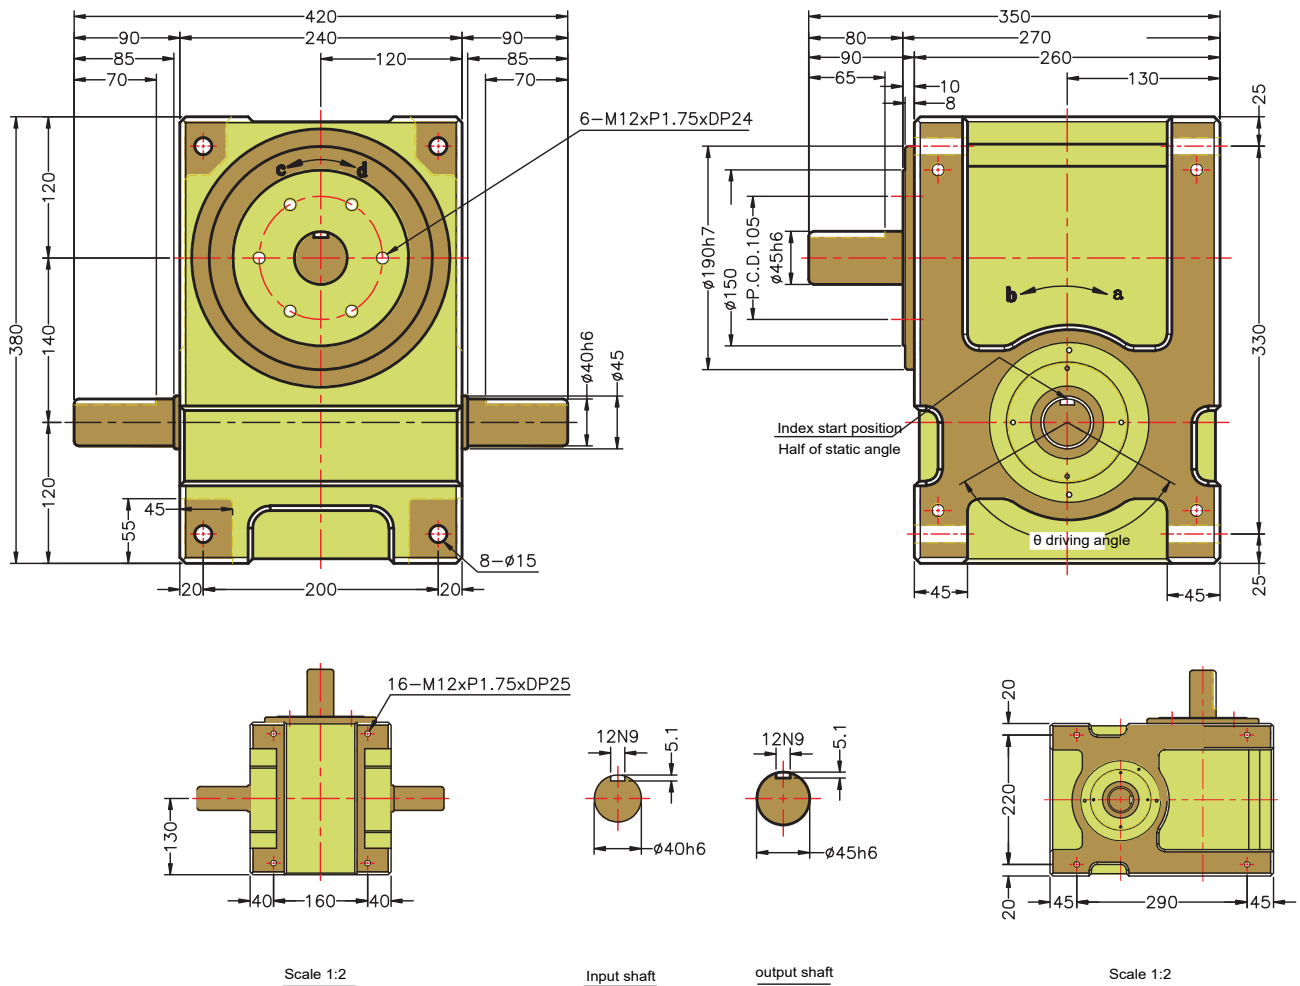


Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	760	Allowable radial load on input shaft	C3	Kgf	550	GD ² of input shaft (Note1)	C6	Kgf-m ²	0.11
Allowable axial load on output shaft	C2	Kgf	1000	Max. bending force on input shaft	C4	Kgf	710	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	100	Weight		Kg	90

Note1:GD² of input shaft is a value in dwell range.

Note 2: Value of C1 to C5 are those obtained for safety factor=2.

180DE

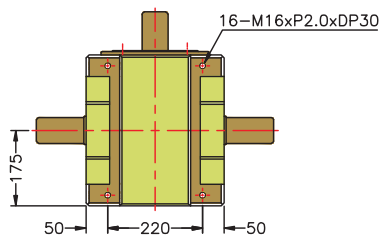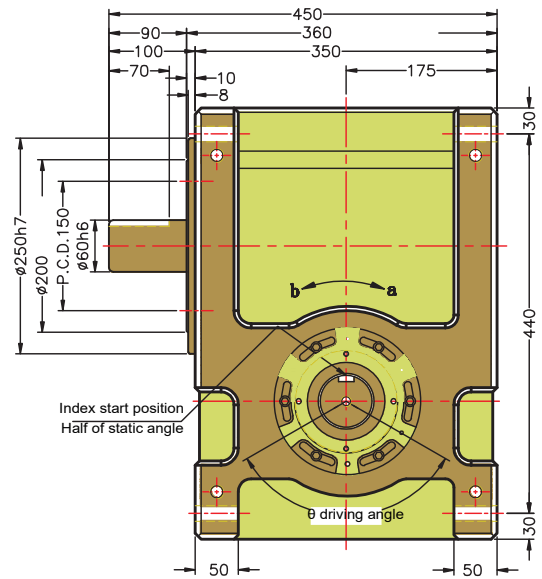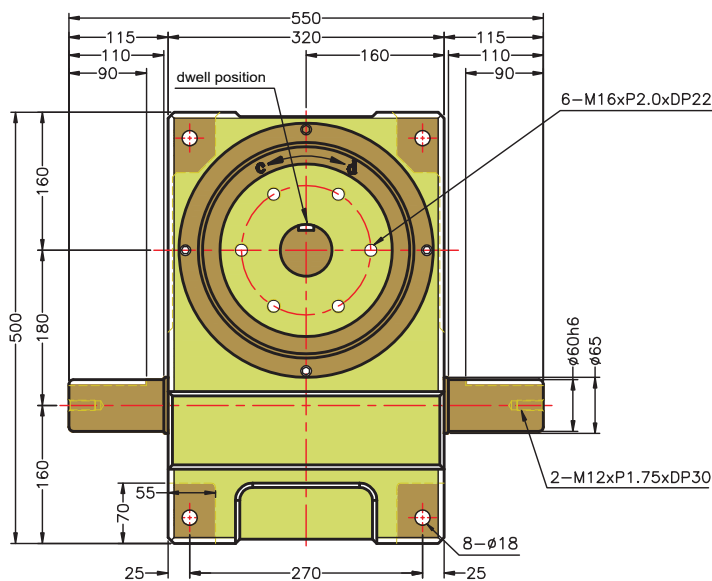

Scale 1:2

Input shaft

output shaft

Scale 1:2

Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	1200	Allowable radial load on input shaft	C3	Kgf	1100	GD ² of input shaft (Note1)	C6	Kgf-m ²	0.39
Allowable axial load on output shaft	C2	Kgf	1500	Max. bending force on input shaft	C4	Kgf	1960	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	340	Weight		Kg	220

Note1:GD² of input shaft is a value in dwell range.

Note 2: Value of C1 to C5 are those obtained for safety factor=2.



DA系列



DA超薄平台桌面型分割器

70DA,90DA,110DA,150DA,190DA,230DA,330DA,
450DA

DA系列机型设计特性与DT桌面平台型功能一样，可安装旋转盘与静止盘。旋转盘驱动时可承受超大轴向负载及垂直径向压力，输出端面凸起的可安装静止盘。大孔径空心轴，可配合设置动态、静态自动化借口设备，可将电、油、气管路置于空心之内，此机型广泛用于重负载、多工艺、复合型产品的装配及各类产业机器，外形设计超薄适合在紧凑空间里安装，节省设备安装空间。





DA超薄平台桌面型分割器型号代码

Model Code 机种选购指定代号排列标示方法：

RU a	70D b	A c	04 d₁	270 d₂	2 e	R f	S3 g	VW h	1 i	X j
a 机种	d 规格	c 形式	d ₁ 分割等份 (s)	d ₂ 驱动角 (θ h)	凸轮运动曲线					
R 滚子凸轮	70D 70mm	A Type	04 4stop	270 270°	2 Ms曲线					
出力轴与入力轴之间的距离 70DA/90DA/110DA/150DA/ 190DA/230DA/330DA/450DA		A超薄平台型	定位分割等份 4.5.6.8.10.12.16 定制规格 20.24.30.32.36. 40.48	入力轴凸 轮驱动出 力轴分割 之角度 90° /120° 150° /180° 210° /240° 270° /300°	1 变形台形曲线MTS 2 变形正弦曲线MS 3 变形等速度曲线MCV50					
f凸轮旋转方向										
R 间歇驱动之右旋向凸轮					L 间歇驱动之左旋向凸轮					
入力轴均可以正逆向旋转，如果入力轴无固定旋向要求，只需要变更马达旋转方向即可达到出力轴旋转方向的要求。R为单驱动，入力轴旋转一圈出力轴做一次间歇运动，多用于4~12等份,R2为双驱动，入力轴旋转180度，出力轴做一次间歇运动，多用于16等份以上R3、R4以此类推。										
R 1Dwell右旋向凸轮	R₂ 2Dwell右旋向凸轮	L 3Dwell左旋向凸轮		L₂ 4Dwell左旋向凸轮						
g入力轴安装方向			h本体安装螺丝孔面		i安装位置		j特殊规格说明			
S3 T面及U面两端			VW 主壳及机体安装螺丝孔 在V及W面皆有固定孔		1 安装位置如下图		X 订购外部特殊指定要求 标准（不加符号） 特别指定注明			
S1 只有T面			1 GL(W)				2 GL(V)			
S2 只有U面										
S3 T面及U面皆有					3 GL(P)					


如何订购

- 1.本体安装螺丝孔面有V.W.P.S.T.U六面，客户可依指定固定面之位置
- 2.机种号码表示入力凸轮及出力轴及螺丝孔安装位置
- 3.订购时，一定要在订单上附上所需要的机种型号，不论是右旋凸轮或是左旋凸轮都有一定的选择标准，同样的，四种型式的运动曲线（MT、MS、MCV50）也有选购标准

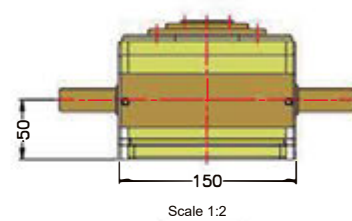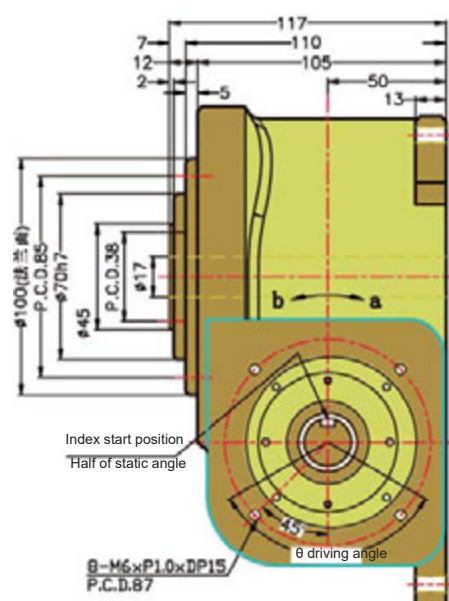

info@sango-automation.com

110DA

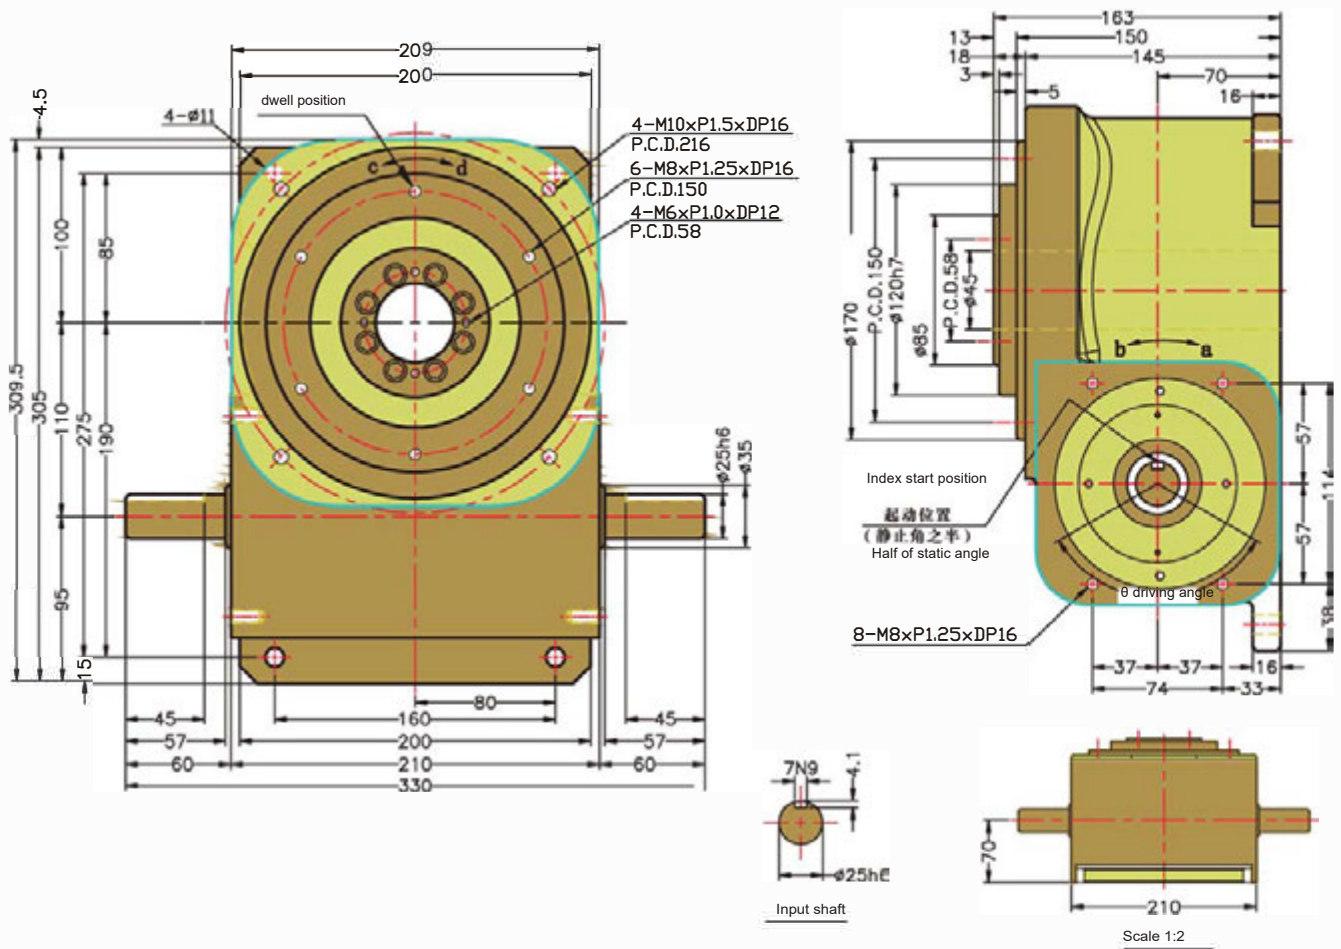


Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	700	Allowable radial load on input shaft	C3	Kgf	310	GD ² of input shaft (Note1)	C6	Kgf-m ²	6x10 ⁻⁵
Allowable axial load on output shaft	C2	Kgf	350	Max. bending force on input shaft	C4	Kgf	360	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	30	Weight		Kg	42

Note1:GD² of input shaft is a value in dwell range.

Note 2:Value of C1 to C5 are those obtained for safety factor=2.

150DA

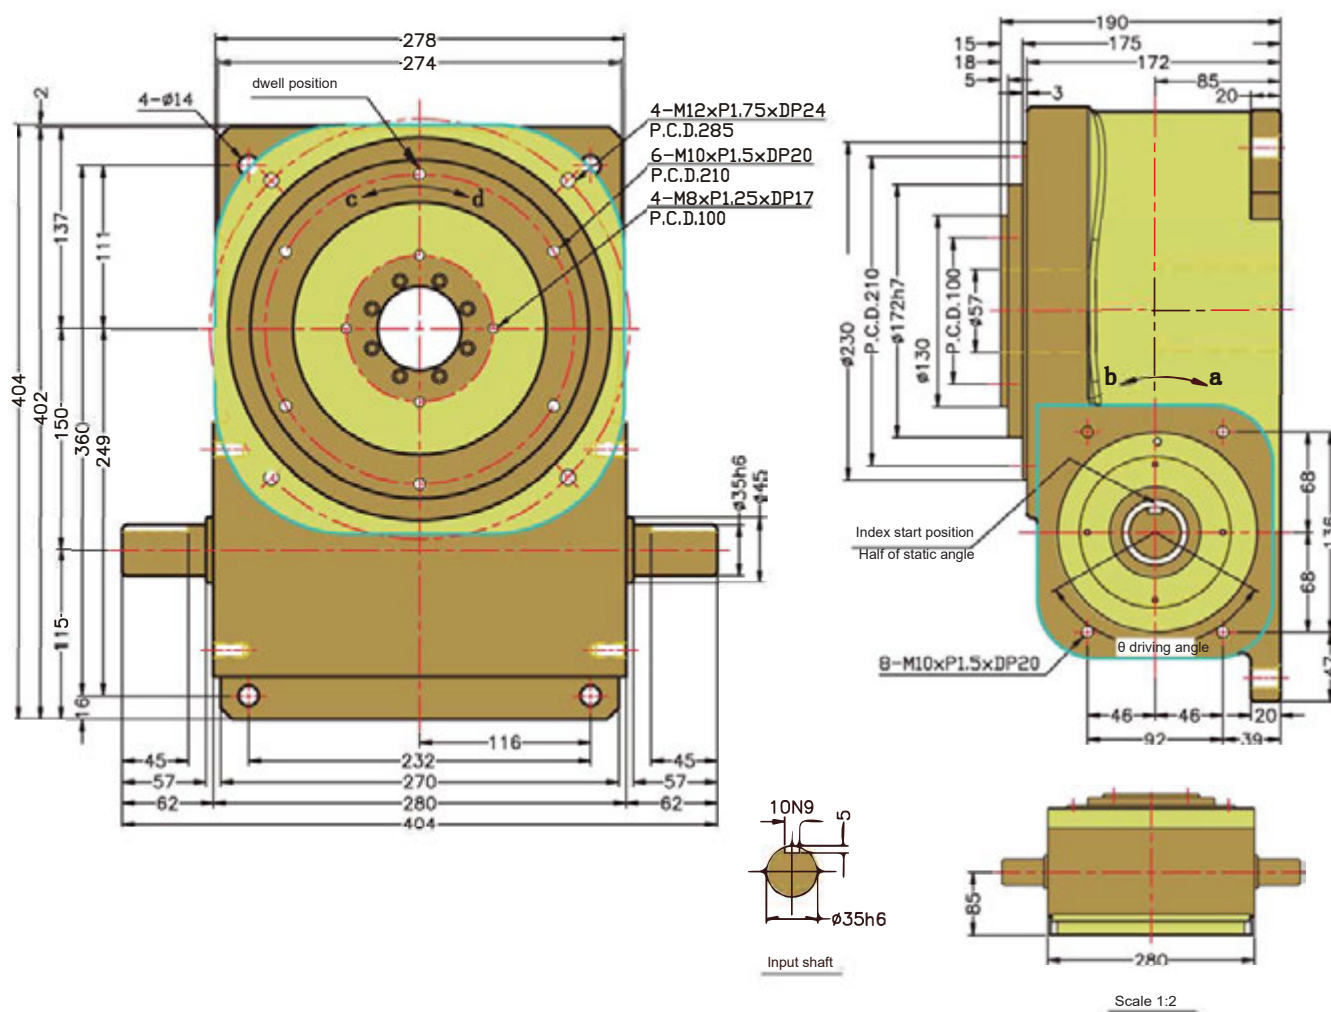


Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	1200	Allowable radial load on input shaft	C3	Kgf	410	GD ² of input shaft (Note1)	C6	Kgf-m ²	2.0x10 ⁻³
Allowable axial load on output shaft	C2	Kgf	700	Max. bending force on input shaft	C4	Kgf	410	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	40	Weight		Kg	86

Note1:GD² of input shaft is a value in dwelt range.

Note 2:Value of C1 to C5 are those obtained for safety factor=2.

190DA

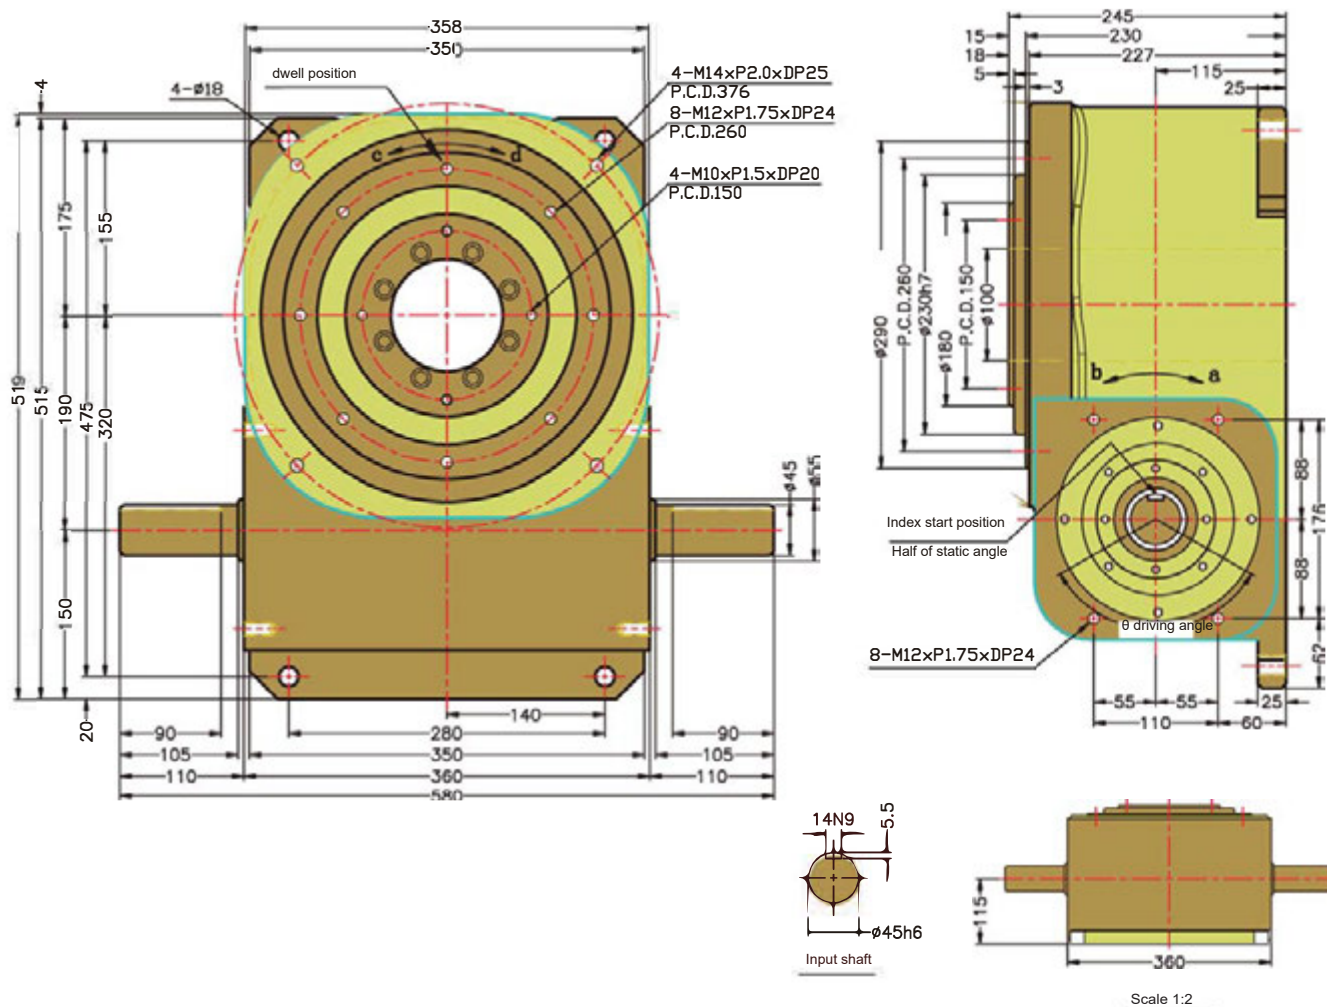

Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	1840	Allowable radial load on input shaft	C3	Kgf	510	GD ² of input shaft (Note1)	C6	Kgf-m ²	0.105
Allowable axial load on output shaft	C2	Kgf	920	Max. bending force on input shaft	C4	Kgf	510	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	61	Weight		Kg	185


Note1:GD² of input shaft is a value in dwell range.

Note 2: Value of C1 to C5 are those obtained for safety factor=2.



Note 2: Value of C1 to C5 are those obtained for safety factor=2.

330DA



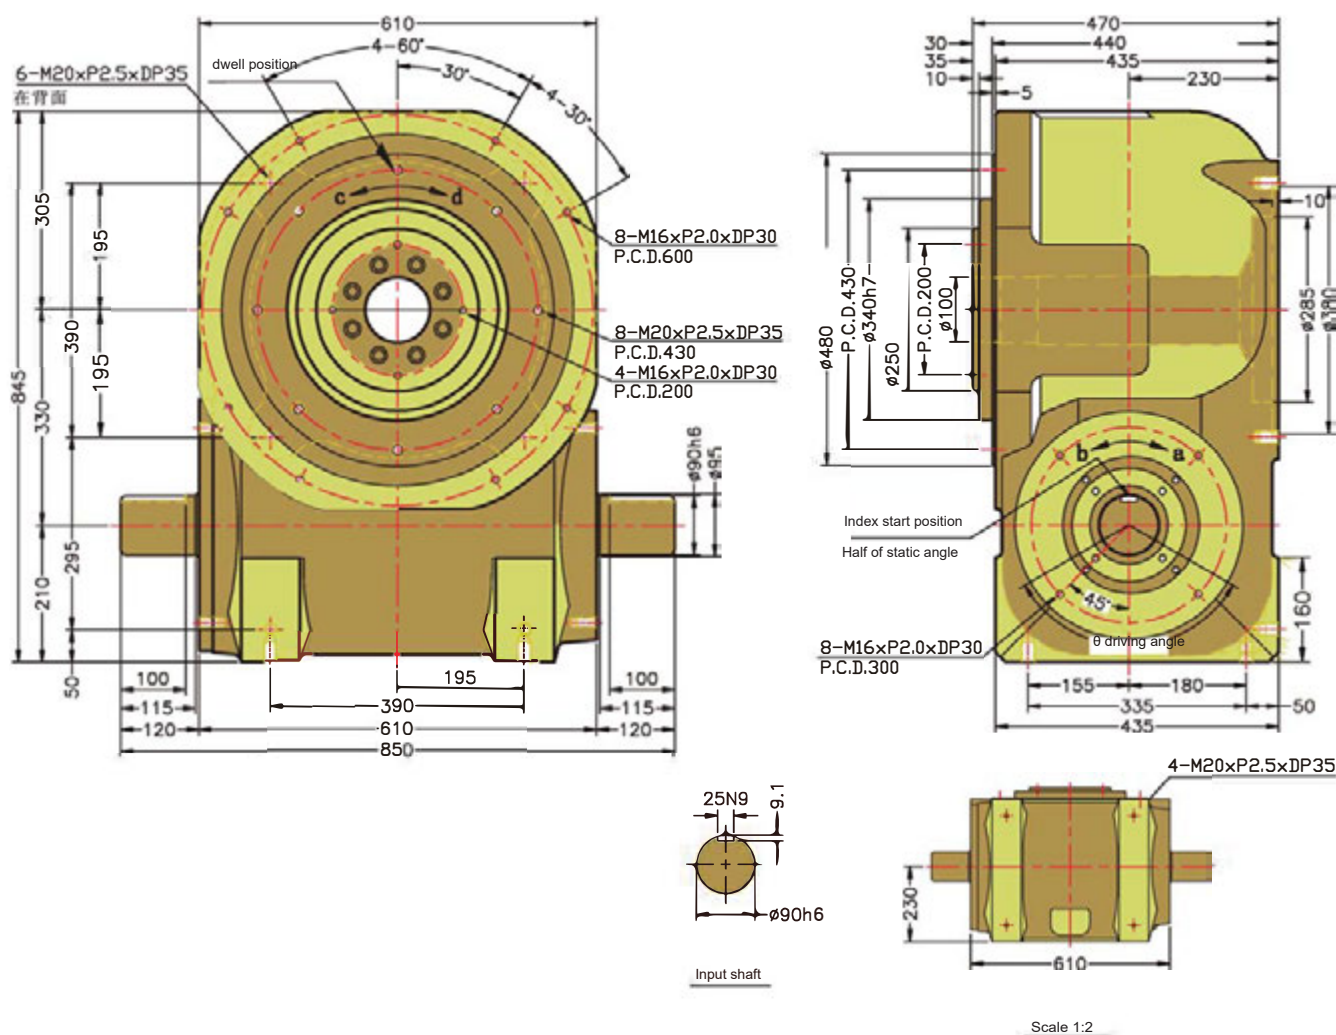


Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	3560	Allowable radial load on input shaft	C3	Kgf	1880	GD ² of input shaft (Note1)	C6	Kgf-m ²	1.71
Allowable axial load on output shaft	C2	Kgf	3430	Max. bending force on input shaft	C4	Kgf	2150	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	650	Weight		Kg	1000

Note1:GD² of input shaft is a value in dwell range.

Note 2:Value of C1 to C5 are those obtained for safety factor=2.

450DA

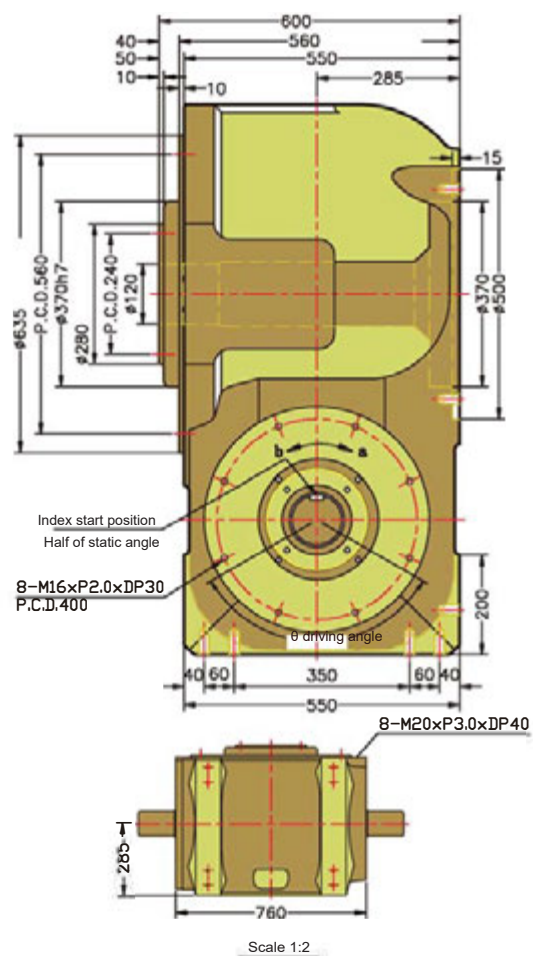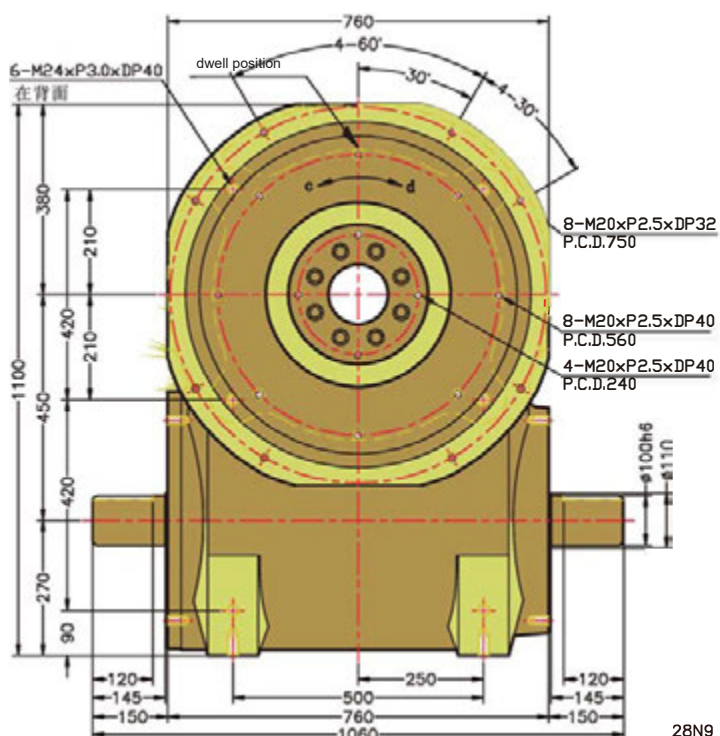

Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	4850	Allowable radial load on input shaft	C3	Kgf	2460	GD ² of input shaft (Note1)	C6	Kgf-m ²	7.9
Allowable axial load on output shaft	C2	Kgf	4160	Max. bending force on input shaft	C4	Kgf	2760	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	860	Weight		Kg	1600

Note1:GD² of input shaft is a value in dwell range.

Note 2:Value of C1 to C5 are those obtained for safety factor=2.



DT系列



DT平台桌面型分割器

80DT, 110DT, 140DT, 180DT, 210DT, 250DT, 350DT, 450DT

此系列机种之尺寸设计特性与凸缘型功能相似，于驱动运转上可承受超大轴向负载及垂直径向压力，在输出端有一凸起固定端面及大孔径空心轴，可搭配设置动态、静态自动化接口设备，可将动力源之电、油、气管路置于空心孔内，此系列机种广泛应用于重负载、直接自动化设备之各类机构及产业机械，作同步自动化间歇驱动。



DT平台桌面型分割器型号代码




Model Code 机种选购指定代号排列标示方法：

RU a	80D b	T c	08 d₁	120 d₂	2 e	R f	S3 g	VW h	1 i	X j
a 机种	b 规格	c 形式	d ₁ 分割等份 (s)	d ₂ 驱动角 (θ h)	e 凸轮运动曲线					
R 滚子凸轮	80D 80mm	T Type	08 8stop	120 120°	2 Ms曲线					
出力轴与入力轴之间的距离 80DT/110DT/140DT/180DT/ 210DT/250DT/350DT/450DT		T平台桌面型	定位分割等份 4.5.6.8.10.12.16 定制规格 20.24.30.32.36. 40.48	入力轴凸 轮驱动出 力轴分割 之角度 90° /120° 150° /180° 210° /240° 270° /300°	1 变形梯形曲线MTS 2 变形正弦曲线MS 3 变形等速度曲线MCV50					
f 凸轮旋转方向										
R 间歇驱动之右旋向凸轮					L 间歇驱动之左旋向凸轮					
入力轴均可以正逆向旋转，如果入力轴无固定旋向要求，只需要变更马达旋向即可达到出力轴旋转方向的要求。R为单驱动，入力轴旋转一圈出力轴做一次间歇运动，多用于4~12等份，R2为双驱动，入力轴旋转180度，出力轴做一次间歇运动，多用于16等份以上R3、R4以此类推。										
R₁ 1Dwell 右旋向凸轮		R₂ 2Dwell 右旋向凸轮		L 3Dwell 左旋向凸轮			L₂ 4Dwell 左旋向凸轮			
g 入力轴安装方向			h 本体安装螺丝孔面		i 安装位置		j 特殊规格说明			
S3 T面及U面两端			VW 主壳及机体安装螺丝孔 在V及W面皆有固定孔		1 安装位置如下图		X 订购外部特殊指定要求 1 标准（不加符号） 2 特别指定注明			
S1 只有T面 			1 GL(W) 							
S2 只有U面 			2 GL(V) 							
S3 T面及U面皆有 			3 GL(P) 							


如何订购

1. 本体安装螺丝孔面有V.P.S.T六面，客户可依指定固定面之位置
2. 机种号码表示入力凸轮及出力轴及螺丝孔安装位置
3. 订购时，一定要在订单上附上所需要的机种型号，不论是右旋凸轮或是左旋凸轮都有一定的选择标准，同样的，四种型式的运动曲线（MT.MS.MCV50）也有选购标准

80DT

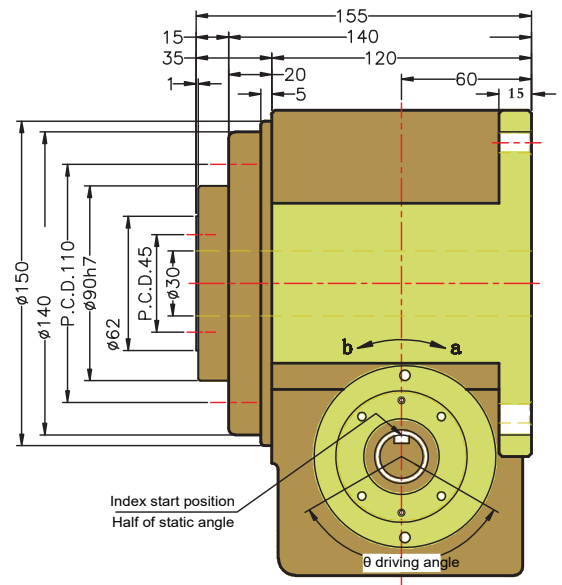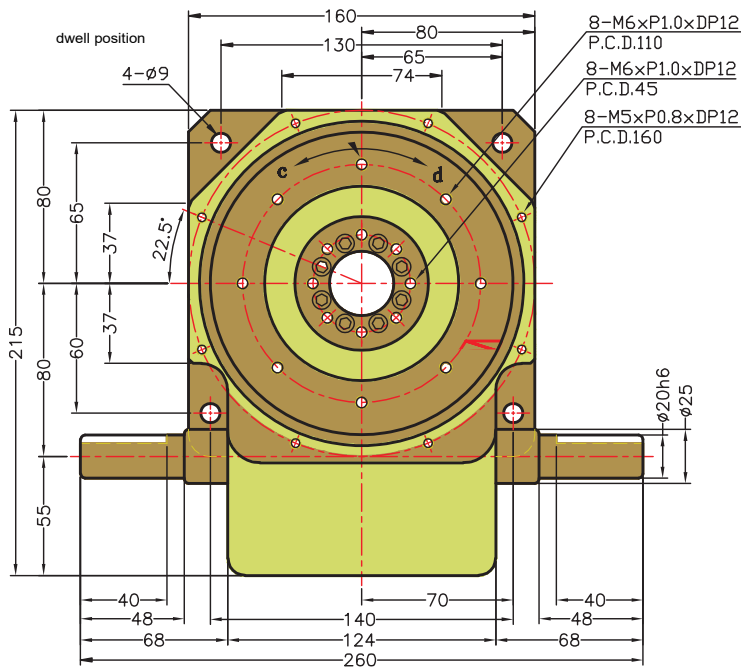

Scale 1:2




Input shaft

Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	520	Allowable radial load on input shaft	C3	Kgf	220	GD ² of input shaft (Note1)	C6	Kgf-m ²	0.03
Allowable axial load on output shaft	C2	Kgf	220	Max. bending force on input shaft	C4	Kgf	160	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	9.5	Weight		Kg	20

Note1:GD² of input shaft is a value in dwelt range.

Note 2:Value of C1 to C5 are those obtained for safety factor=2.

110DT

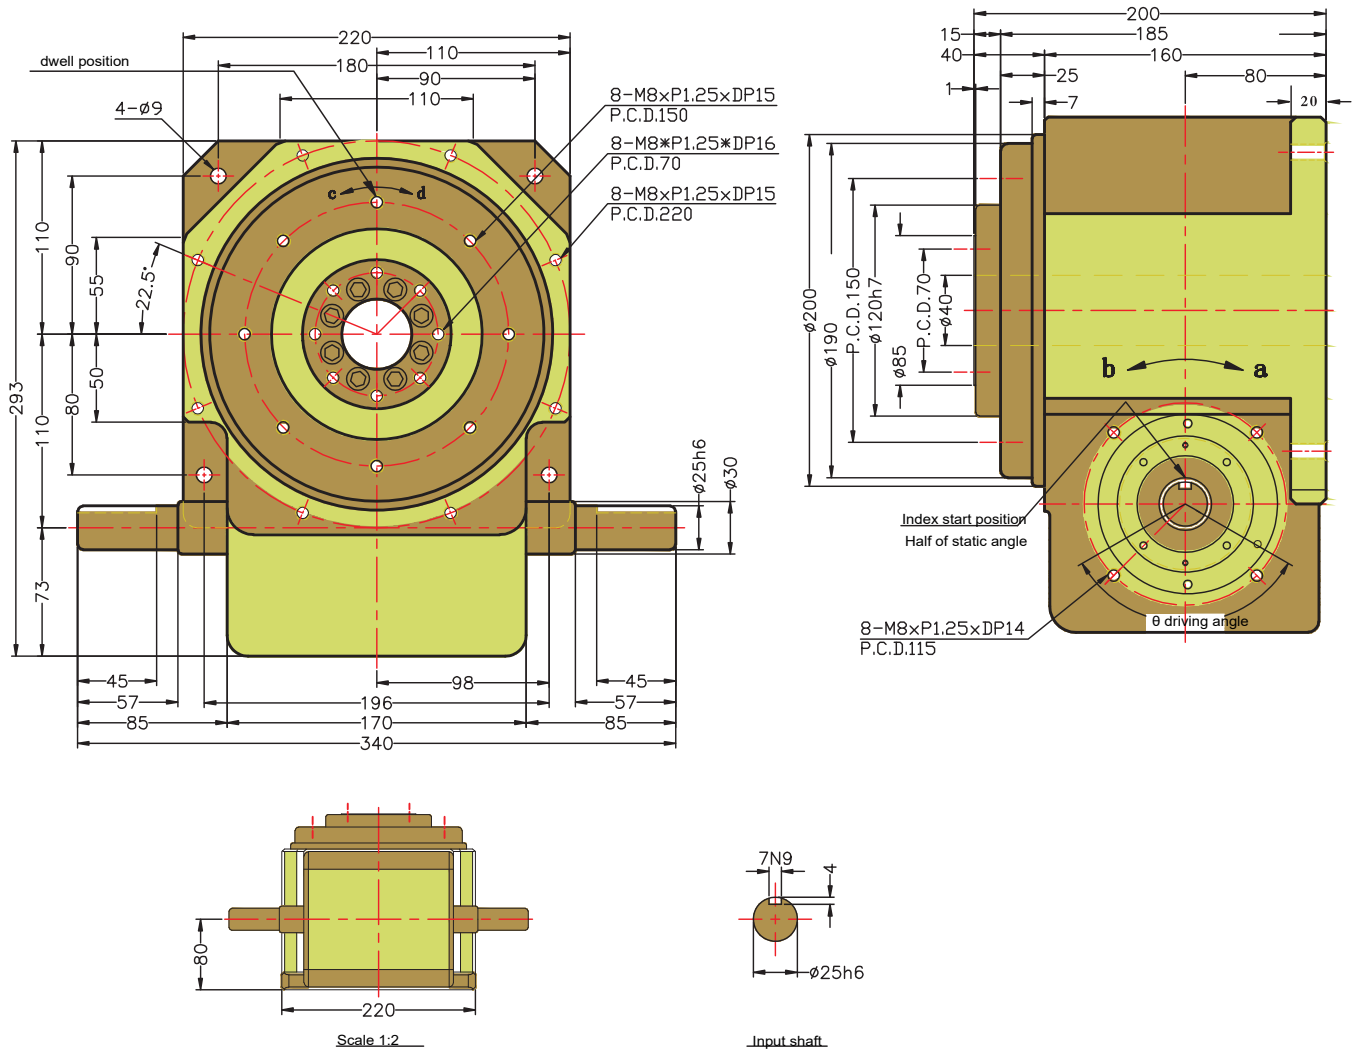


Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	860	Allowable radial load on input shaft	C3	Kgf	300	GD ² of input shaft (Note1)	C6	Kgf-m ²	0.11
Allowable axial load on output shaft	C2	Kgf	420	Max. bending force on input shaft	C4	Kgf	250	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	25	Weight		Kg	50

Note1:GD² of input shaft is a value in dwell range.

Note 2:Value of C1 to C5 are those obtained for safety factor=2.

140DT

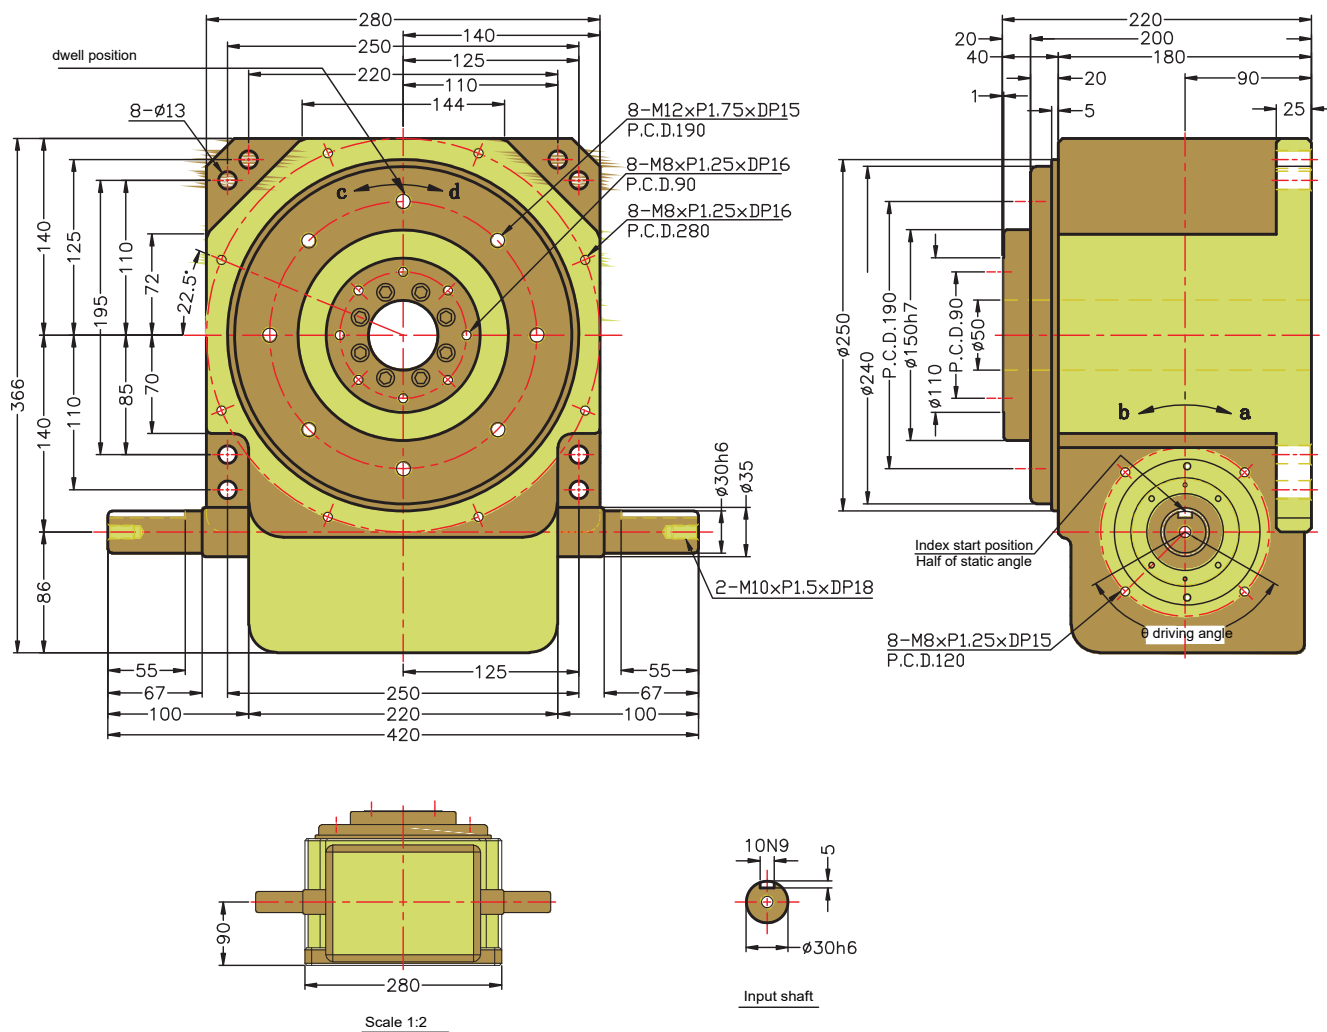


Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	1050	Allowable radial load on input shaft	C3	Kgf	500	GD ² of input shaft (Note1)	C6	Kgf-m ²	0.07
Allowable axial load on output shaft	C2	Kgf	720	Max. bending force on input shaft	C4	Kgf	350	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	53	Weight		Kg	85

Note1:GD² of input shaft is a value in dwell range.

Note 2: Value of C1 to C5 are those obtained for safety factor=2.

180DT

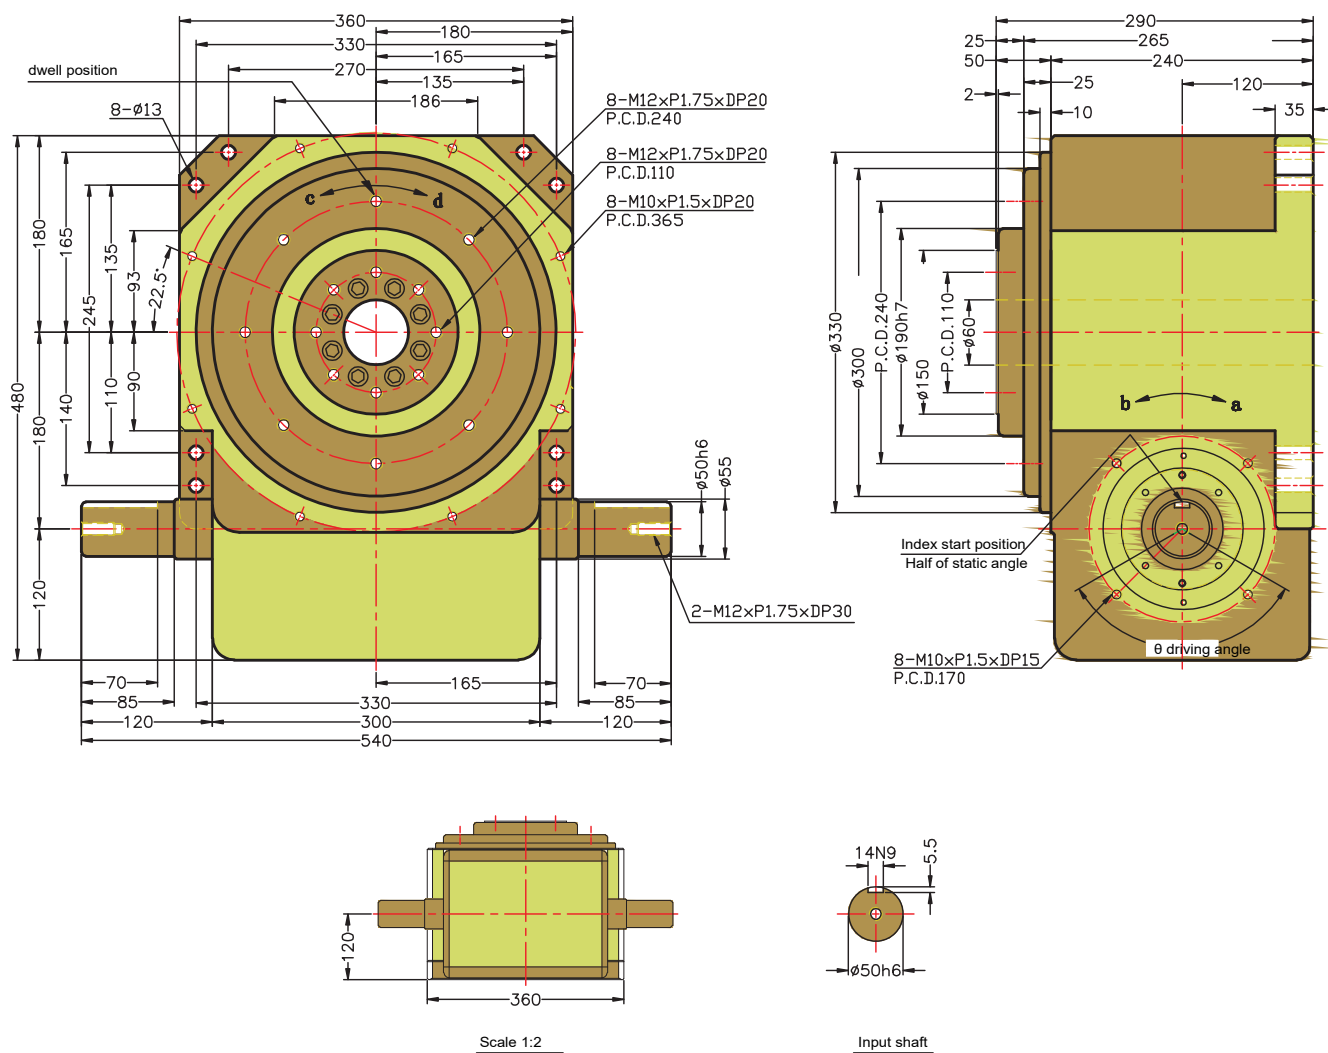


Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	1500	Allowable radial load on input shaft	C3	Kgf	1200	GD ² of input shaft (Note1)	C6	Kgf-m ²	0.23
Allowable axial load on output shaft	C2	Kgf	1100	Max. bending force on input shaft	C4	Kgf	960	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	220	Weight		Kg	190

Note1:GD² of input shaft is a value in dwell range.

Note 2: Value of C1 to C5 are those obtained for safety factor=2.

210DT

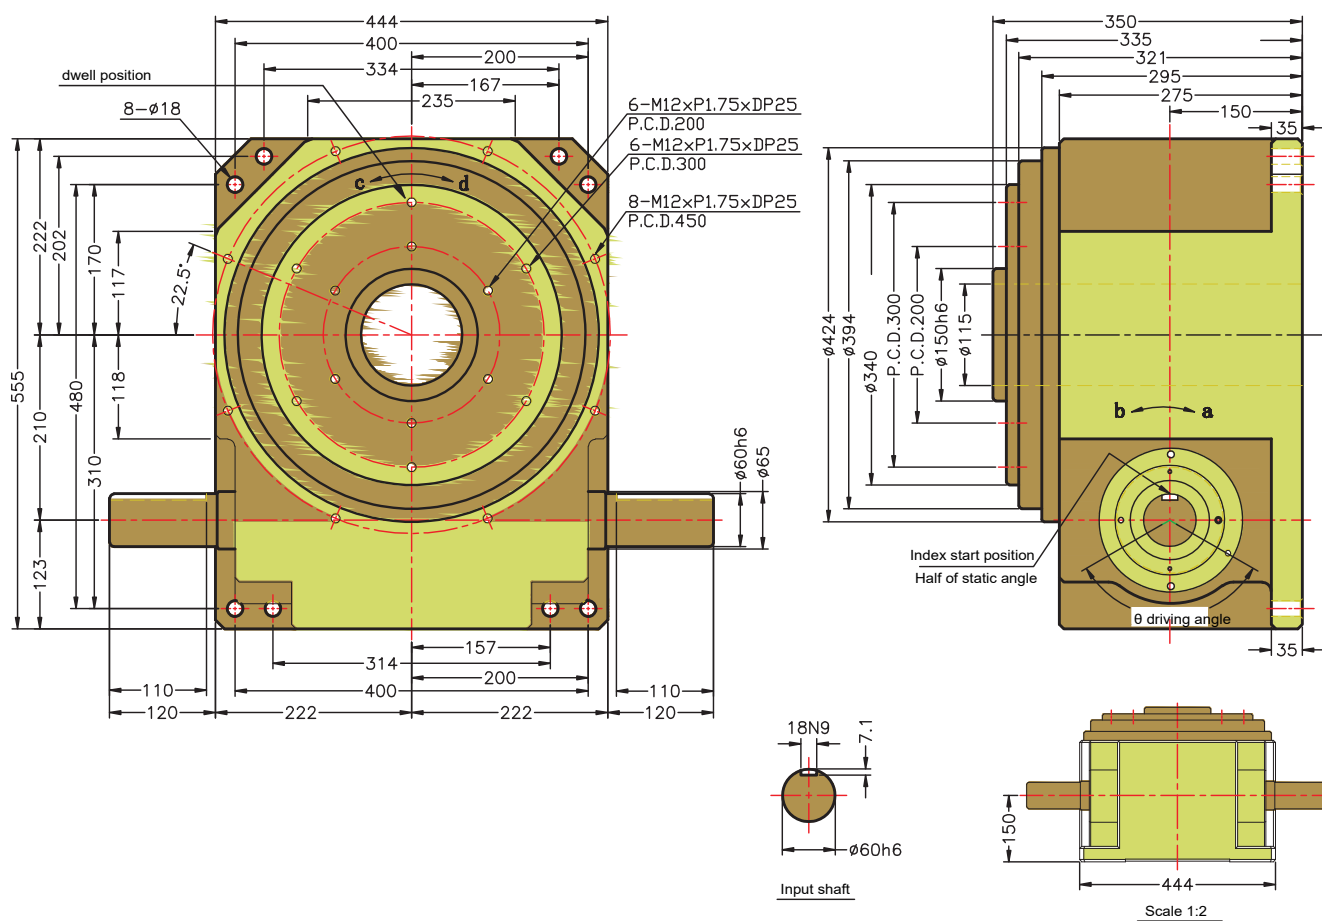


Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	1950	Allowable radial load on input shaft	C3	Kgf	1570	GD ² of input shaft (Note1)	C6	Kgf-m ²	0.62
Allowable axial load on output shaft	C2	Kgf	1520	Max. bending force on input shaft	C4	Kgf	1130	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	460	Weight		Kg	450

Note1:GD² of input shaft is a value in dwell range.

Note 2: Value of C1 to C5 are those obtained for safety factor=2.

250DT


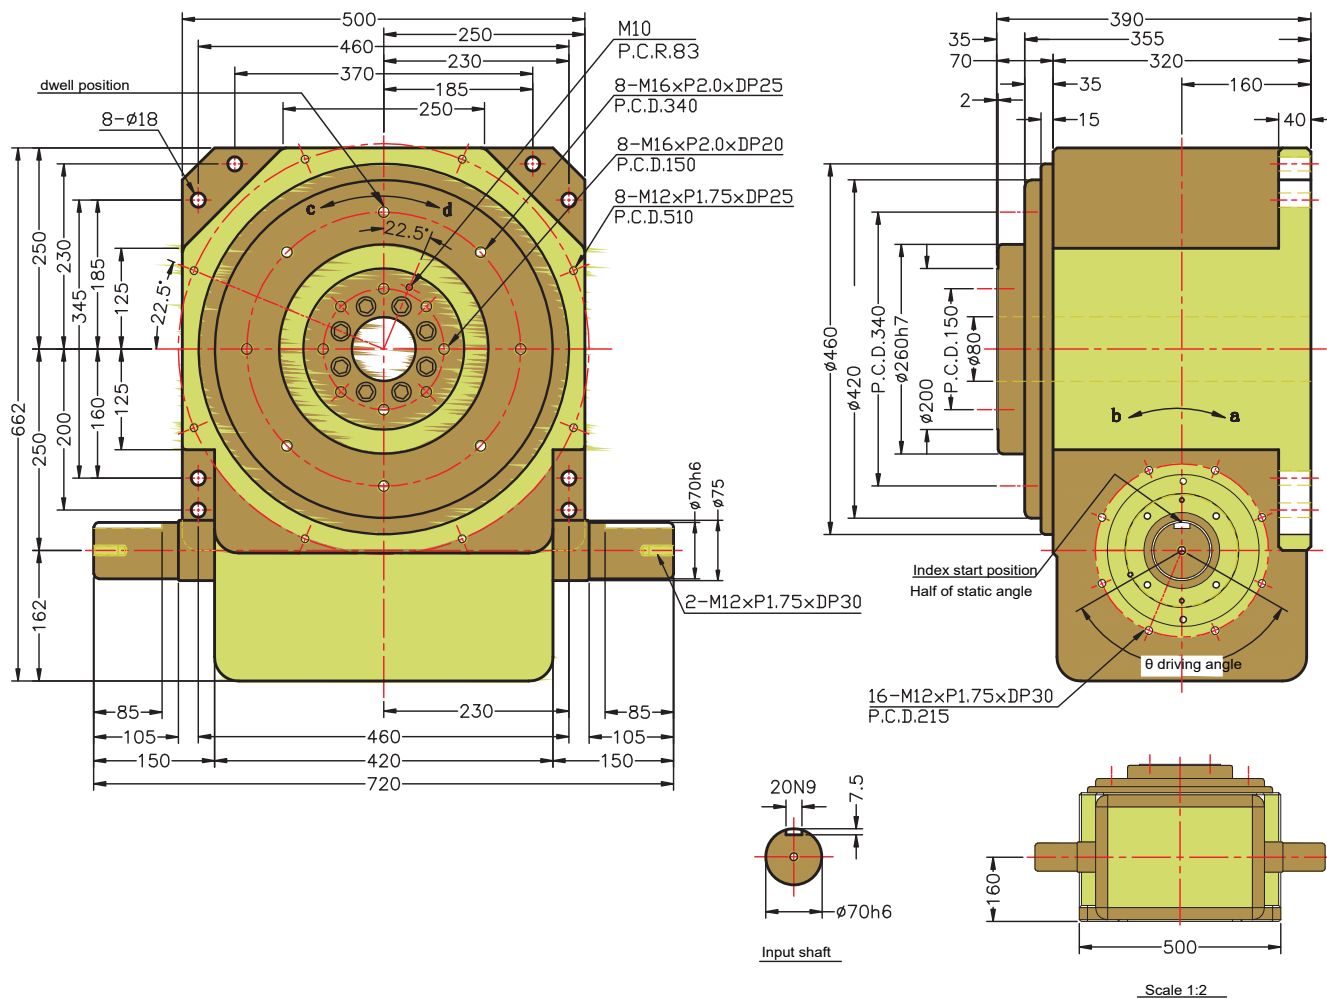


Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	2500	Allowable radial load on input shaft	C3	Kgf	1900	GD ² of input shaft (Note1)	C6	Kgf-m ²	0.86
Allowable axial load on output shaft	C2	Kgf	1800	Max. bending force on input shaft	C4	Kgf	2250	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	670	Weight		Kg	500

Note1:GD² of input shaft is a value in dwell range.

Note 2: Value of C1 to C5 are those obtained for safety factor=2.

350DT

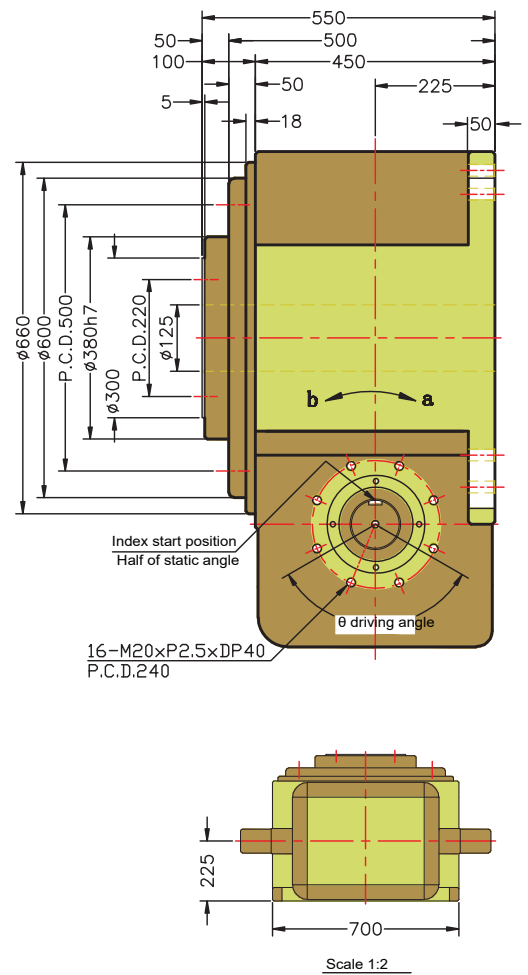
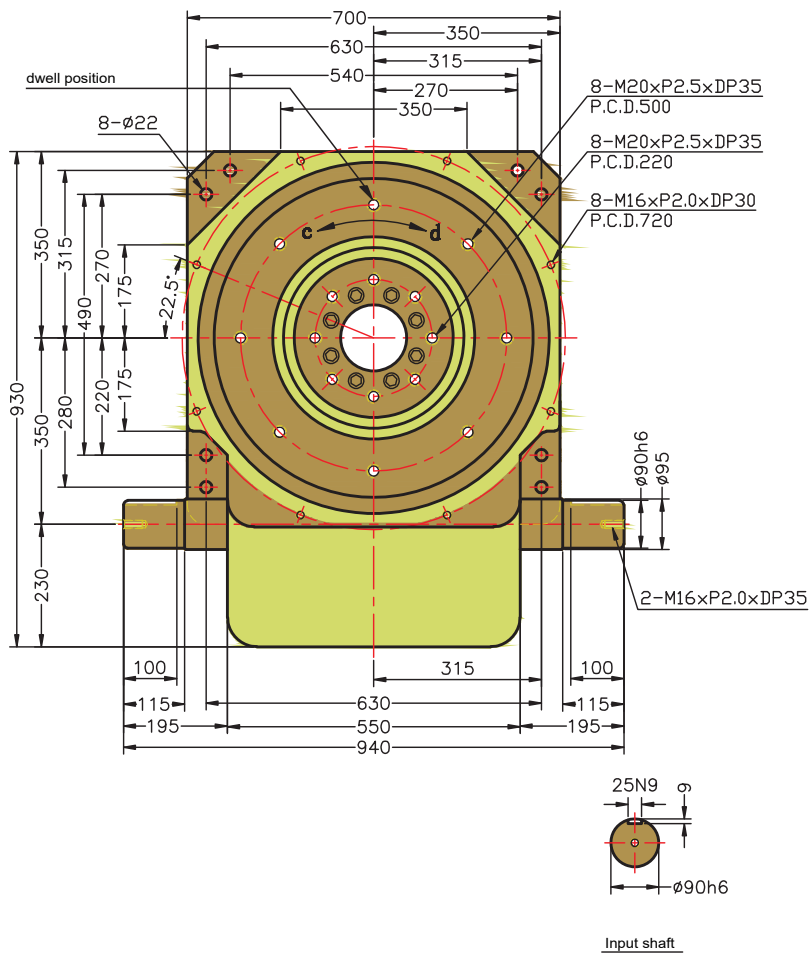


Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	4500	Allowable radial load on input shaft	C3	Kgf	2800	GD ² of input shaft (Note1)	C6	Kgf-m ²	2.7
Allowable axial load on output shaft	C2	Kgf	3300	Max. bending force on input shaft	C4	Kgf	3800	Indexing accuracy		Sec.	± 20
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	1000	Weight		Kg	1200



Note1:GD² of input shaft is a value in dwelt range.

Note 2:Value of C1 to C5 are those obtained for safety factor=2.

450DT

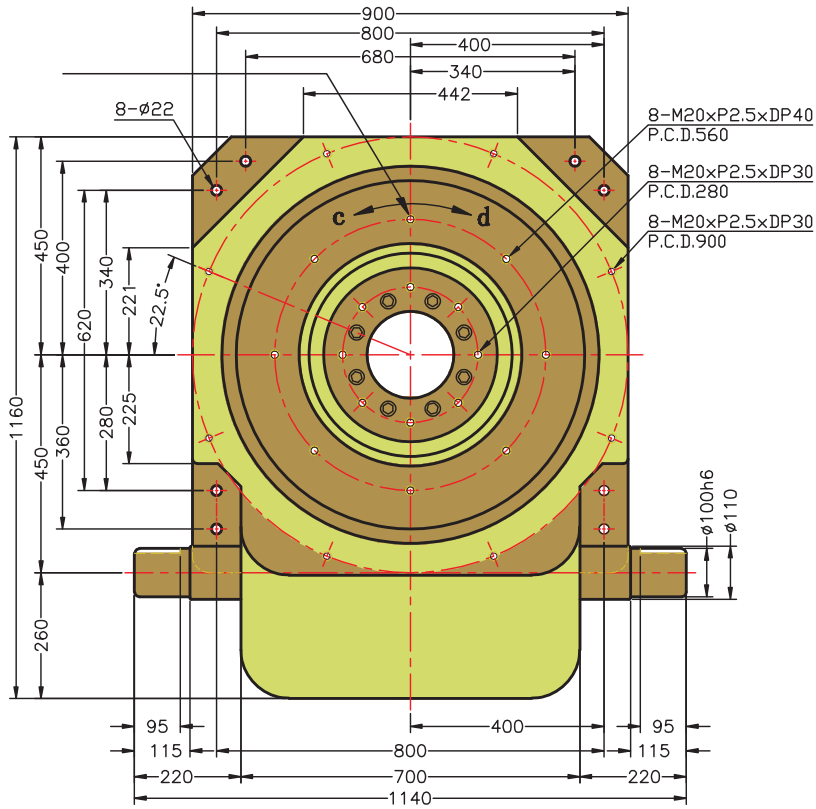

Scale 1:2

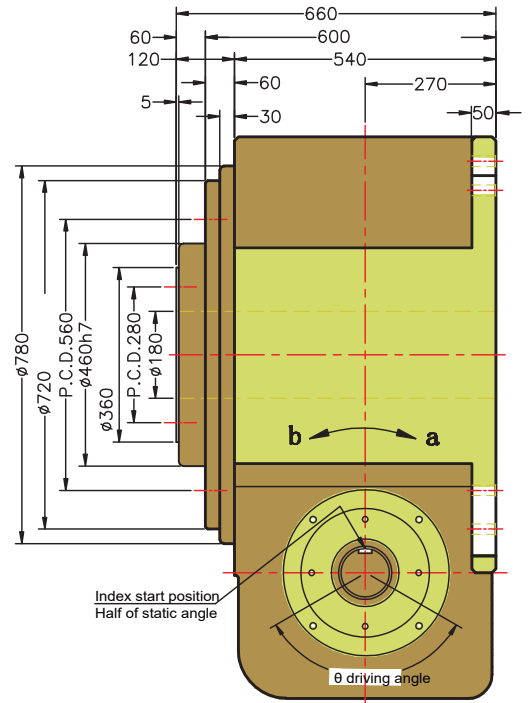


Input shaft

Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable radial load on output shaft	C1	Kgf	6500	Allowable radial load on input shaft	C3	Kgf	3300	GD ² of input shaft (Note1)	C6	Kgf-m ²	10.27
Allowable axial load on output shaft	C2	Kgf	4500	Max. bending force on input shaft	C4	Kgf	4500	Indexing accuracy		Sec.	±30
Allowable torque on output shaft	Ts	Kgf-m	Refer torque table	Max. torque on input shaft	C5	Kgf-m	1300	Weight		Kg	2240

Note1:GD² of input shaft is a value in dwell range.

Note 2:Value of C1 to C5 are those obtained for safety factor=2.

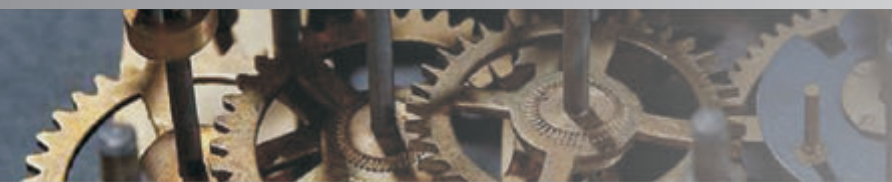

PU系列



PU平板共轭型分割器

PU50DS, PU60DS, PU65DS, PU80DS, PU100DS, PU125DS, PU150DS, PU175DS, PU225DS, PU250DS, PU320DS

此系列机种，内含二片固定在入力轴的板型凸轮以及随凸轮传动的滚子转塔出力轴，此分割器有平行共轭凸轮的机构设计，藉由接合于入力轴上的二片板形凸轮知转动而传动滚子转塔旋转而达成出力轴分度的功能，最适合供给节距较大的轮送带传动或用于停留时间较长的间歇分度。另有三片式重负荷型式，更适合一些快速且长节距的轮送，并且停留时间亦比二片式长。



Model.Code机种选购指定代号排列表示方法

PU100DS

01 270


2 A

S12 VW


1 X

a 规格	b 分割等份(s)	c 驱动角(θ h)	d 凸轮运动曲线	e 凸轮旋转方向
PU100D 100mm	01 L stop	270 270°	2 MS 曲线	A 间歇驱动之右旋向凸轮
50D/65D/ 80D/100D/ 125D/150D/ 175D/200D/ 250D/320D/ 225D	分割定位等份 1.2.3.4.6.8	输入轴凸轮驱动 出力轴分割之角度 90° /120° 150° /180° 210° /240° 270° /300°	①②③④ 曲线的选用 ① 变形台形曲线 MT(Modified Trapezoid) ② 变形正弦曲线 MS(Modified Sine) ③ 变形等速度曲线 MCV50(Modified Constant Velocity 50)	A 逆时针回转 S 出力轴 顺时针回转 S 出力轴 输入轴 P
	f 输入轴组立方向		g 本体安装螺丝孔面	h 安装位置
	S12 T面及U面		VW	1
口出, 输入轴装配方向及单向双向之选择 S11 T面单向 S21 U面单向、T面单向 S12 T面单向、U面单向 S22 U面单向 S13 T面单向、T.U面双向 S23 U面单向、T.U面双向			主壳及本体安装螺丝孔在 V 面和 W 面都有固定孔, 此外, P、S、T、U 面也可选择使用 安装位置如下图所示 订购时外部特殊之指定要求 ☐ 标准 (不加符号) ☒ 特别指定注明	
□ 输入轴 ■ 出力轴 S11 S12 S13 S21 S22 S23 				


PU65DS

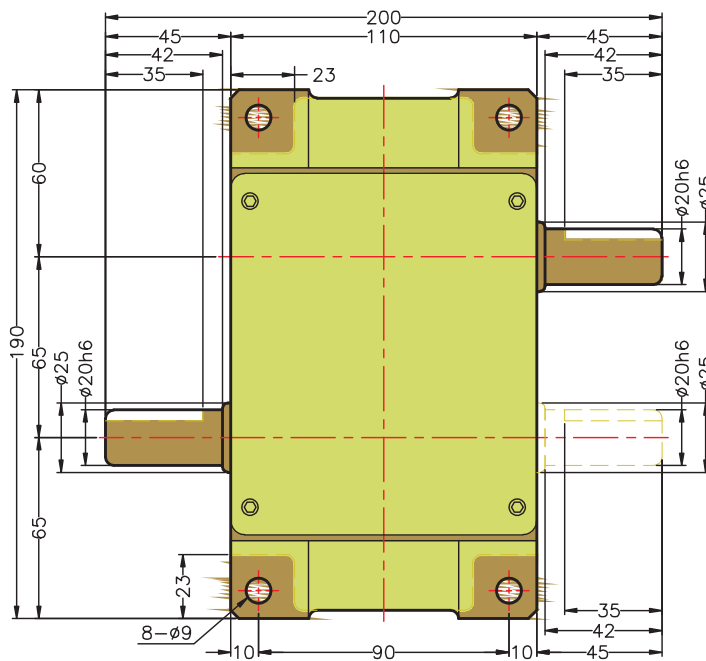



16-M8xP1.25xDP15



Scale 1:2




output/input shaft

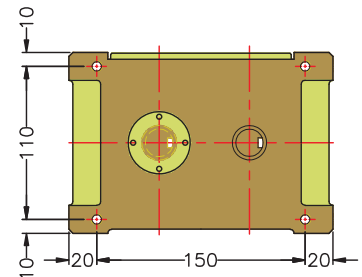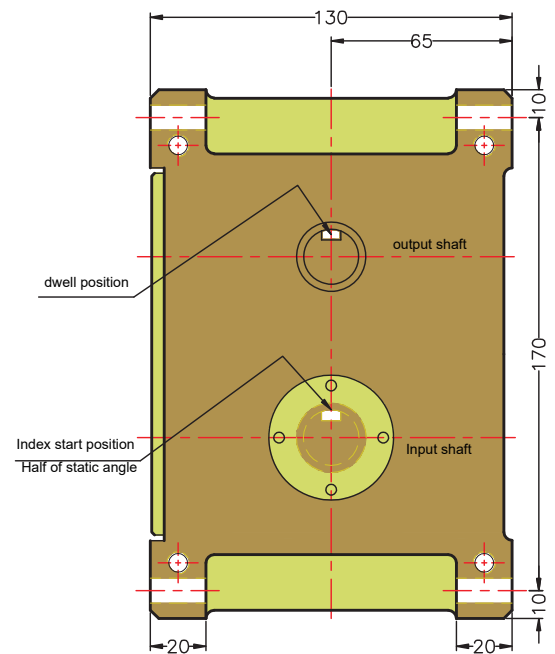

Scale 1:2


Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable axial stress on output shaft	P1	Kgf	250	Allowable axial stress on input shaft	P4	Kgf	250	1DWELL segmentation accuracy	SEC.		±60
Allowable radial load on output shaft	P2	Kgf	160	Allowable radial load on input shaft	P5	Kgf	160	2DWELL segmentation accuracy	SEC.		±120
Allowable torsion on output shaft	Ts	Kgf-m	Refer torque table	Allowable torsion on input shaft	P6	Kgf-m	11	Repeat positioning accuracy	SEC.		60
Output shaft rotary rigid	K1	kgf-m/rad	9.2×10^2	Input shaft rotary rigid	K2	kgf-m/rad	9.2×10^2	Weight	Kg		15

PU80DS

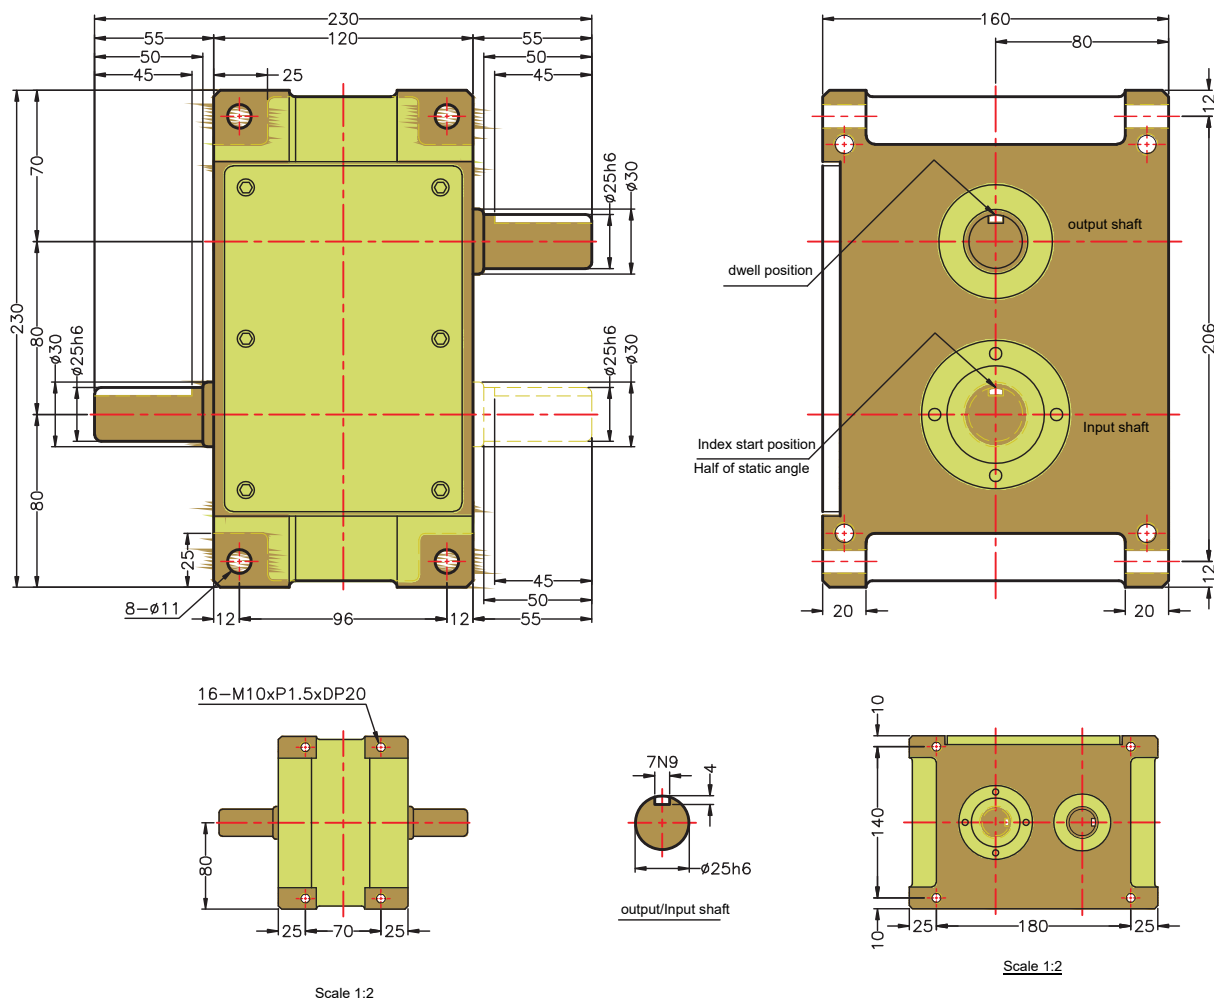




Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable axial stress on output shaft	P1	Kgf	360	Allowable axial stress on input shaft	P4	Kgf	360	1DWELL segmentation accuracy		SEC.	±60
Allowable radial load on output shaft	P2	Kgf	250	Allowable radial load on input shaft	P5	Kgf	250	2DWELL segmentation accuracy		SEC.	±120
Allowable torsion on output shaft	Ts	Kgf-m	Refer torque table	Allowable torsion on input shaft	P6	Kgf-m	25	Repeat positioning accuracy		SEC.	60
Output shaft rotary rigid	K1	kgf-m/rad	1.85×10^3	Input shaft rotary rigid	K2	kgf-m/rad	1.85×10^3	Weight		Kg	20

PU100DS

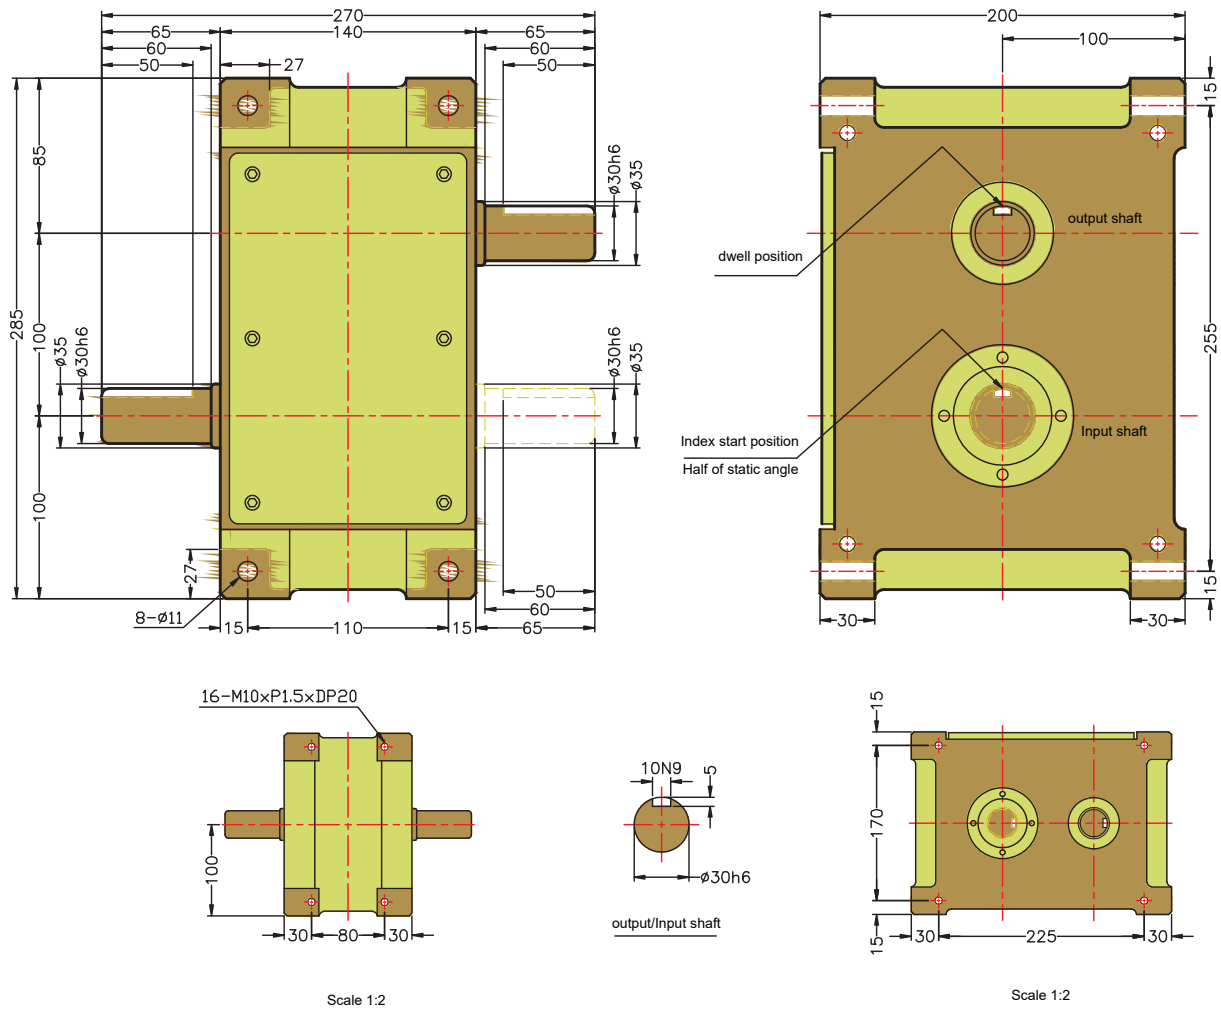


Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable axial stress on output shaft	P1	Kgf	480	Allowable axial stress on input shaft	P4	Kgf	480	1DWELL segmentation accuracy	SEC.		± 60
Allowable radial load on output shaft	P2	Kgf	400	Allowable radial load on input shaft	P5	Kgf	400	2DWELL segmentation accuracy	SEC.		± 120
Allowable torsion on output shaft	Ts	Kgf-m	Refer torque table	Allowable torsion on input shaft	P6	Kgf-m	40	Repeat positioning accuracy	SEC.		60
Output shaft rotary rigid	K1	kgf-m/rad	3.26×10^{-3}	Input shaft rotary rigid	K2	kgf-m/rad	3.26×10^{-3}	Weight	Kg		38


P U 1 2 5 D S

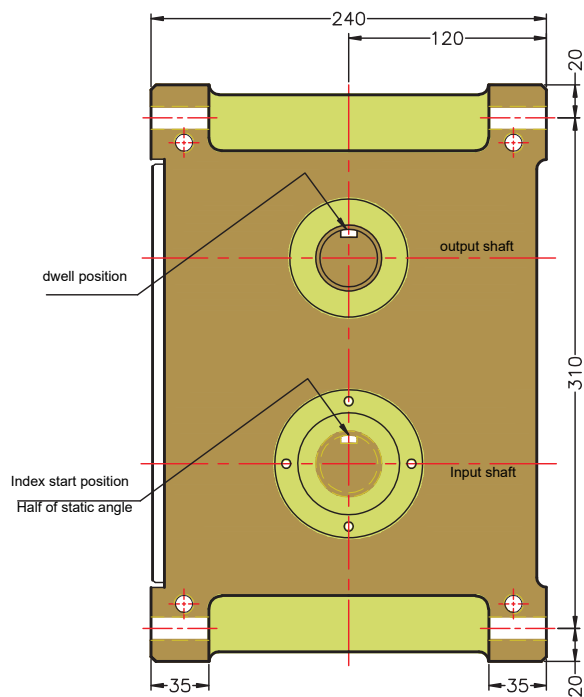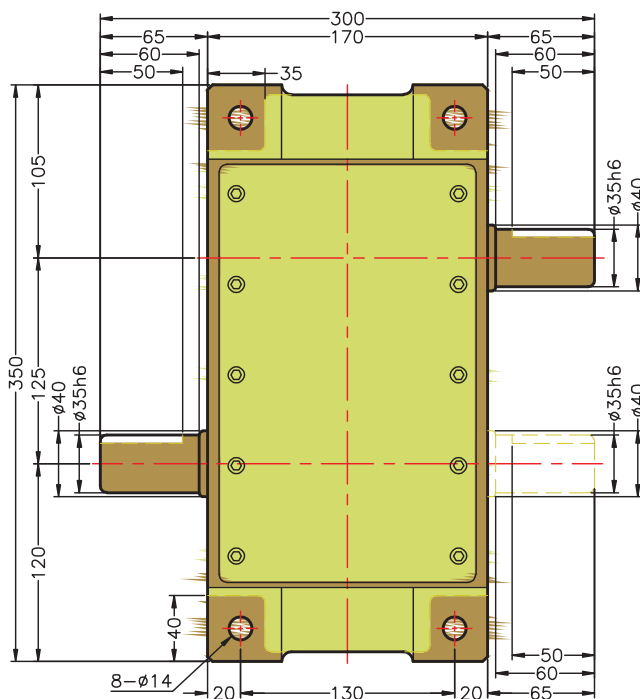

Scale 1:2





output/Input shaft

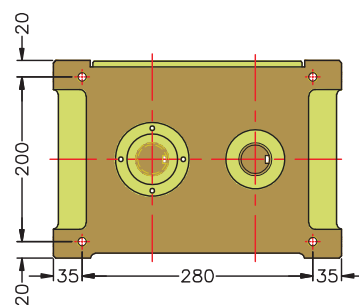



Scale 1:2

Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable axial stress on output shaft	P1	Kgf	520	Allowable axial stress on input shaft	P4	Kgf	520	1DWELL segmentation accuracy		SEC.	±60
Allowable radial load on output shaft	P2	Kgf	630	Allowable radial load on input shaft	P5	Kgf	630	2DWELL segmentation accuracy		SEC.	±120
Allowable torsion on output shaft	Ts	Kgf-m	Refer torque table	Allowable torsion on input shaft	P6	Kgf-m	65	Repeat positioning accuracy		SEC.	60
Output shaft rotary rigid	K1	kgf-m/rad	5.03x 10 ³	Input shaft rotary rigid	K2	kgf-m/rad	5.03x 10 ³	Weight		Kg	65


PU150DS

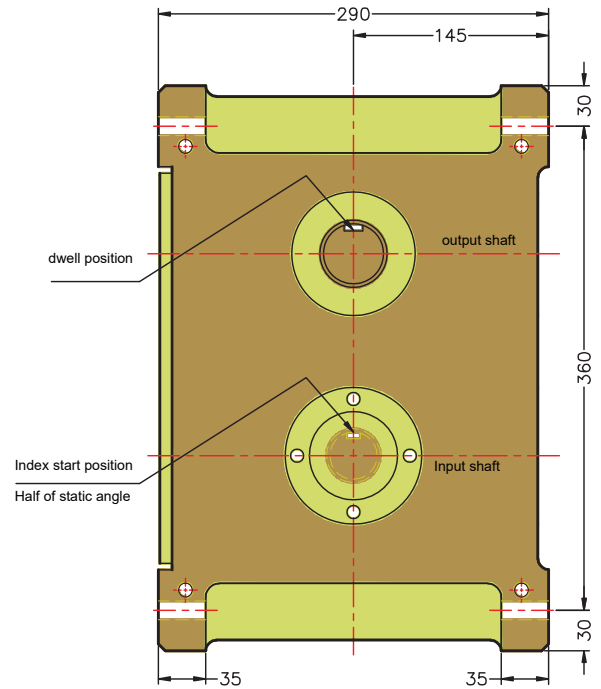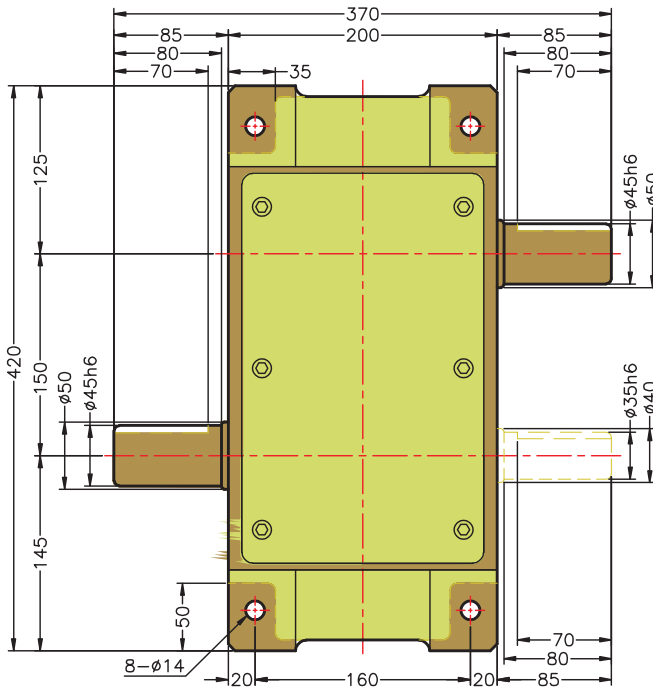


16-M12xP1.75xDP20



output/input shaft




Input shaft

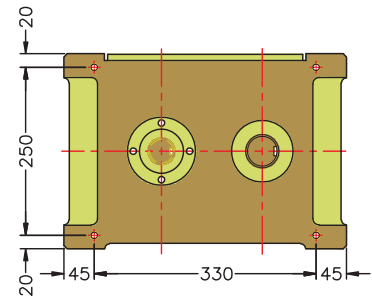

Scale 1:2




Scale 1:2

Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable axial stress on output shaft	P1	Kgf	750	Allowable axial stress on input shaft	P4	Kgf	750	1DWELL segmentation accuracy	SEC.		± 60
Allowable radial load on output shaft	P2	Kgf	860	Allowable radial load on input shaft	P5	Kgf	880	2DWELL segmentation accuracy	SEC.		± 120
Allowable torsion on output shaft	Ts	Kgf-m	Refer torque table	Allowable torsion on input shaft	P6	Kgf-m	135	Repeat positioning accuracy	SEC.		60
Output shaft rotary rigid	K1	kgf-m/rad	1.8×10^4	Input shaft rotary rigid	K2	kgf-m/rad	1.8×10^4	Weight	Kg		87


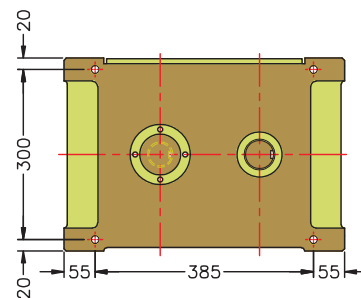


Scale 1:2

PU225DS

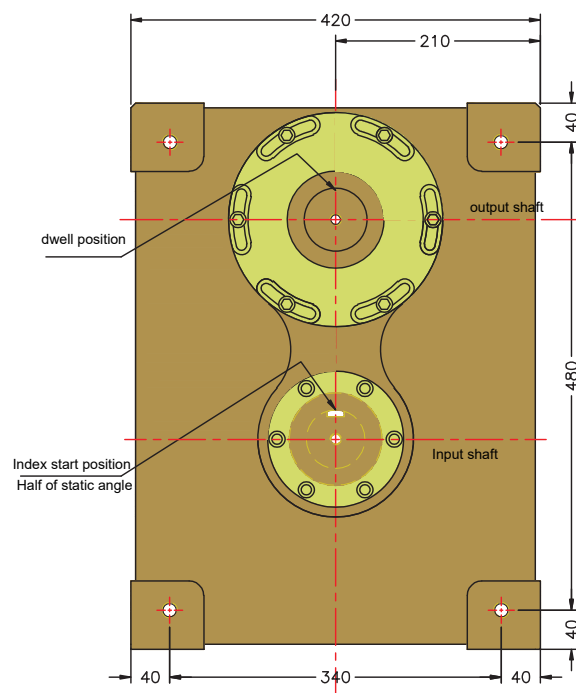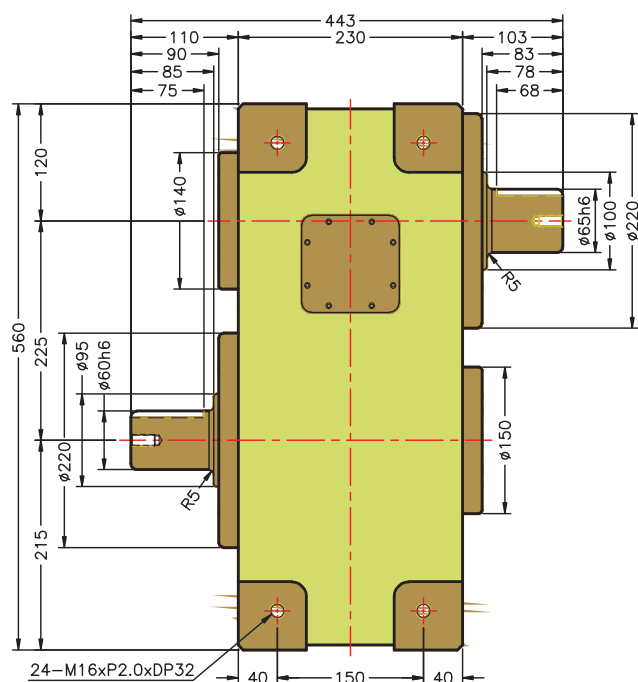


Scale 1:2

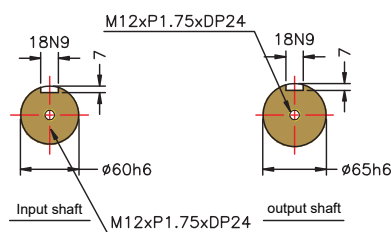

Scale 1:2


Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable axial stress on output shaft	P1	Kgf	1435	Allowable axial stress on input shaft	P4	Kgf	1435	1DWELL segmentation accuracy		SEC.	±60
Allowable radial load on output shaft	P2	Kgf	1470	Allowable radial load on input shaft	P5	Kgf	2150	2DWELL segmentation accuracy		SEC.	±120
Allowable torsion on output shaft	Ts	Kgf-m	Refer torque table	Allowable torsion on input shaft	P6	Kgf-m	410	Repeat positioning accuracy		SEC.	60
Output shaft rotary rigid	K1	kgf-m/rad	4.31×10^4	Input shaft rotary rigid	K2	kgf-m/rad	4.31×10^4	Weight		Kg	220

PU250DS

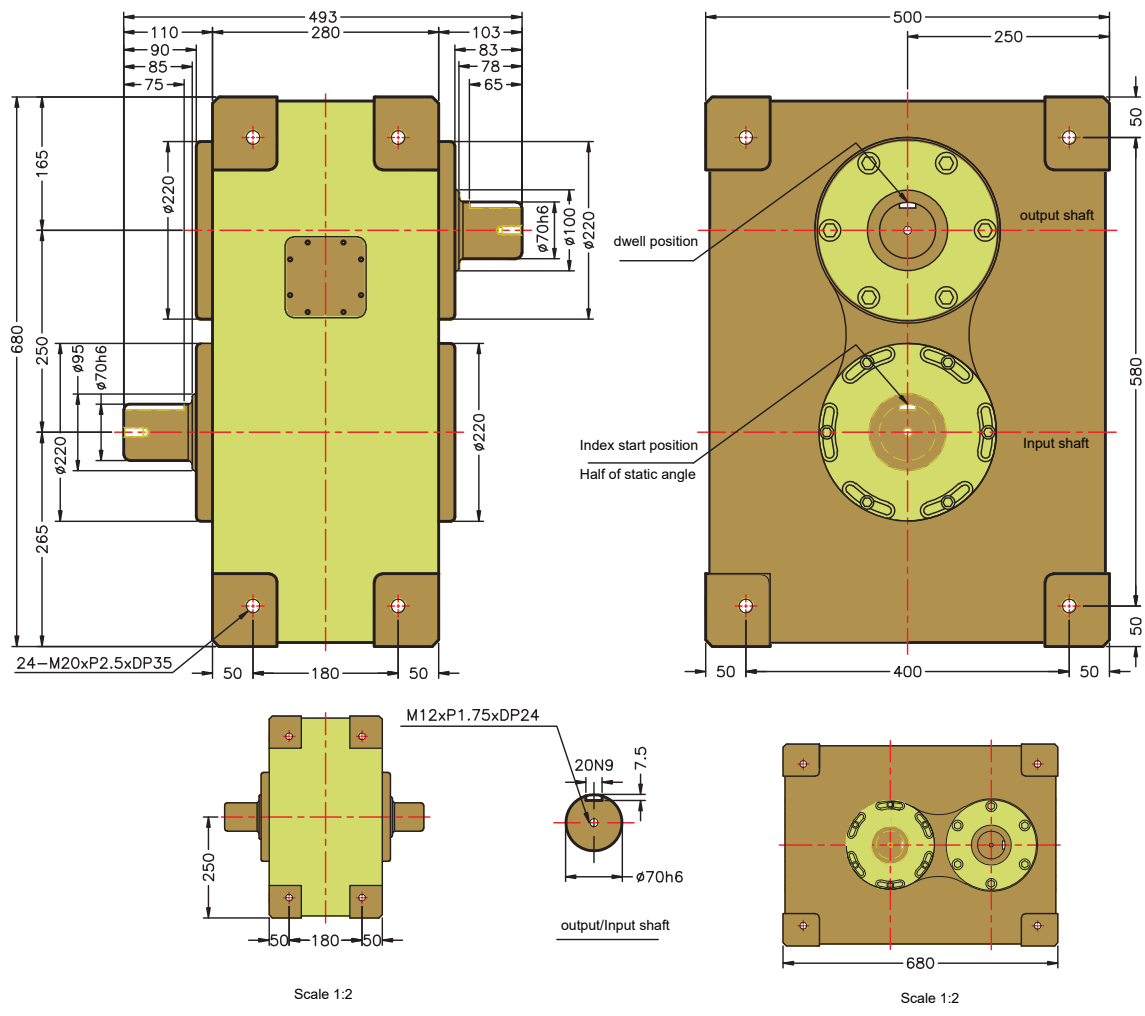

Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable axial stress on output shaft	P1	Kgf	1550	Allowable axial stress on input shaft	P4	Kgf	1550	1DWELL segmentation accuracy	SEC.		±60
Allowable radial load on output shaft	P2	Kgf	1560	Allowable radial load on input shaft	P5	Kgf	2400	2DWELL segmentation accuracy	SEC.		±120
Allowable torsion on output shaft	Ts	Kgf-m	Refer torque table	Allowable torsion on input shaft	P6	Kgf-m	500	Repeat positioning accuracy	SEC.		60
Output shaft rotary rigid	K1	kgf-m/rad	5.37x 10 ⁴	Input shaft rotary rigid	K2	kgf-m/rad	5.37x 10 ⁴	Weight	Kg		388

PU320DS

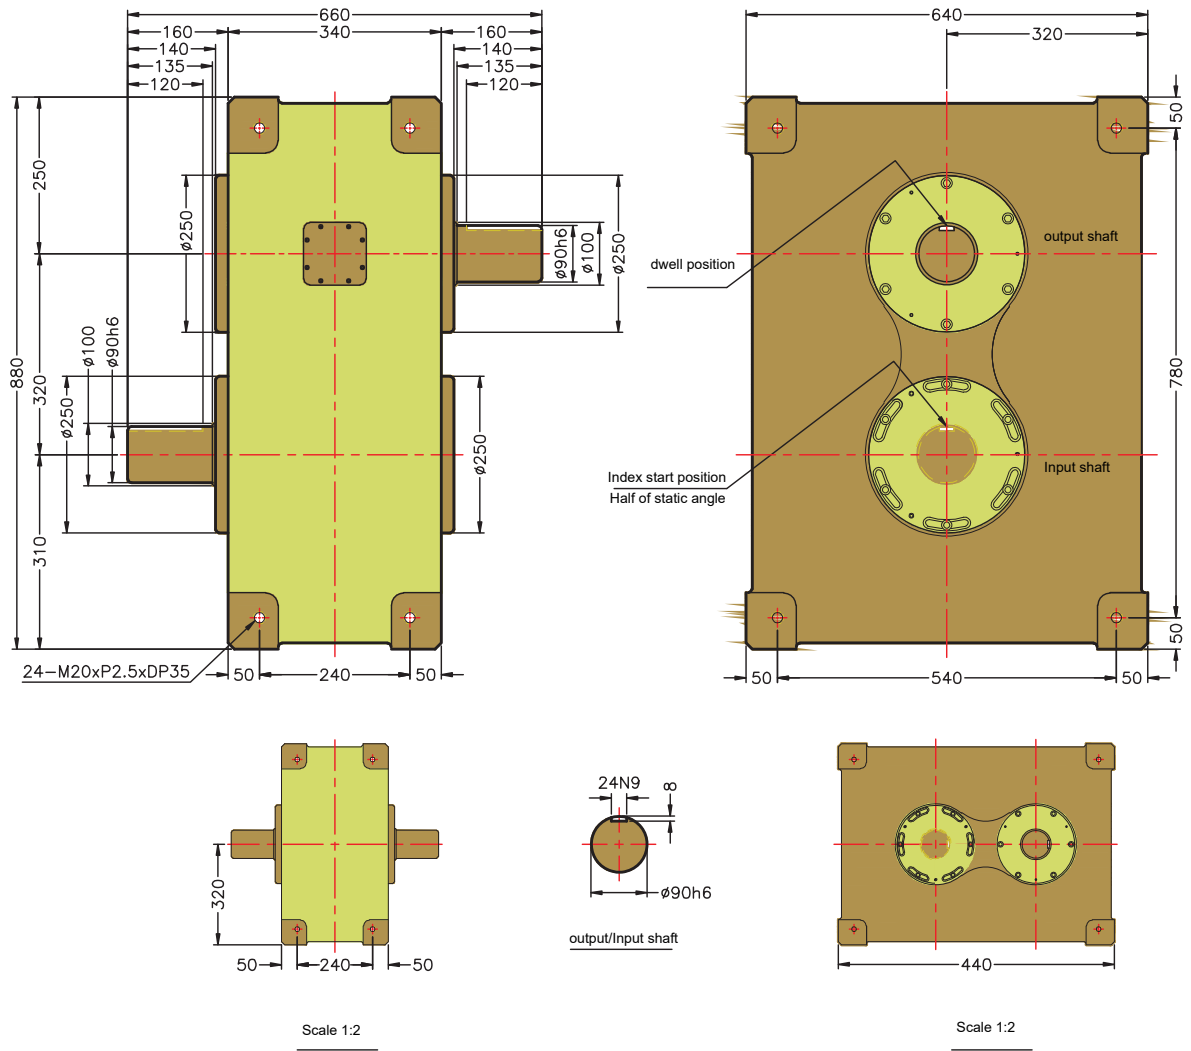

Item	Symbol	Unit	Value	Item	Symbol	Unit	Value	Item	Symbol	Unit	Value
Allowable axial stress on output shaft	P1	Kgf	1750	Allowable axial stress on input shaft	P4	Kgf	1690	1DWELL segmentation accuracy	SEC.		± 60
Allowable radial load on output shaft	P2	Kgf	1775	Allowable radial load on input shaft	P5	Kgf	2670	2DWELL segmentation accuracy	SEC.		± 120
Allowable torsion on output shaft	Ts	Kgf-m	Refer torque table	Allowable torsion on input shaft	P6	Kgf-m	580	Repeat positioning accuracy	SEC.		60
Output shaft rotary rigid	K1	kgf-m/rad	5.82×10^4	Input shaft rotary rigid	K2	kgf-m/rad	5.82×10^4	Weight	Kg		750



Sango Automation Limited
Address: Block 2, Huiye Tech Park, Tangtou Avenue,
Baoan District, Shenzhen, China
Email: info@sango-automation.com
Website: www.sango-automation.com