Chapter 1
Introduction

A note on the use of these PowerPoint slides:
We're making these slides freely available to all (faculty, students, readers). They're in PowerPoint form so you see the animations; and can add, modify, and delete slides (including this one) and slide content to suit your needs. They obviously represent a *lot* of work on our part. In return for use, we only ask the following:

- If you use these slides (e.g., in a class) that you mention their source (after all, we'd like people to use our book!)
- If you post any slides on a www site, that you note that they are adapted from (or perhaps identical to) our slides, and note our copyright of this material.

For a revision history, see the slide note for this page.

Thanks and enjoy! JFK/KWR

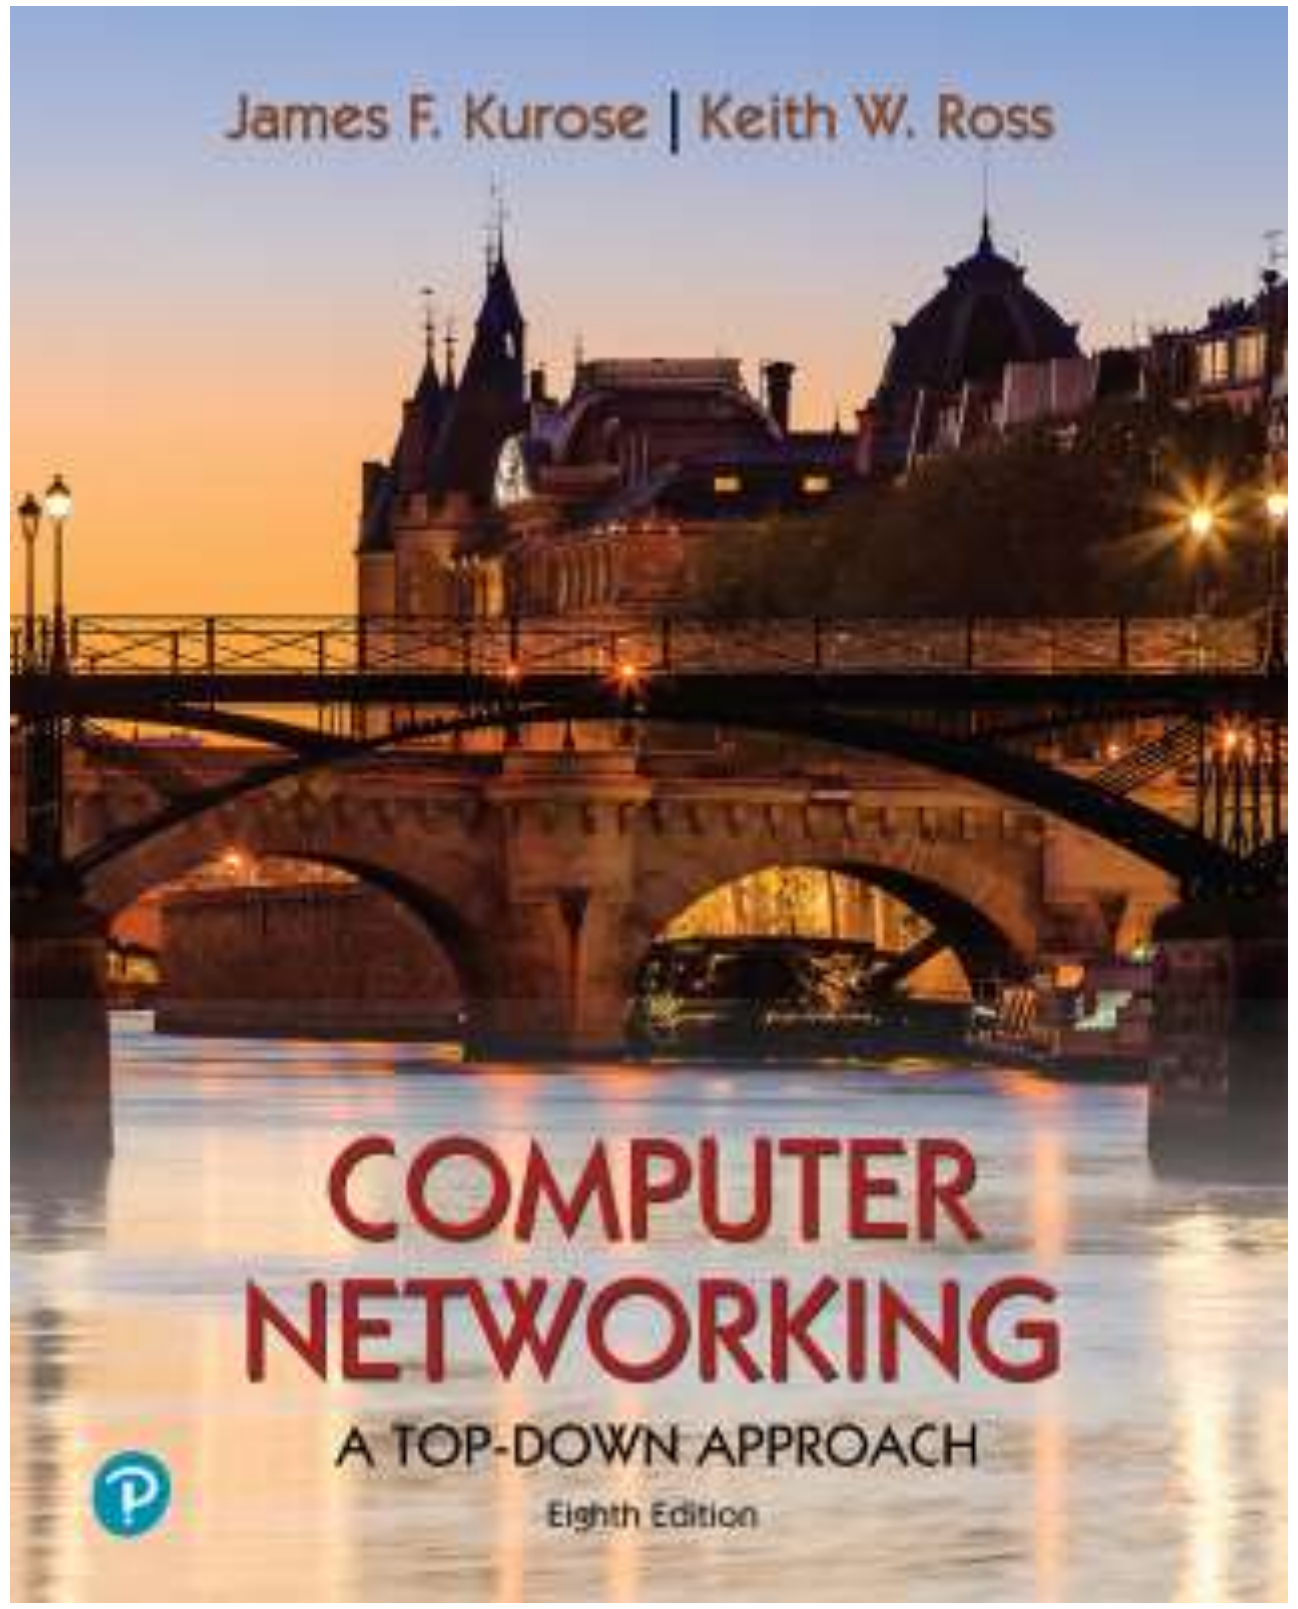

Computer Networking: A Top-Down Approach
8th edition
Jim Kurose, Keith Ross
Pearson, 2020

Chapter 1: introduction

Chapter goal:

- Get "feel," "big picture," introduction to terminology
  - more depth, detail *later* in course

Overview/roadmap:

- What *is* the Internet? What *is* a protocol?
- Network edge: hosts, access network, physical media
- Network core: packet/circuit switching, internet structure
- Performance: loss, delay, throughput
- Protocol layers, service models
- Security
- History

The Internet: a "nuts and bolts" view

Billions of connected computing *devices*:

- *hosts = end systems*
- running *network apps* at Internet's "edge"



Packet switches: forward packets (chunks of data)

- *routers, switches*

Communication links

- fiber, copper, radio, satellite
- transmission rate: *bandwidth*

Networks

- collection of devices, routers, links: managed by an organization

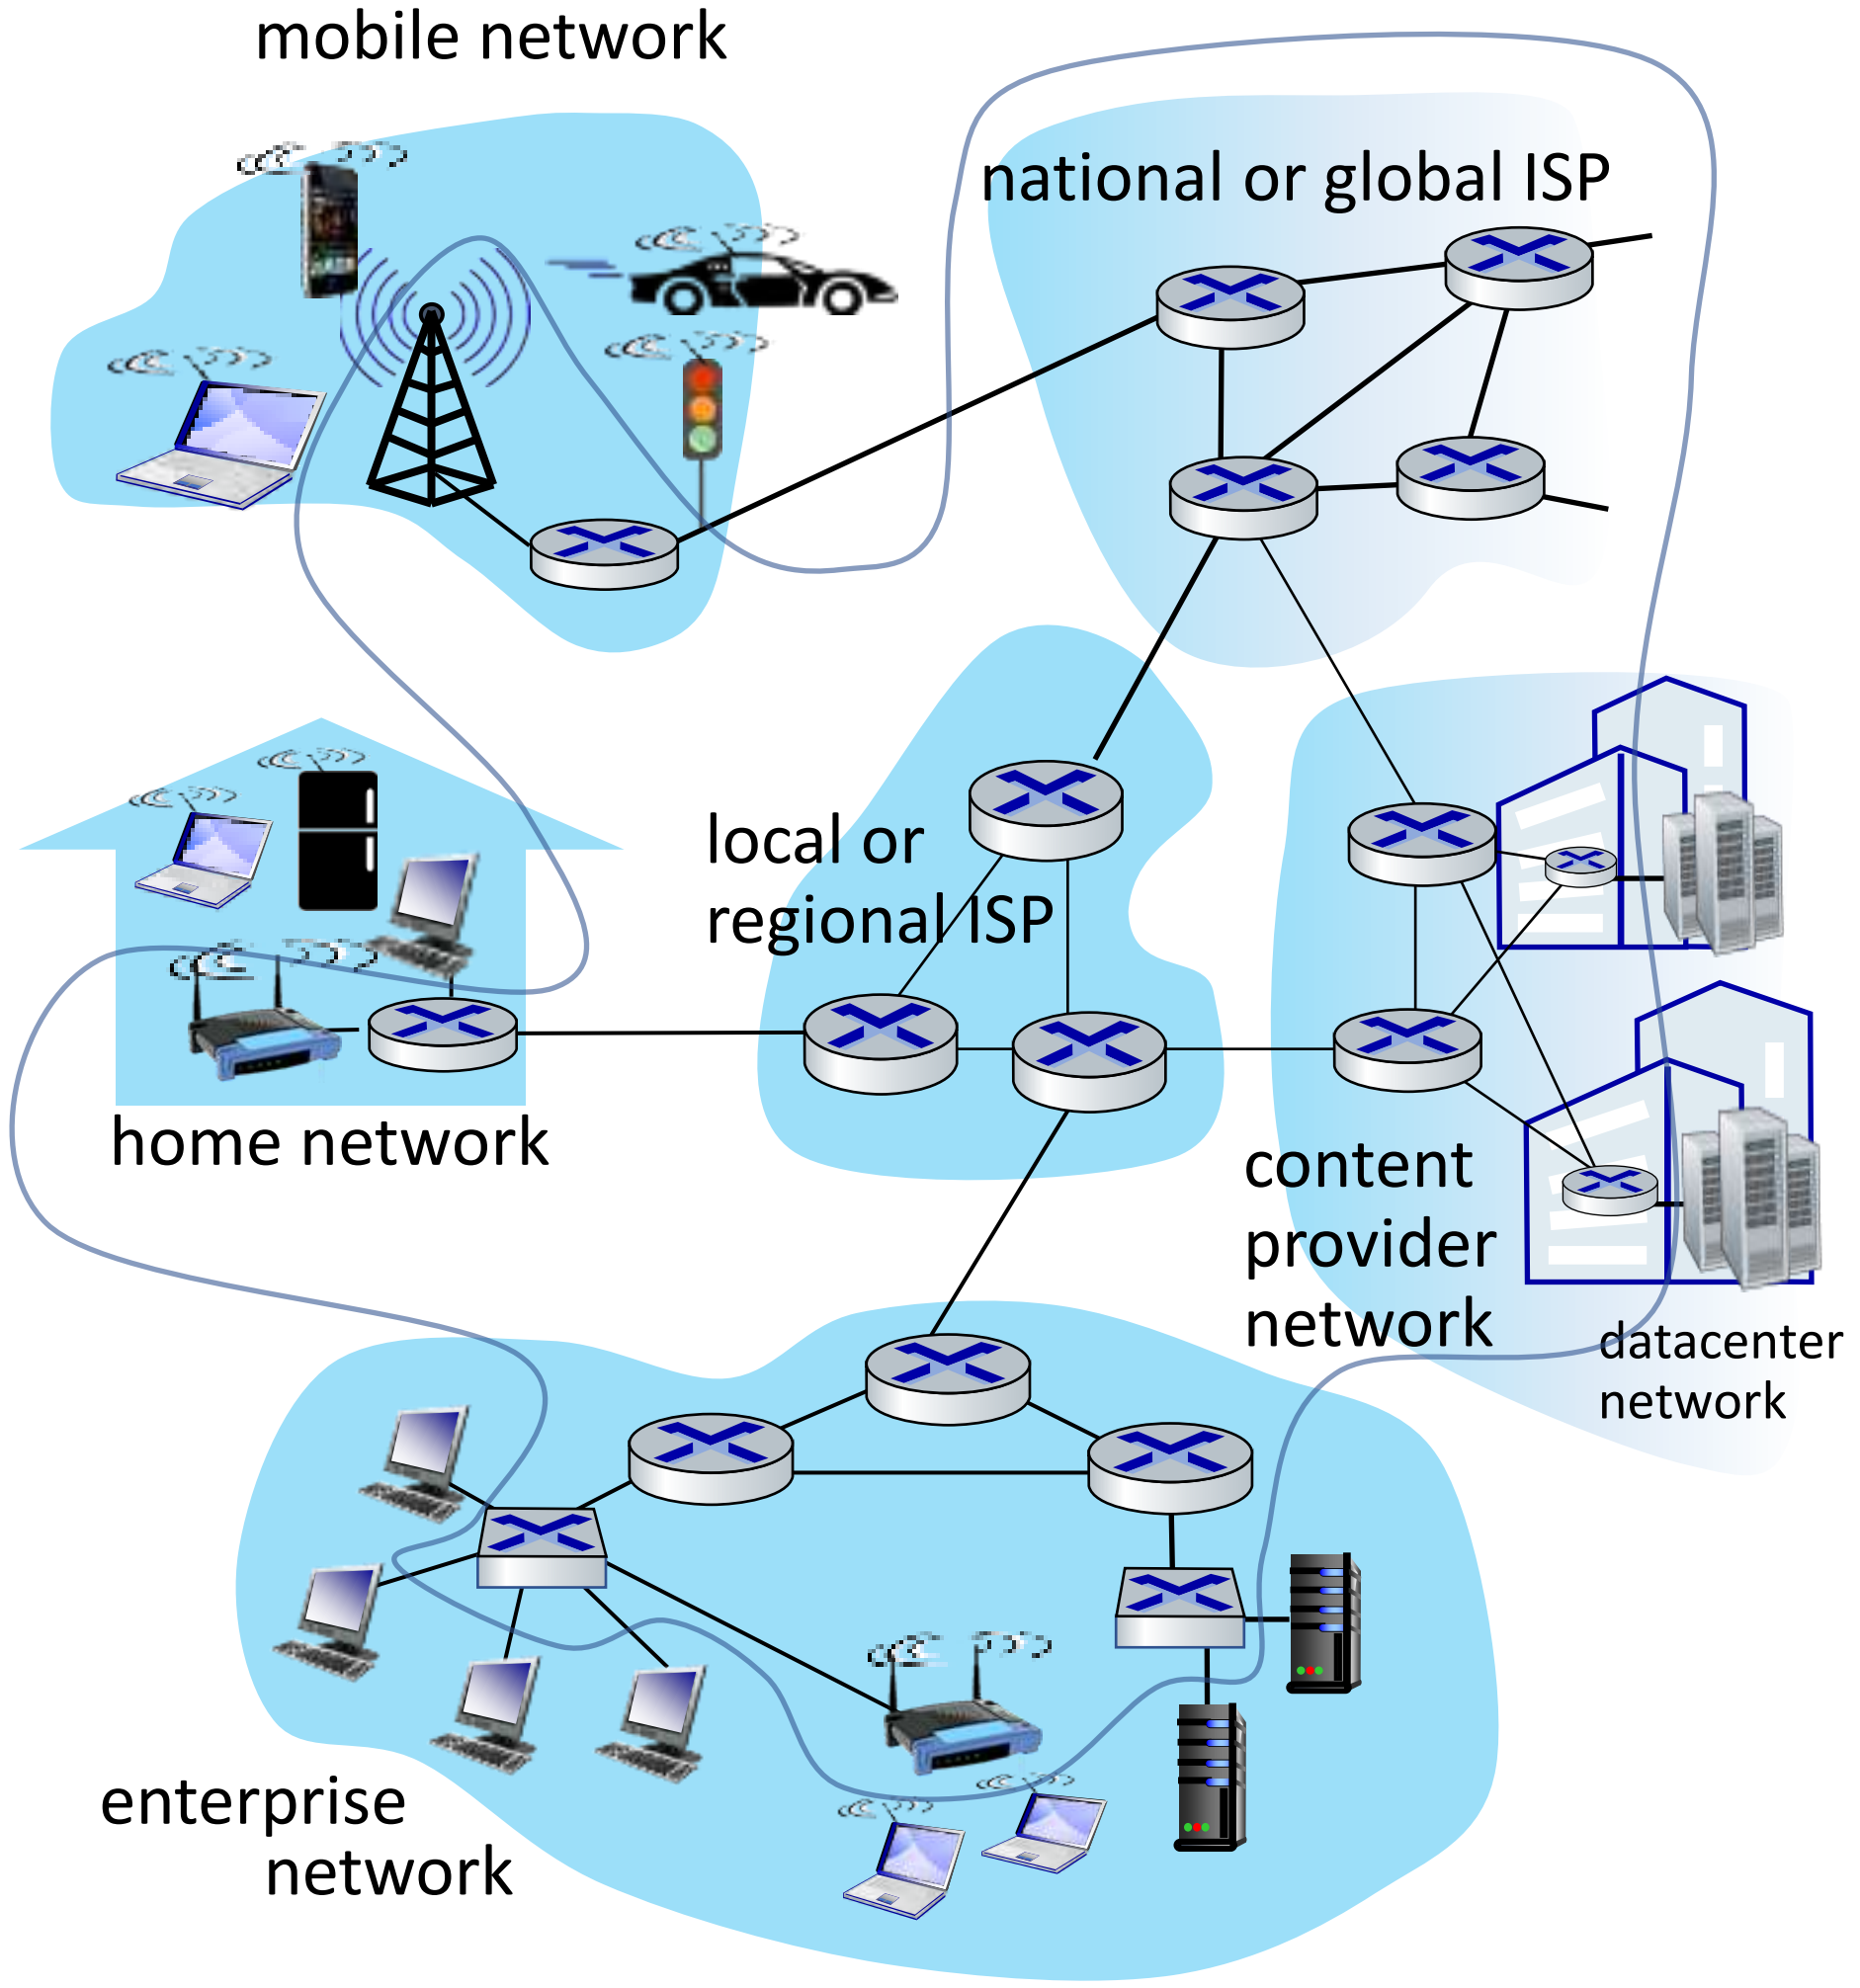

“Fun” Internet-connected devices

Amazon Echo

Internet refrigerator

IP picture frame

Pacemaker & Monitor

Tweet-a-watt: monitor energy use

bikes

Web-enabled toaster + weather forecaster

cars

scooters

Security Camera

Slingbox: remote control cable TV

AR devices

Fitbit

Internet phones

Gaming devices

sensorized, bed mattress

diapers

Others?

The Internet: a "nuts and bolts" view

- *Internet: "network of networks"*
  - Interconnected ISPs
- *protocols* are *everywhere*
  - control sending, receiving of messages
  - e.g., HTTP (Web), streaming video, Skype, TCP, IP, WiFi, 4/5G, Ethernet
- *Internet standards*
  - RFC: Request for Comments
  - IETF: Internet Engineering Task Force

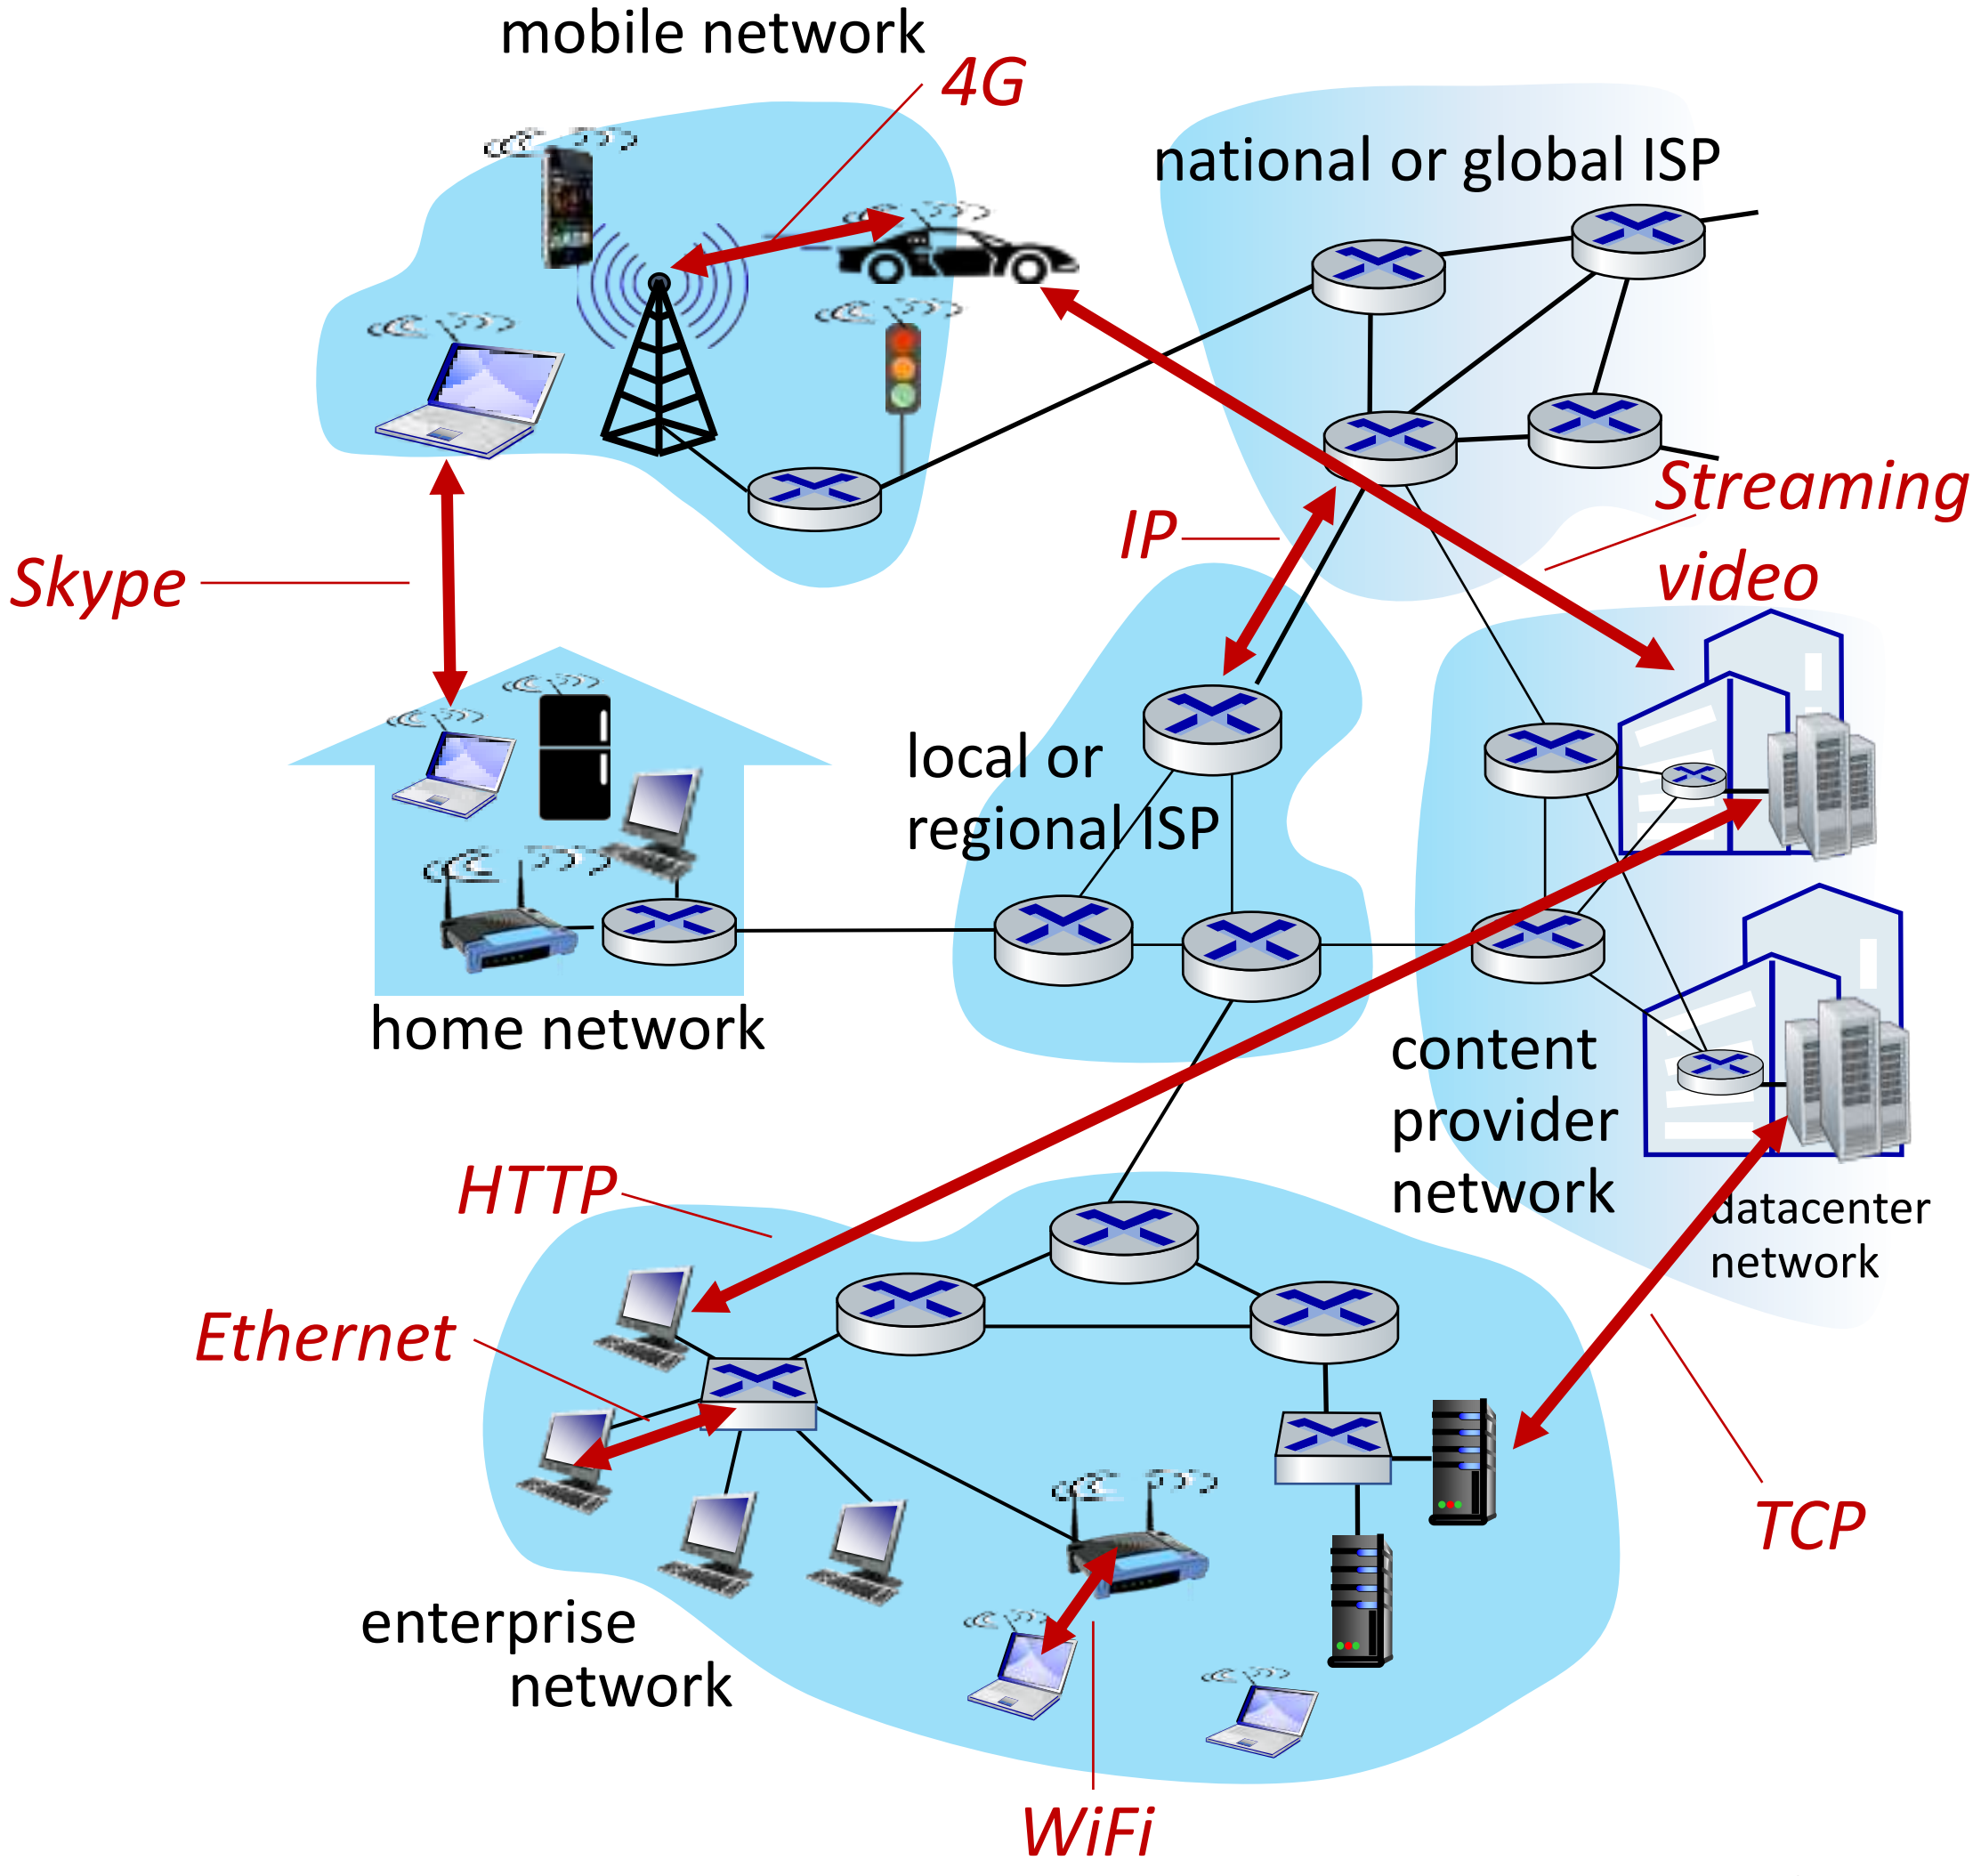

The Internet: a "services" view

- *Infrastructure* that provides services to applications:
  - Web, streaming video, multimedia teleconferencing, email, games, e-commerce, social media, inter-connected appliances, …
- provides *programming interface* to distributed applications:
  - "hooks" allowing sending/receiving apps to "connect" to, use Internet transport service
  - provides service options, analogous to postal service

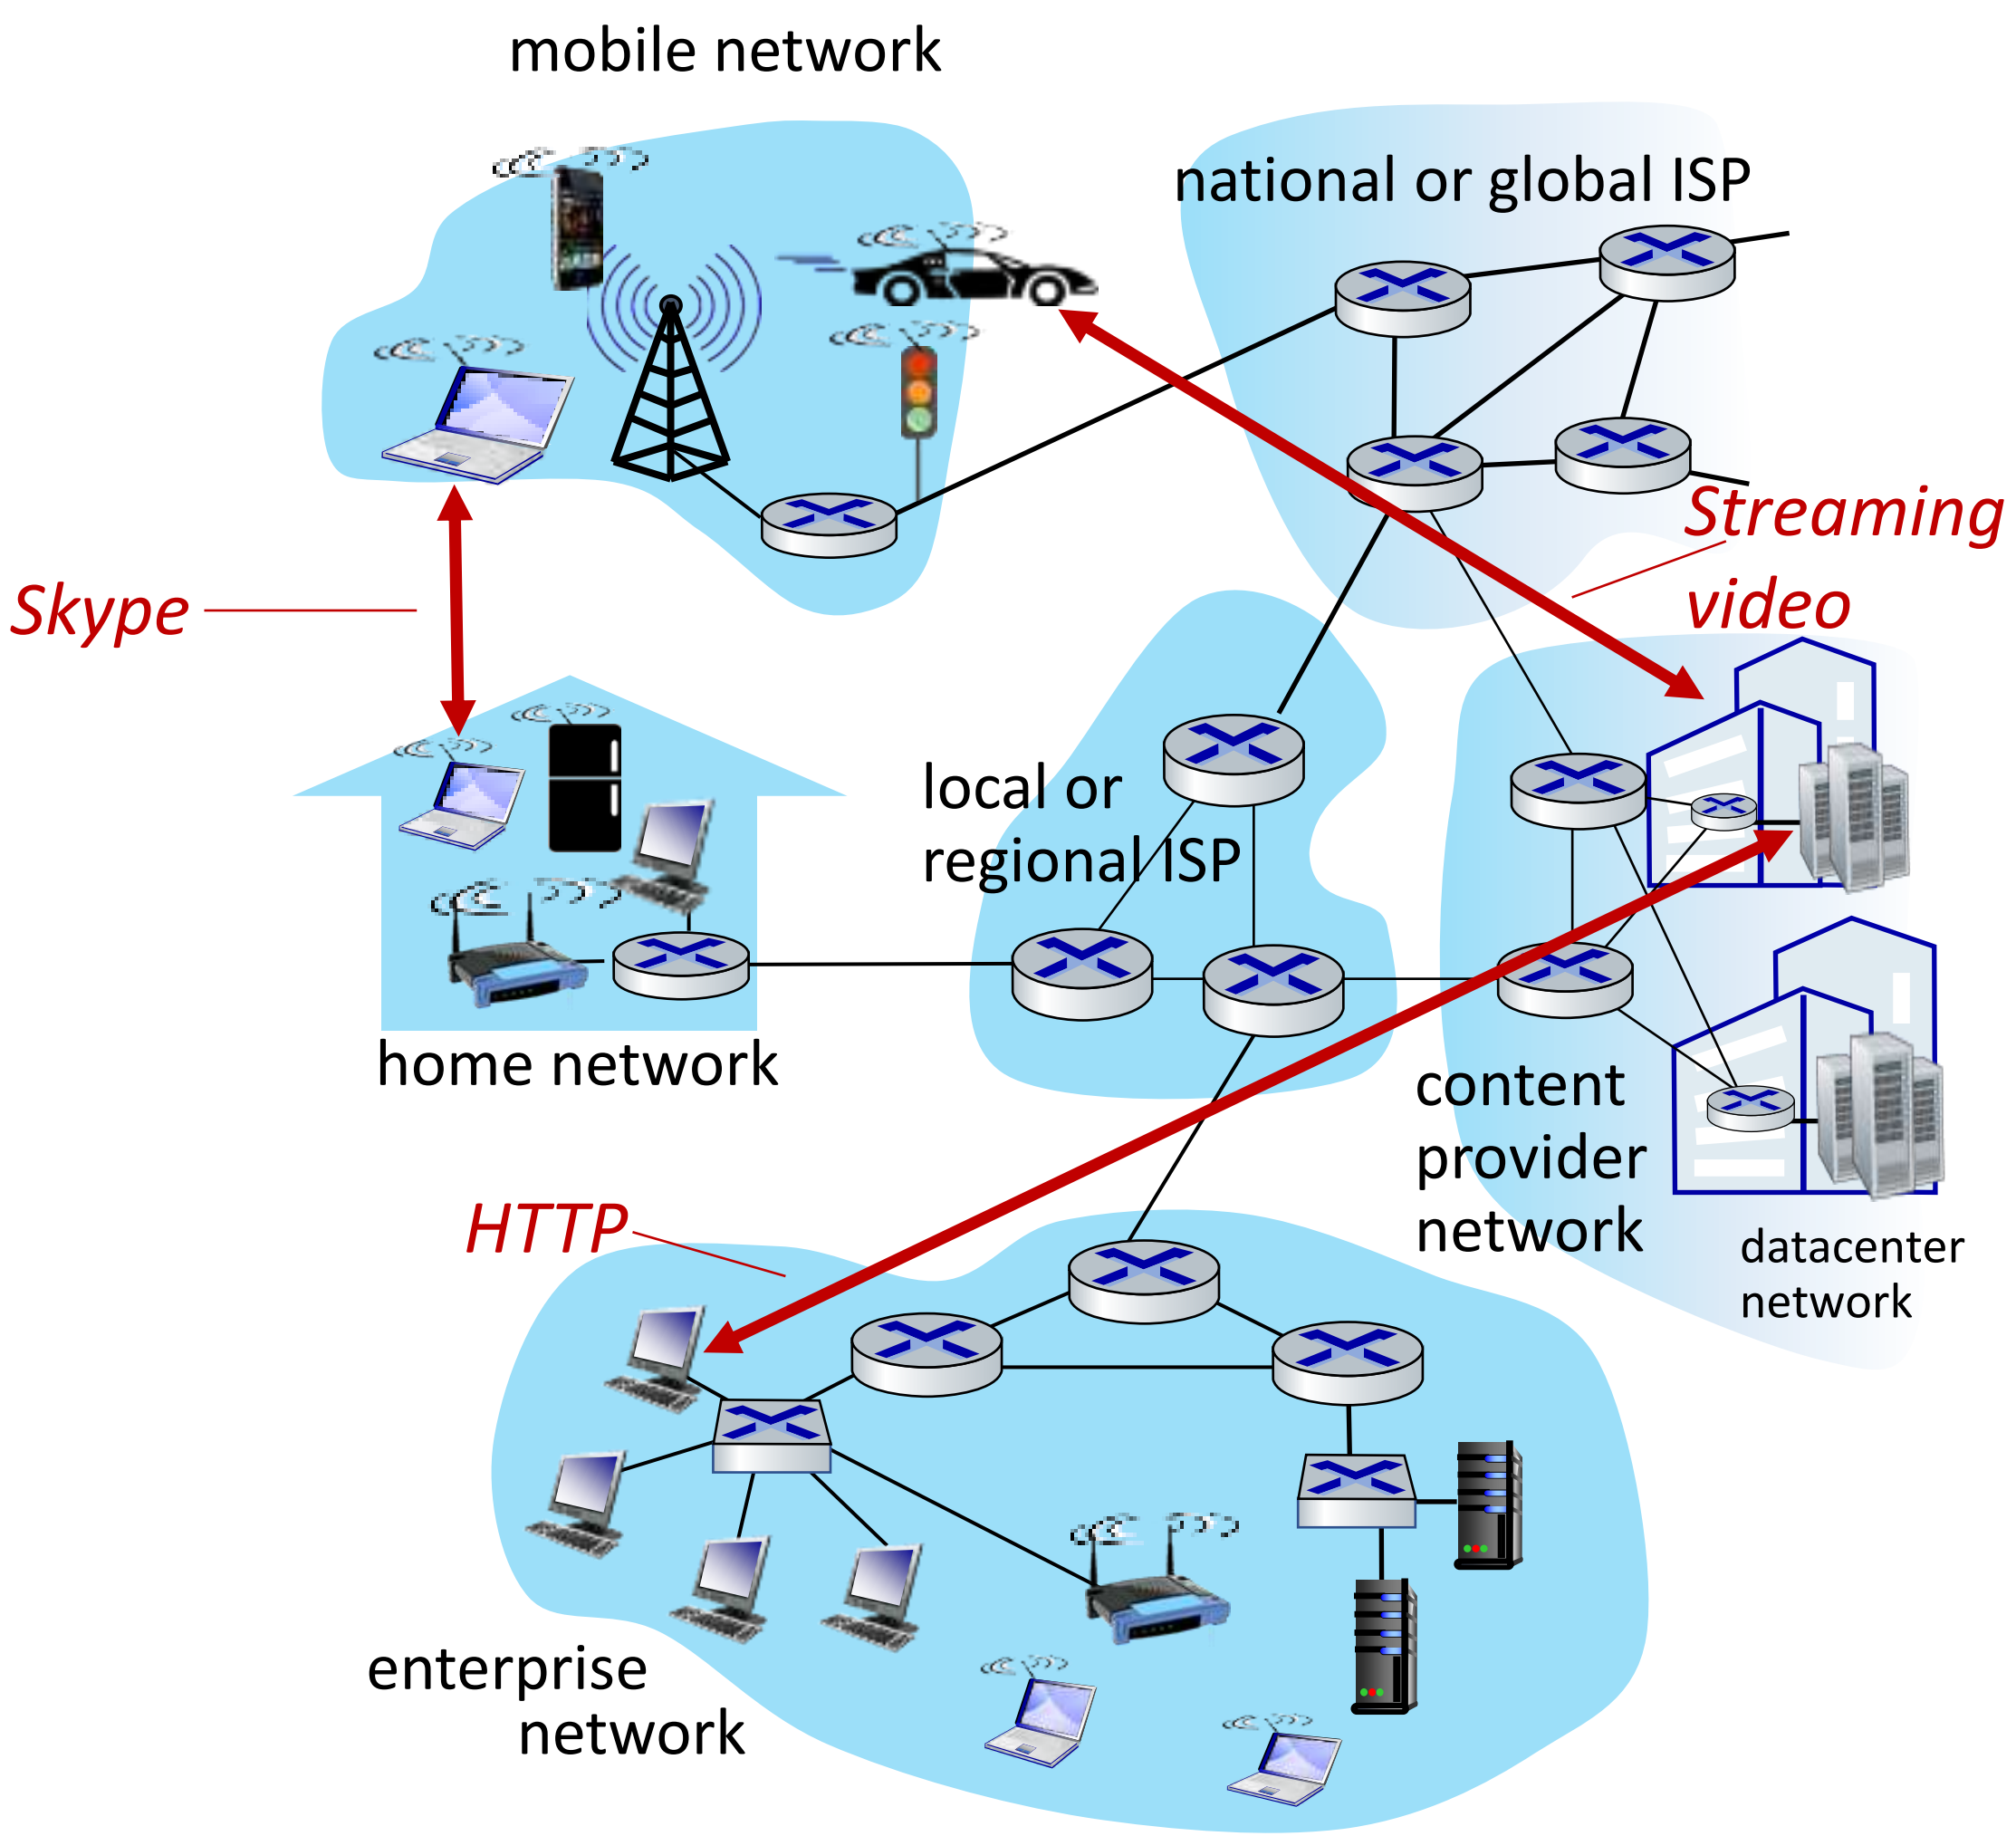

What's a protocol?

Human protocols:

- "what's the time?"
- "I have a question"
- introductions

Rules for:

… specific messages sent

… specific actions taken when message received, or other events

Network protocols:

- computers (devices) rather than humans
- all communication activity in Internet governed by protocols

Protocols define the format, order of messages sent and received among network entities, and actions taken on message transmission, receipt

What’s a protocol?

A human protocol and a computer network protocol:

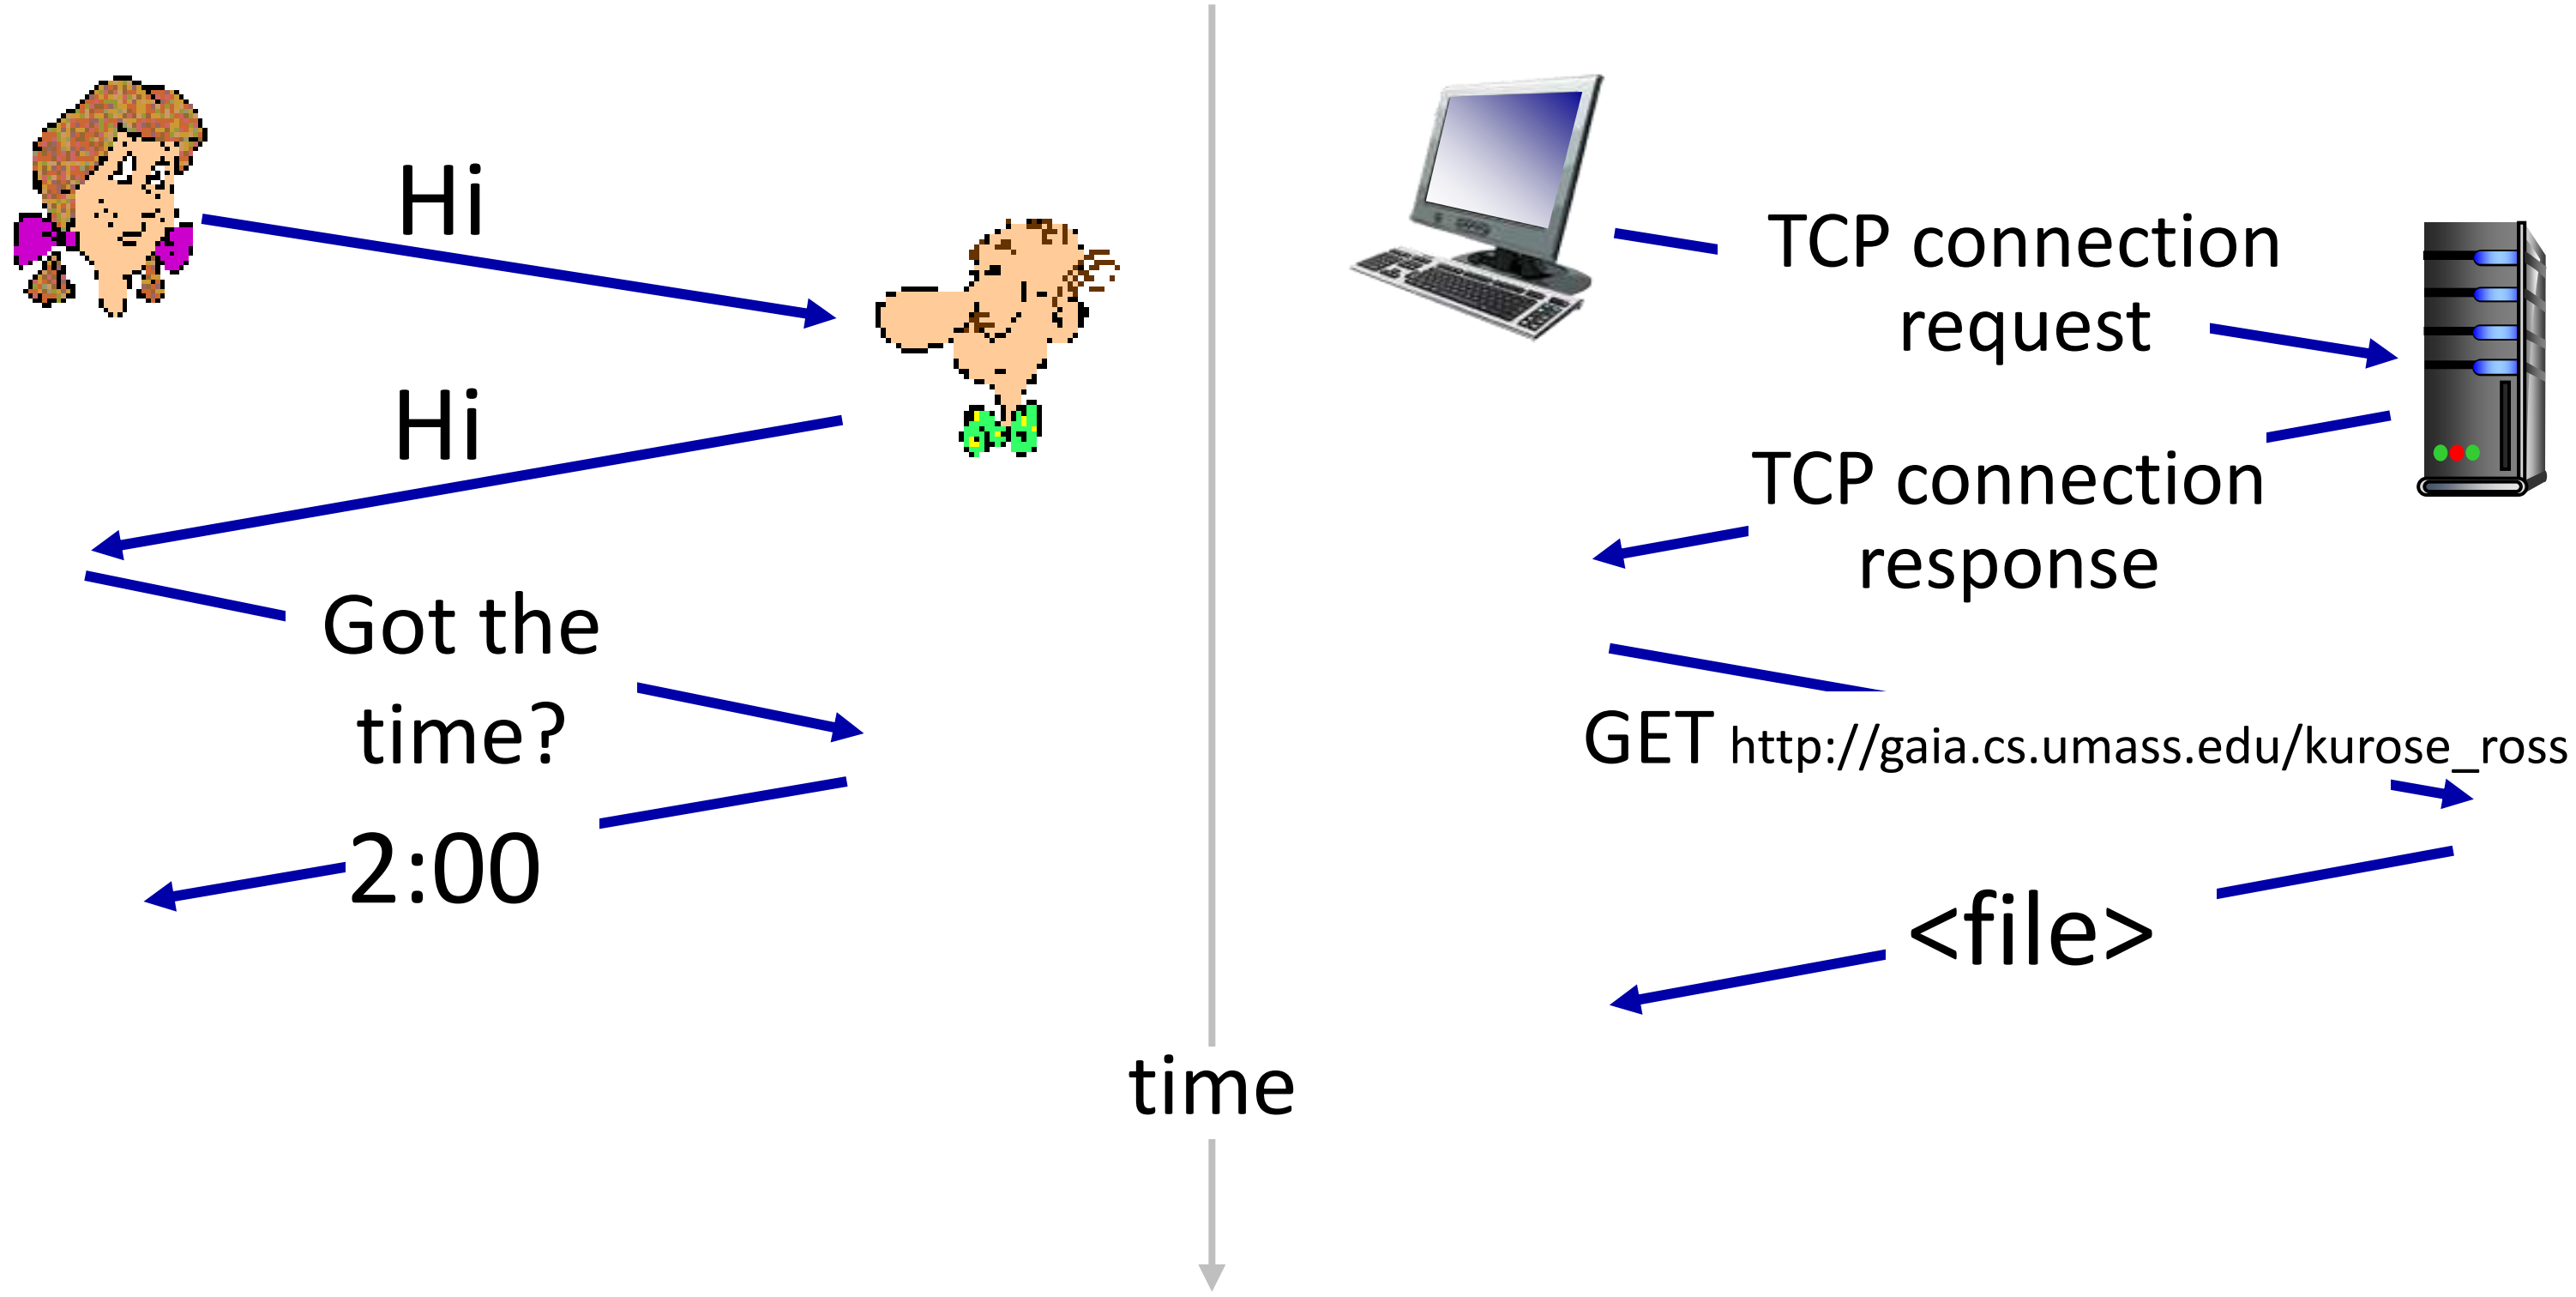

Q: other human protocols?

Chapter 1: roadmap

- What *is* the Internet?
- What *is* a protocol?
- Network edge: hosts, access network, physical media
- Network core: packet/circuit switching, internet structure
- Performance: loss, delay, throughput
- Security
- Protocol layers, service models
- History

A closer look at Internet structure

Network edge:

- hosts: clients and servers
- servers often in data centers

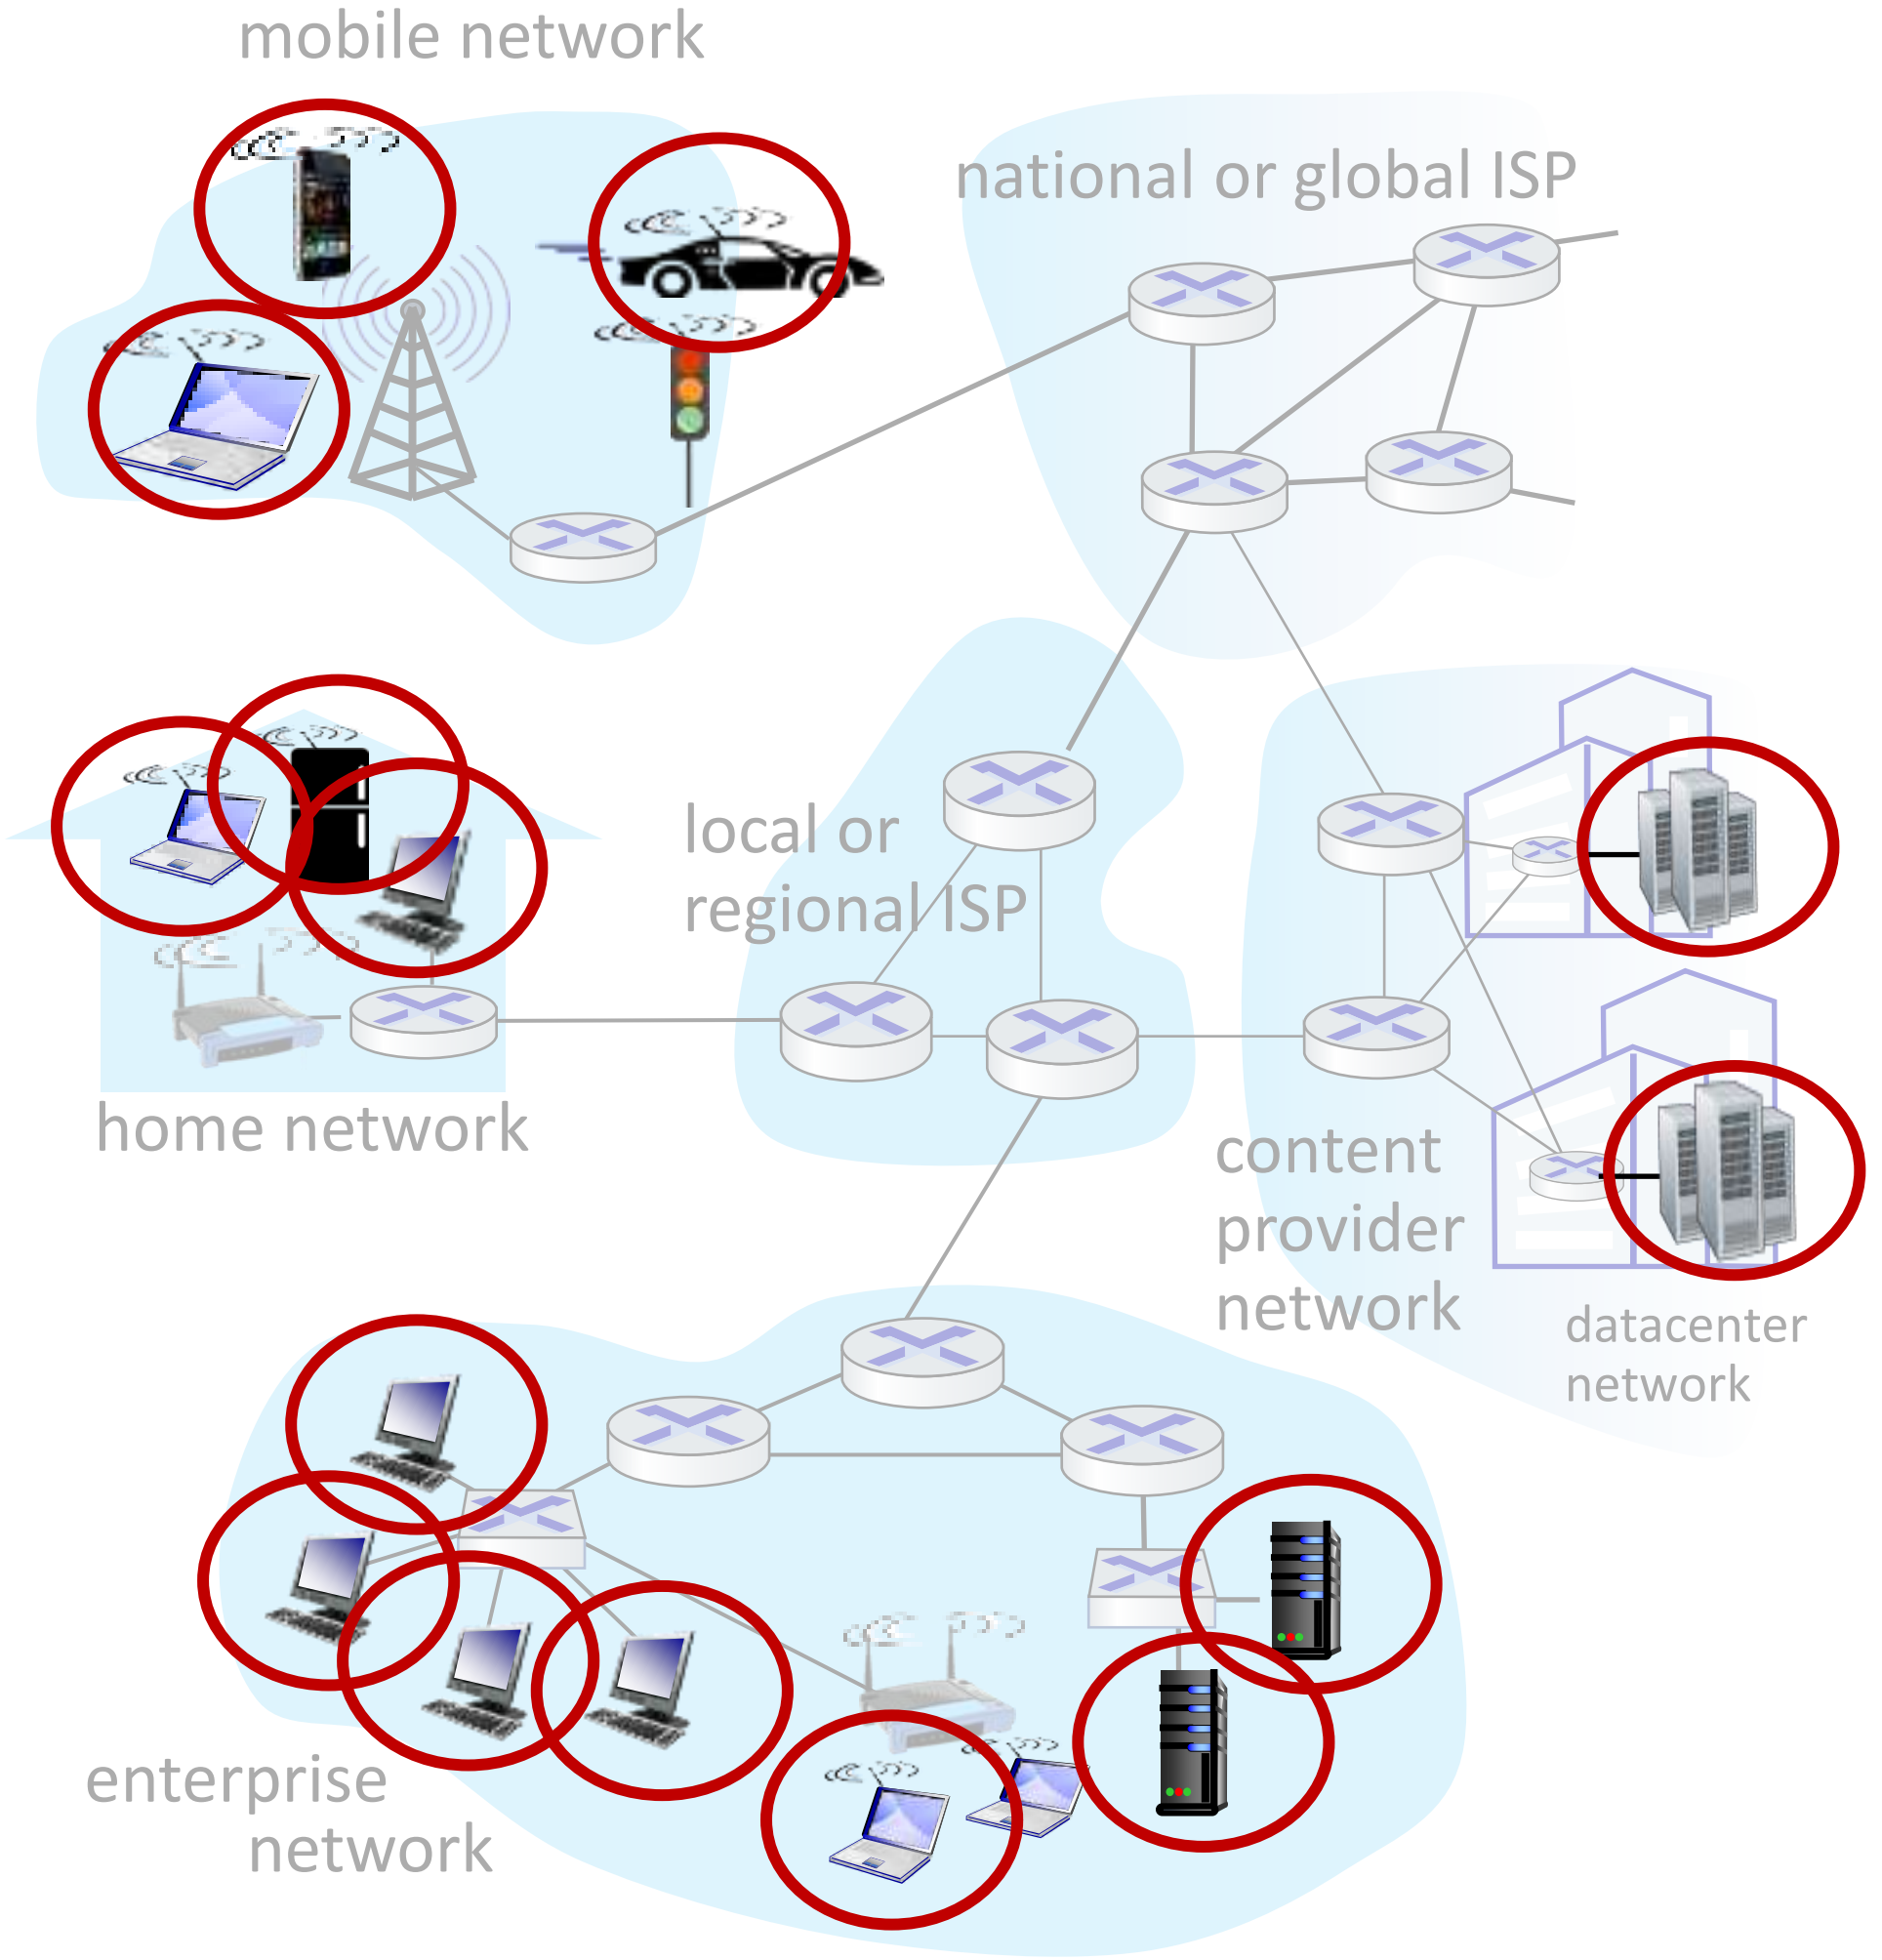

A closer look at Internet structure

Network edge:

- hosts: clients and servers
- servers often in data centers

Access networks, physical media:

- wired, wireless communication links

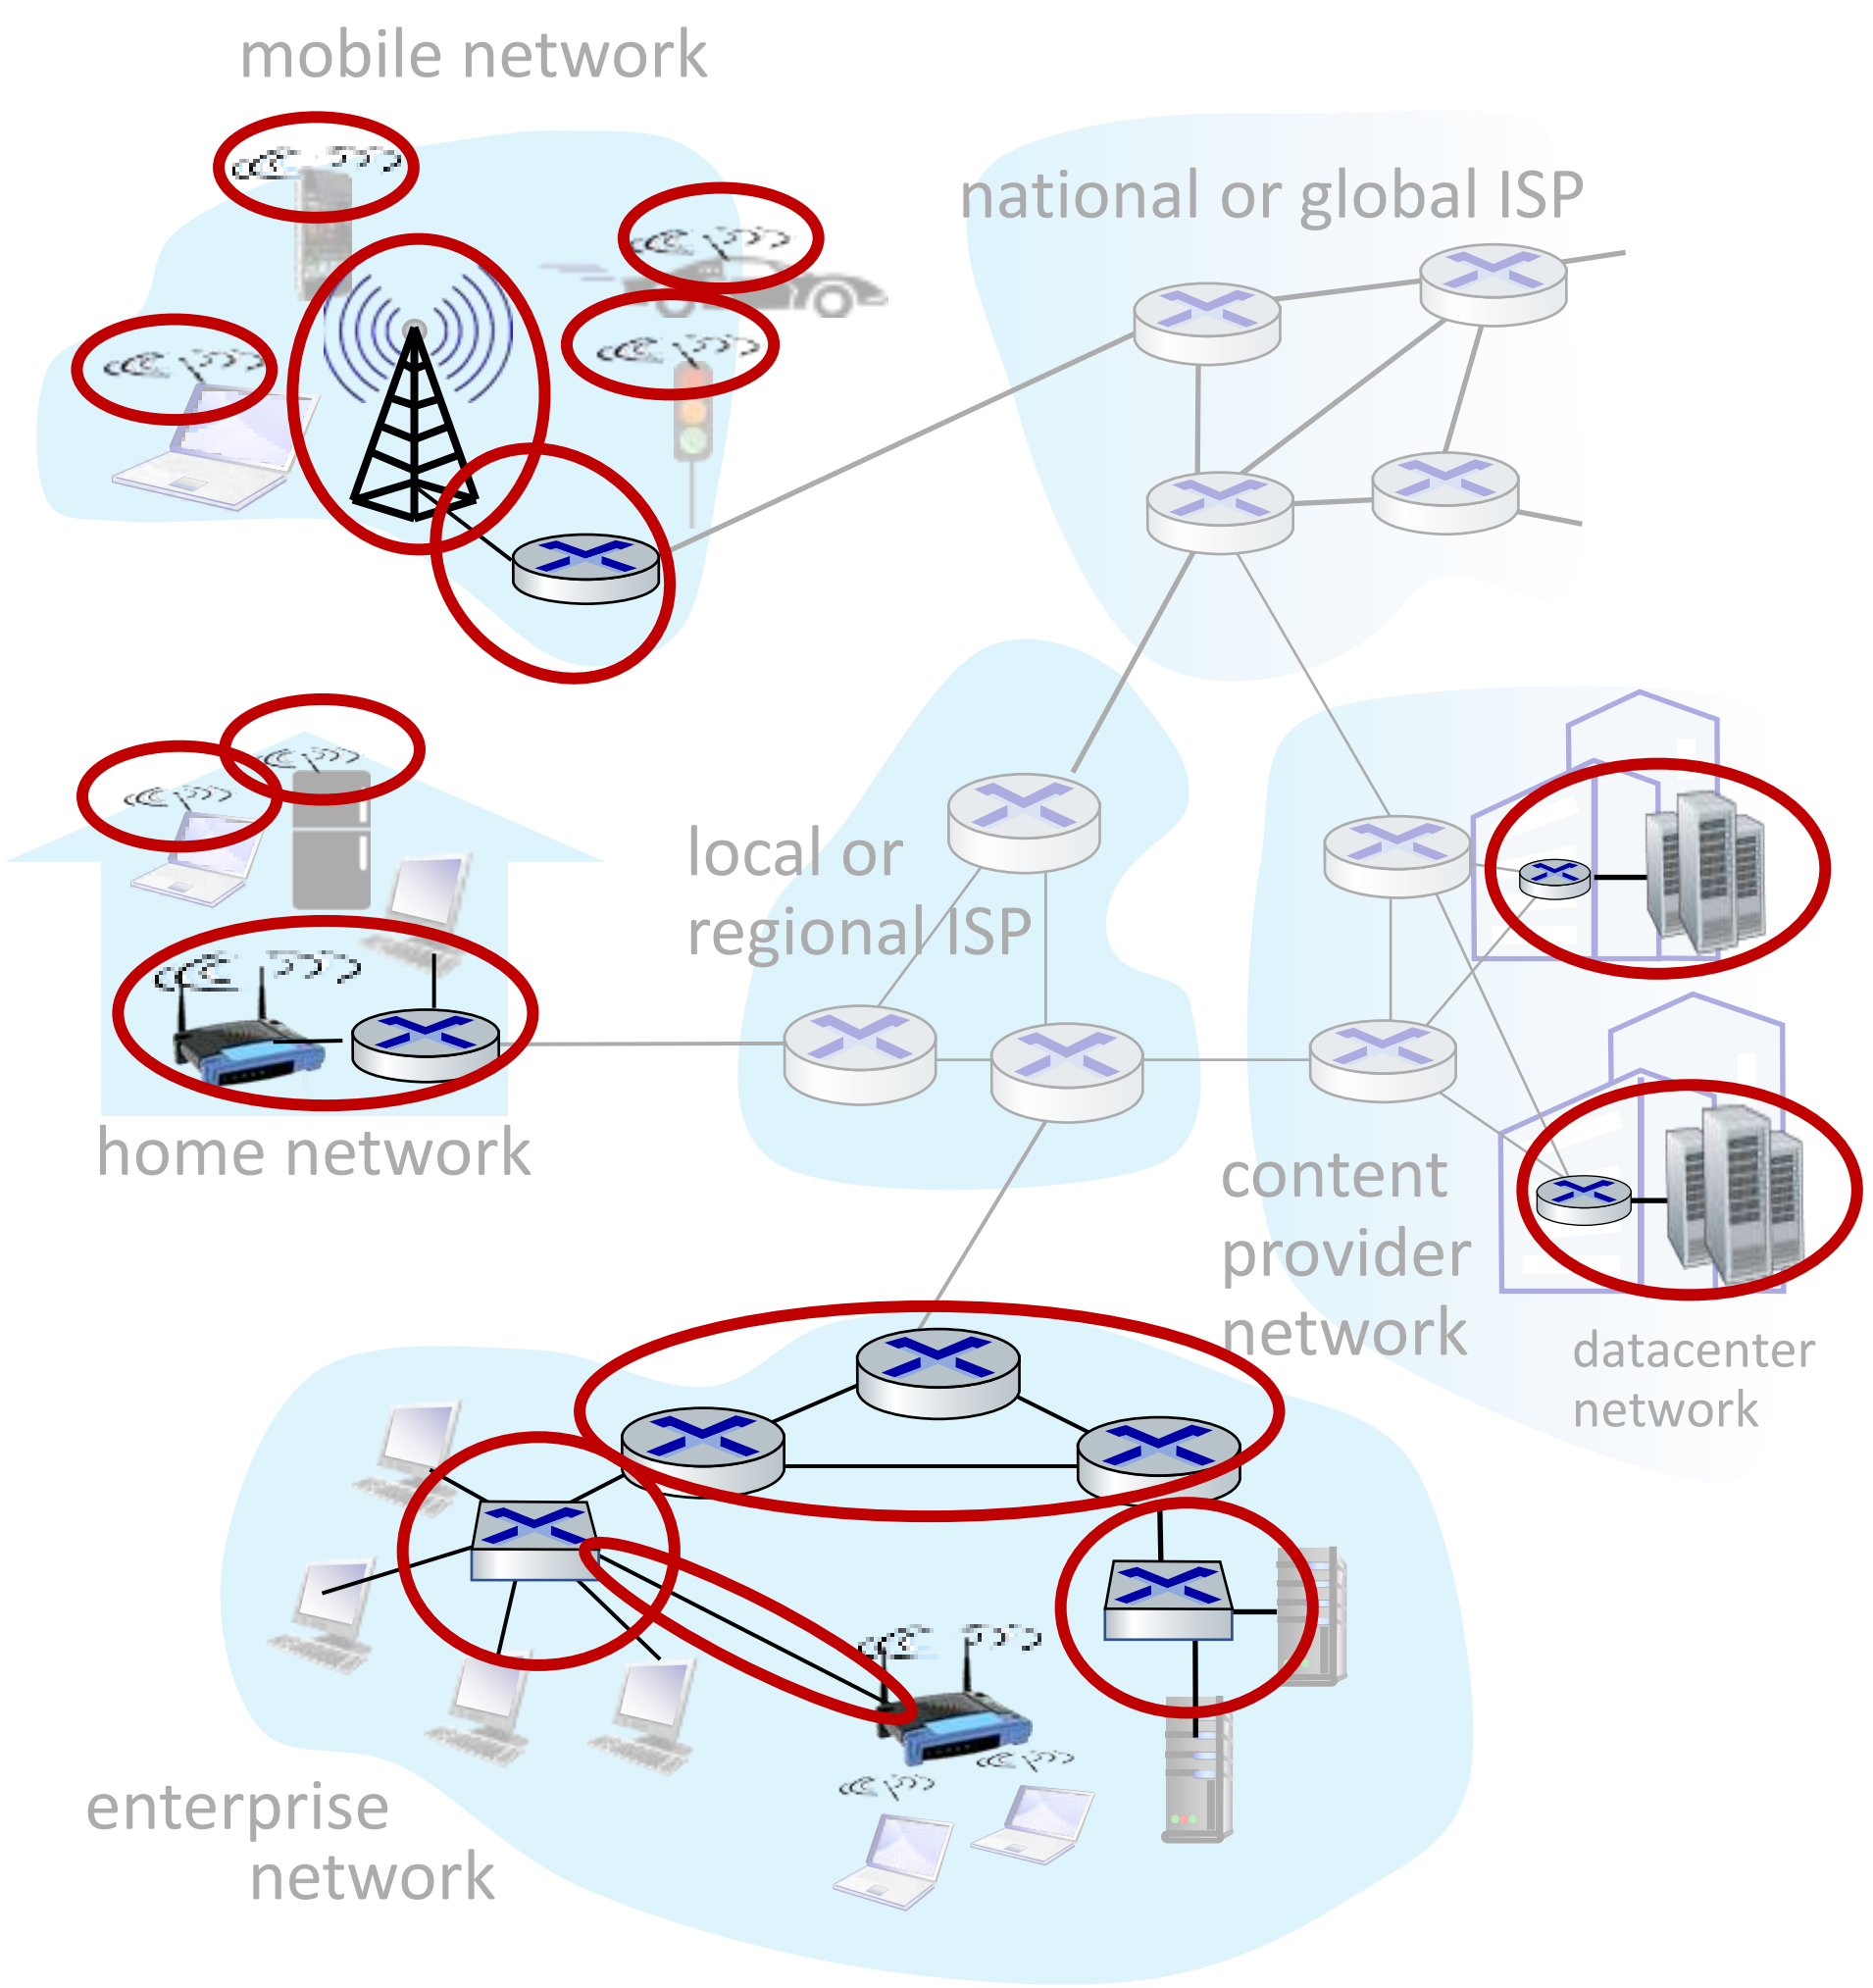

A closer look at Internet structure

Network edge:

- hosts: clients and servers
- servers often in data centers

Access networks, physical media:

- wired, wireless communication links

Network core:

- interconnected routers
- network of networks

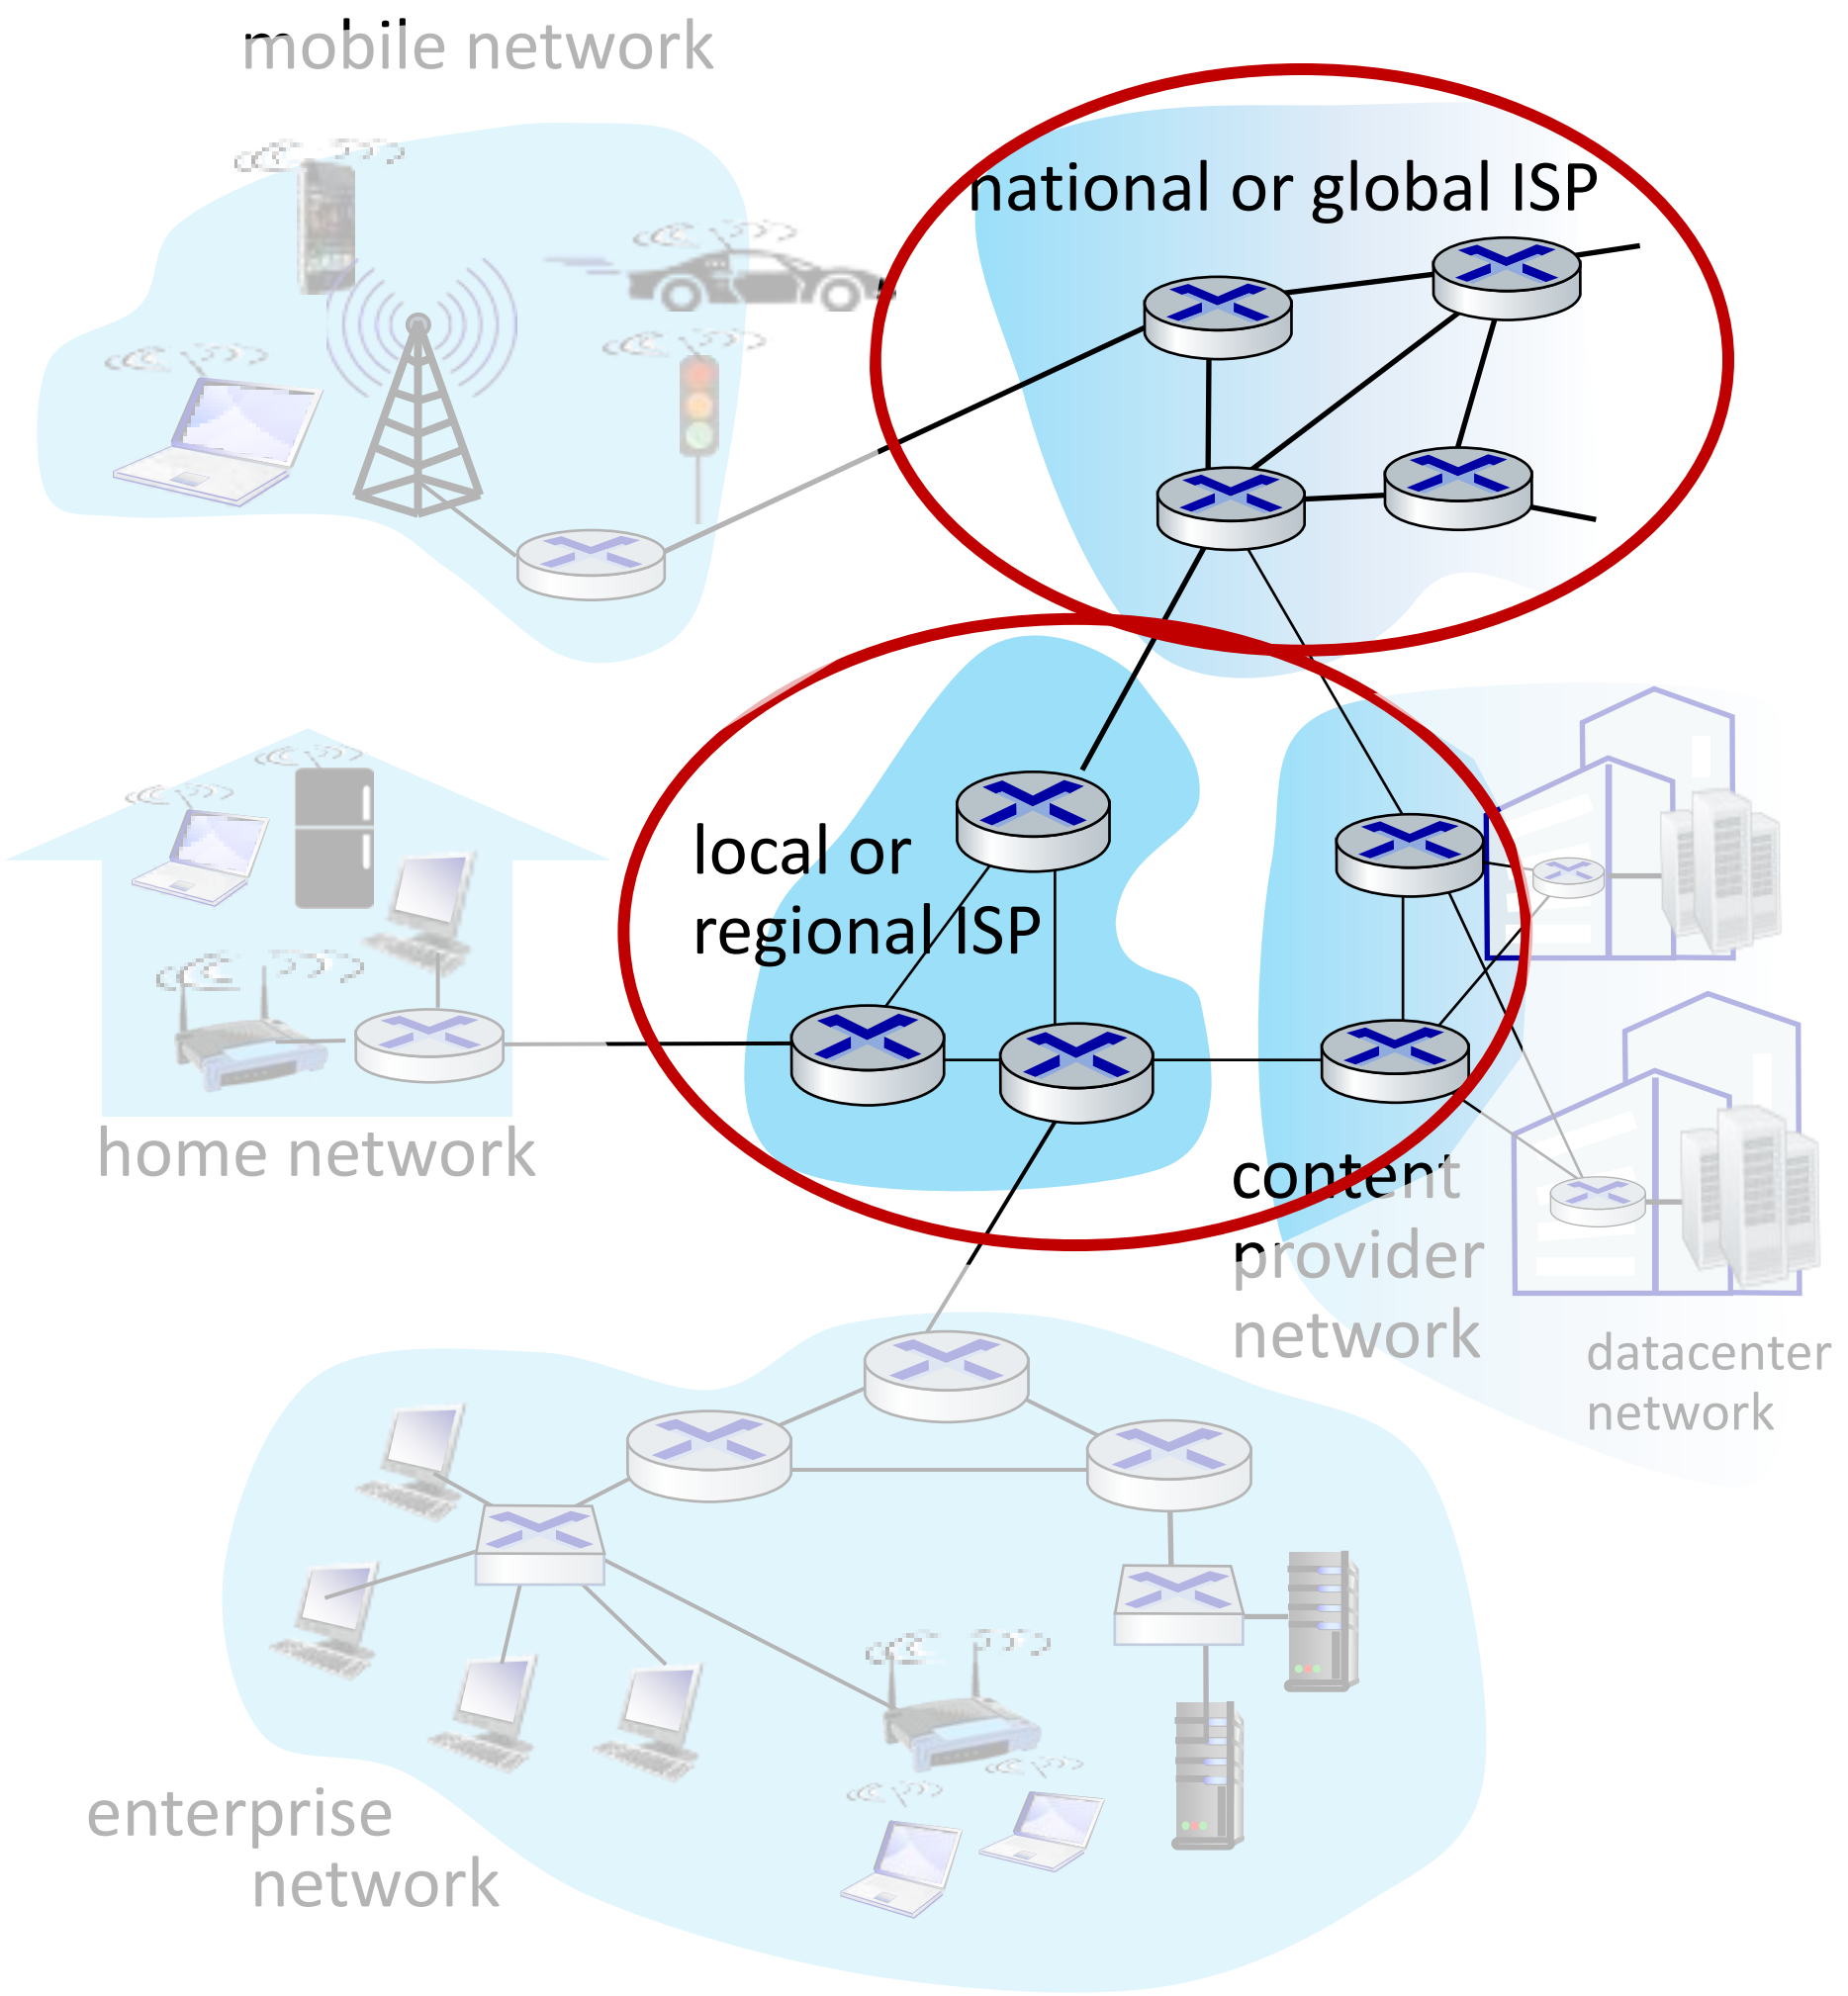

Access networks and physical media

Q: How to connect end systems to edge router?

- residential access nets
- institutional access networks (school, company)
- mobile access networks (WiFi, 4G/5G)

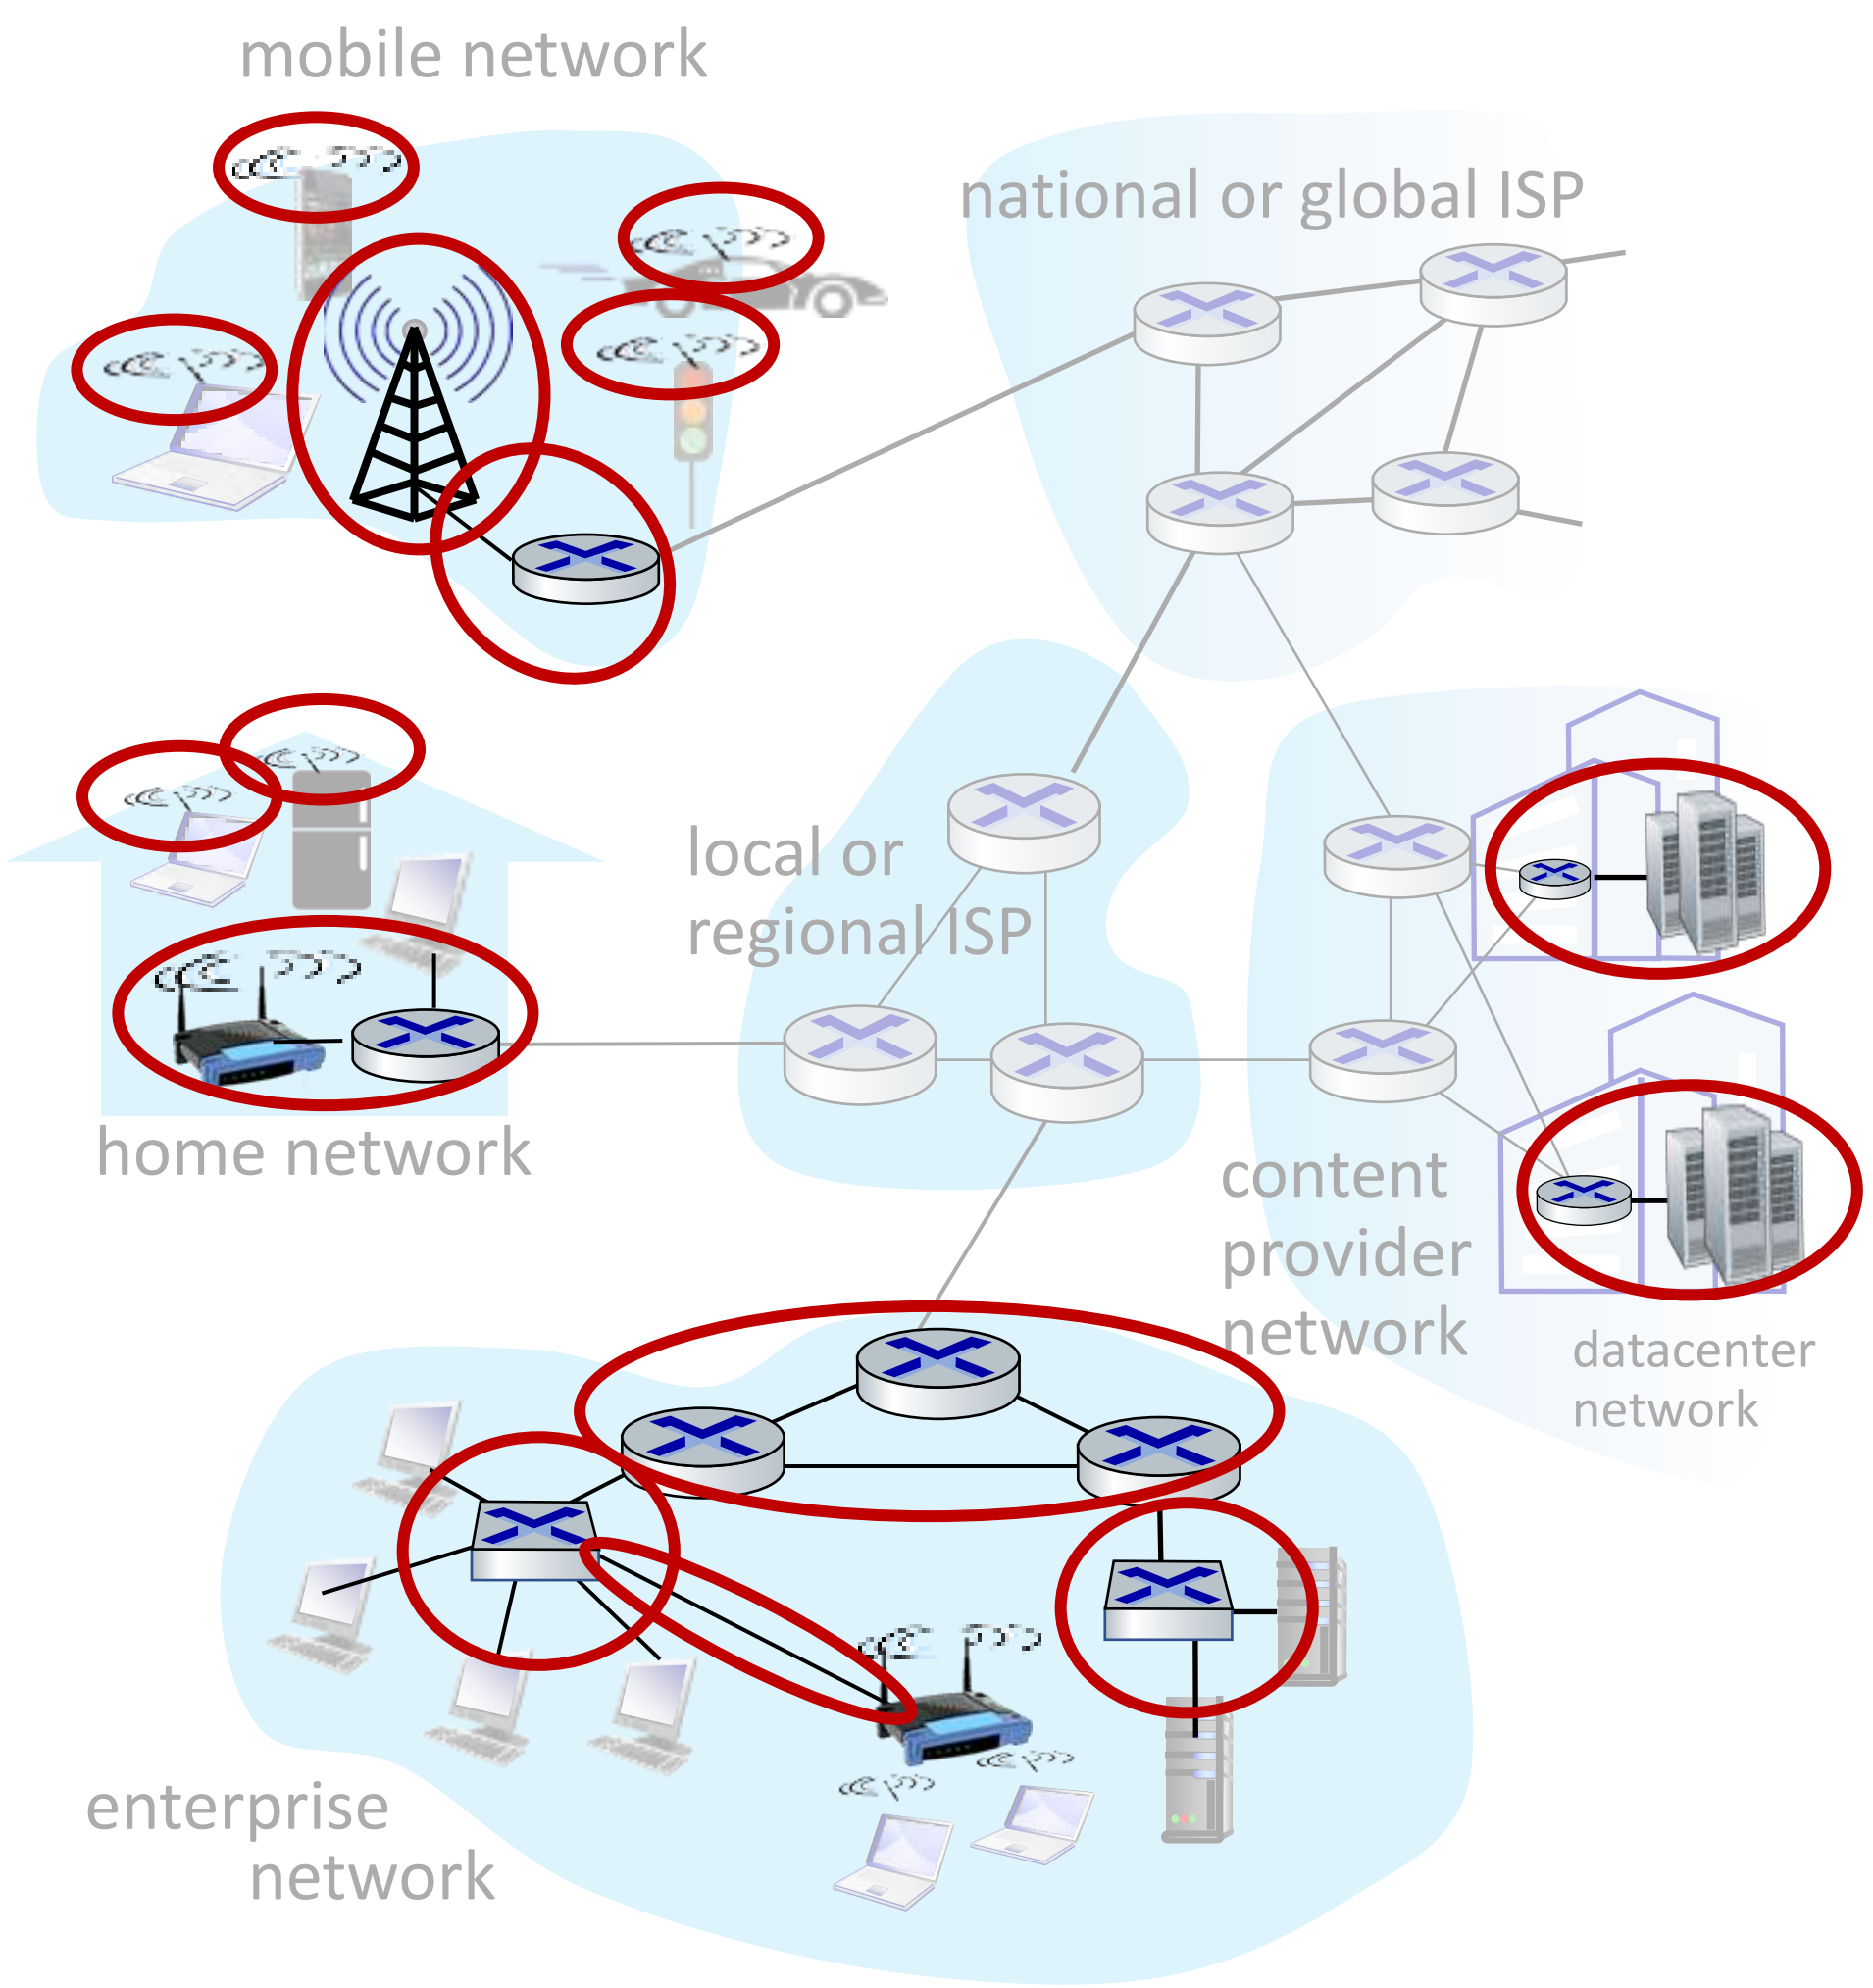

Access networks: cable-based access

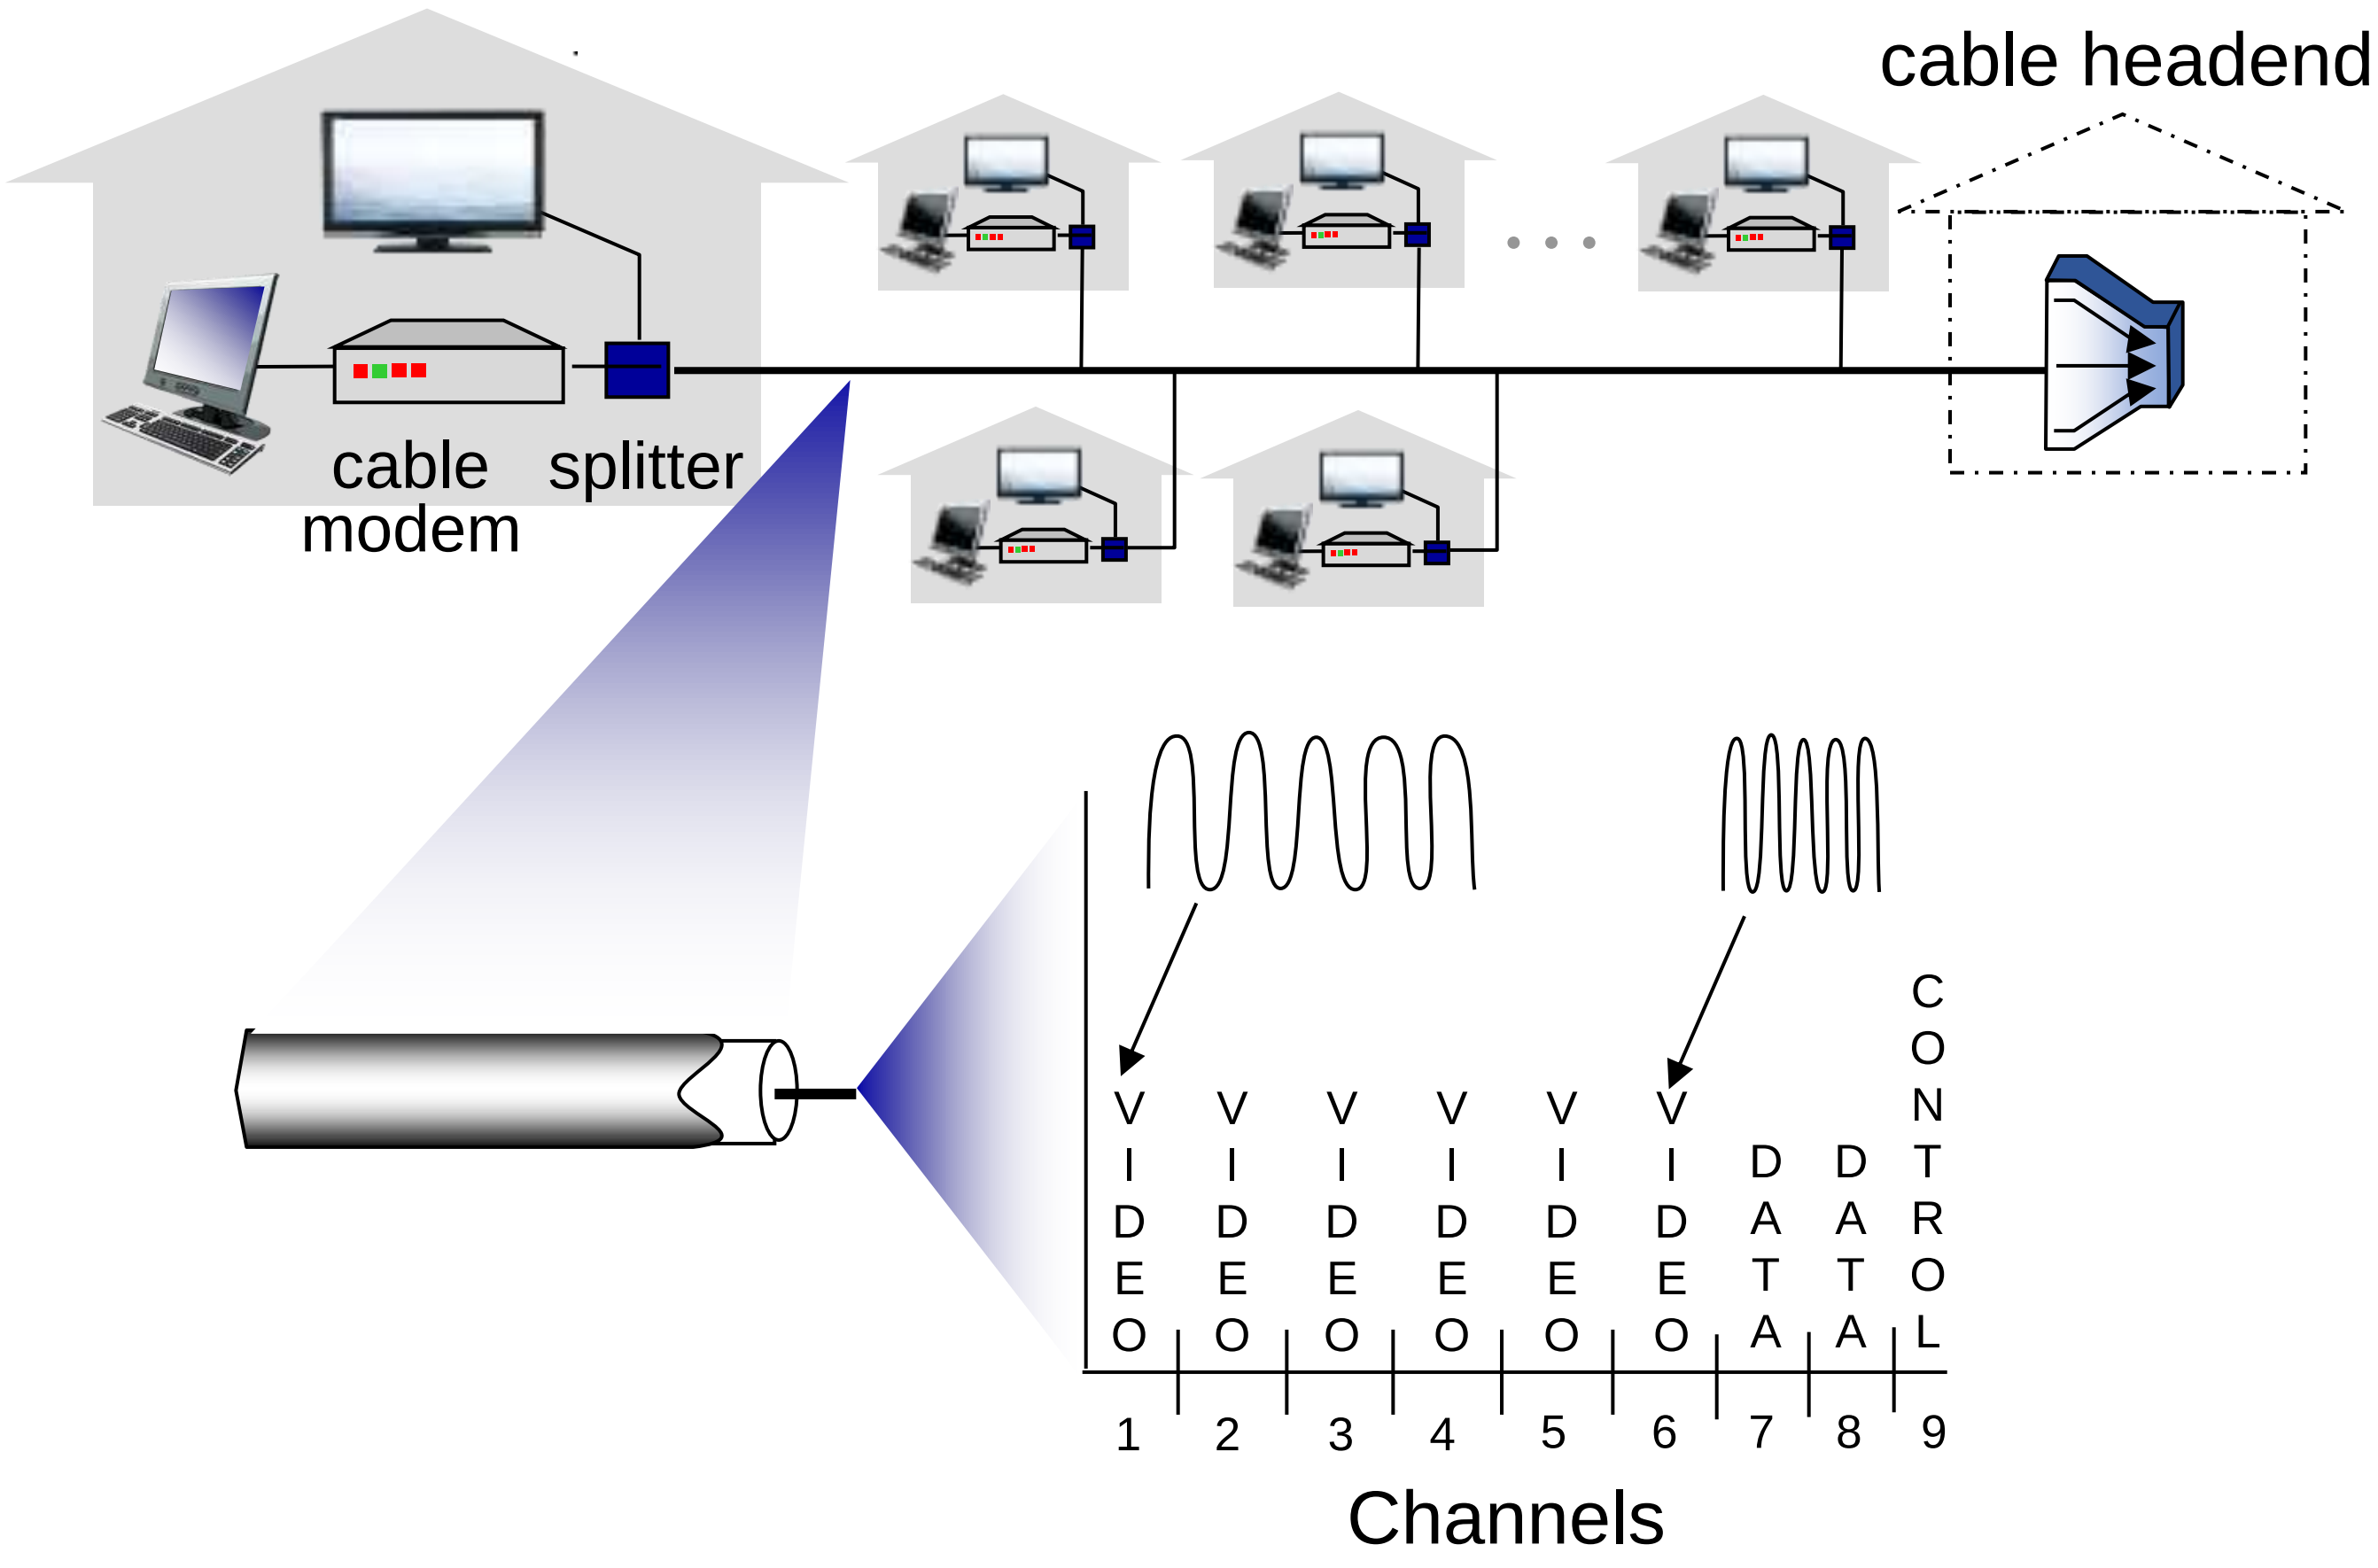

frequency division multiplexing (FDM): different channels transmitted in different frequency bands

Access networks: cable-based access

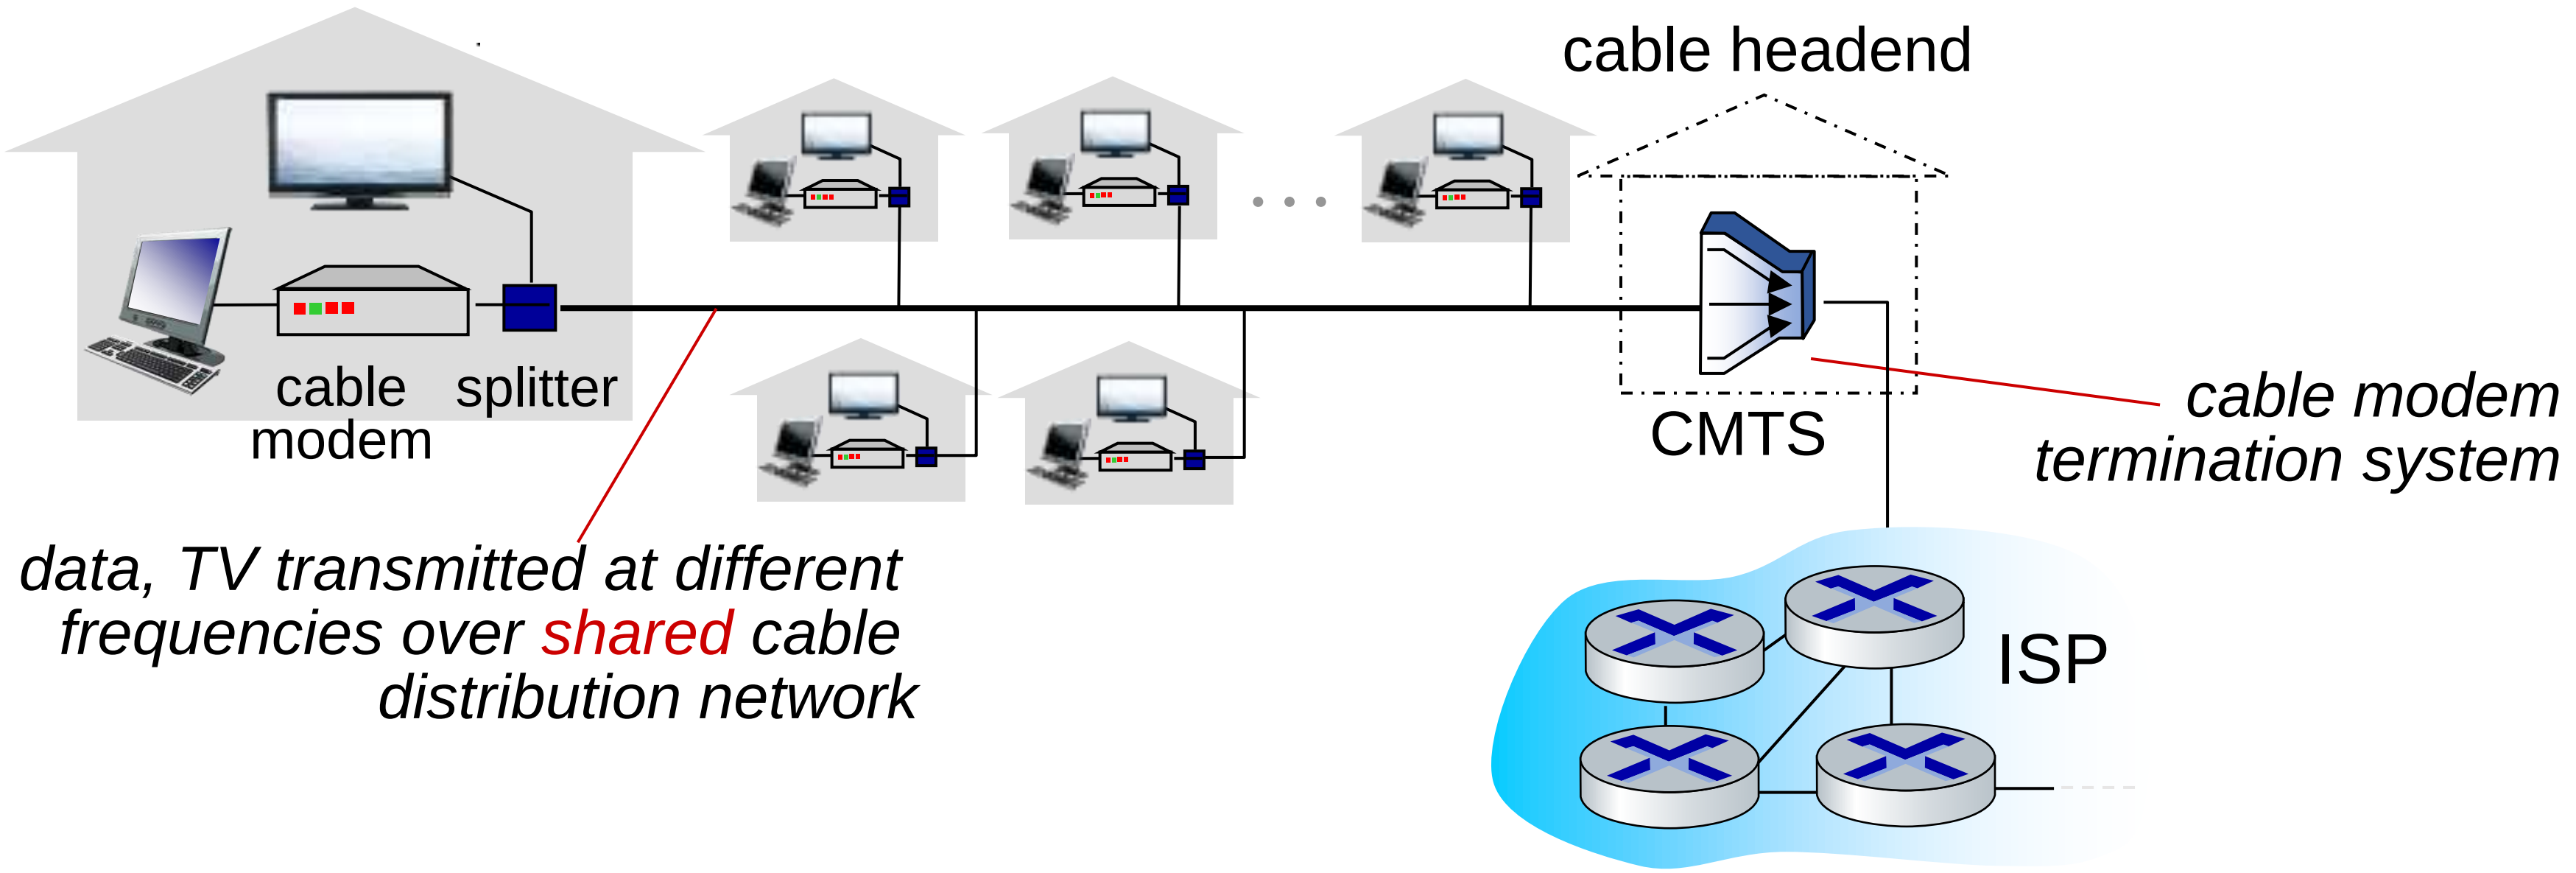

- HFC: hybrid fiber coax
  - asymmetric: up to 40 Mbps – 1.2 Gbps downstream transmission rate, 30-100 Mbps upstream transmission rate
  - Uses fiber cable and coaxial cable
- network of cable, fiber attaches homes to ISP router
  - homes *share access network* to cable headend

Access networks: digital subscriber line (DSL)

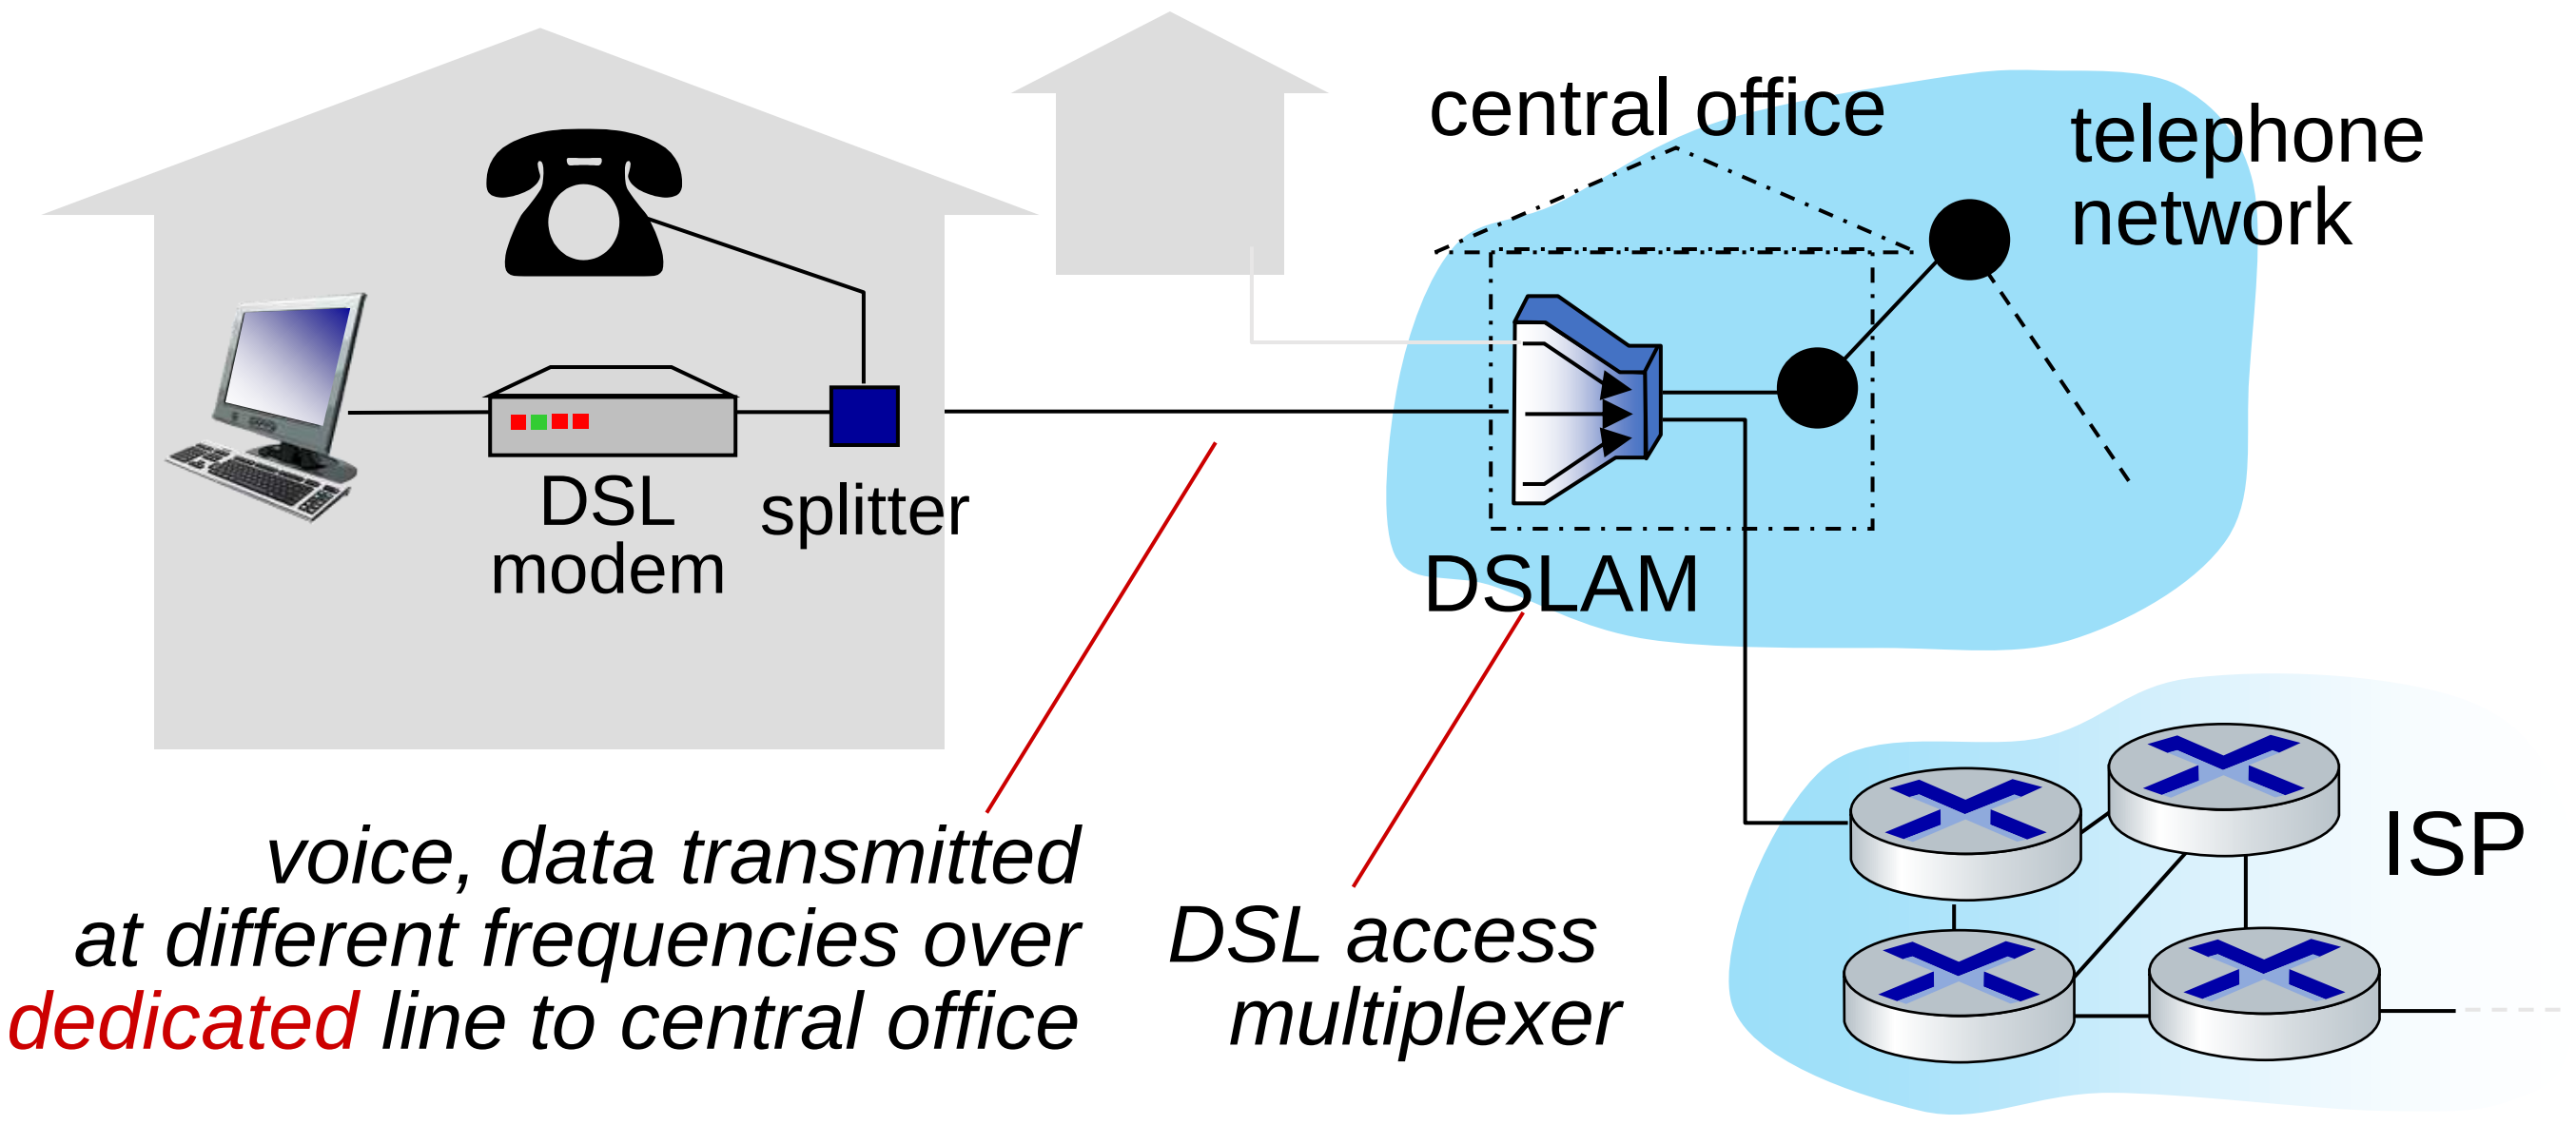

- use *existing* telephone line to central office DSLAM
  - Uses copper wire
  - data over DSL phone line goes to Internet
  - voice over DSL phone line goes to telephone net
- 24-52 Mbps dedicated downstream transmission rate
- 3.5-16 Mbps dedicated upstream transmission rate

Access networks: home networks

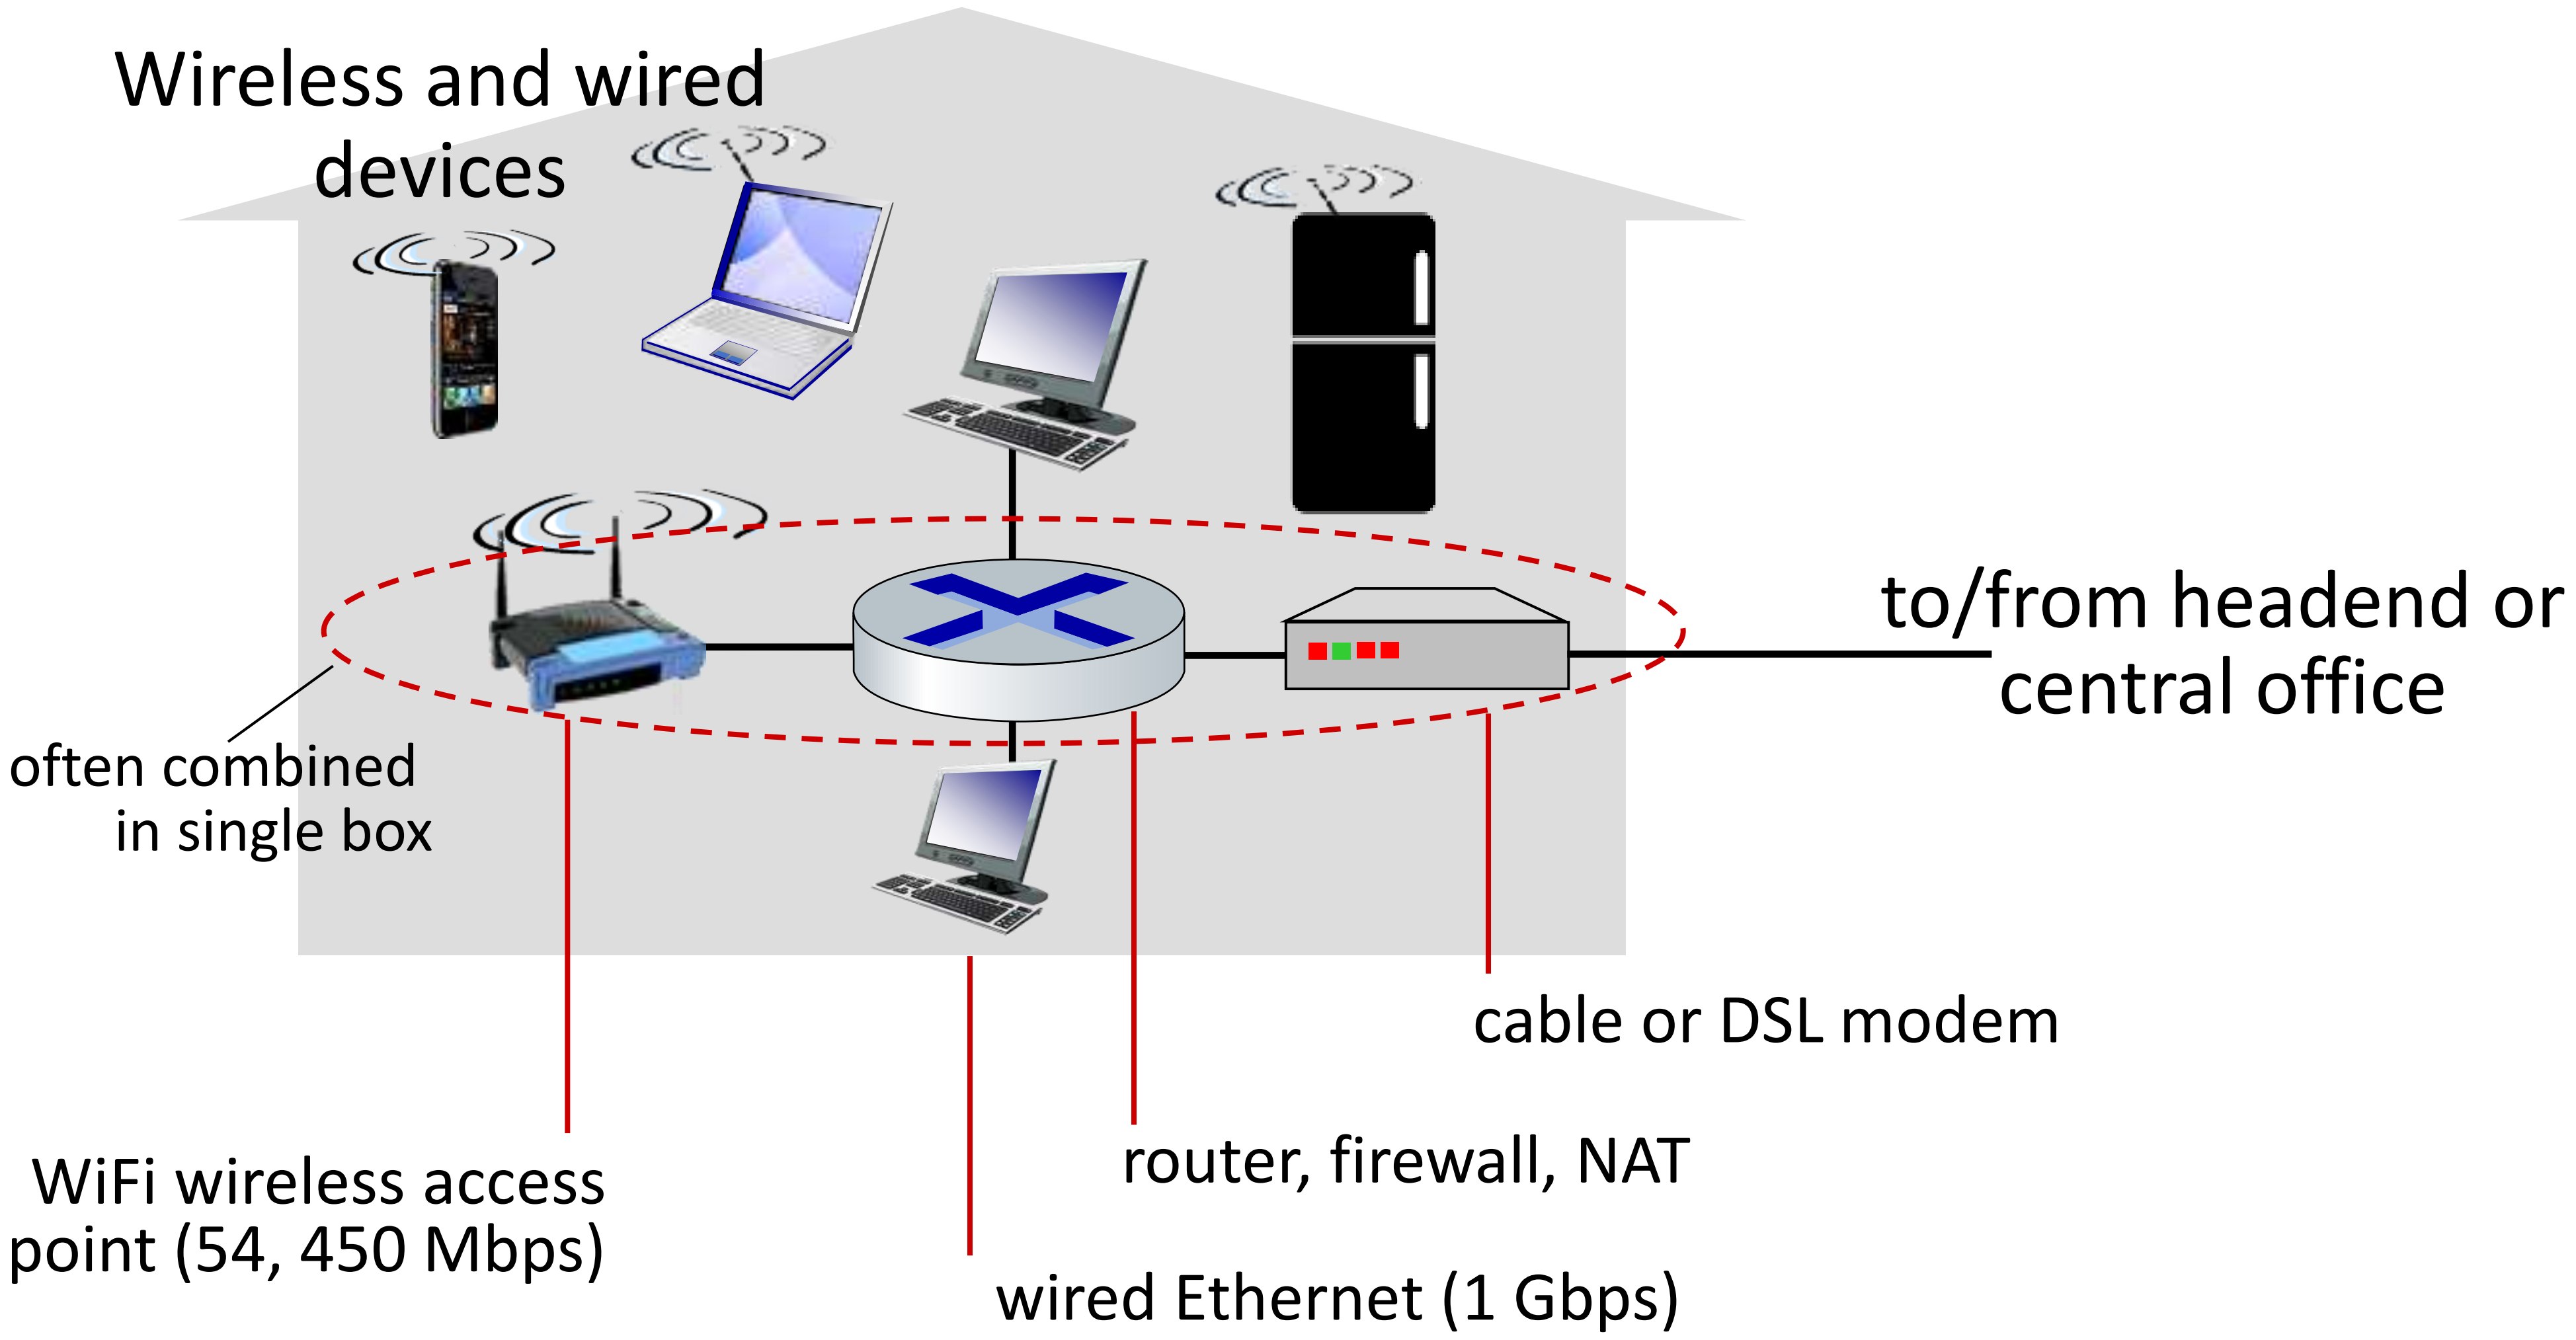

Wireless access networks

Shared *wireless* access network connects end system to router

- via base station aka "access point"

Wireless local area networks (WLANs)

- typically within or around building (~100 ft)
- 802.11b/g/n (WiFi): 11, 54, 450 Mbps transmission rate

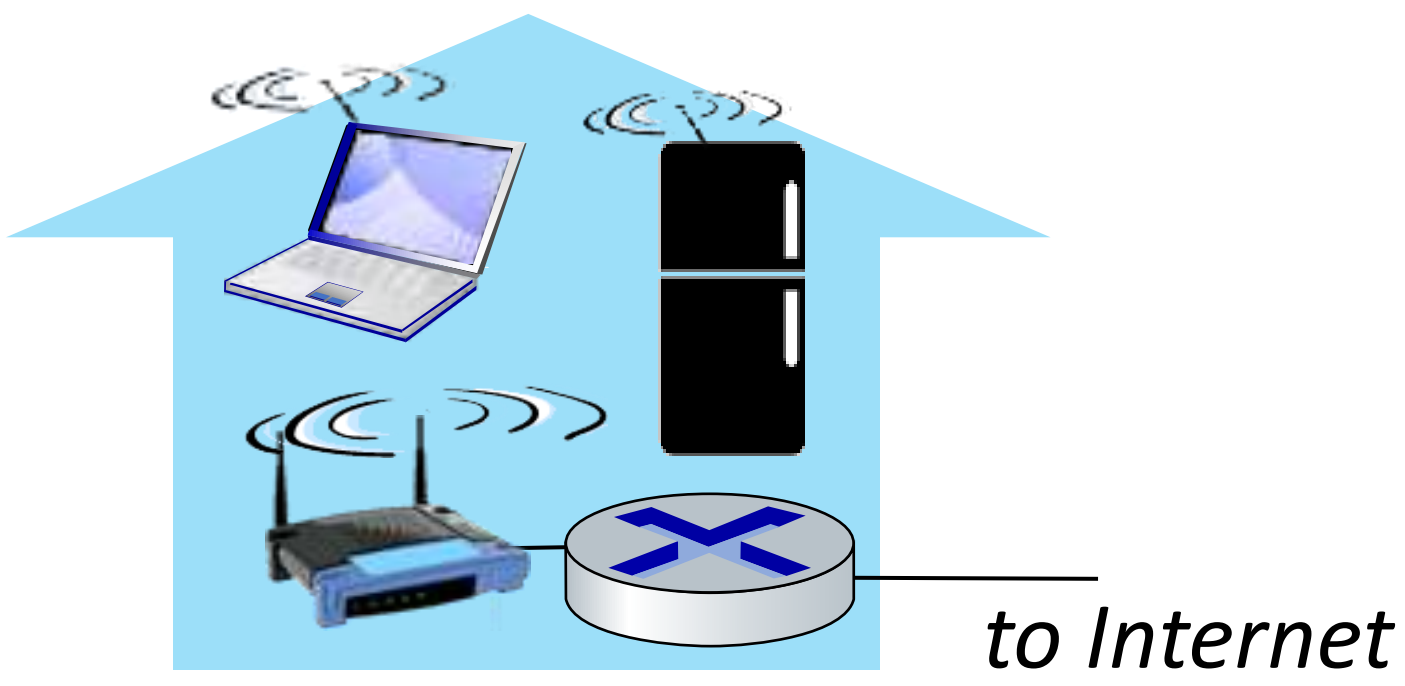

Wide-area cellular access networks

- provided by mobile, cellular network operator (10's km)
- 10's Mbps
- 4G/5G cellular networks

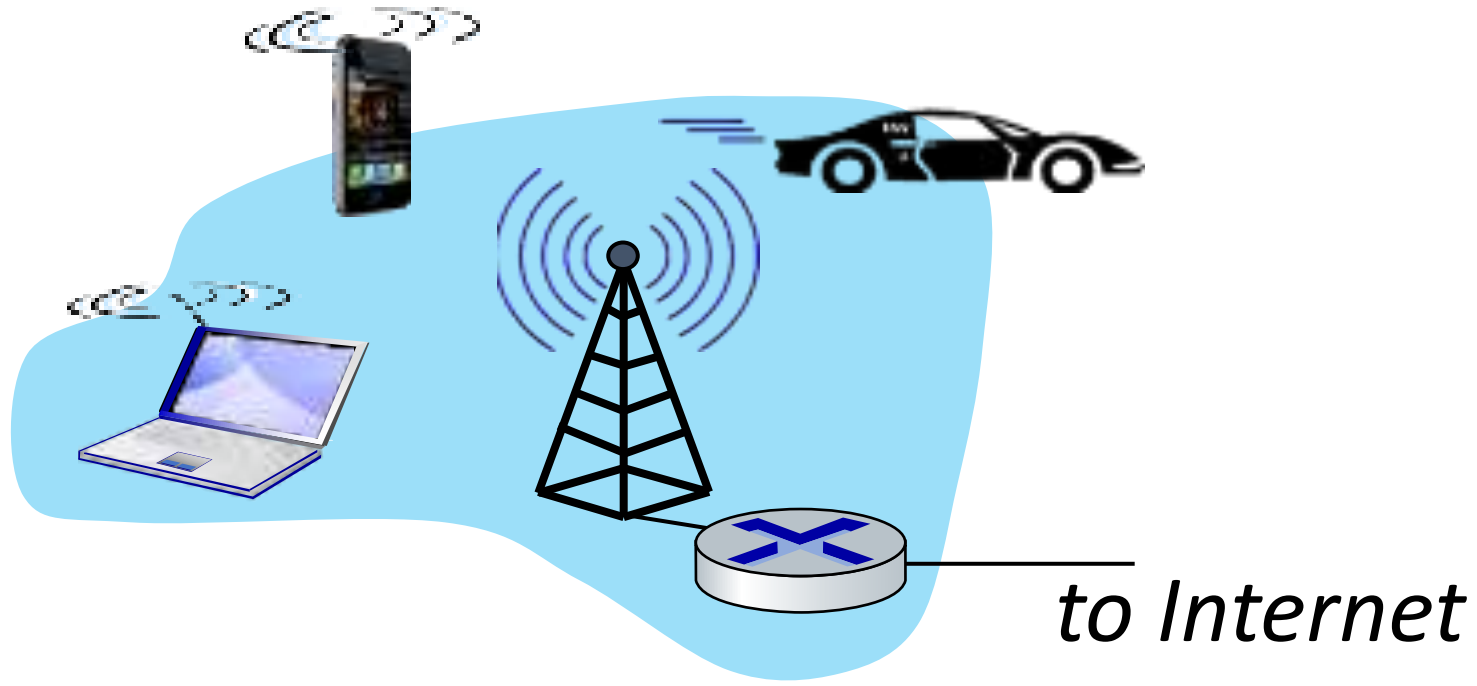

Access networks: enterprise networks

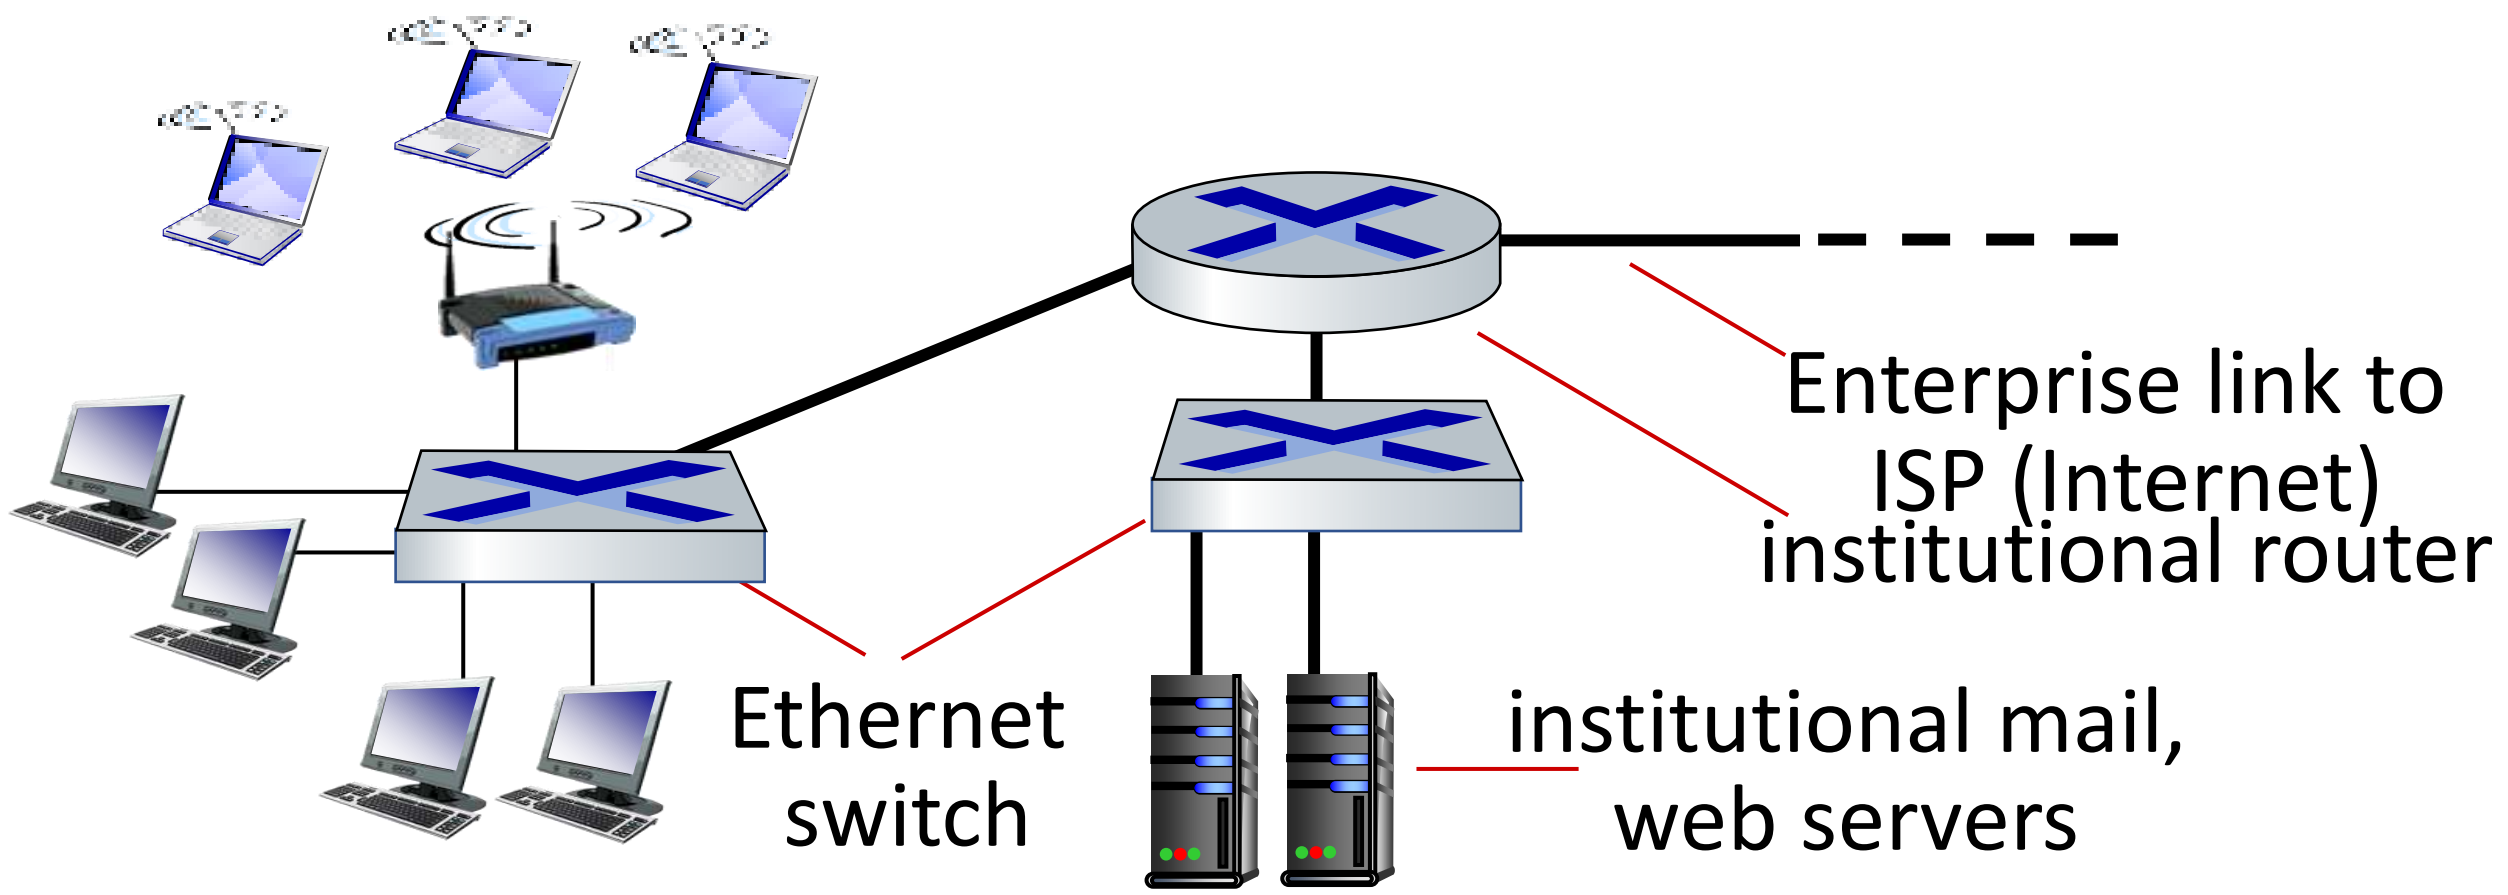

- companies, universities, etc.
- mix of wired, wireless link technologies, connecting a mix of switches and routers (we'll cover differences shortly)
  - Ethernet: wired access at 100Mbps, 1Gbps, 10Gbps
  - WiFi: wireless access points at 11, 54, 450 Mbps

Access networks: data center networks

- high-bandwidth links (10s to 100s Gbps) connect hundreds to thousands of servers together, and to Internet

Courtesy: Massachusetts Green High Performance Computing Center (mghpcc.org)

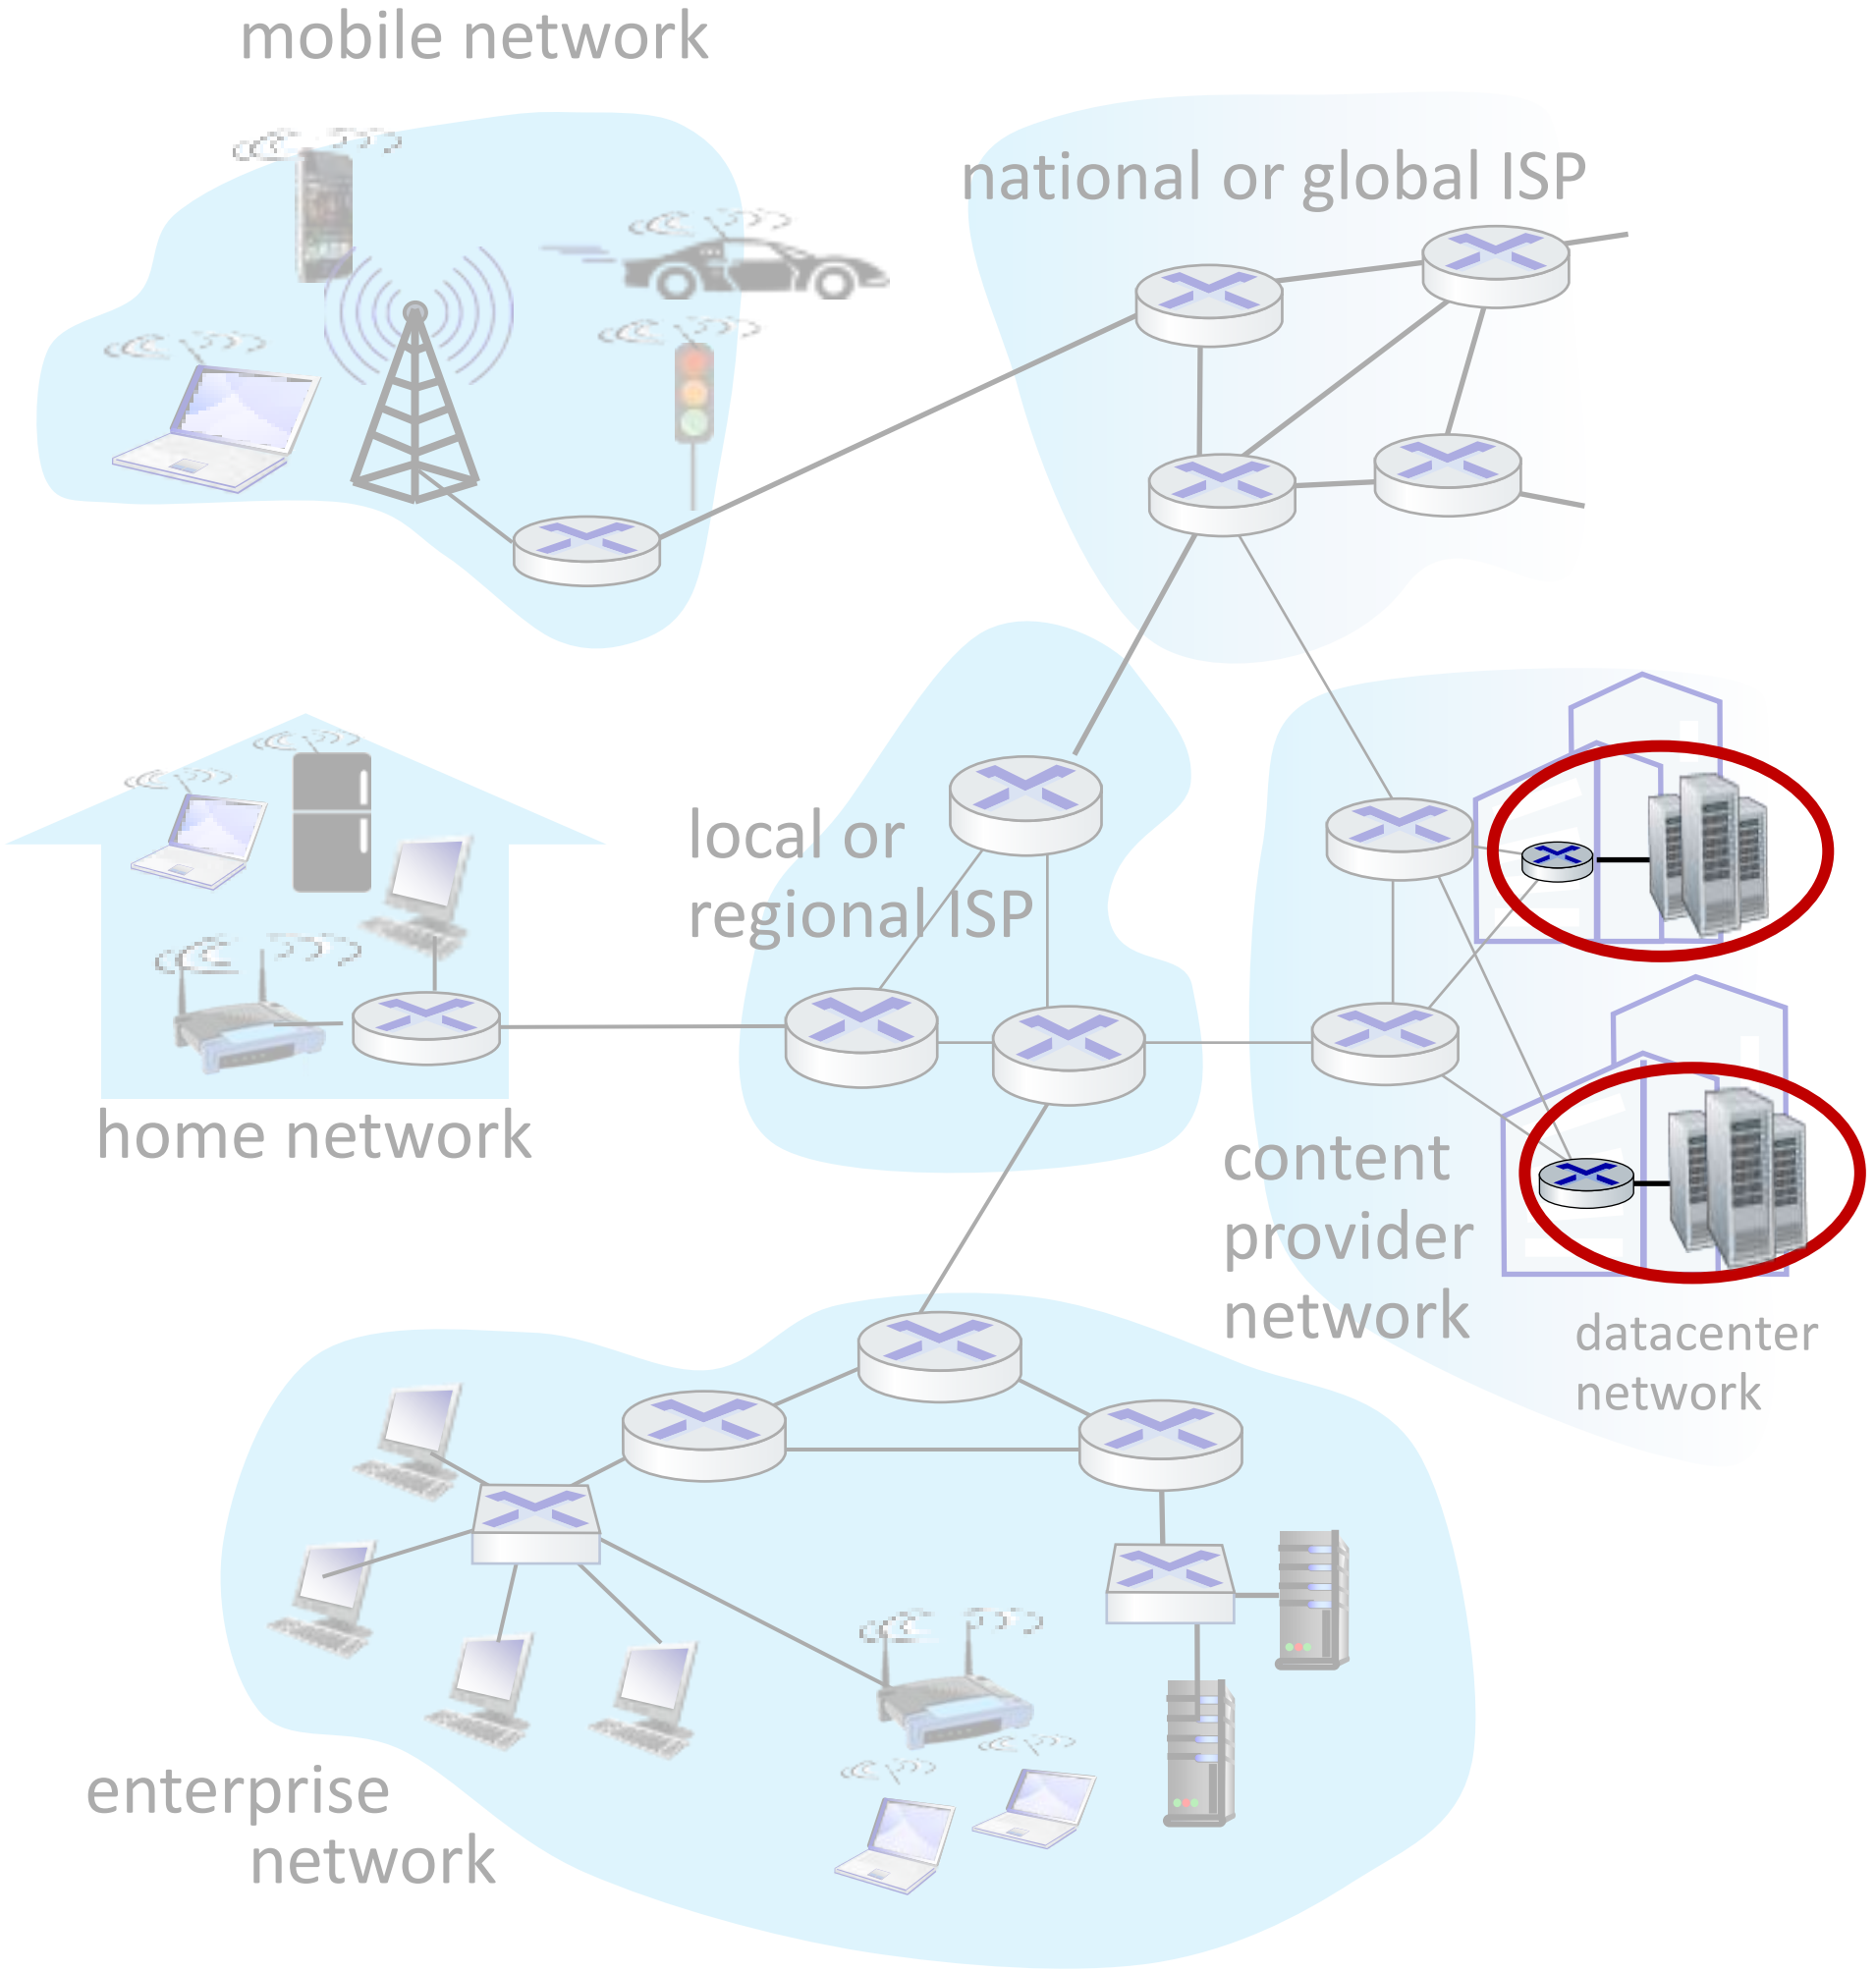

Host: sends *packets* of data

host sending function:

- takes application message
- breaks into smaller chunks, known as *packets*, of length *L* bits
- transmits packet into access network at *transmission rate R*
  - link transmission rate, aka link *capacity, aka link bandwidth*

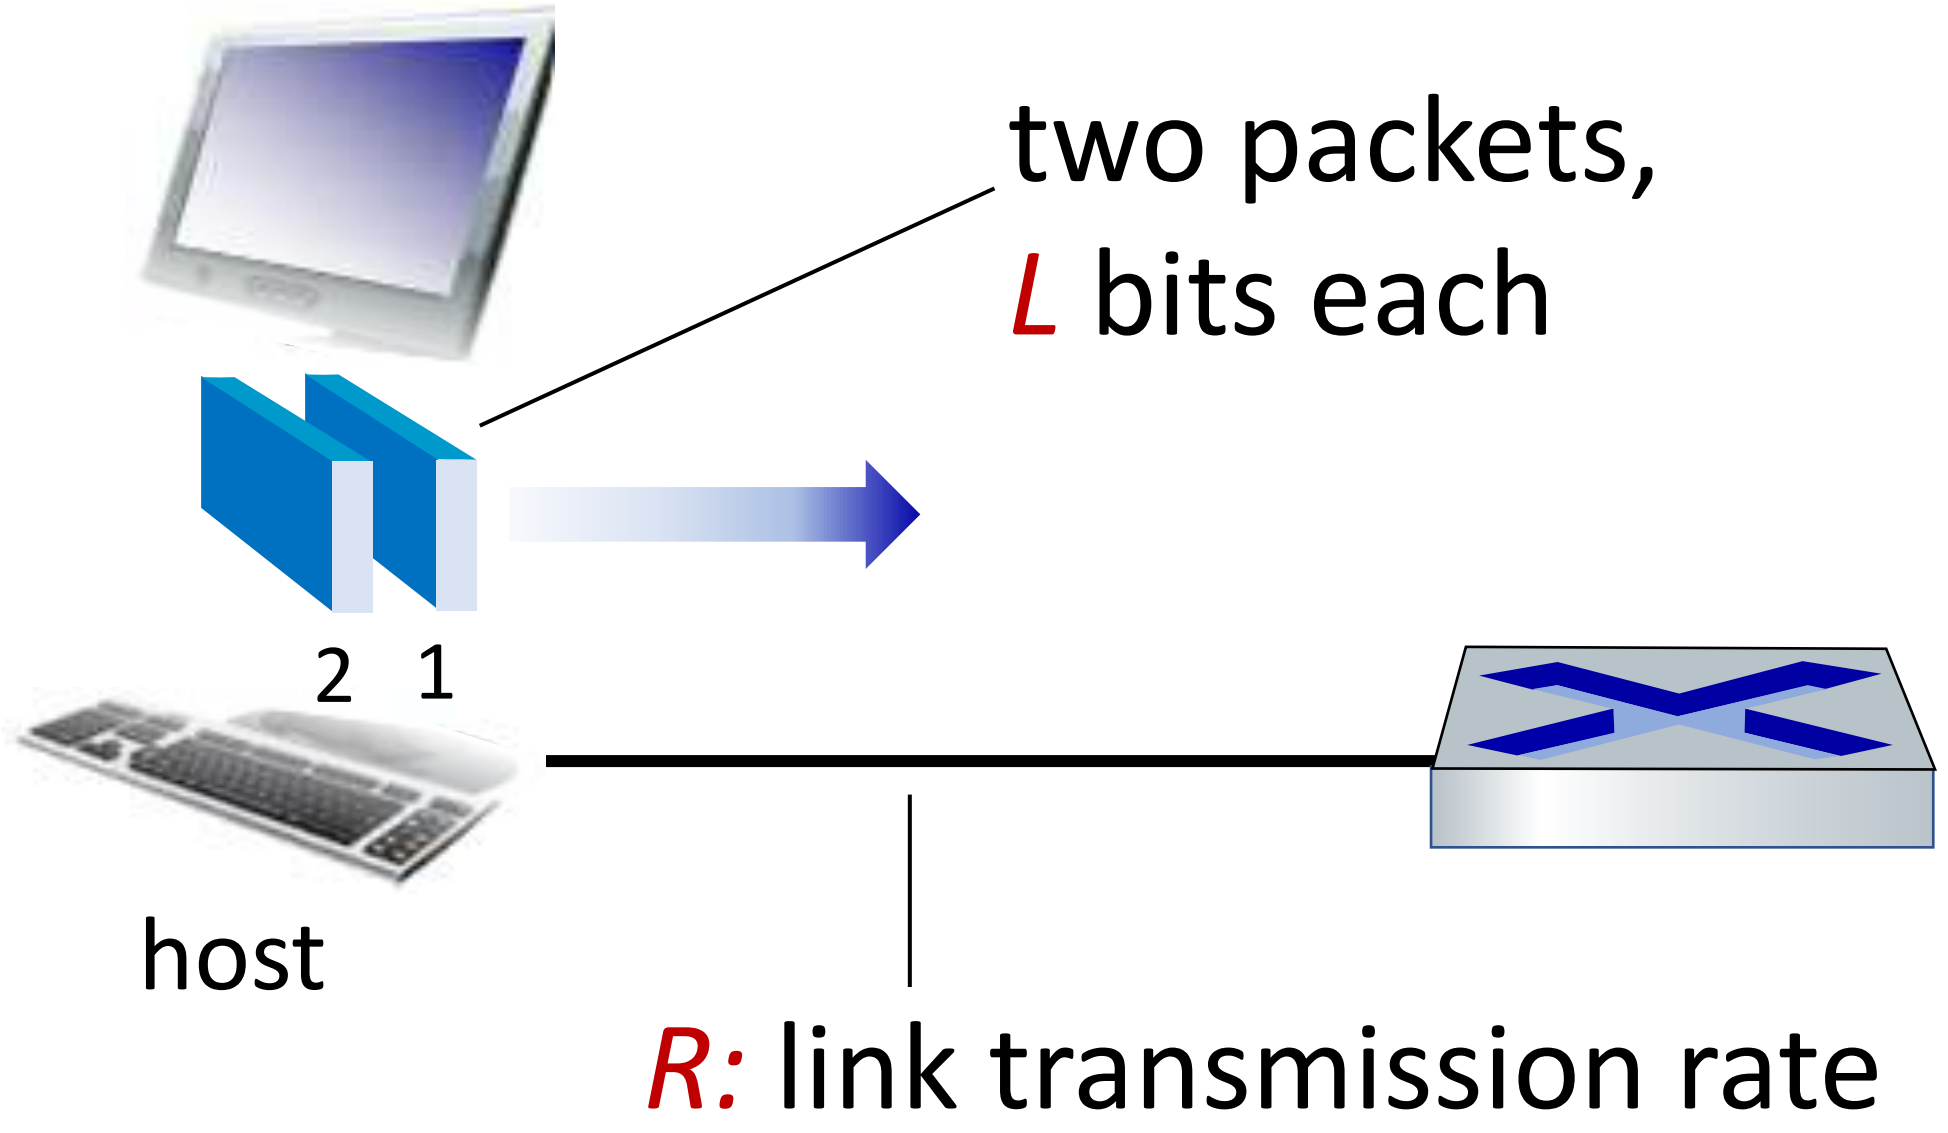

$$\text{packet transmission delay} = \text{time needed to transmit } L\text{-bit packet into link} = \frac{L \text{ (bits)}}{R \text{ (bits/sec)}}$$

Links: physical media

- bit: propagates between transmitter/receiver pairs
- physical link: what lies between transmitter & receiver
- guided media:
  - signals propagate in solid media: copper, fiber, coax
- unguided media:
  - signals propagate freely, e.g., radio

Twisted pair (TP)

- two insulated copper wires
  - Category 5: 100 Mbps, 1 Gbps Ethernet
  - Category 6: 10Gbps Ethernet

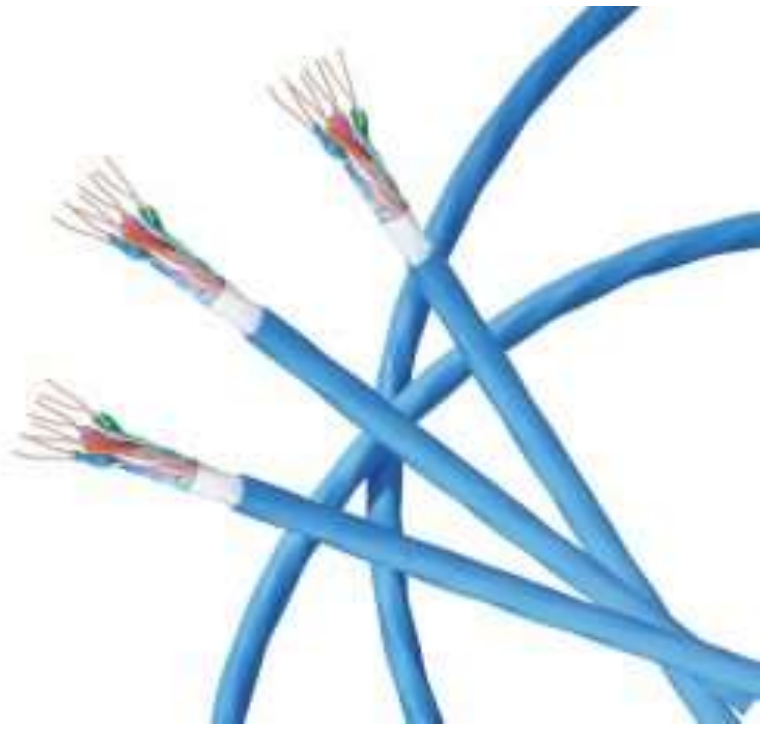

Links: physical media

Coaxial cable:

- two concentric copper conductors
- bidirectional
- broadband:
  - multiple frequency channels on cable
  - 100’s Mbps per channel

Fiber optic cable:

- glass fiber carrying light pulses, each pulse a bit
- high-speed operation:
  - high-speed point-to-point transmission (10’s-100’s Gbps)
- low error rate:
  - repeaters spaced far apart
  - immune to electromagnetic noise

Links: physical media

Wireless radio

- signal carried in various "bands" in electromagnetic spectrum
- no physical "wire"
- broadcast, "half-duplex" (sender to receiver)
- propagation environment effects:
  - reflection
  - obstruction by objects
  - Interference/noise

Radio link types:

- Wireless LAN (WiFi)
  - 10-100's Mbps; 10's of meters
- wide-area (e.g., 4G/5G cellular)
  - 10's Mbps (4G) over ~10 Km
- Bluetooth: cable replacement
  - short distances, limited rates
- terrestrial microwave
  - point-to-point; 45 Mbps channels
- satellite
  - up to < 100 Mbps (Starlink) downlink
  - 270 msec end-end delay (geostationary)

Connection Types

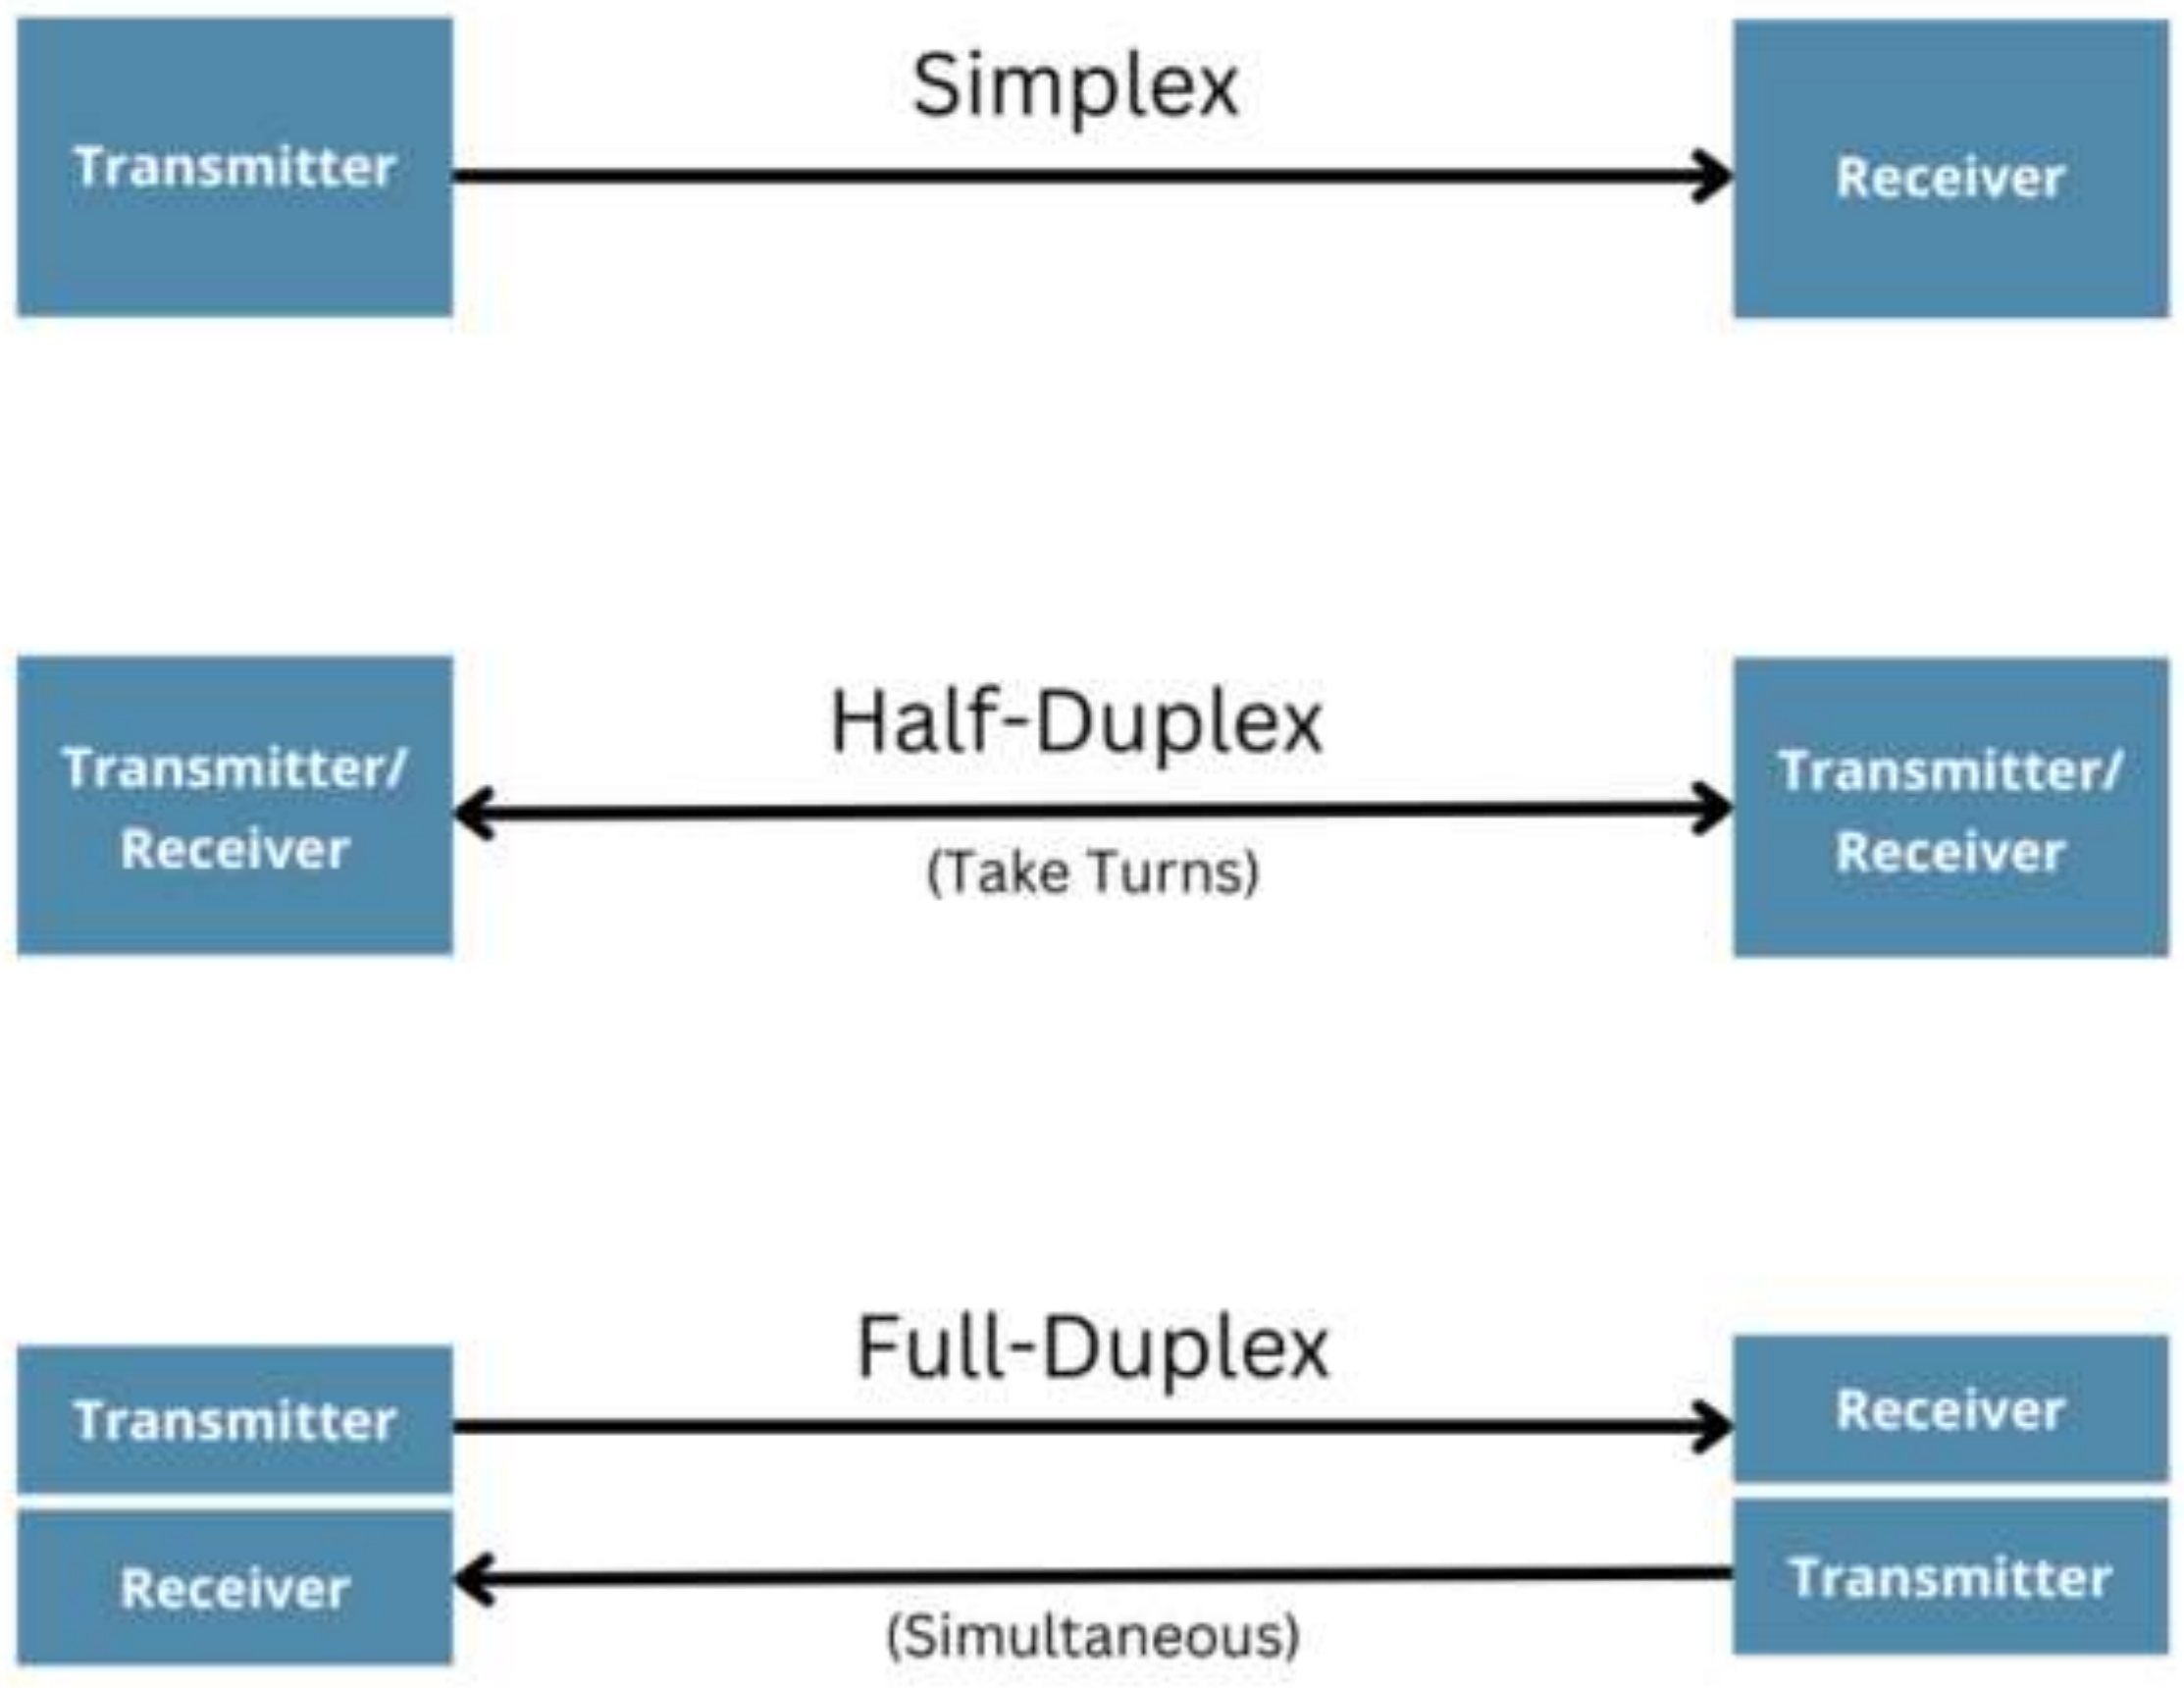

Chapter 1: roadmap

- What *is* the Internet?
- What *is* a protocol?
- Network edge: hosts, access network, physical media
- Network core: packet/circuit switching, internet structure
- Performance: loss, delay, throughput
- Security
- Protocol layers, service models
- History

The network core

- mesh of interconnected routers
- End systems exchange messages with each other
- packet-switching (routers and switches): hosts break application-layer messages into *packets*
  - network forwards packets from one router to the next, across links on path from source to destination

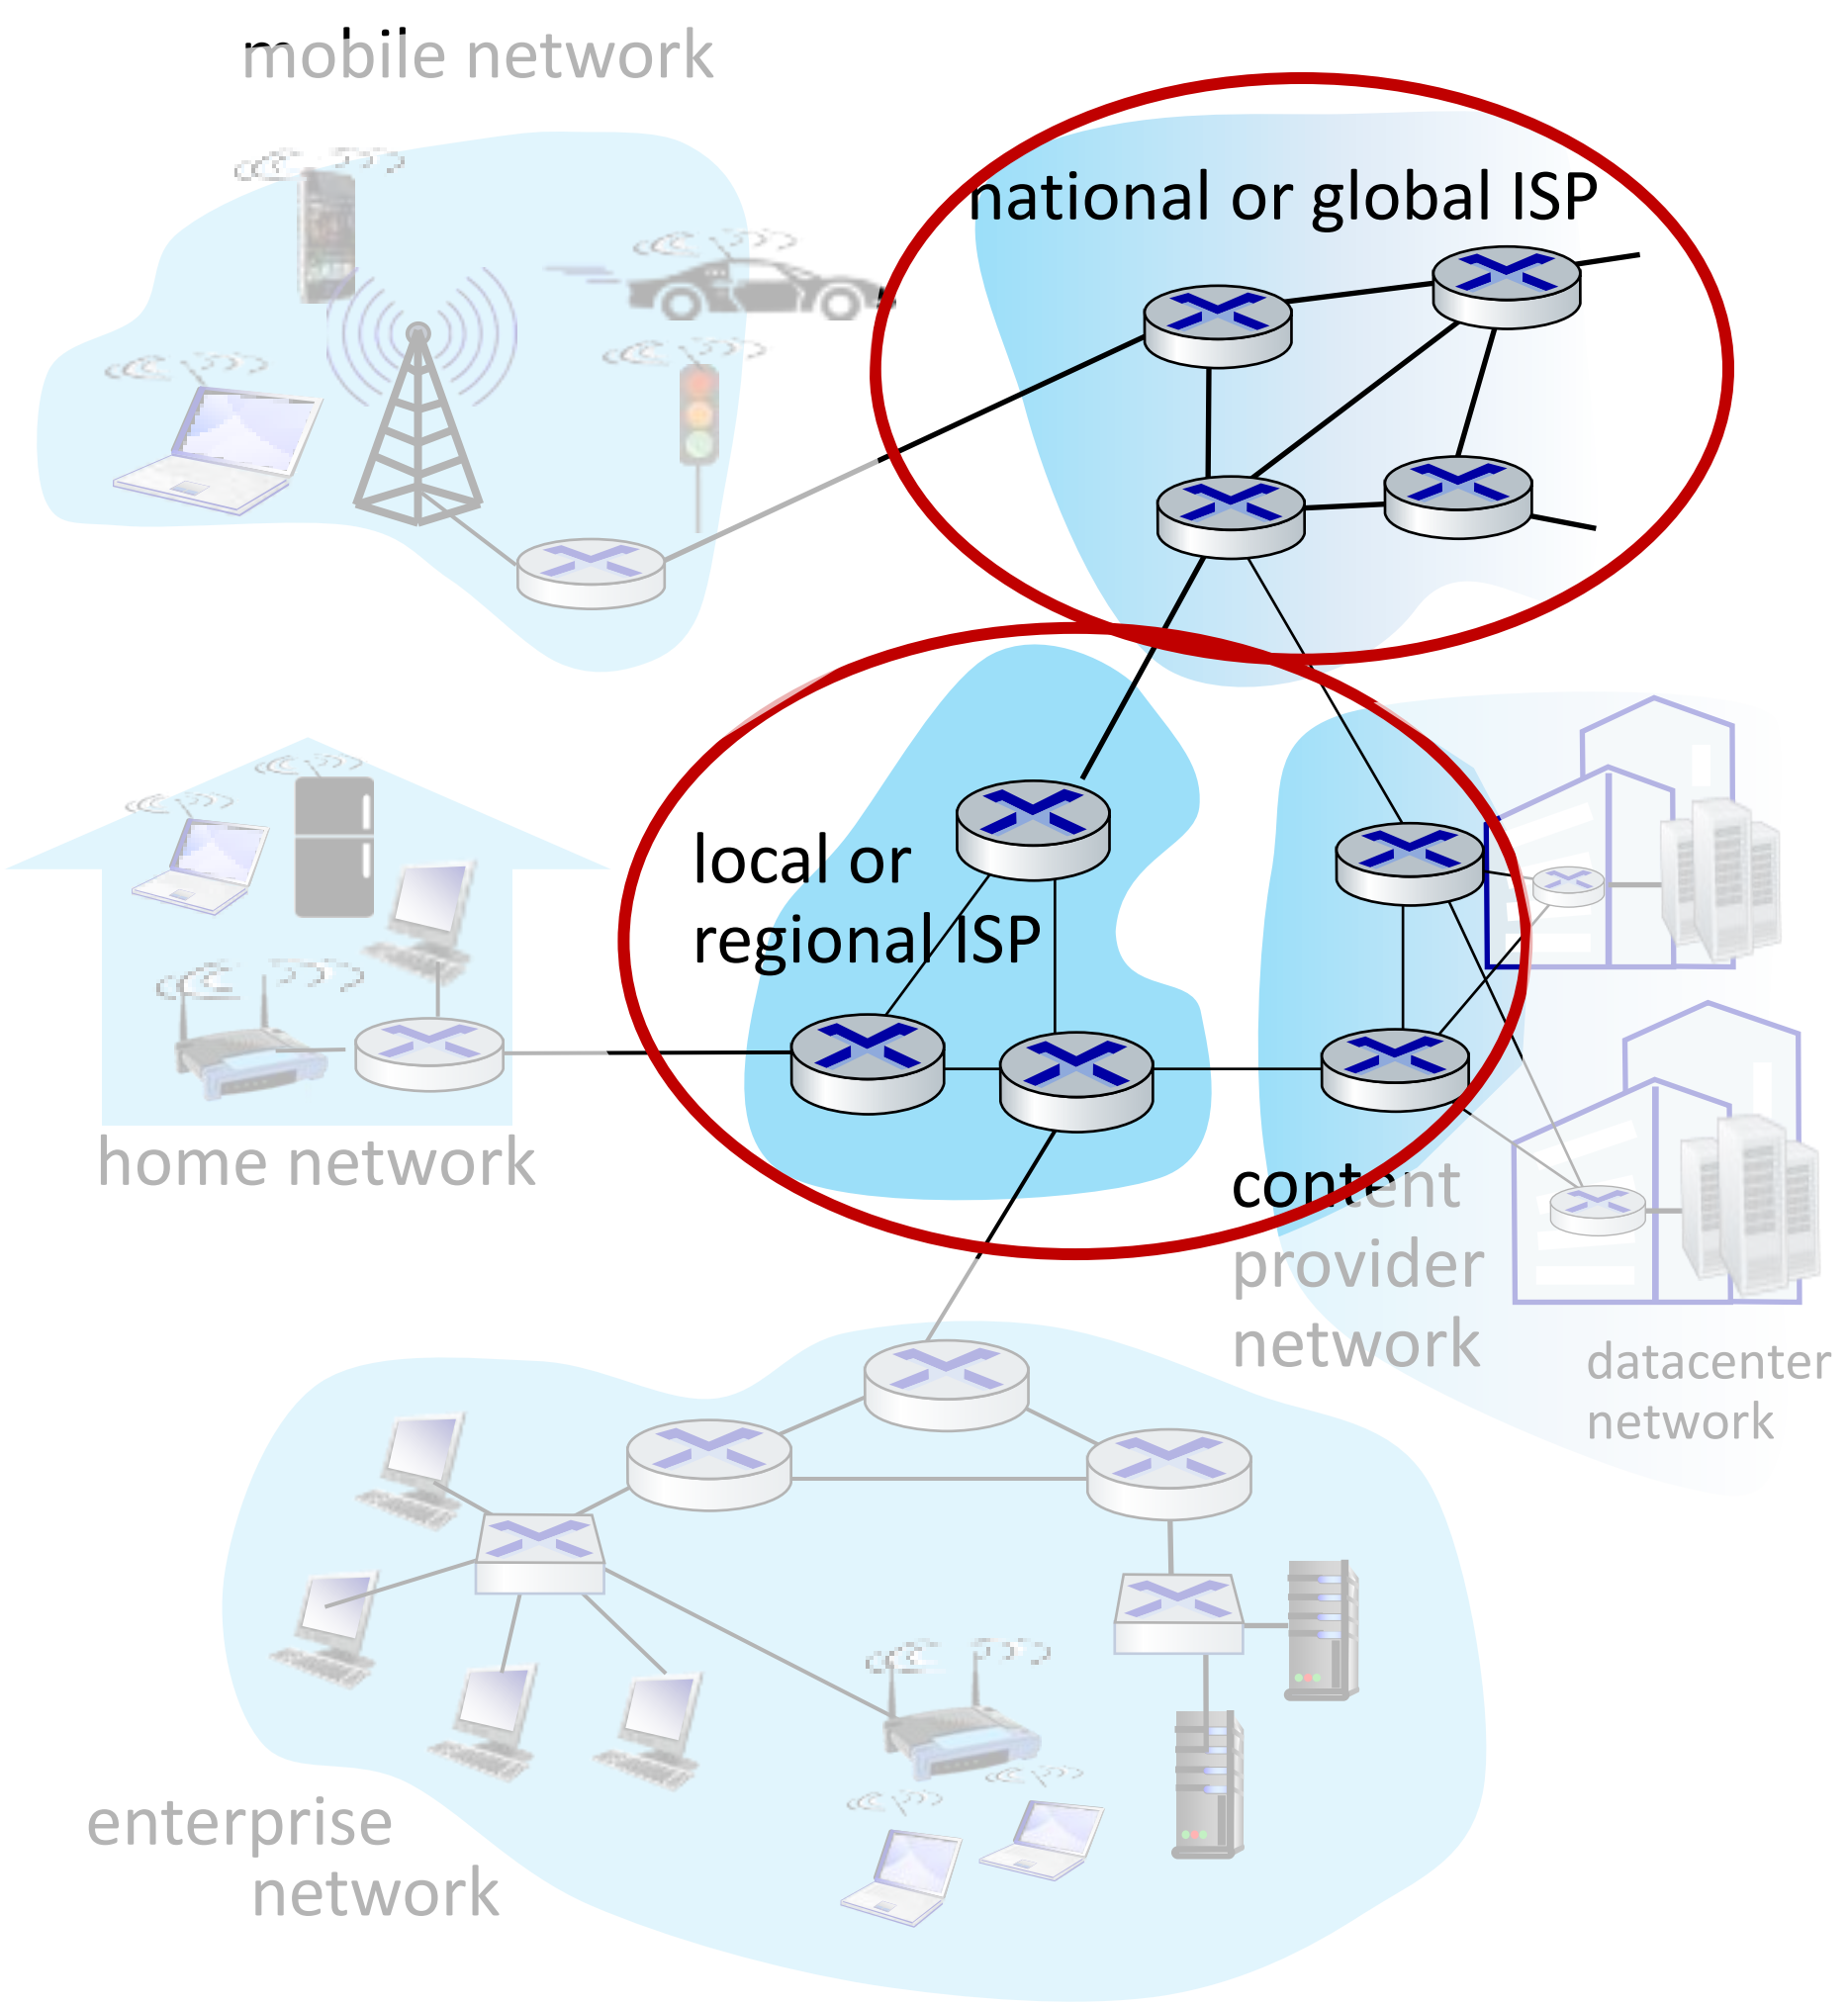

The network core

- Packets are transmitted over each communication link at a rate equal to the full transmission rate of the link
- Store-and-forward transmission at the inputs to the links.
  - Packet switch must receive the entire packet before it can begin to transmit the first bi of the packet to the next packet switch

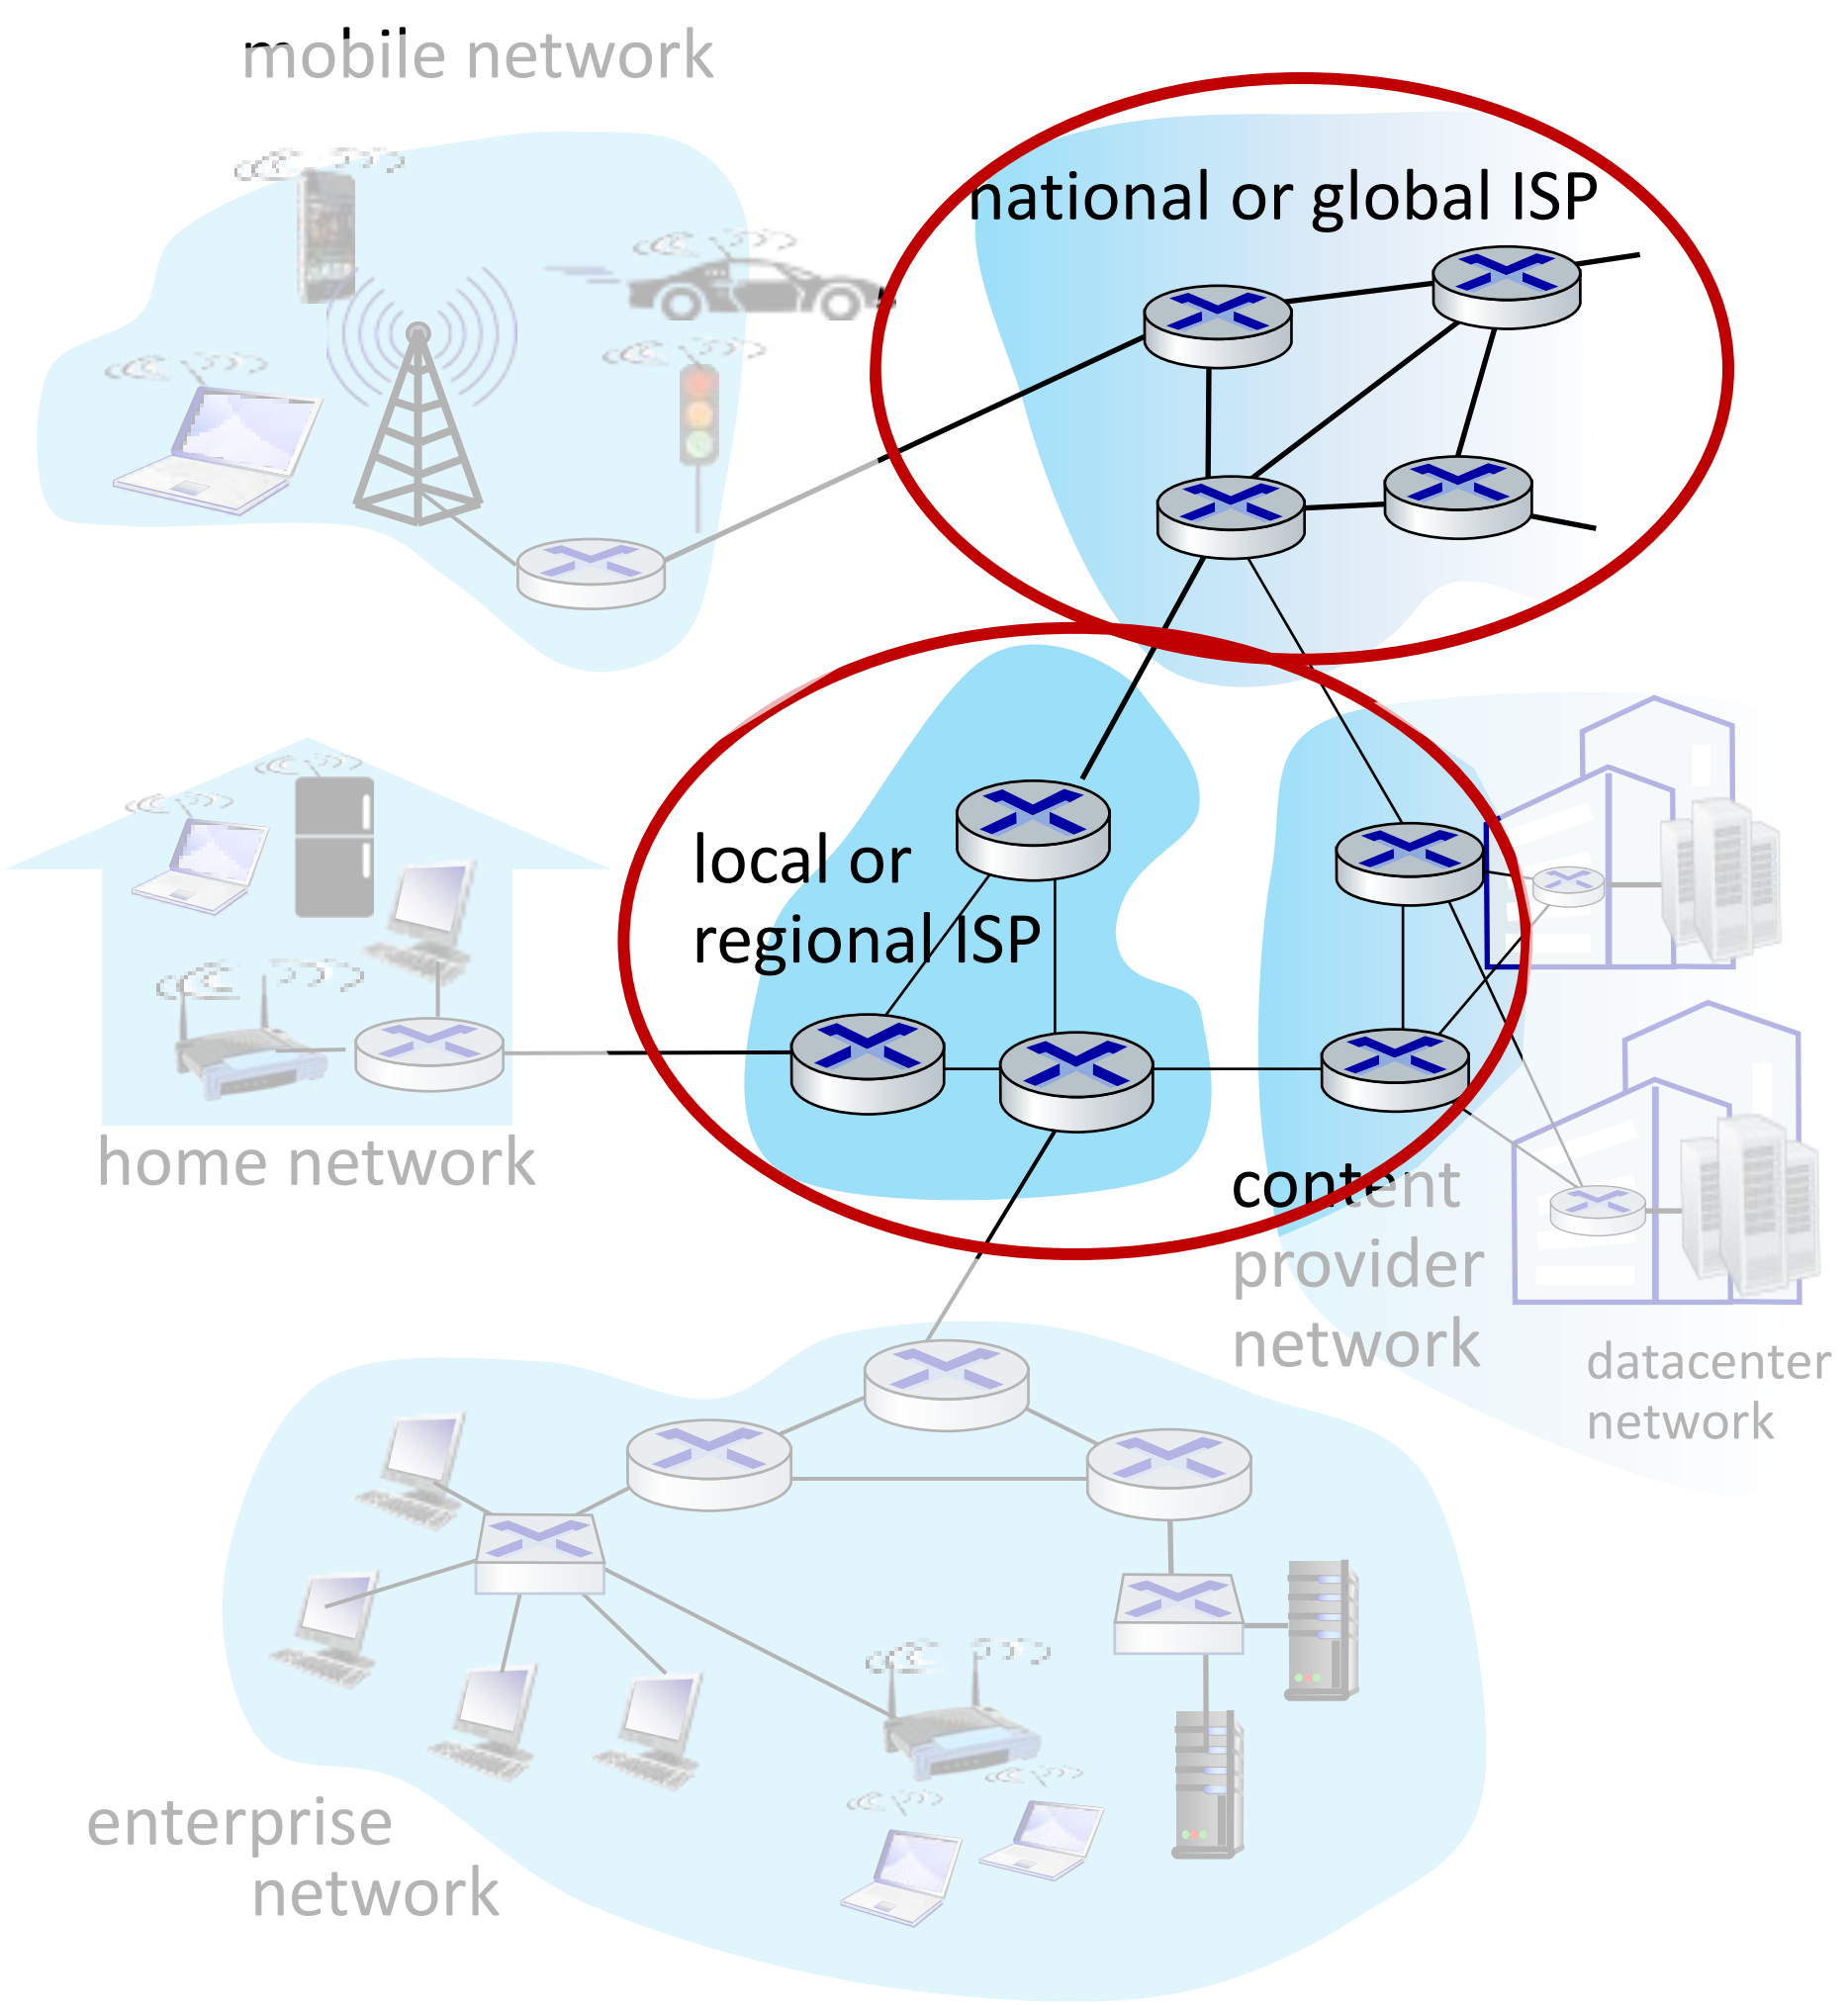

The network core

- Router utilizes store-and-forwarding, but first store or buffer the packet's bits

COMPUTER NETWORKS AND THE INTERNET

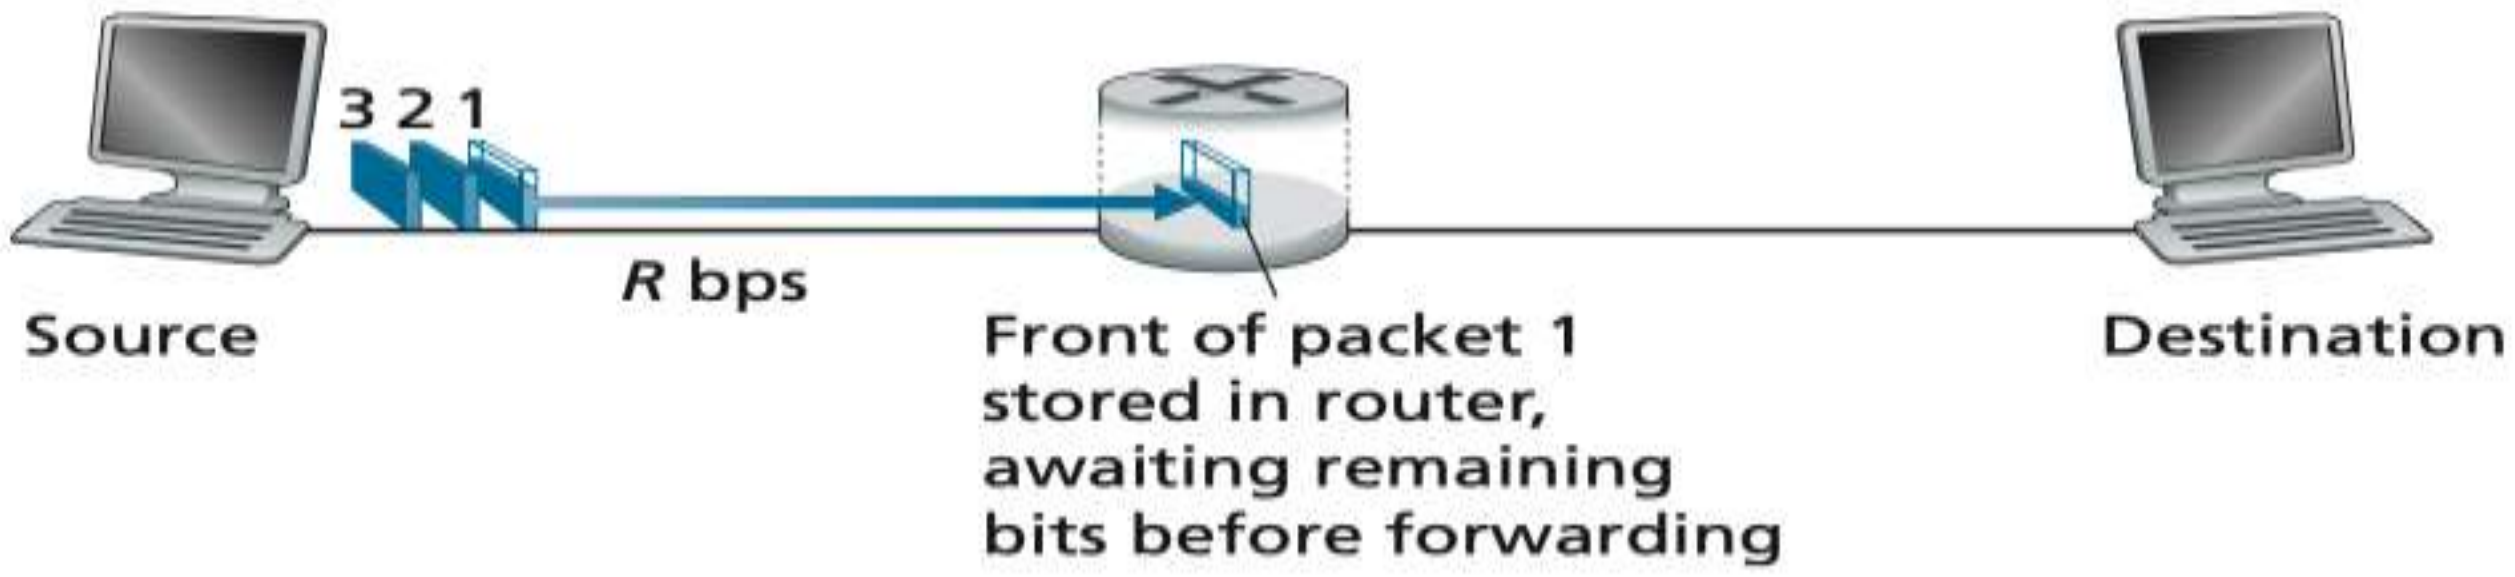

The network core

- Each packet switch has multiple links attached to it
- For each link there is output buffer (output queue).
- Queuing Delays, if the packet needs to wait before it is sent to the next link.
- Store-and forward and Queuing Delays

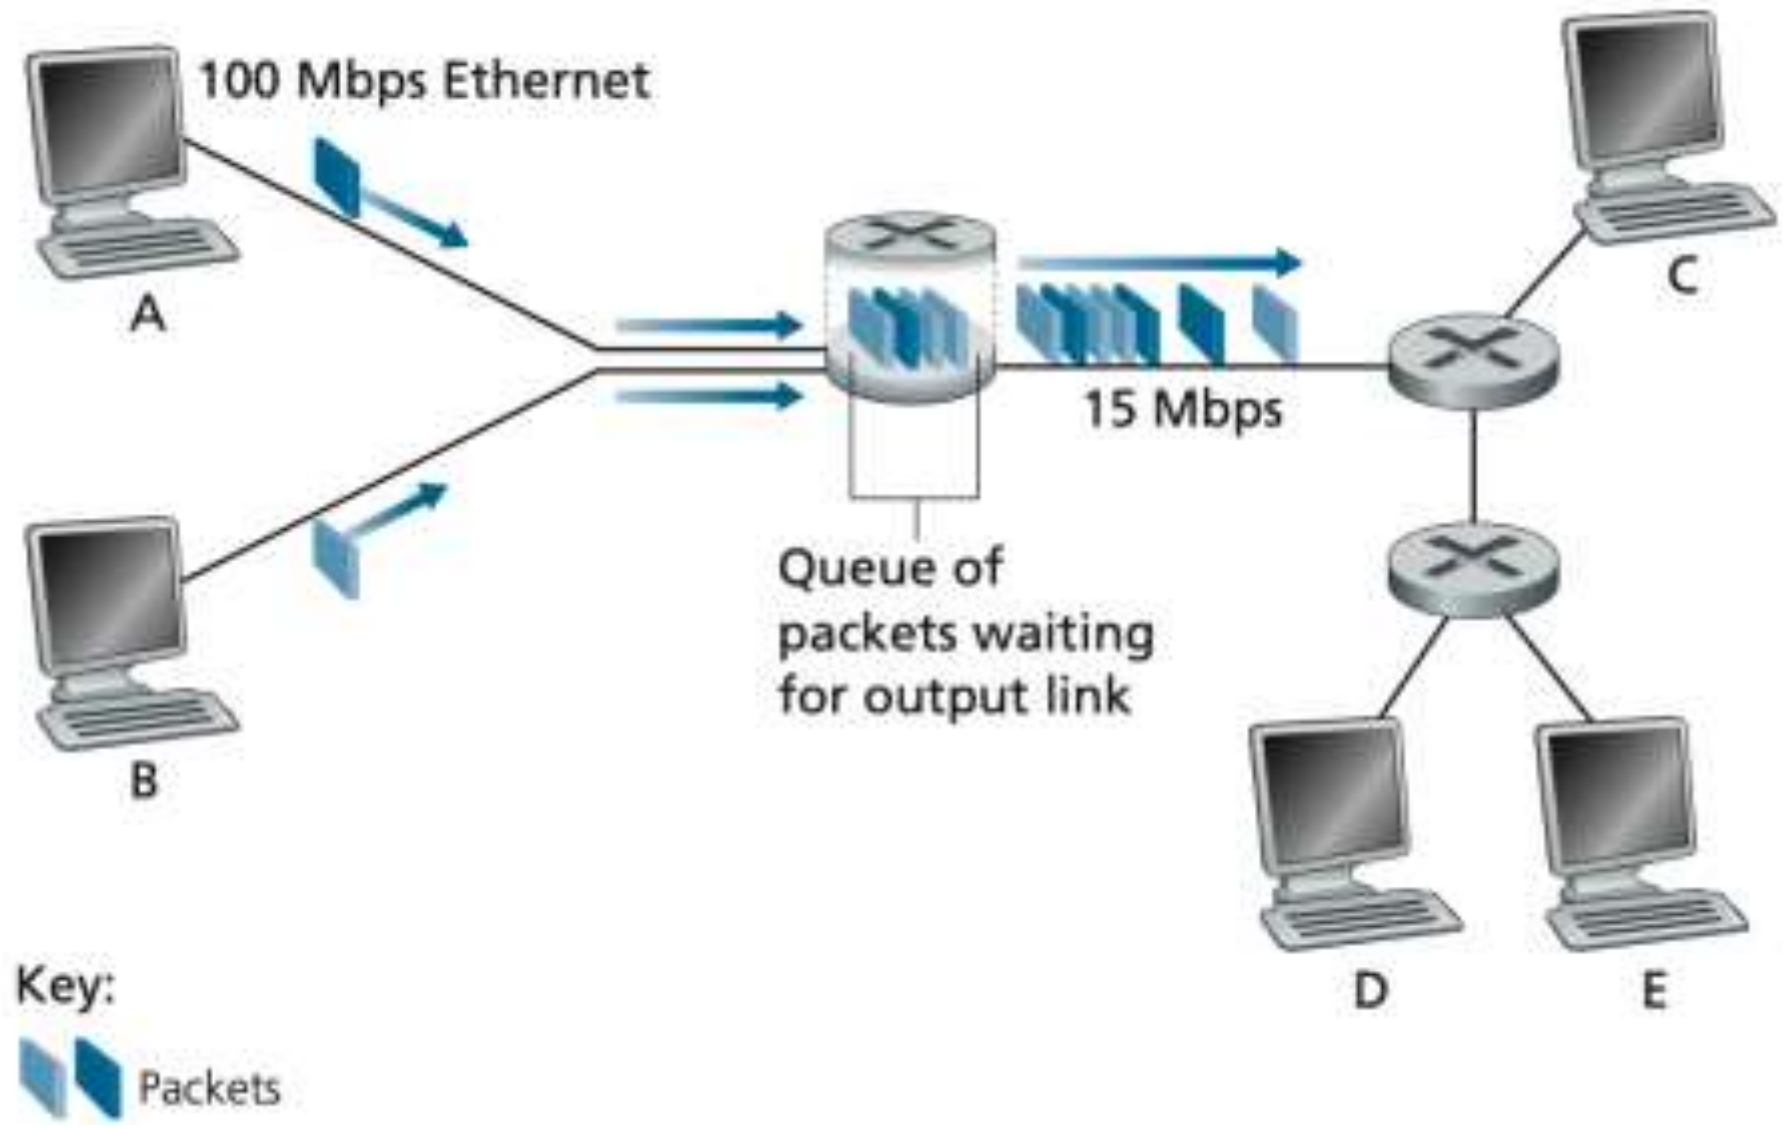

The network core

- Each packet switch has multiple links attached to it
- For each link there is output buffer (output queue).
- Queuing Delays, if the packet needs to wait before it is sent to the next link.
- Store-and forward and Queuing Delays

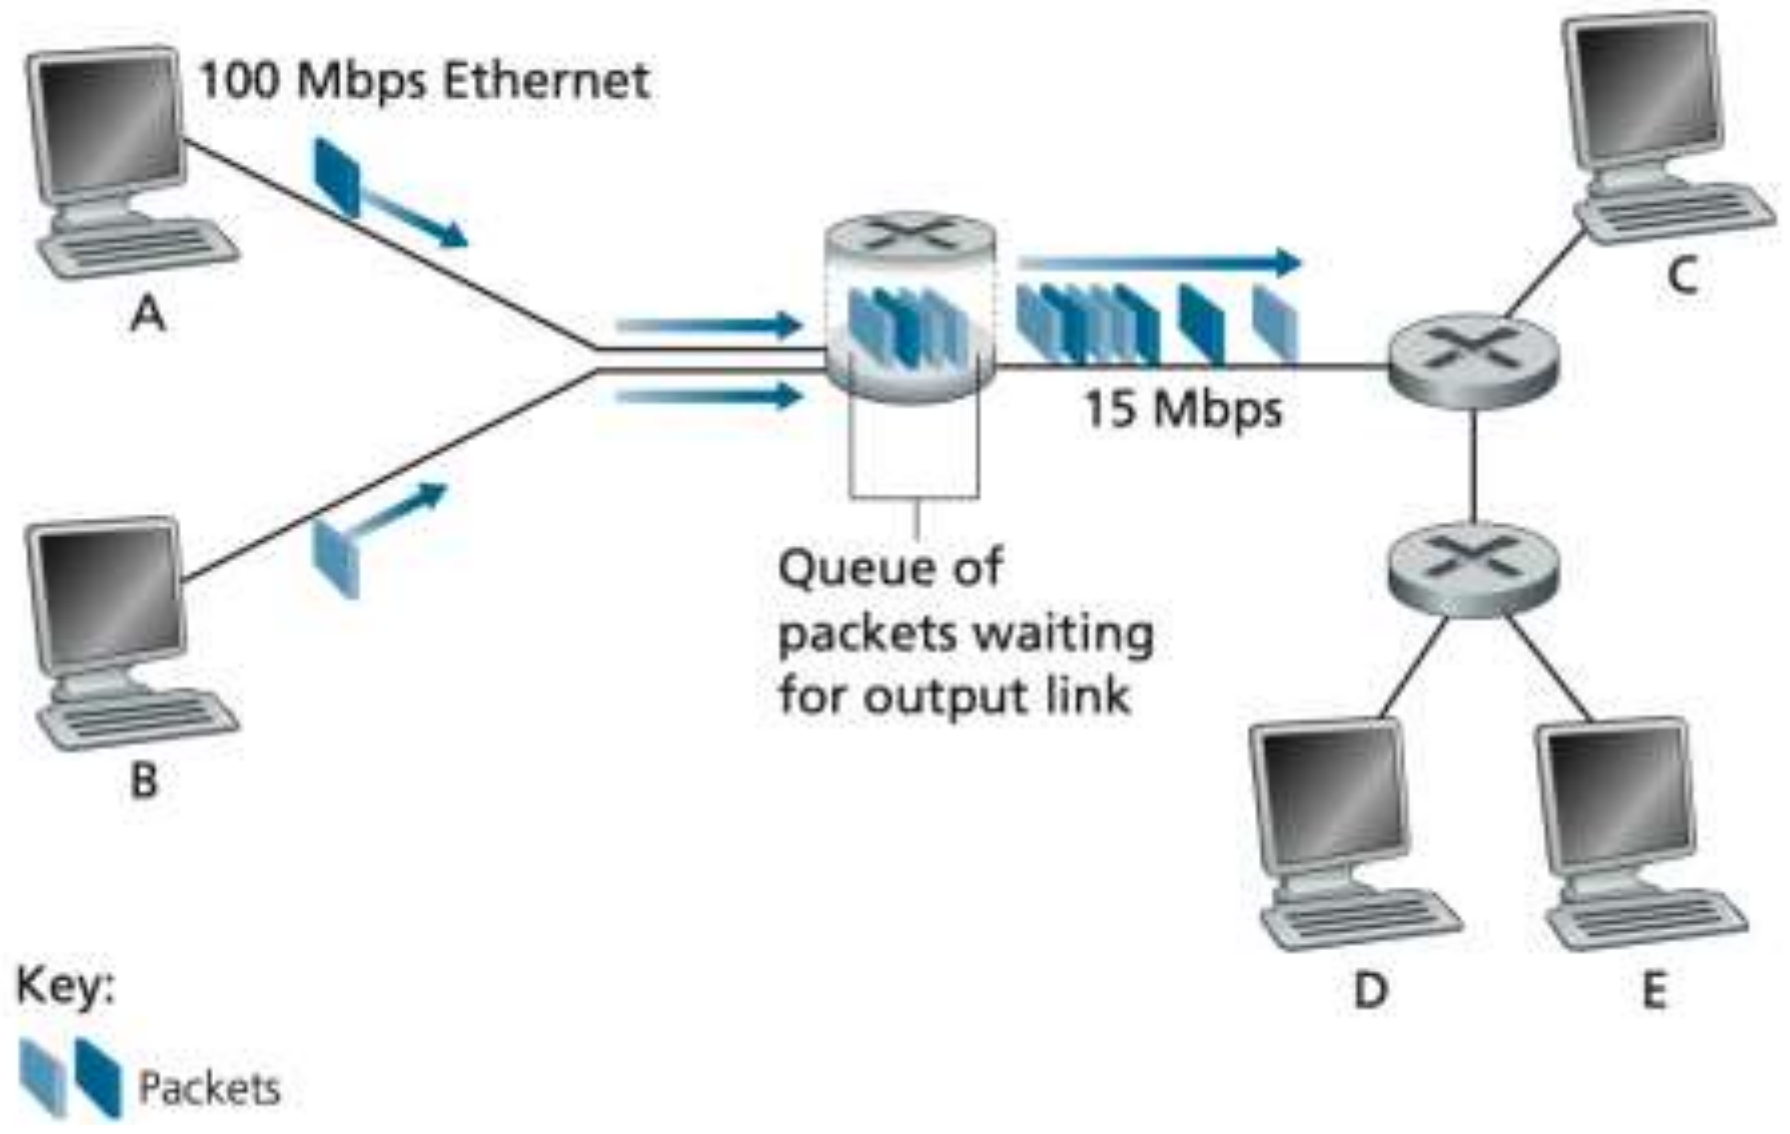

Packet-switching: store-and-forward

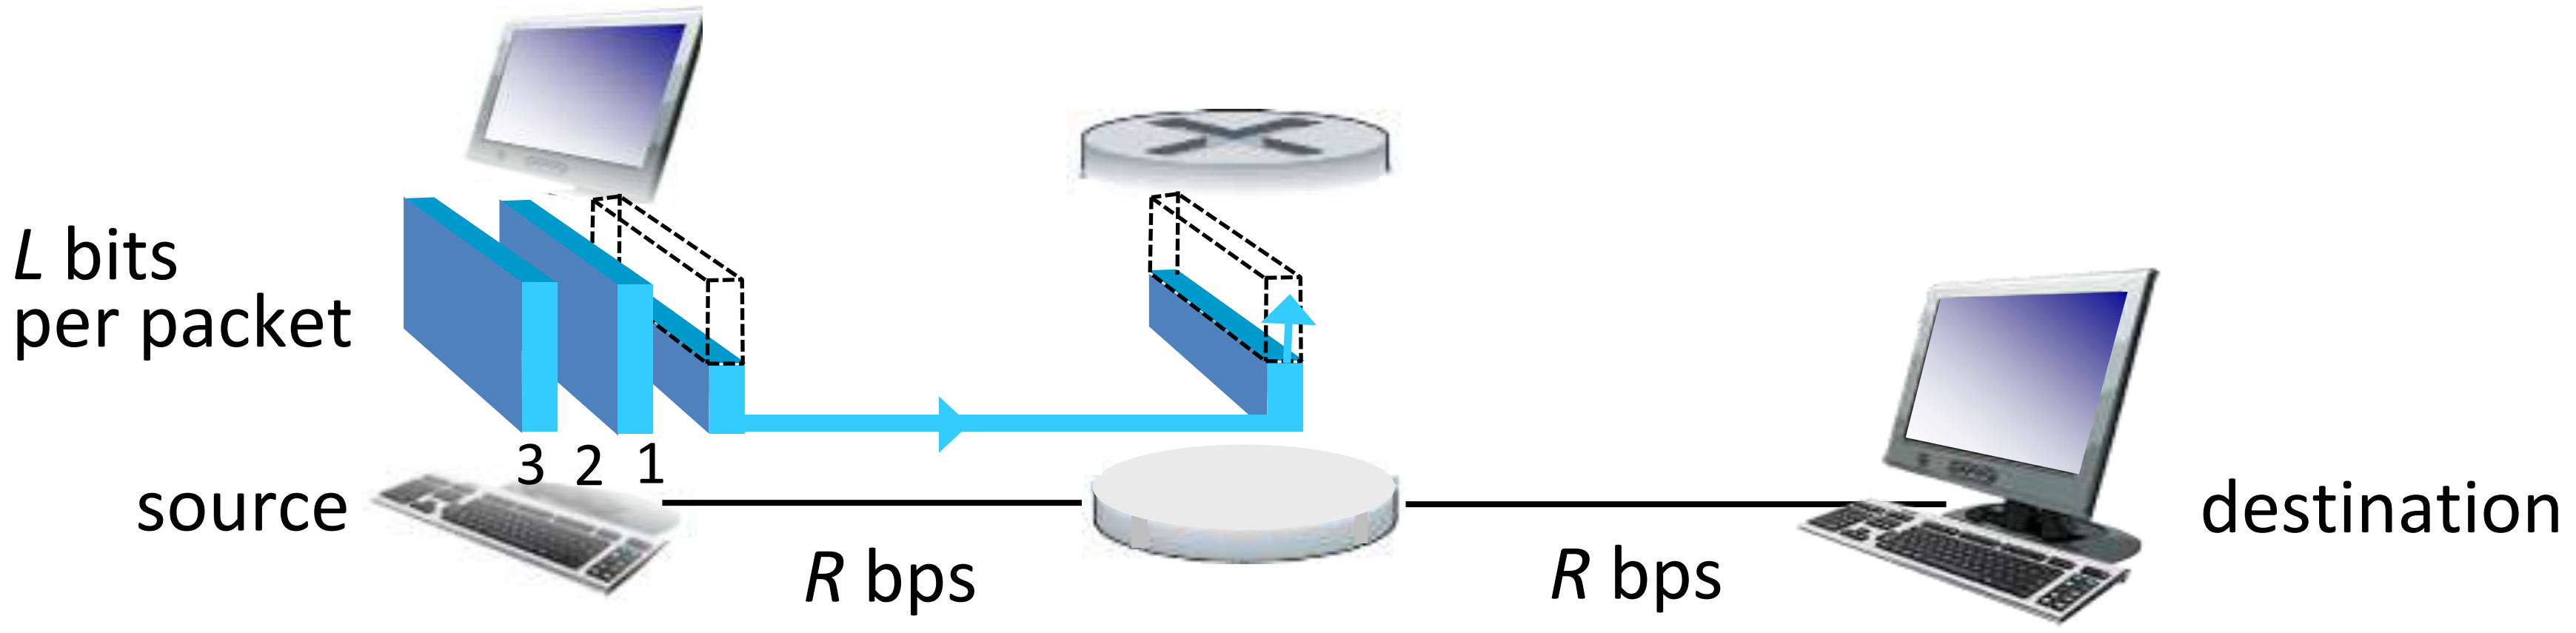

- packet transmission delay: takes L/R seconds to transmit (push out) L-bit packet into link at R bps
- *store and forward: entire* packet must arrive at router before it can be transmitted on next link

One-hop numerical example:

- L = 10 Kbits
- R = 100 Mbps
- one-hop transmission delay = 0.1 msec

Packet-switching: queueing

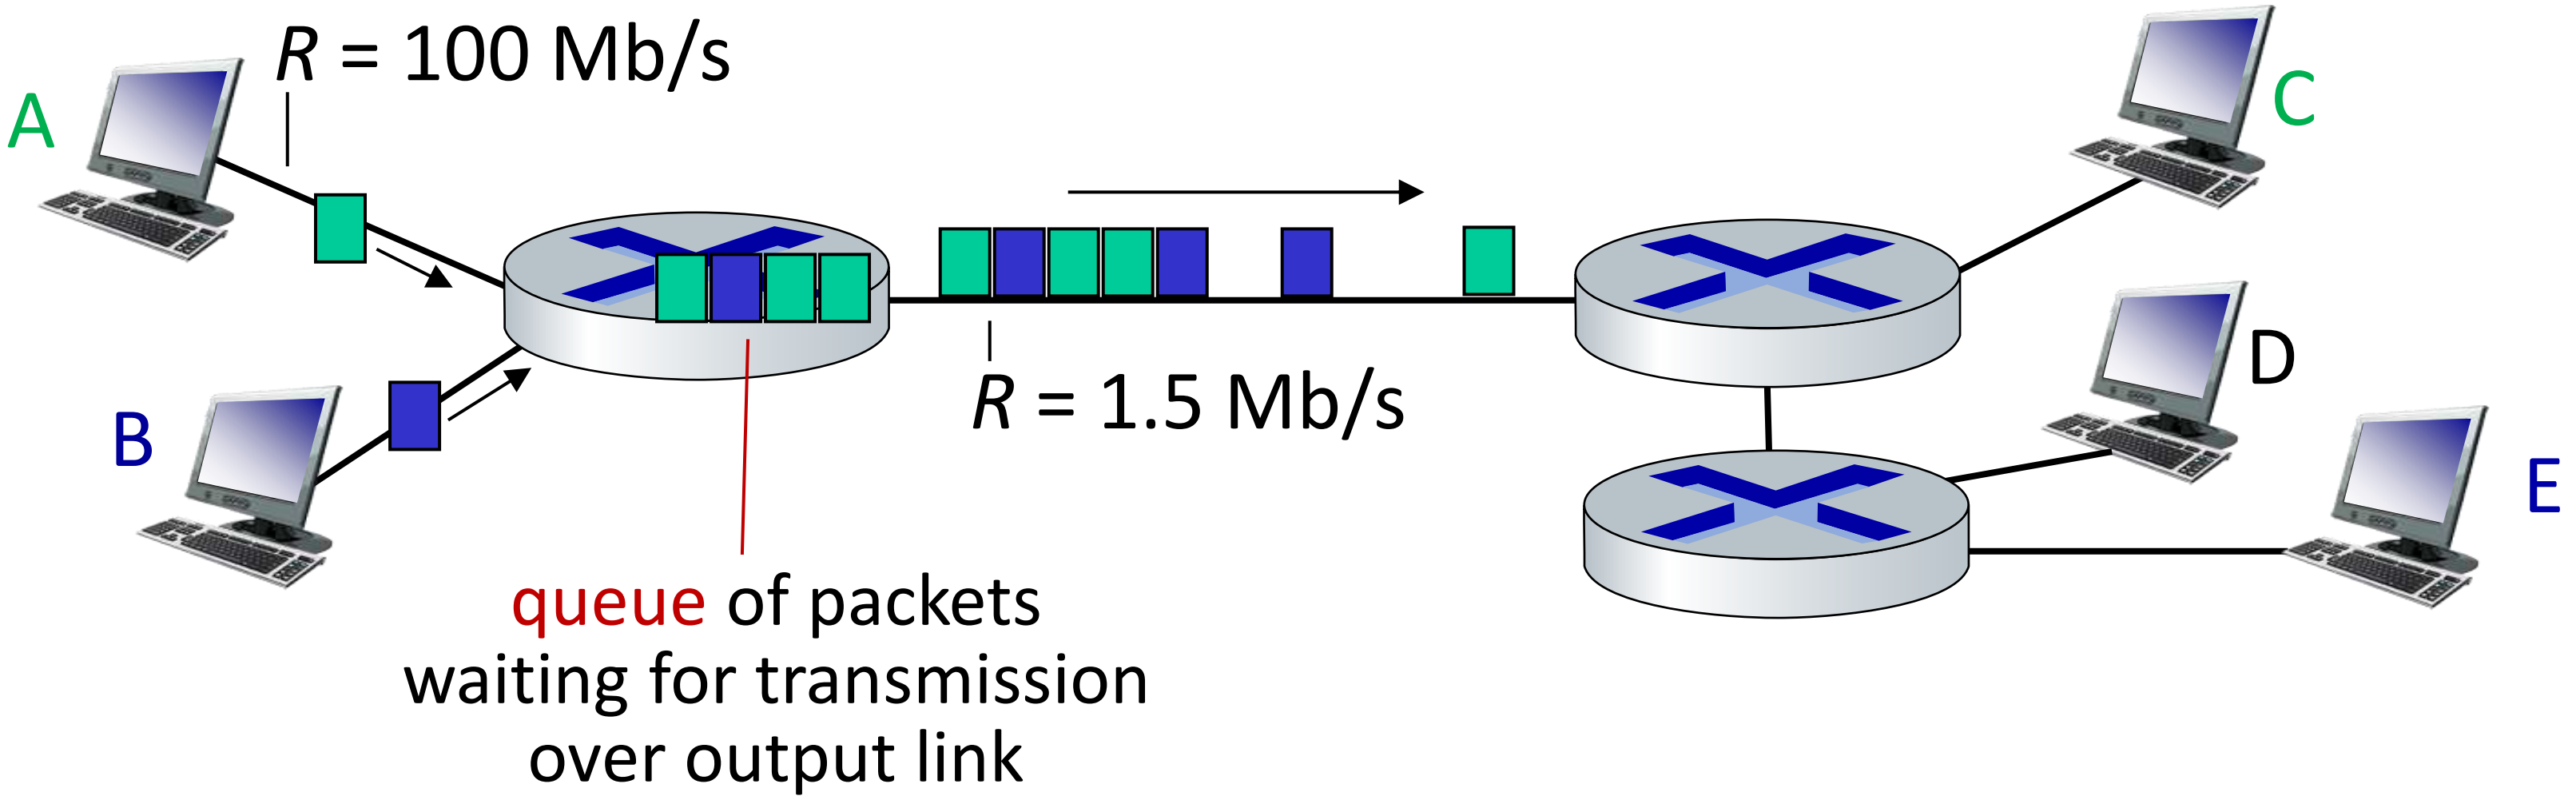

Packet queuing and loss: if arrival rate (in bps) to link exceeds transmission rate (bps) of link for some period of time:

- packets will queue, waiting to be transmitted on output link
- packets can be dropped (lost) if memory (buffer) in router fills up. Packet loss


45 h
3,053 miles
48 h
3,309 miles
routing
United States
San Jose
Northampton
Seattle
Portland
San Francisco
Sacramento
Las Vegas
Los Angeles
San Diego
Phoenix
Tucson
El Paso
Dallas
Austin
Houston
San Antonio
New Orleans
Kansas City
Minneapolis
Chicago
Detroit
Indianapolis
Nashville
Atlanta
Charlotte
Jacksonville
Orlando
Tampa
Toronto
Ottawa
Montreal
Quebec City
New York
Philadelphia
Victoria

forwarding
forwarding
45 h
3,053 miles
48 h
3,309 miles
San Jose
Northampton
Cleveland
United States

Routing and Forwarding

Every system or host or link has a corresponding IP Address

- the IP address of a destination is recorded in the packet header
- Every router reads the portion of the packet's header and forwards to adjacent router
- Each router has forwarding table, maps destination portion o the IP header address to the router's outbound link
- When the packet arrives at a router based on the predefined forwarding table it finds the outbound link
- Routing protocols are used to automatically set the forwarding tables

Circuit Switching

Data moves through network of links and switches by either: circuit switching or packet switching

- In a **circuit-switched network**, the needed resources (buffers, link transmission rate) needed for communication between the end systems are reserved for the duration of the communication session. In packet switched networks – resources **are not reserved**, hence the delays.
- Phone networks are example of circuit-switched networks
  - Sender and receiver establish a connection
  - *Bona fide* connection, switches and receiver maintain for the duration of the session - circuit
- Restaurants: walk-in versus reservation.

Alternative to packet switching: circuit switching

end-end resources allocated to, reserved for "call" between source and destination

- in diagram, each link has four circuits.
  - call gets 2nd circuit in top link and 1st circuit in right link.
- dedicated resources: no sharing
  - circuit-like (guaranteed) performance
  - Transmission rate has been reserved
- circuit segment idle if not used by call (no sharing)

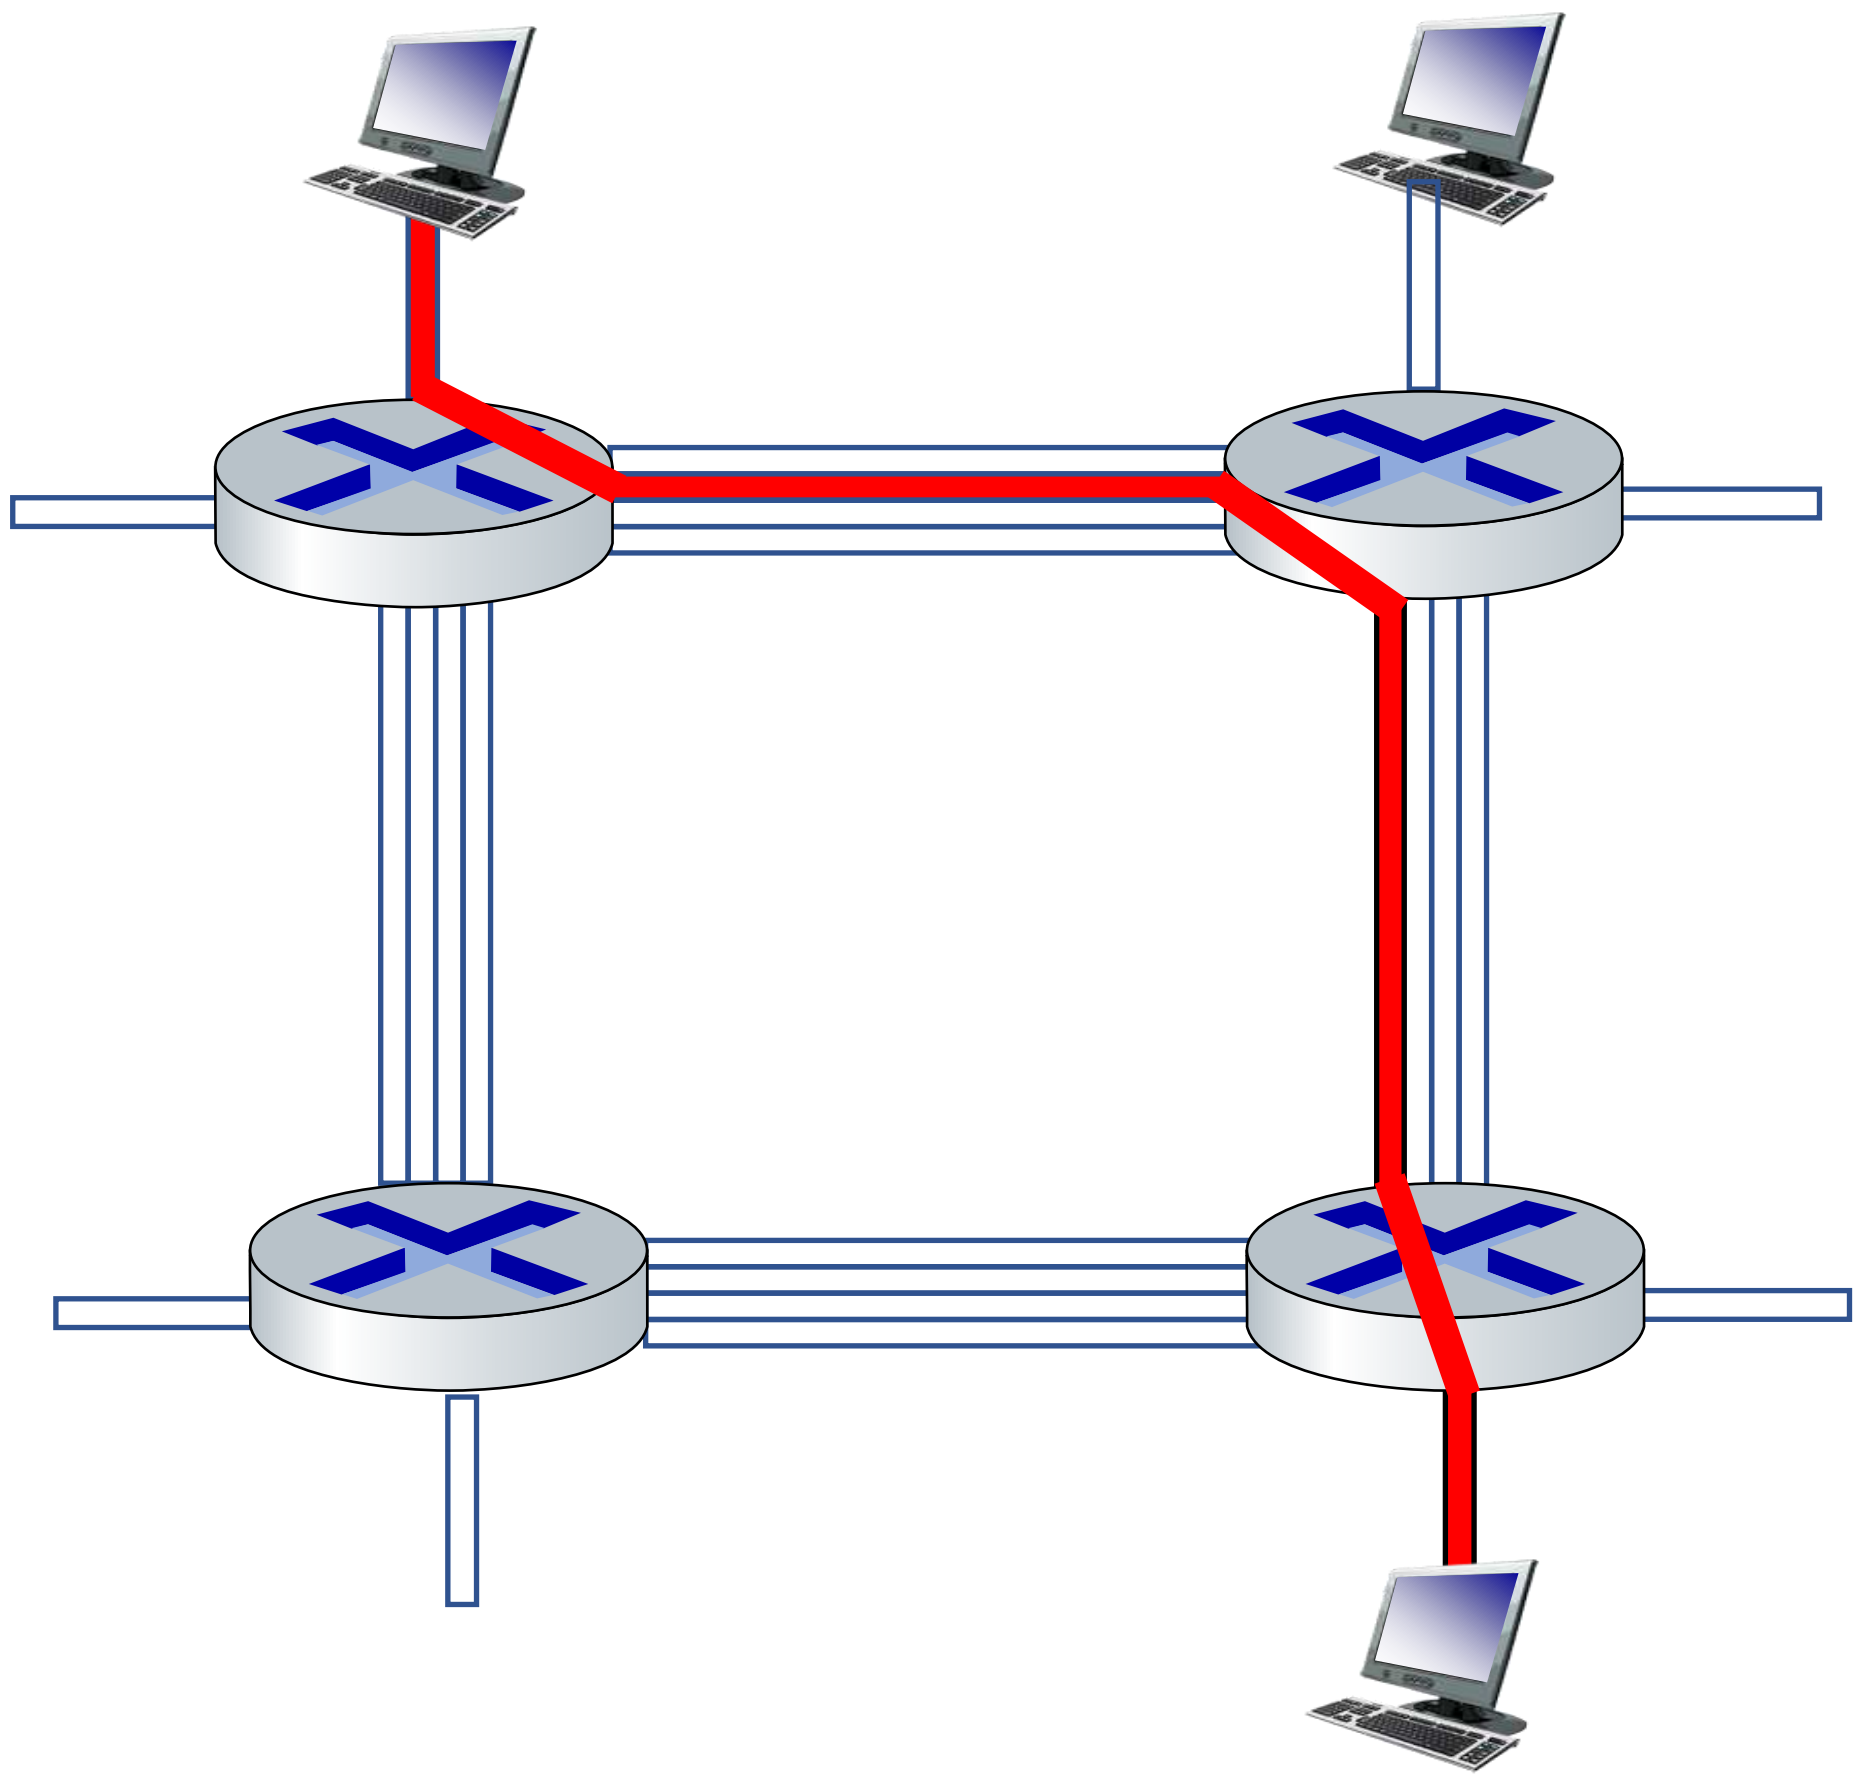

Circuit switching: FDM and TDM

Frequency Division Multiplexing (FDM)

- optical, electromagnetic frequencies divided into (narrow) frequency bands- bandwidth
- each call allocated its own band, can transmit at max rate of that narrow band

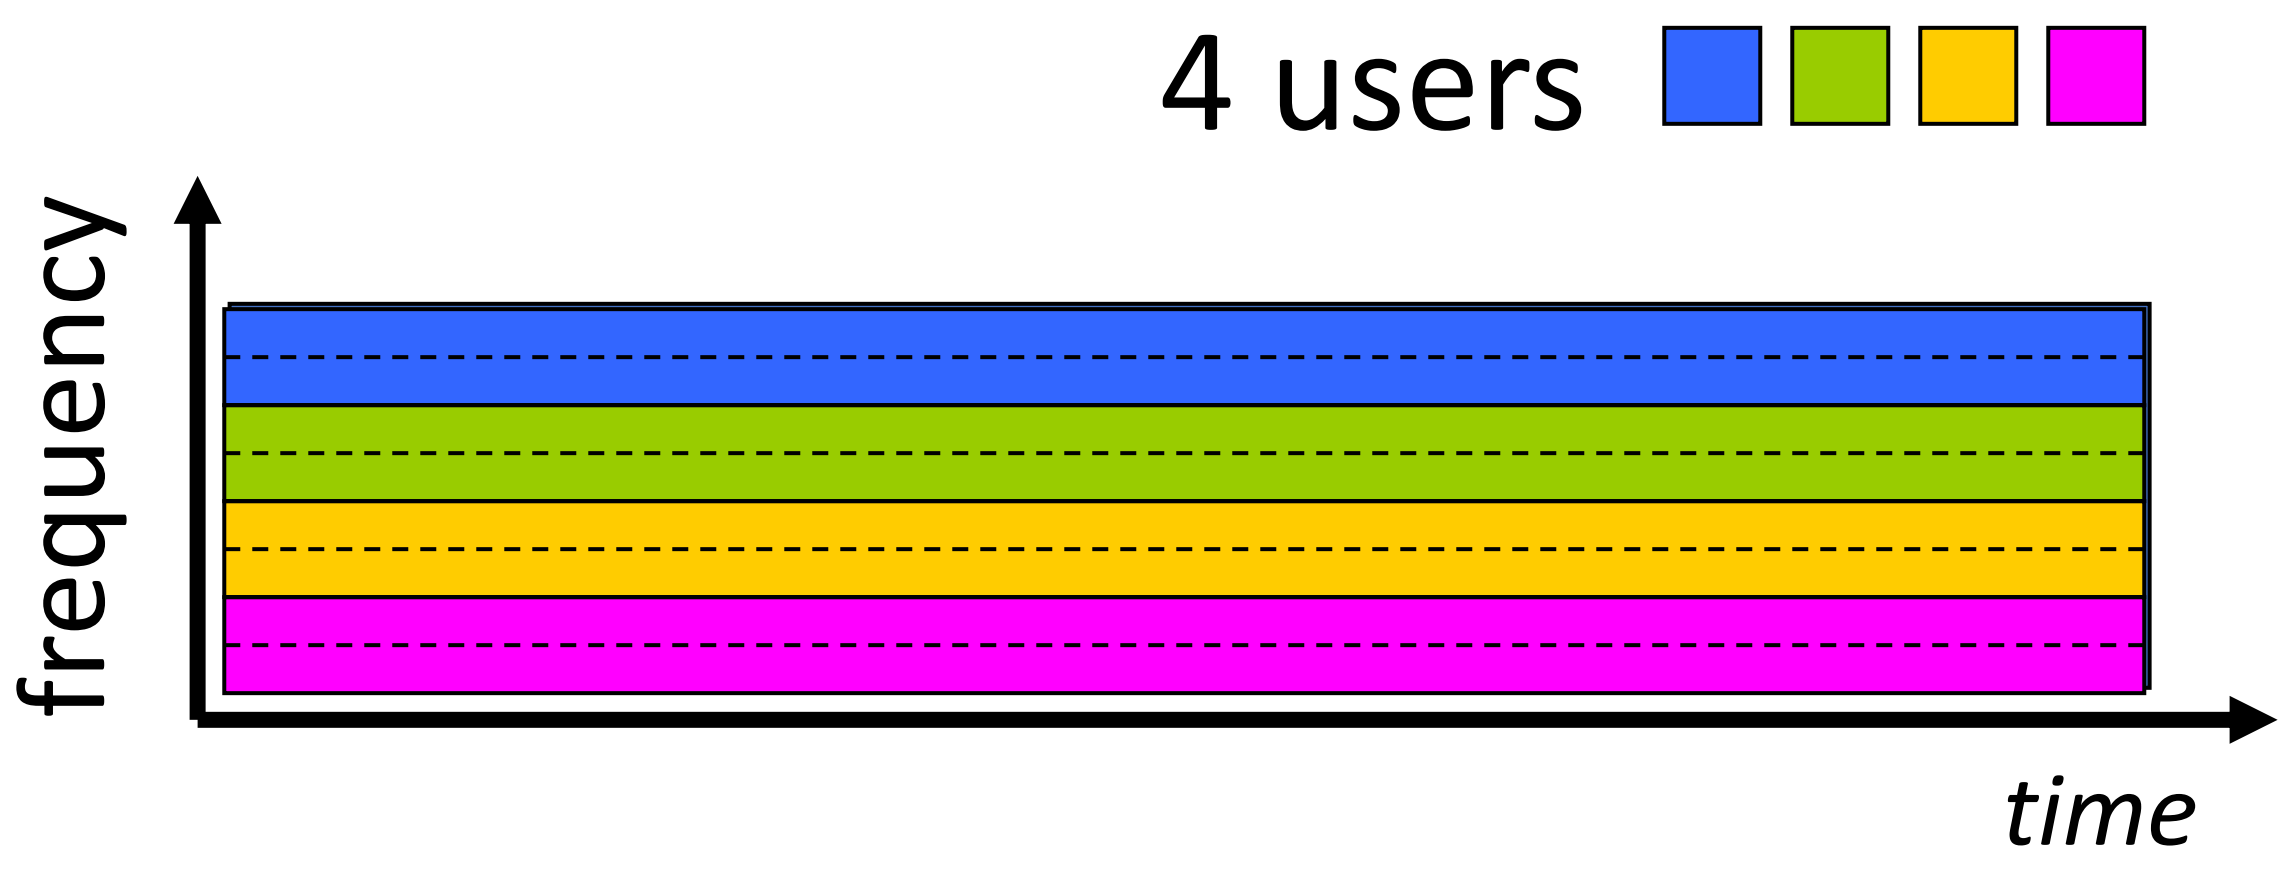

Time Division Multiplexing (TDM)

- time divided into slots
- each call allocated periodic slot(s), can transmit at maximum rate of (wider) frequency band (only) during its time slot(s)

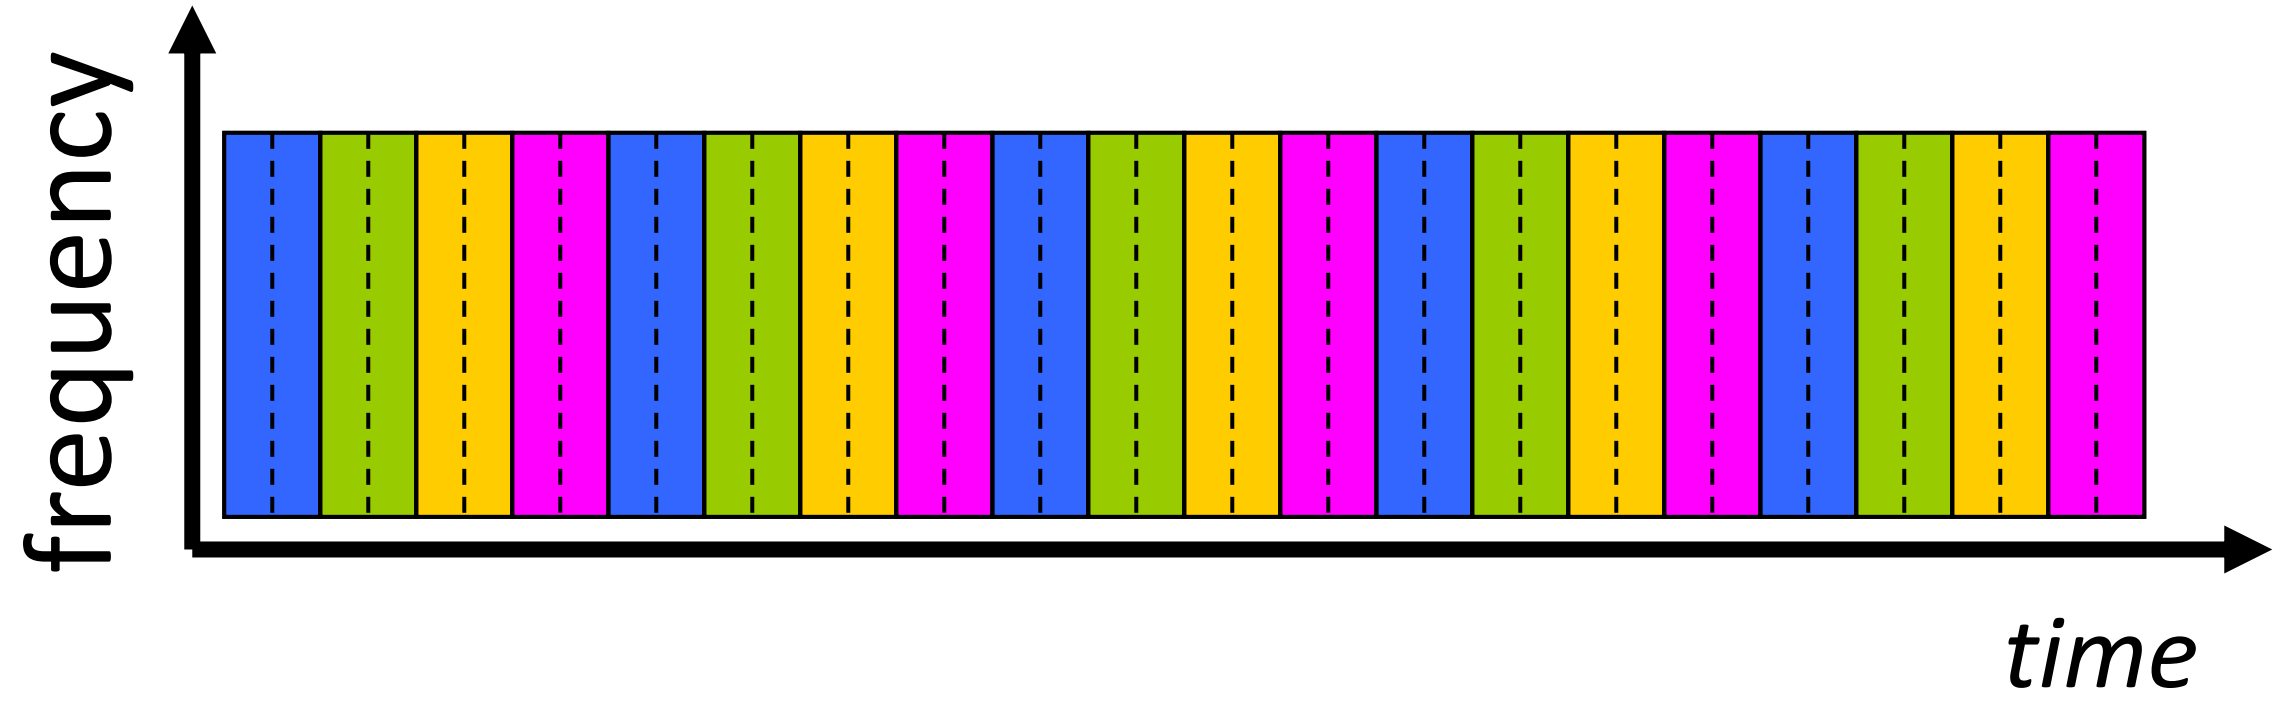

Packet switching versus circuit switching

Is packet switching a “slam dunk winner”?

- great for “bursty” data – sometimes has data to send, but at other times not
  - resource sharing
  - simpler, no call setup
- excessive congestion possible: packet delay and loss due to buffer overflow
  - protocols needed for reliable data transfer, congestion control
- *Q:* How to provide circuit-like behavior with packet-switching?
  - “It’s complicated.” We’ll study various techniques that try to make packet switching as “circuit-like” as possible.

Q: human analogies of reserved resources (circuit switching) versus on-demand allocation (packet switching)?

Internet structure: a "network of networks"

- hosts connect to Internet via access Internet Service Providers (ISPs)
- access ISPs in turn must be interconnected
  - so that *any* two hosts *(anywhere!)* can send packets to each other
- resulting network of networks is very complex
  - evolution driven by economics, national policies

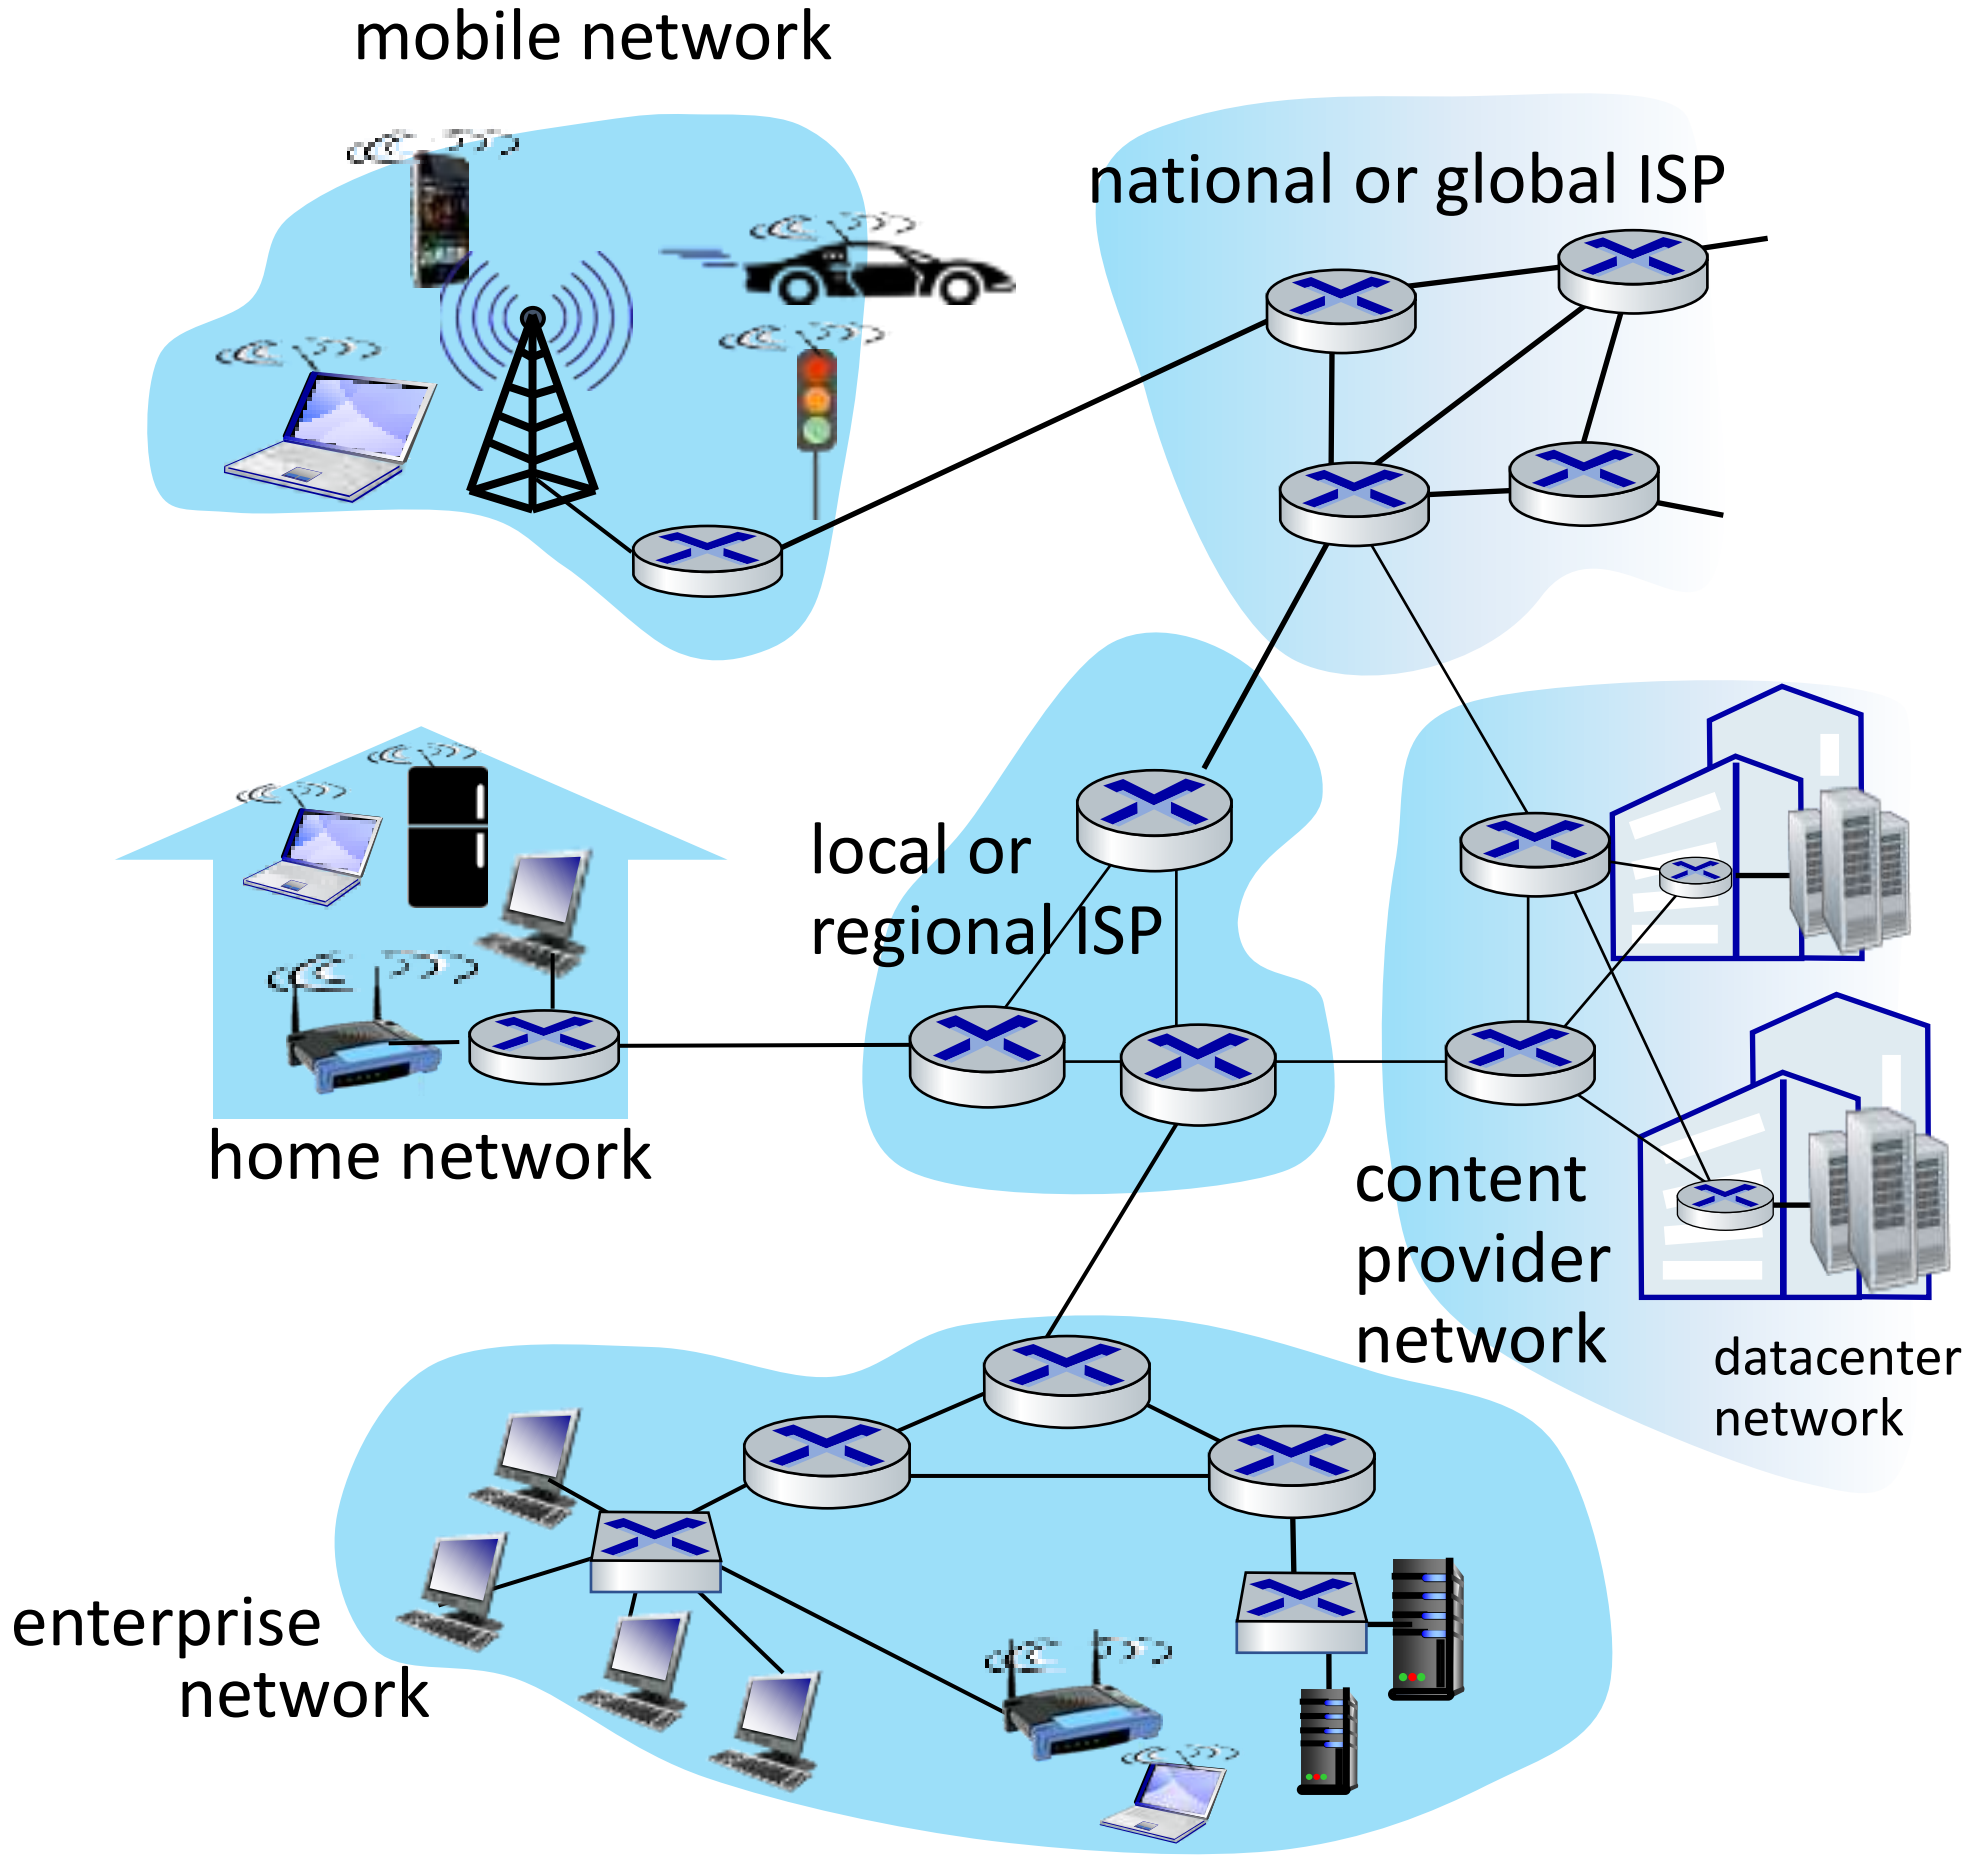

Let's take a stepwise approach to describe current Internet structure

Internet structure: a "network of networks"

Question: given *millions* of access ISPs, how to connect them together?

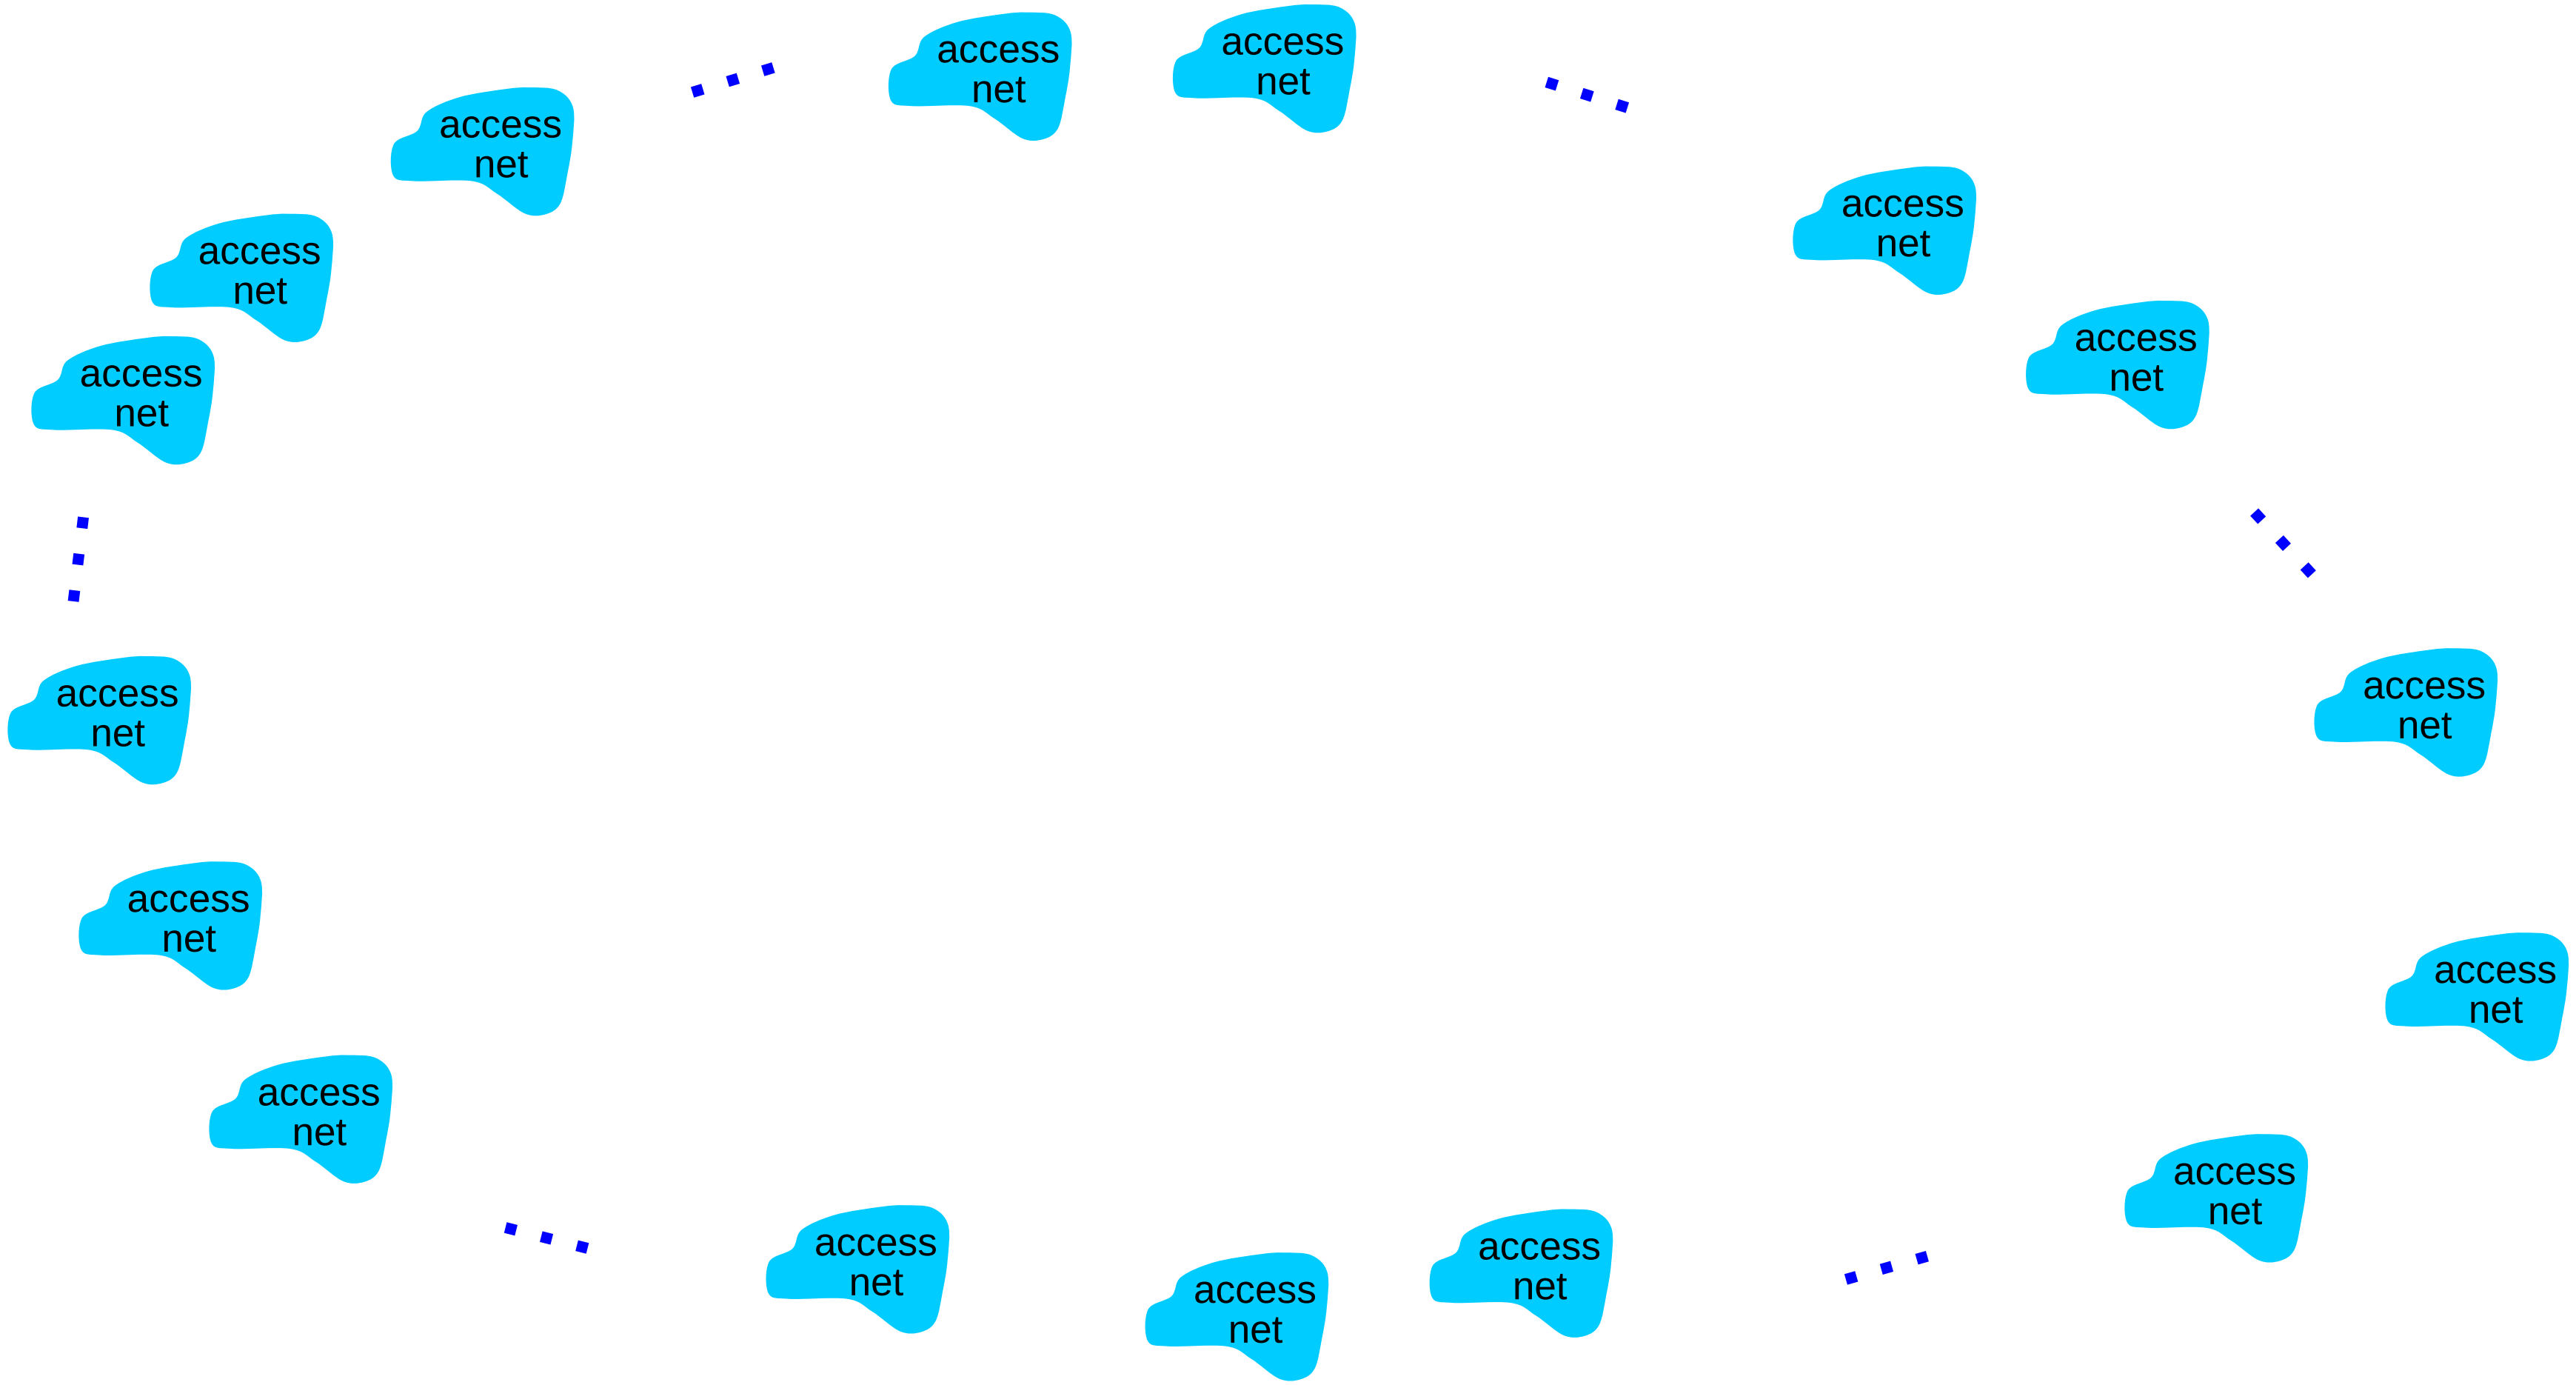

Internet structure: a “network of networks”

Question: given *millions* of access ISPs, how to connect them together?

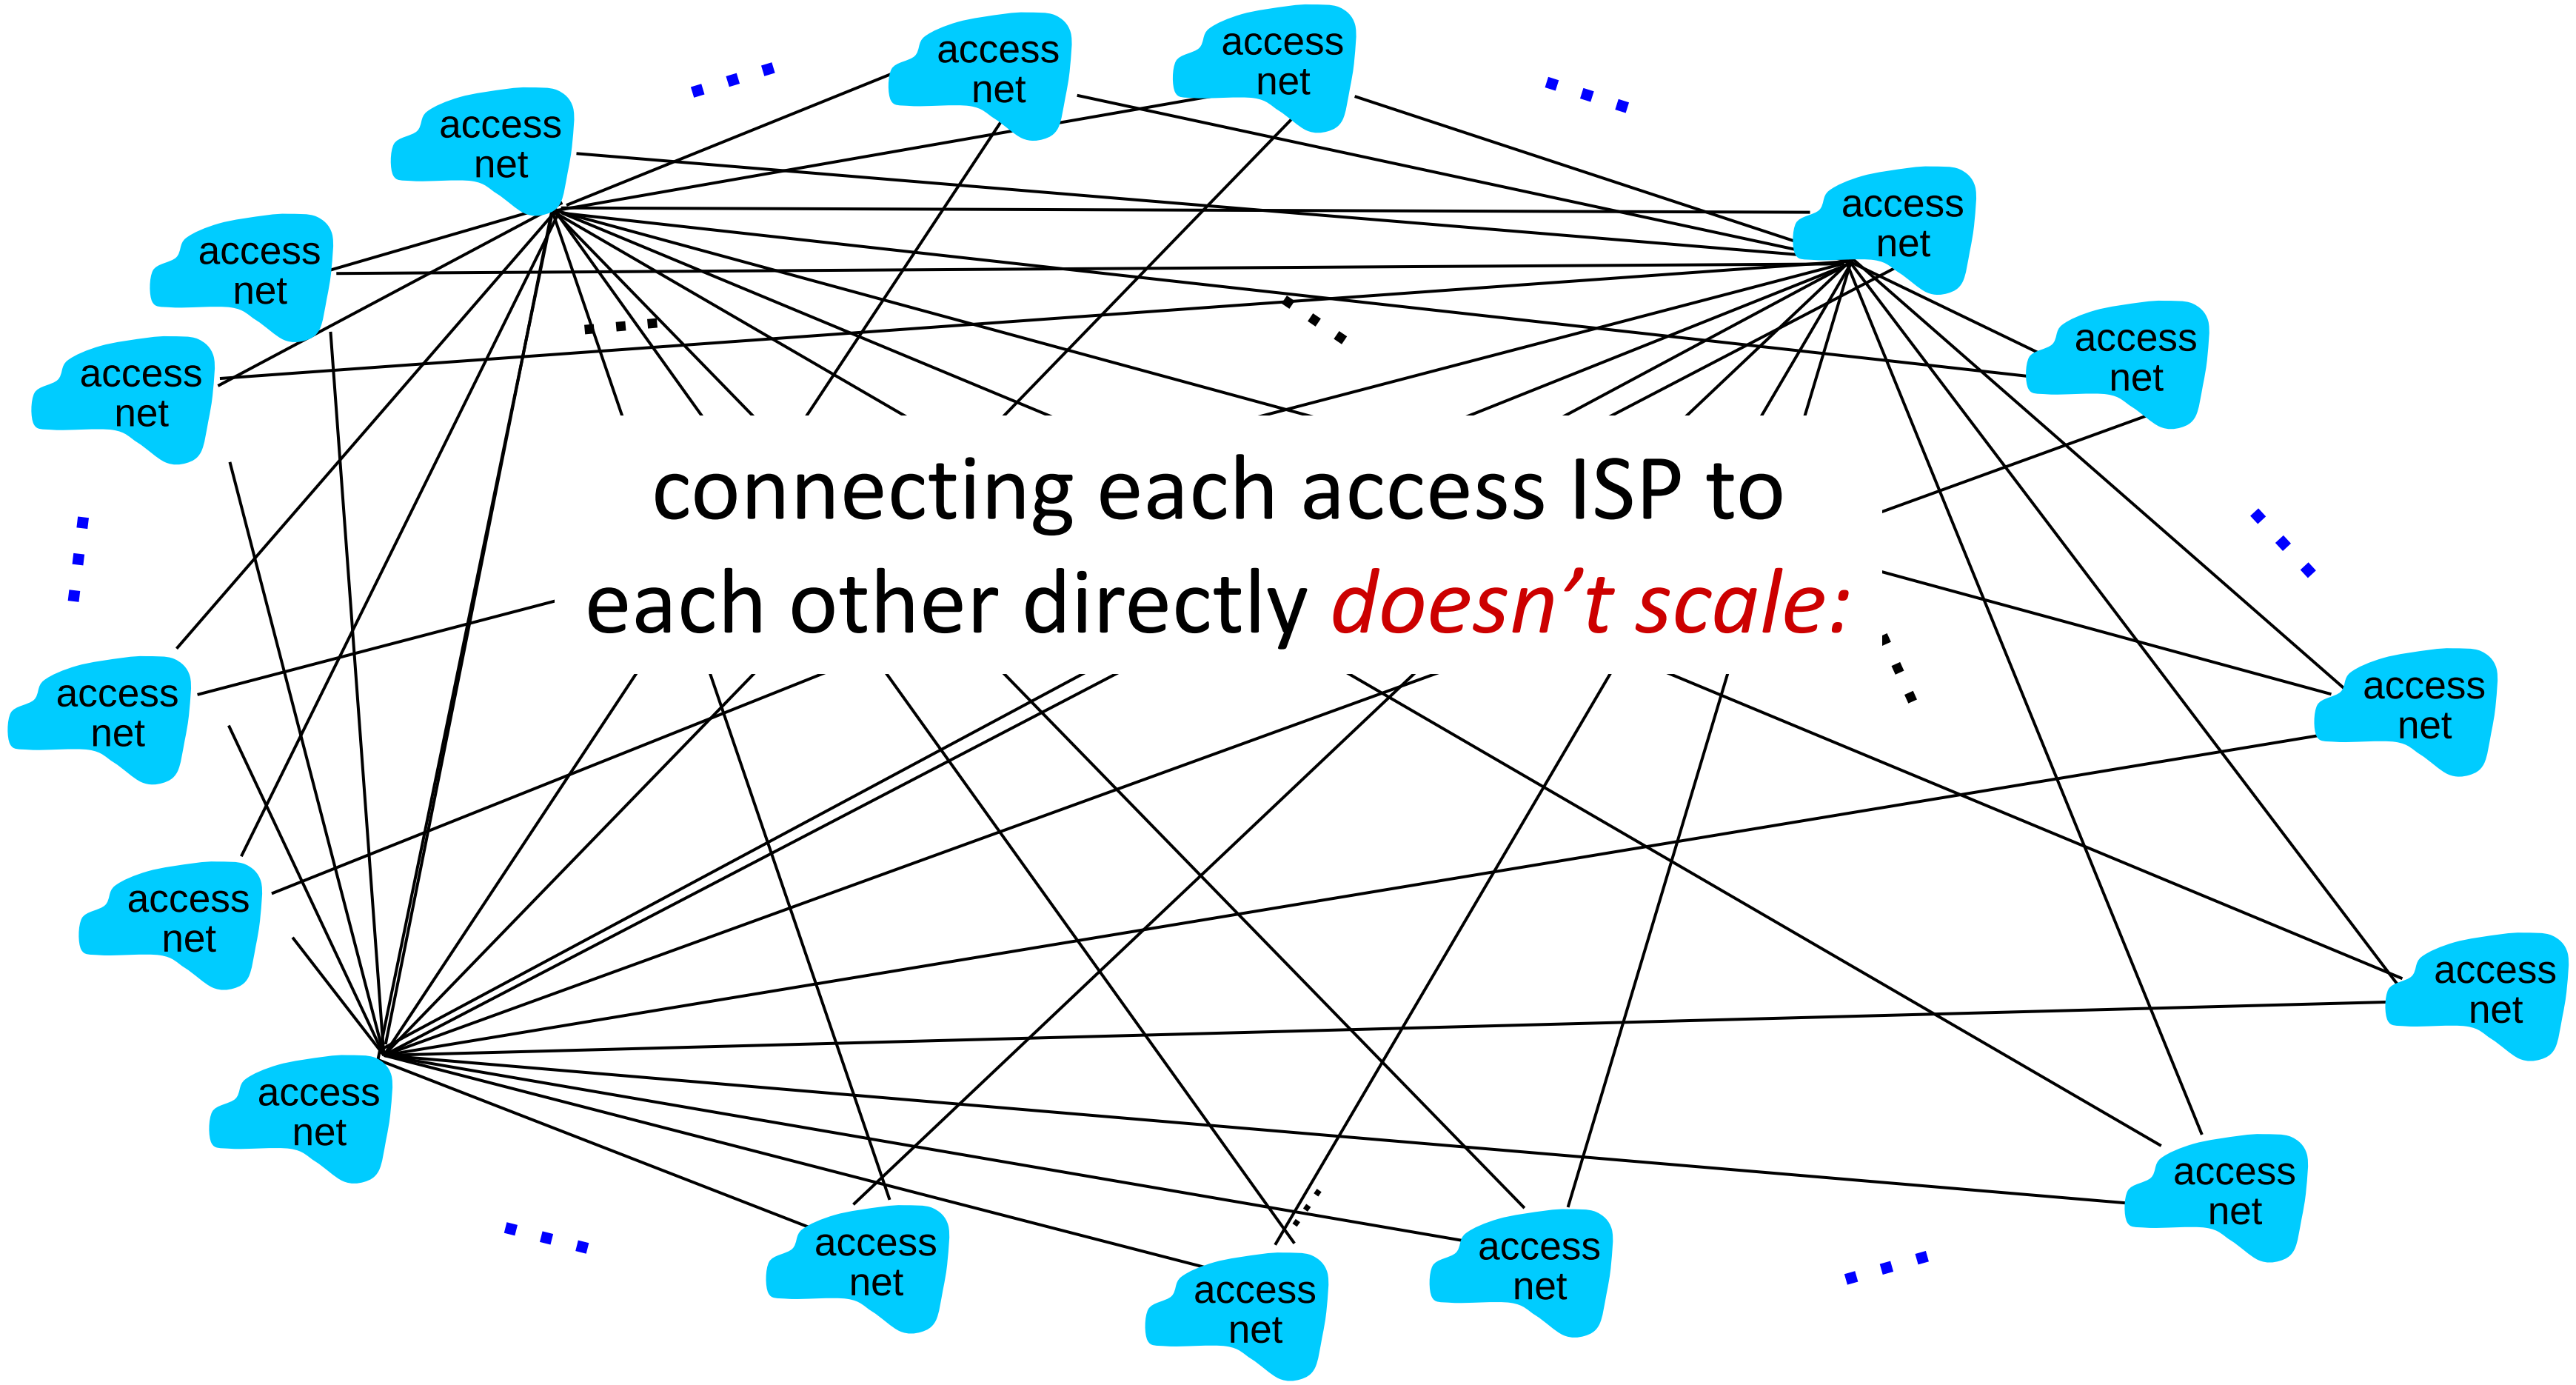

Internet structure: a "network of networks"

Option: connect each access ISP to one global transit ISP?
Customer and provider ISPs have economic agreement.

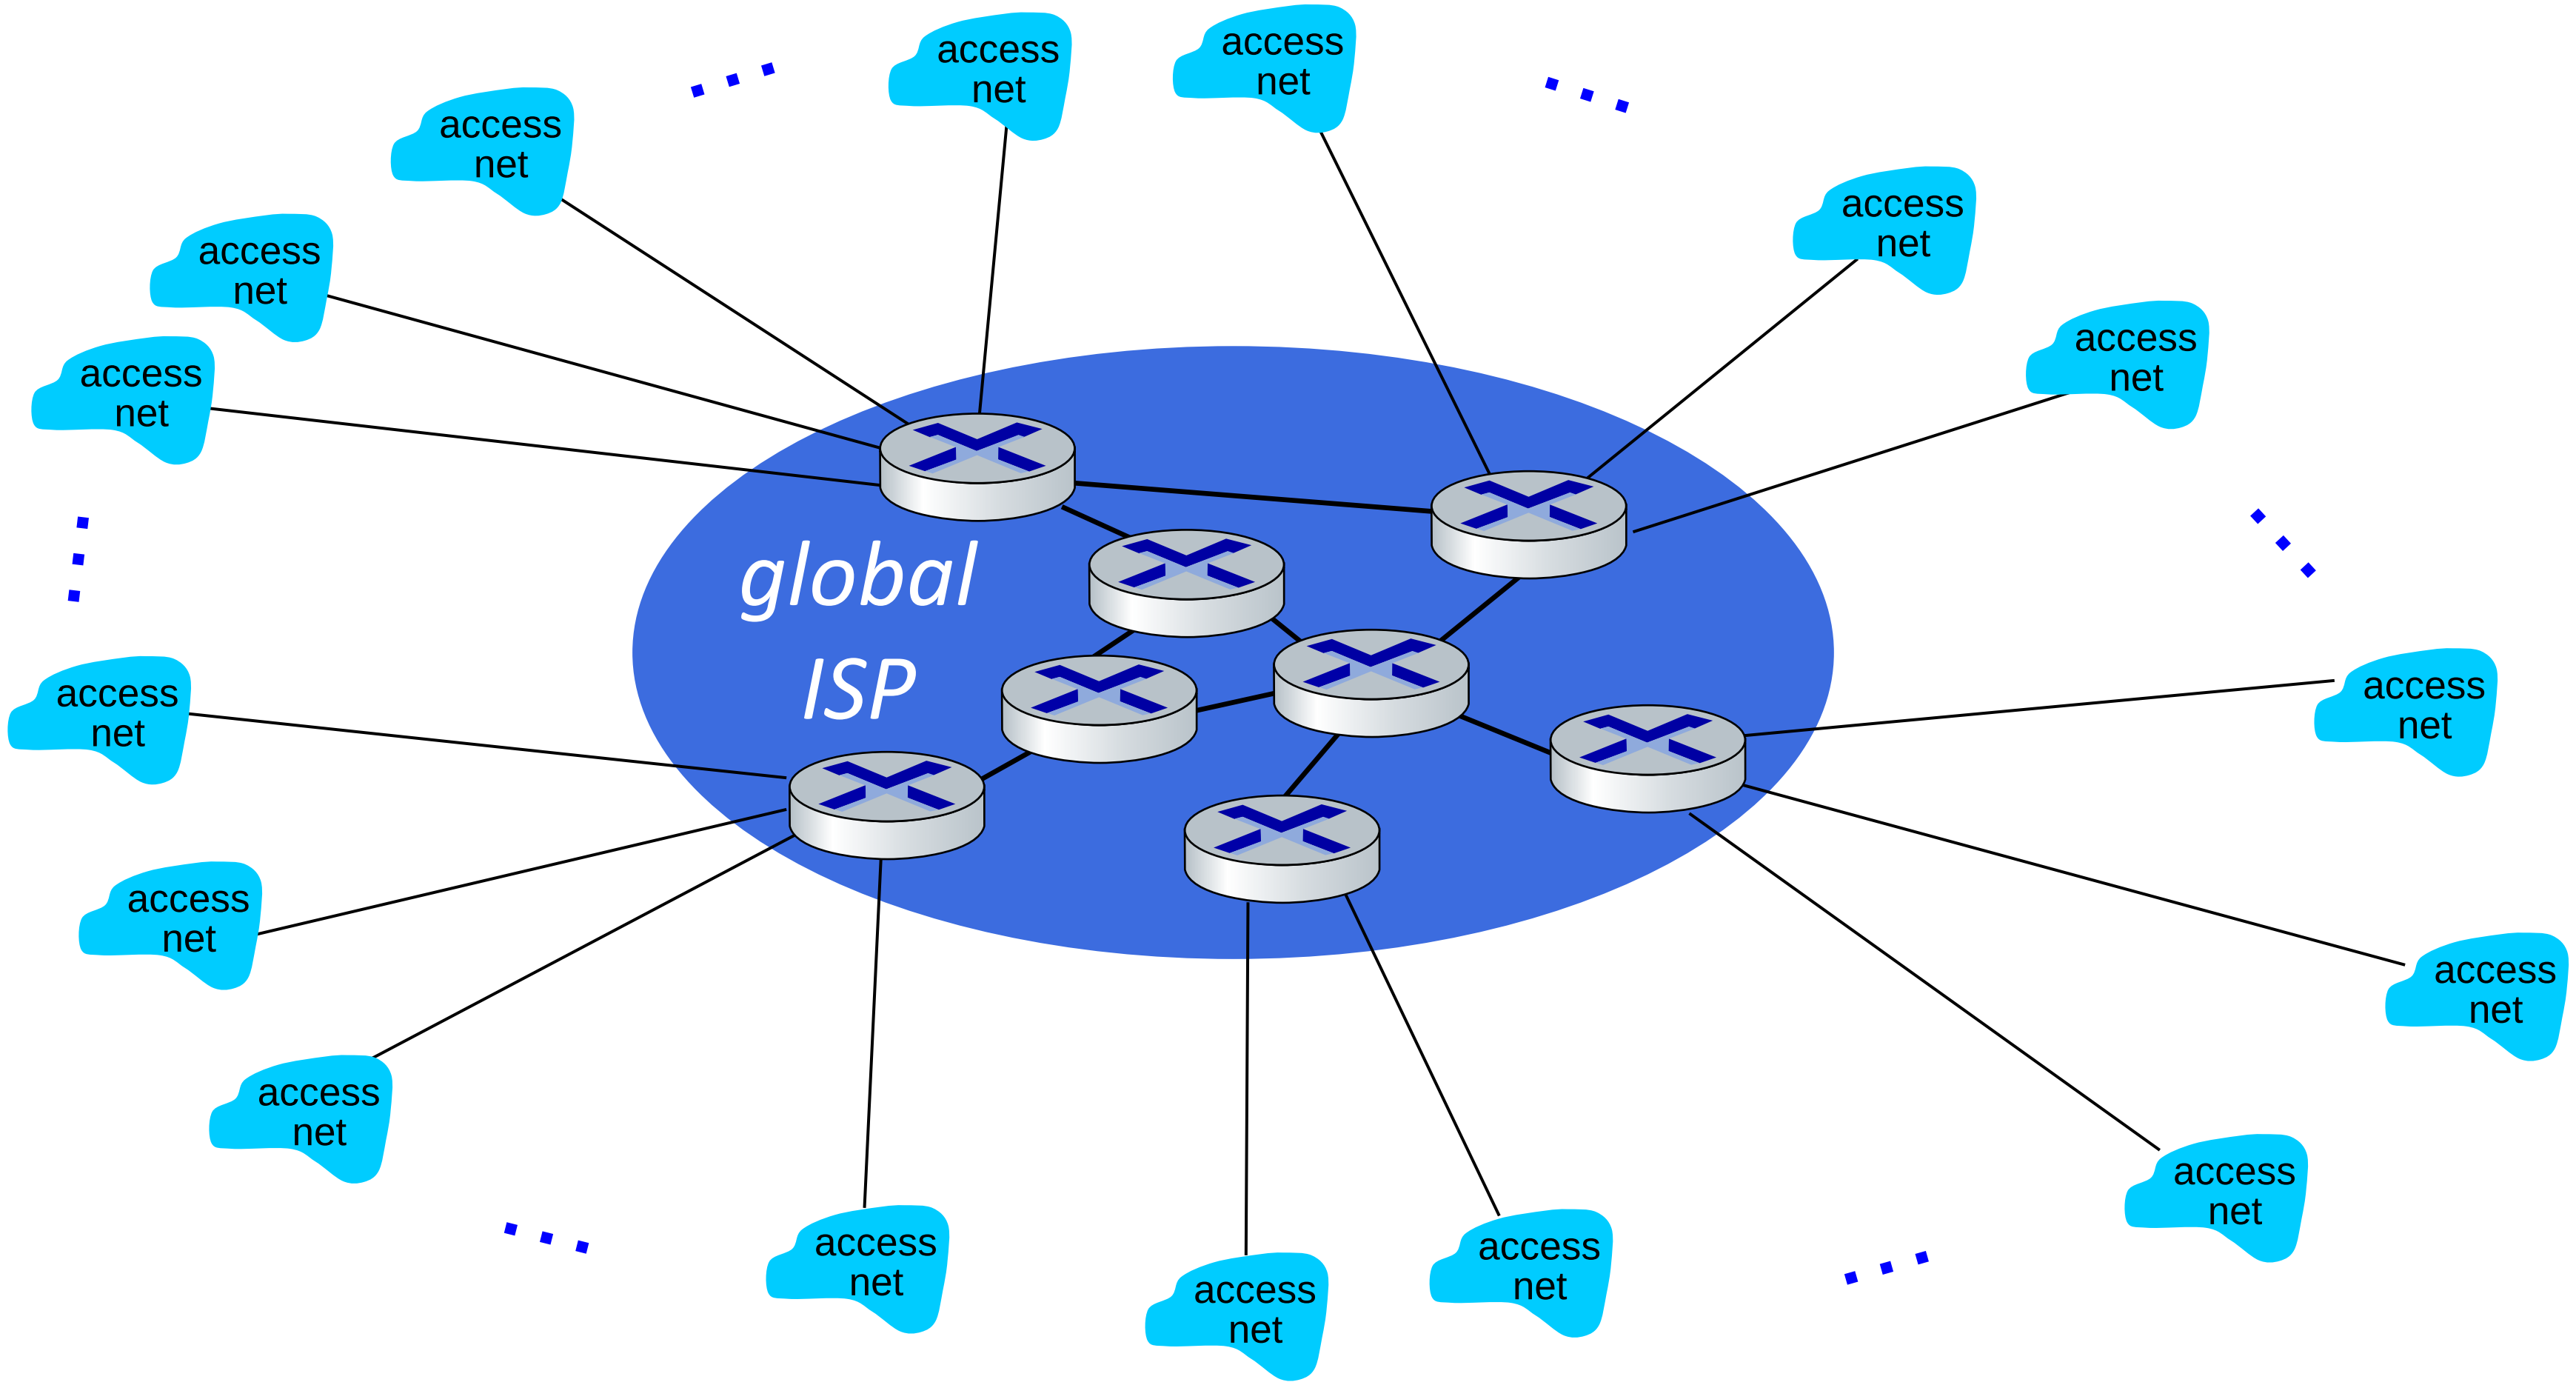

Internet structure: a "network of networks"

But if one global ISP is viable business, there will be competitors ….

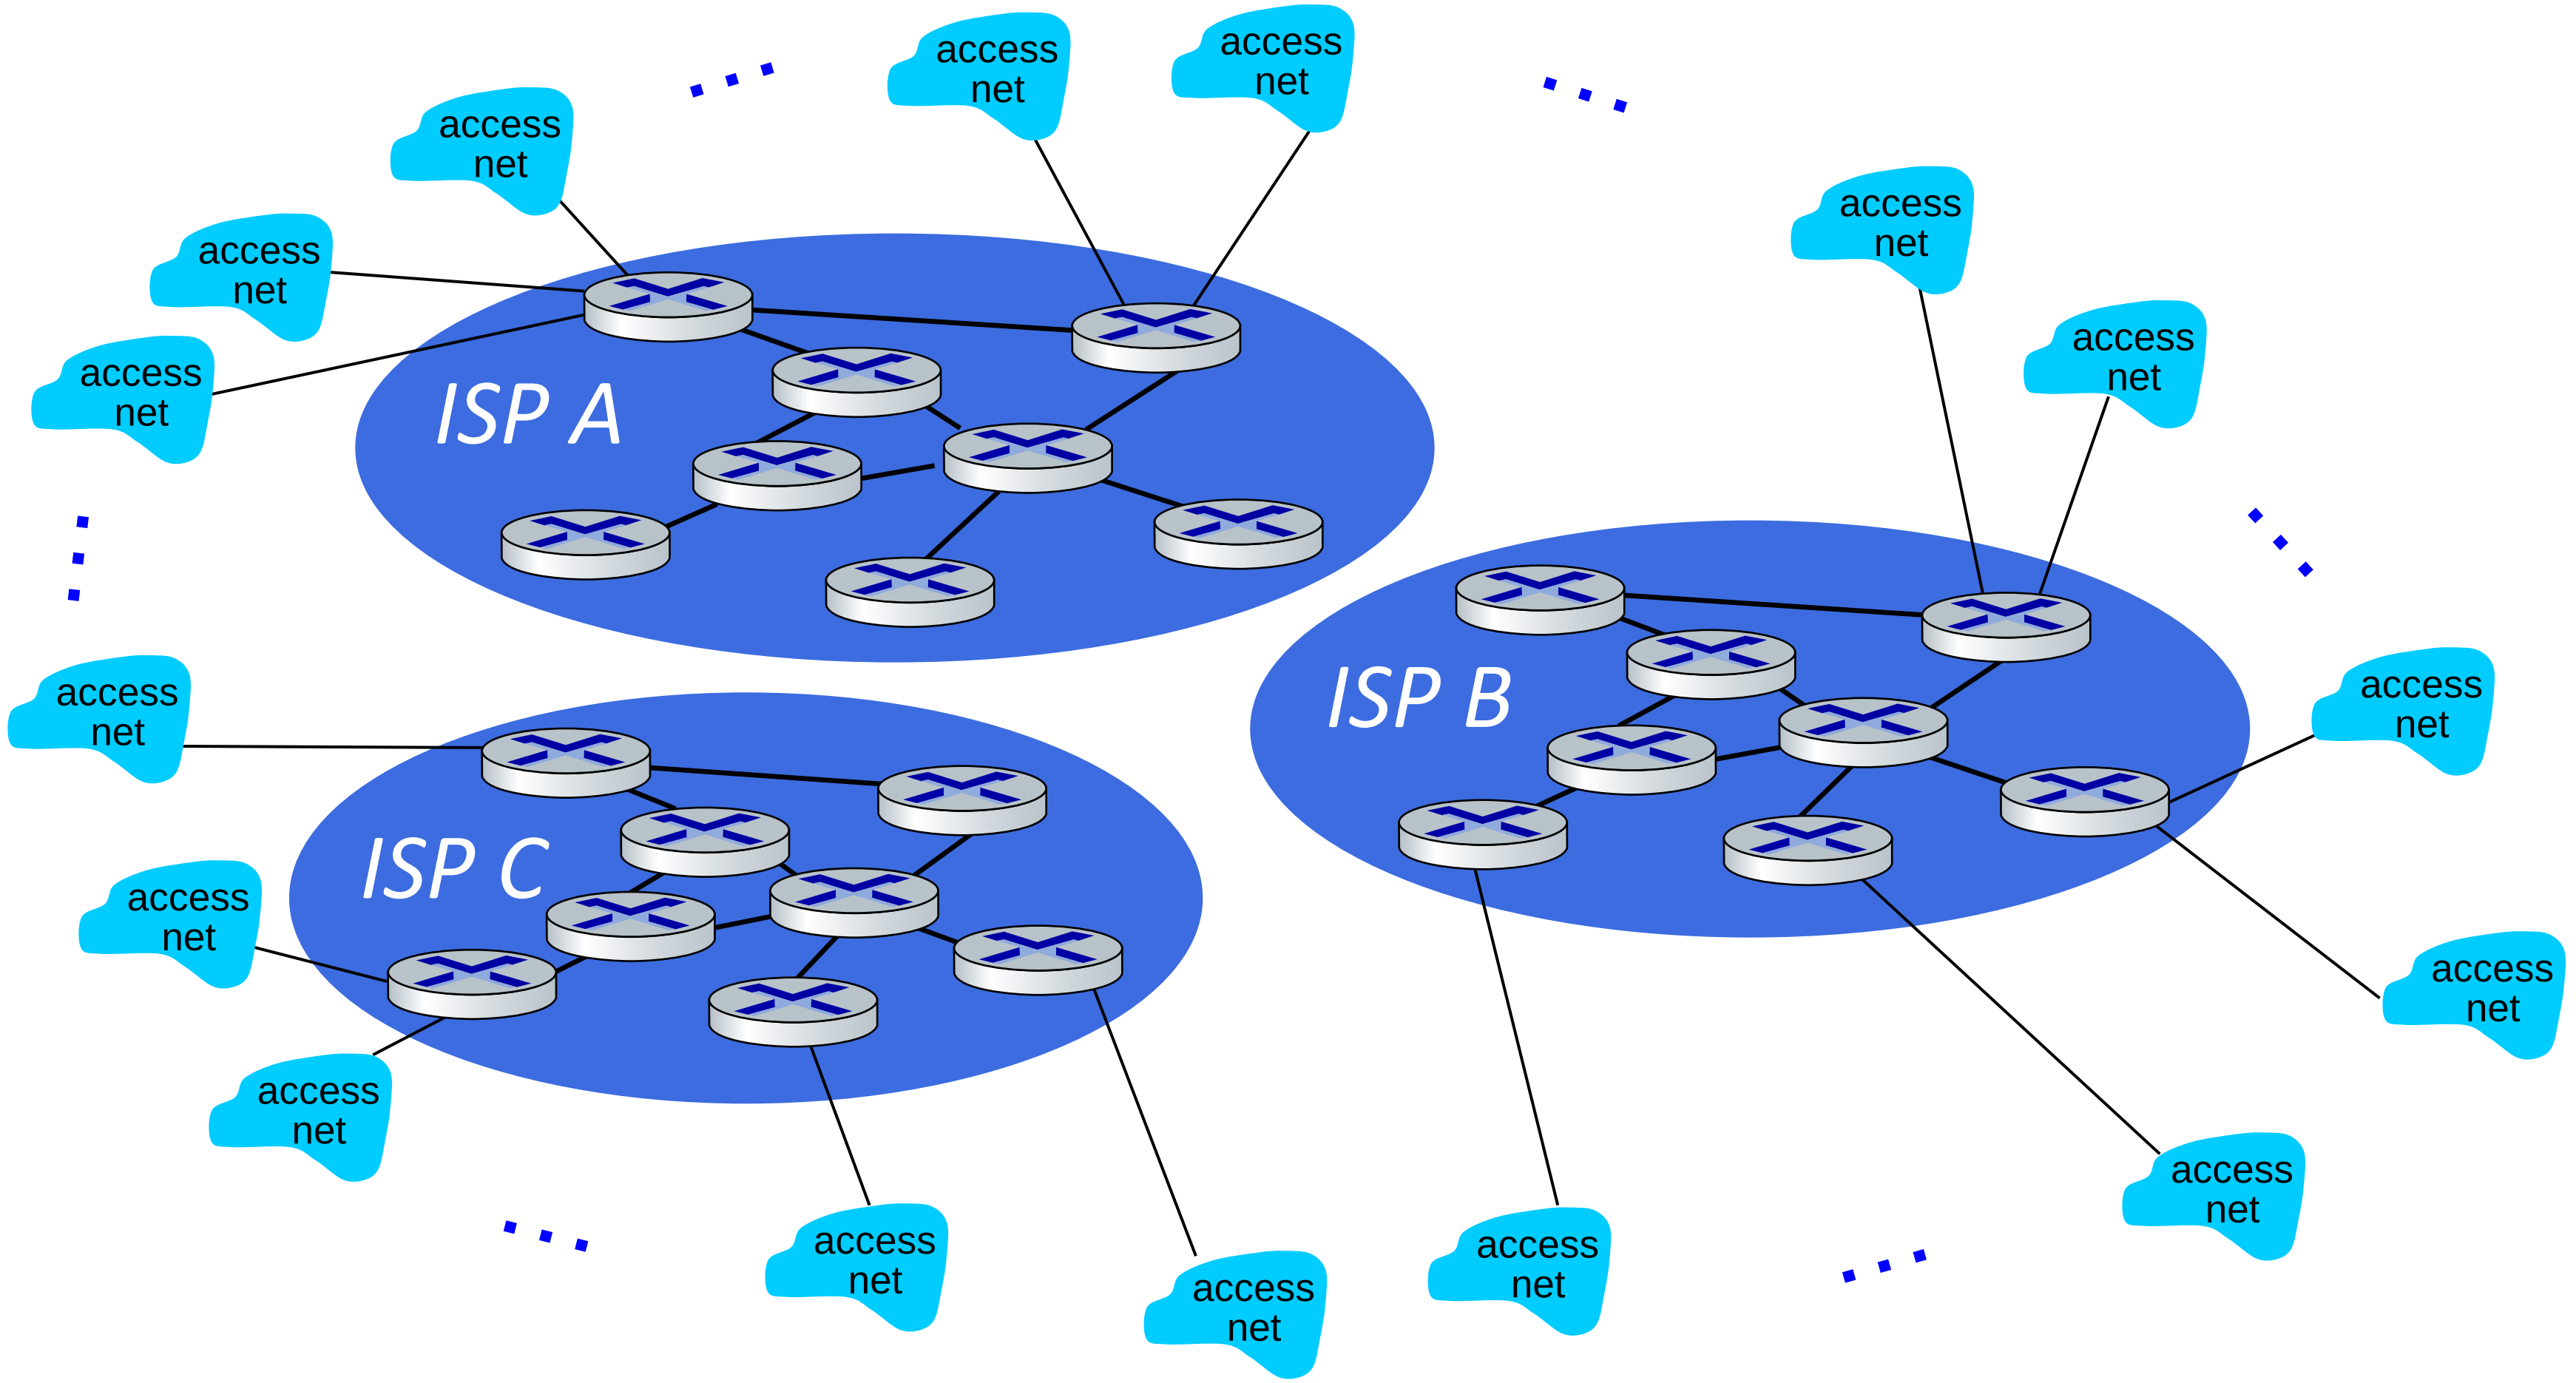

Internet structure: a "network of networks"

But if one global ISP is viable business, there will be competitors …. who will want to be connected

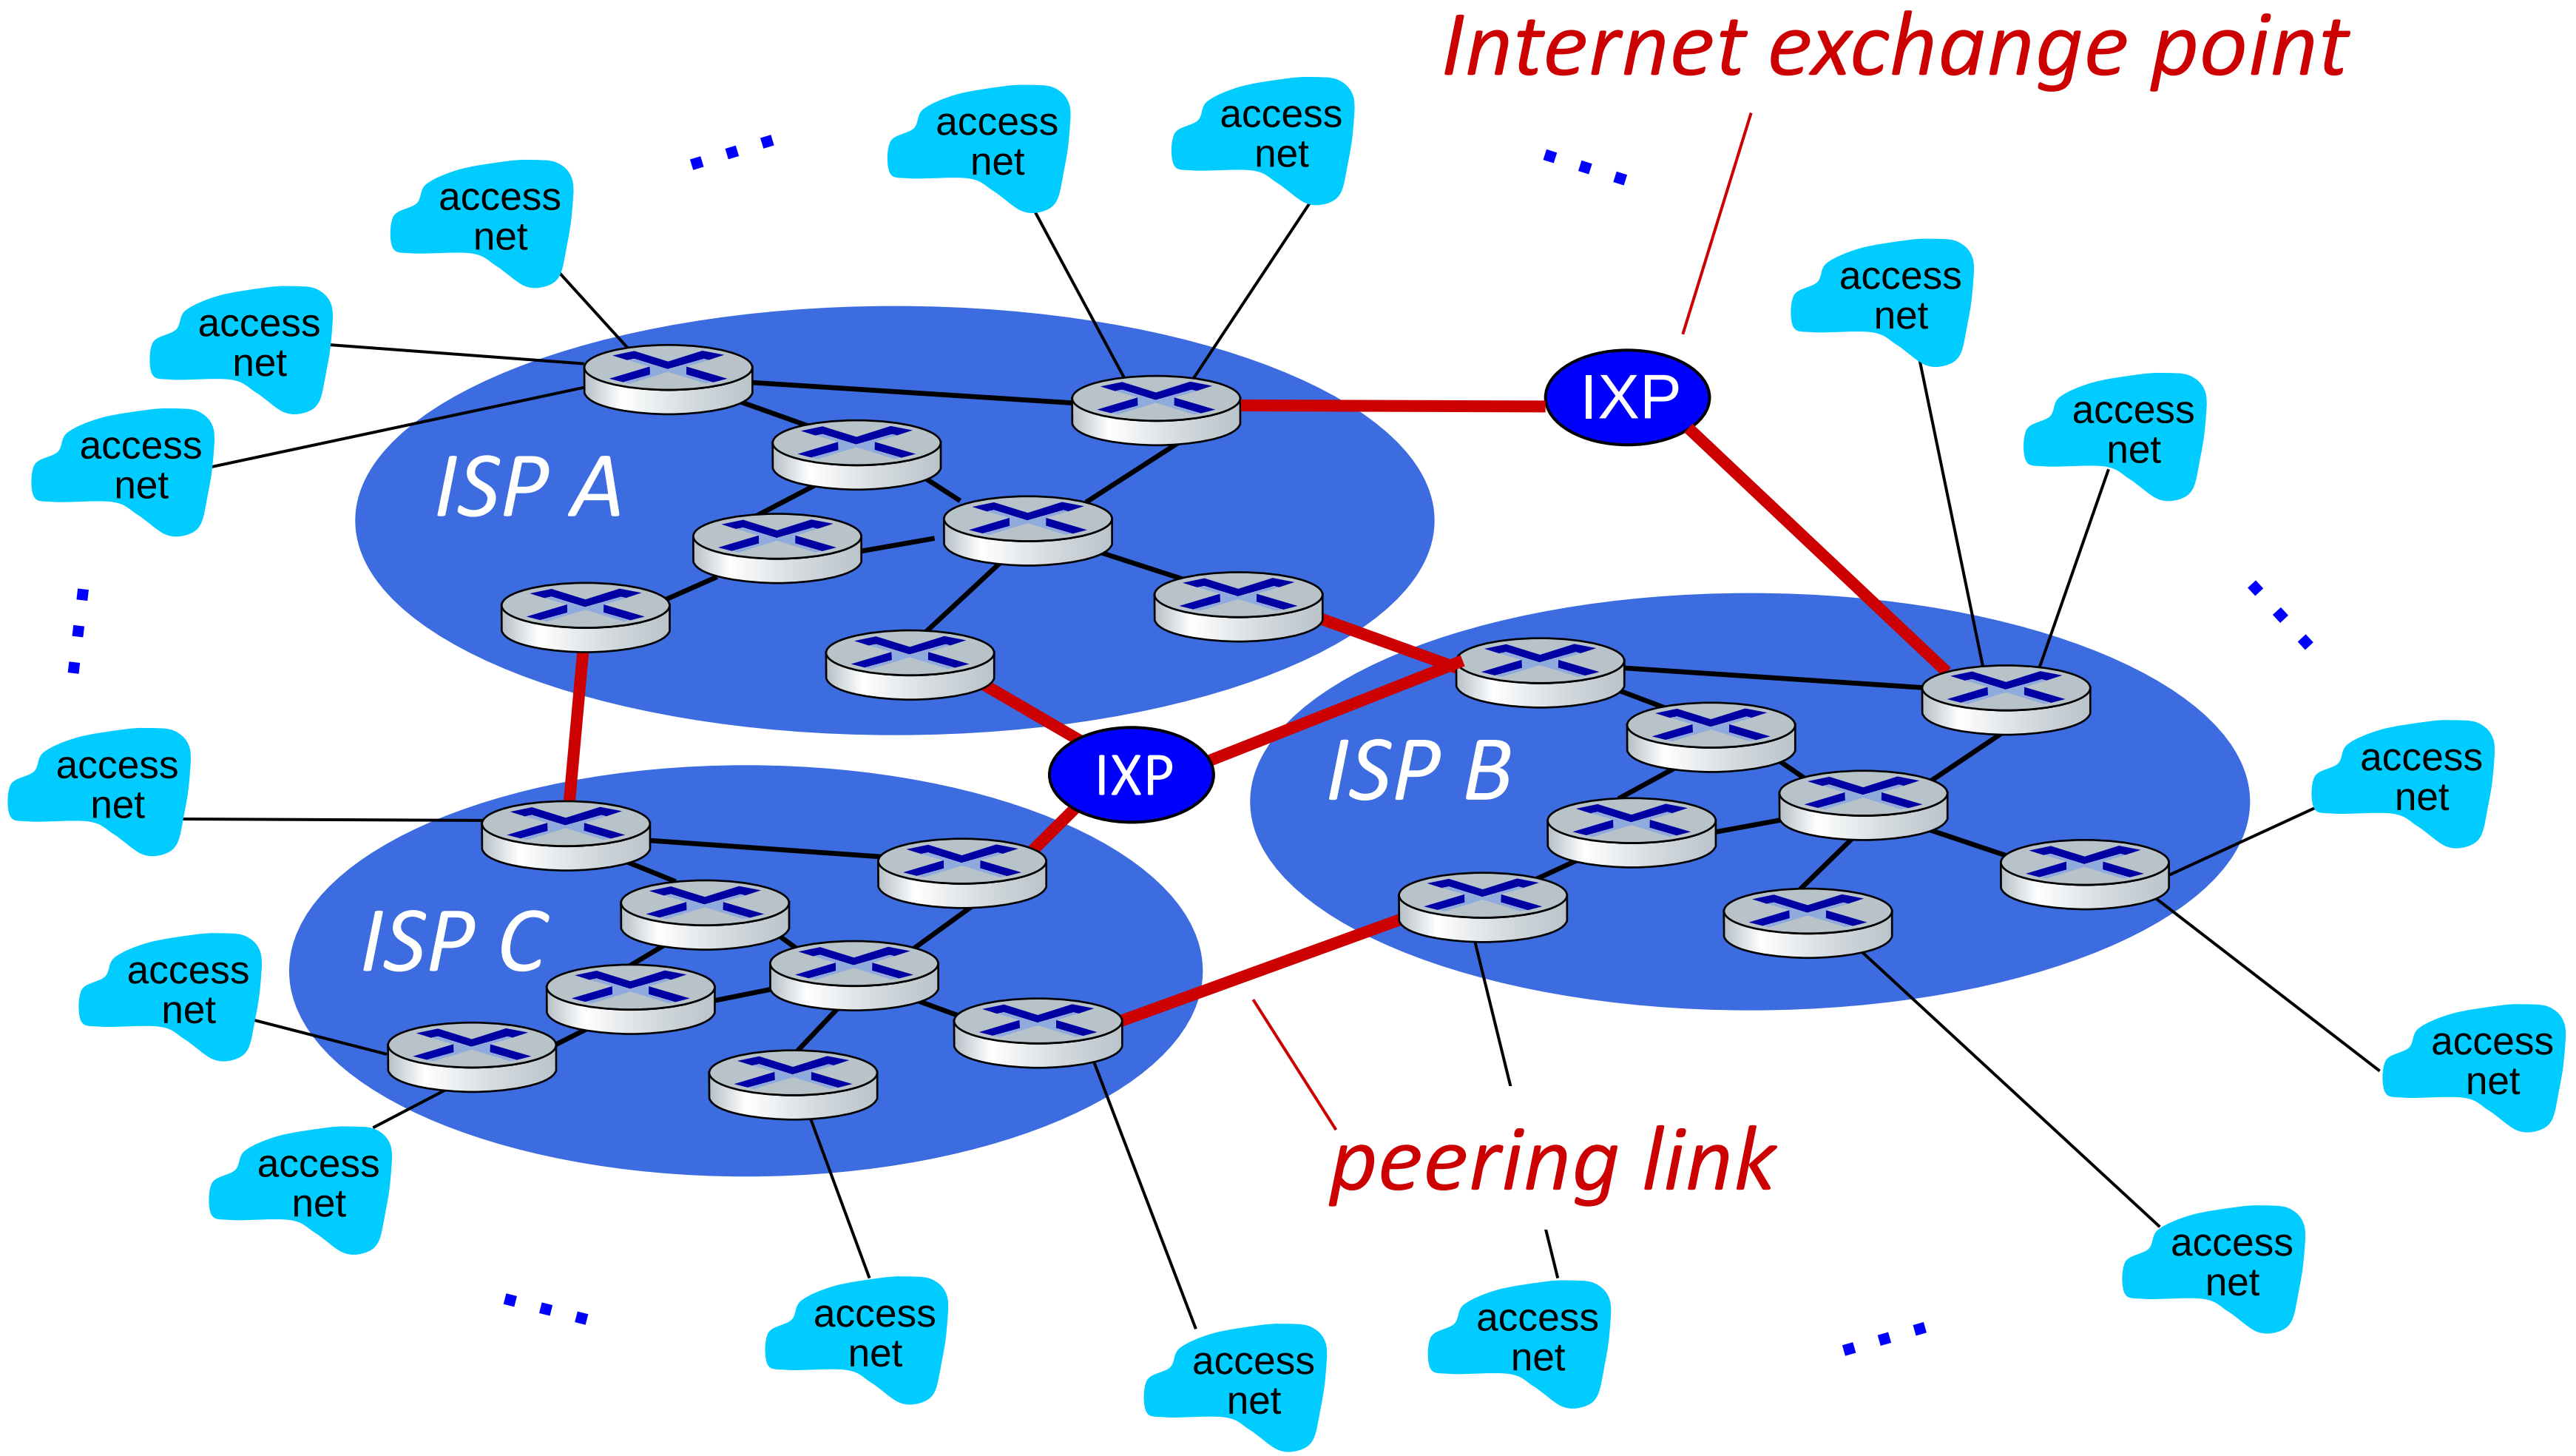

Internet structure: a "network of networks"

… and regional networks may arise to connect access nets to ISPs

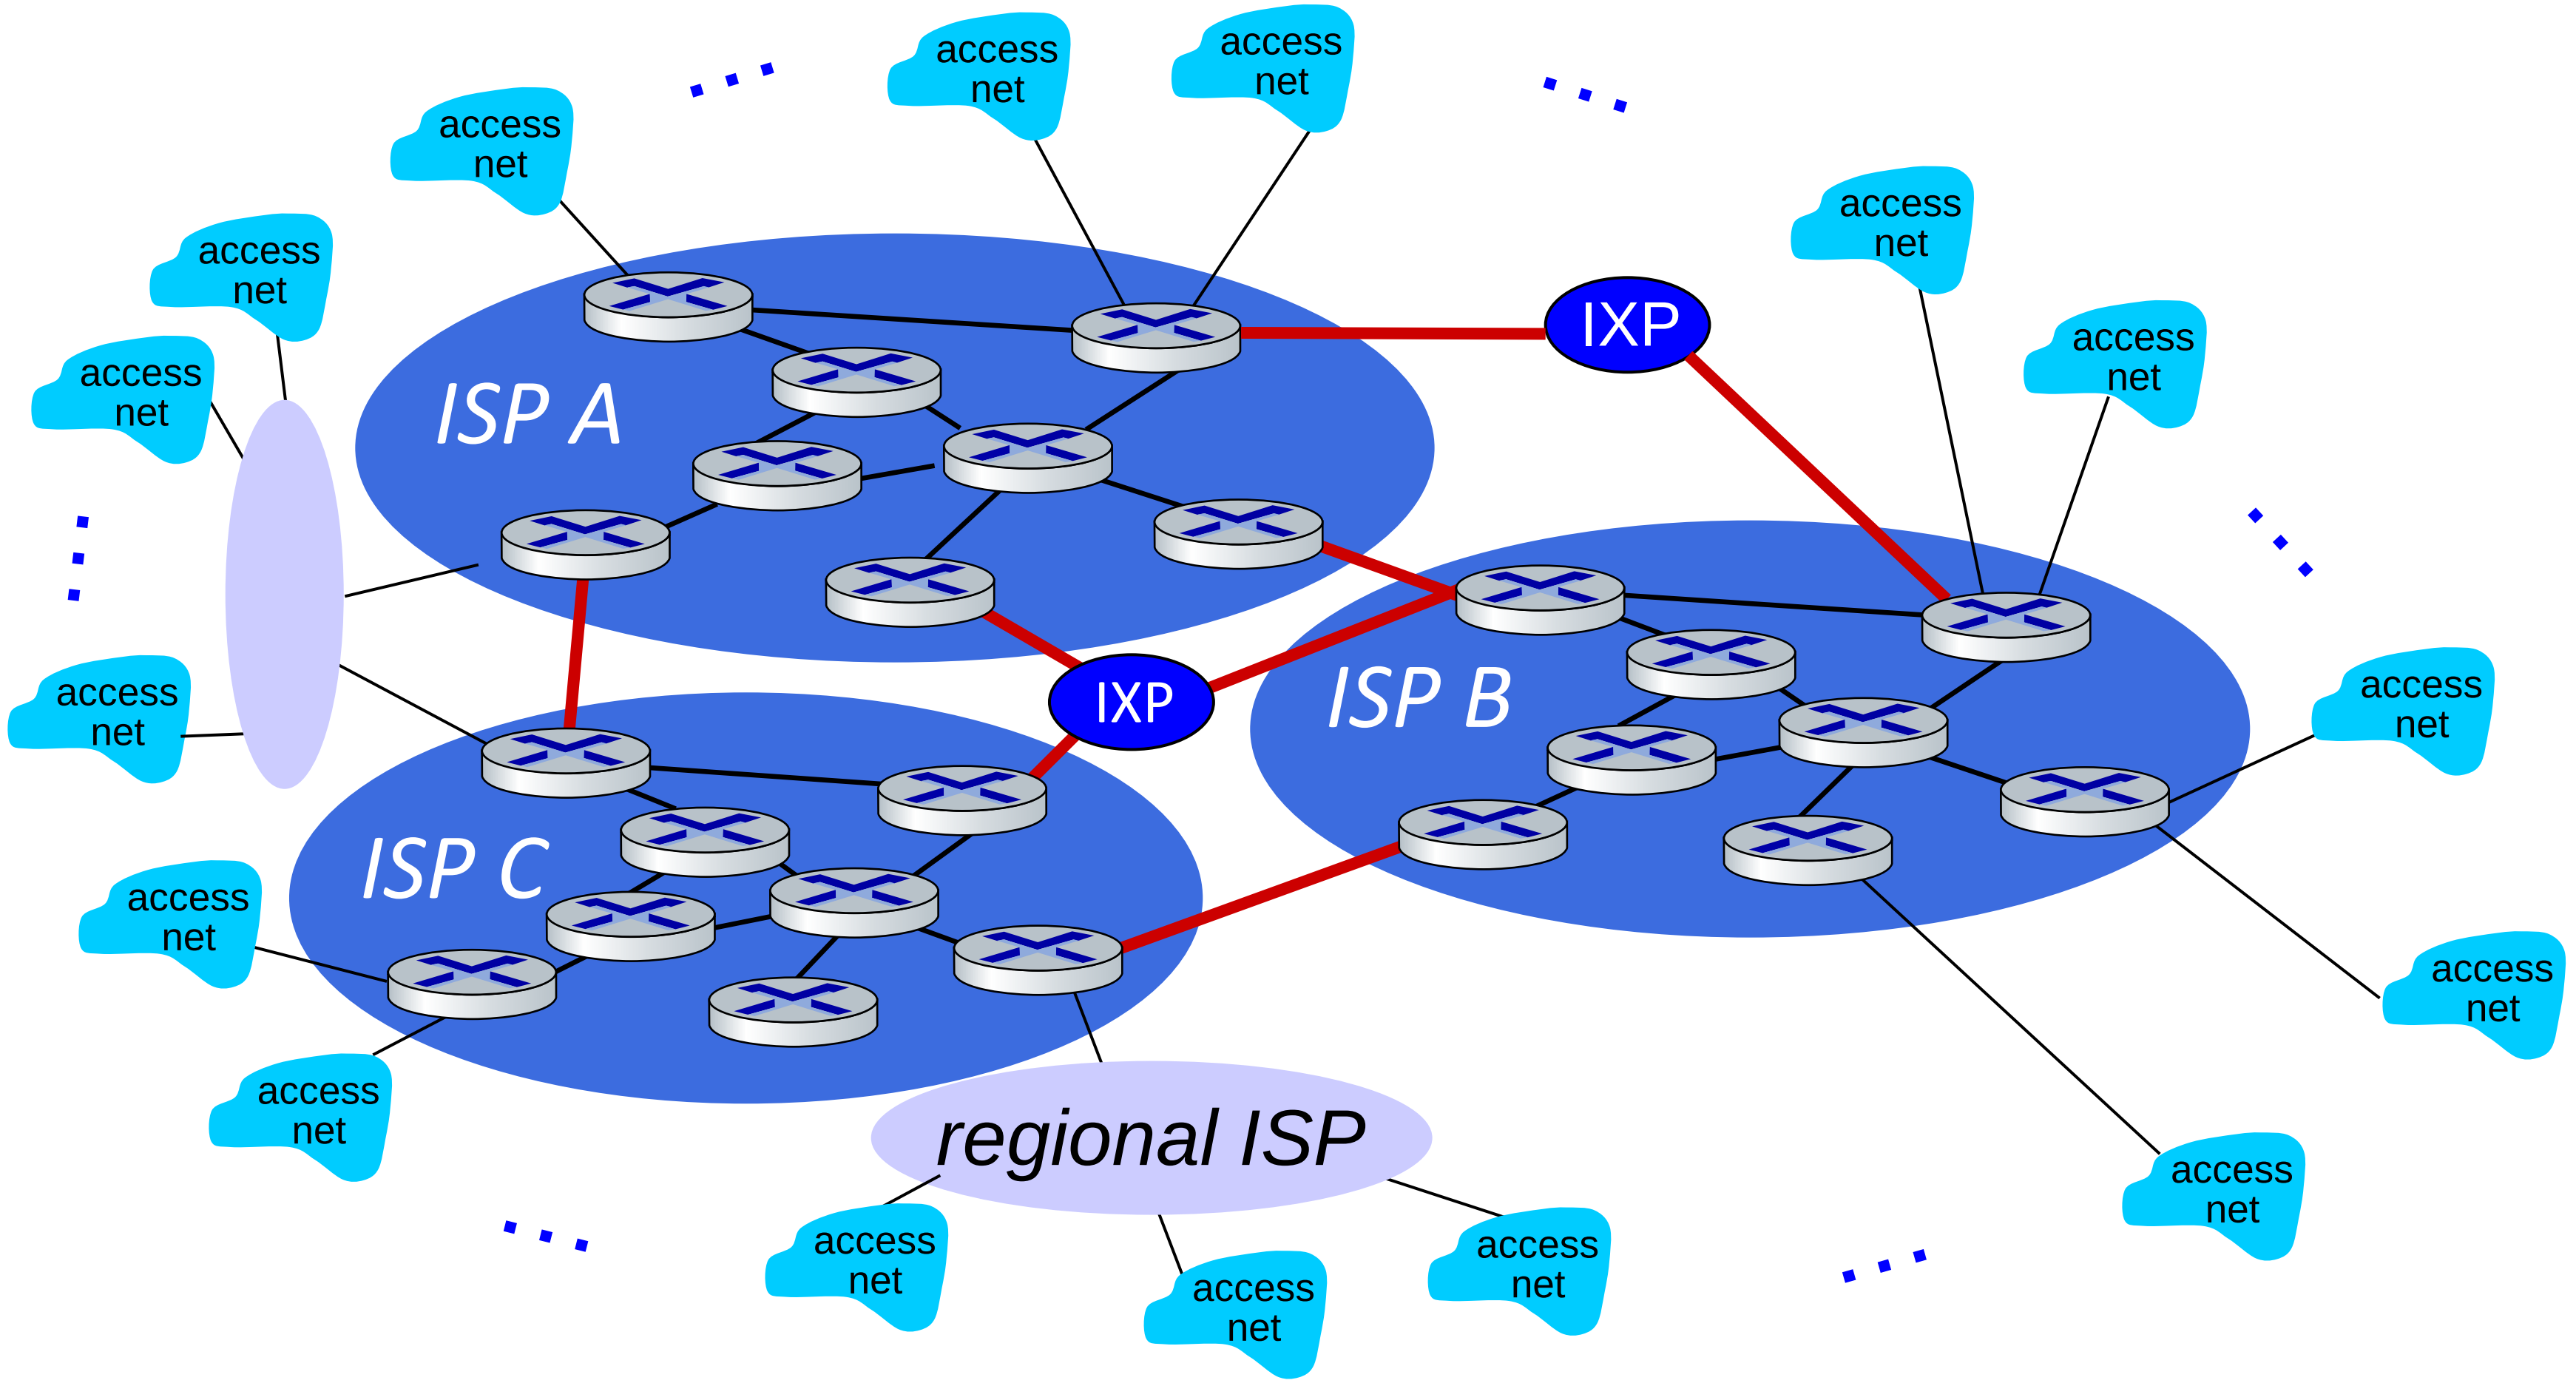

Internet structure: a “network of networks”

… and content provider networks (e.g., Google, Microsoft, etc.) may run their own network, to bring services, content close to end users

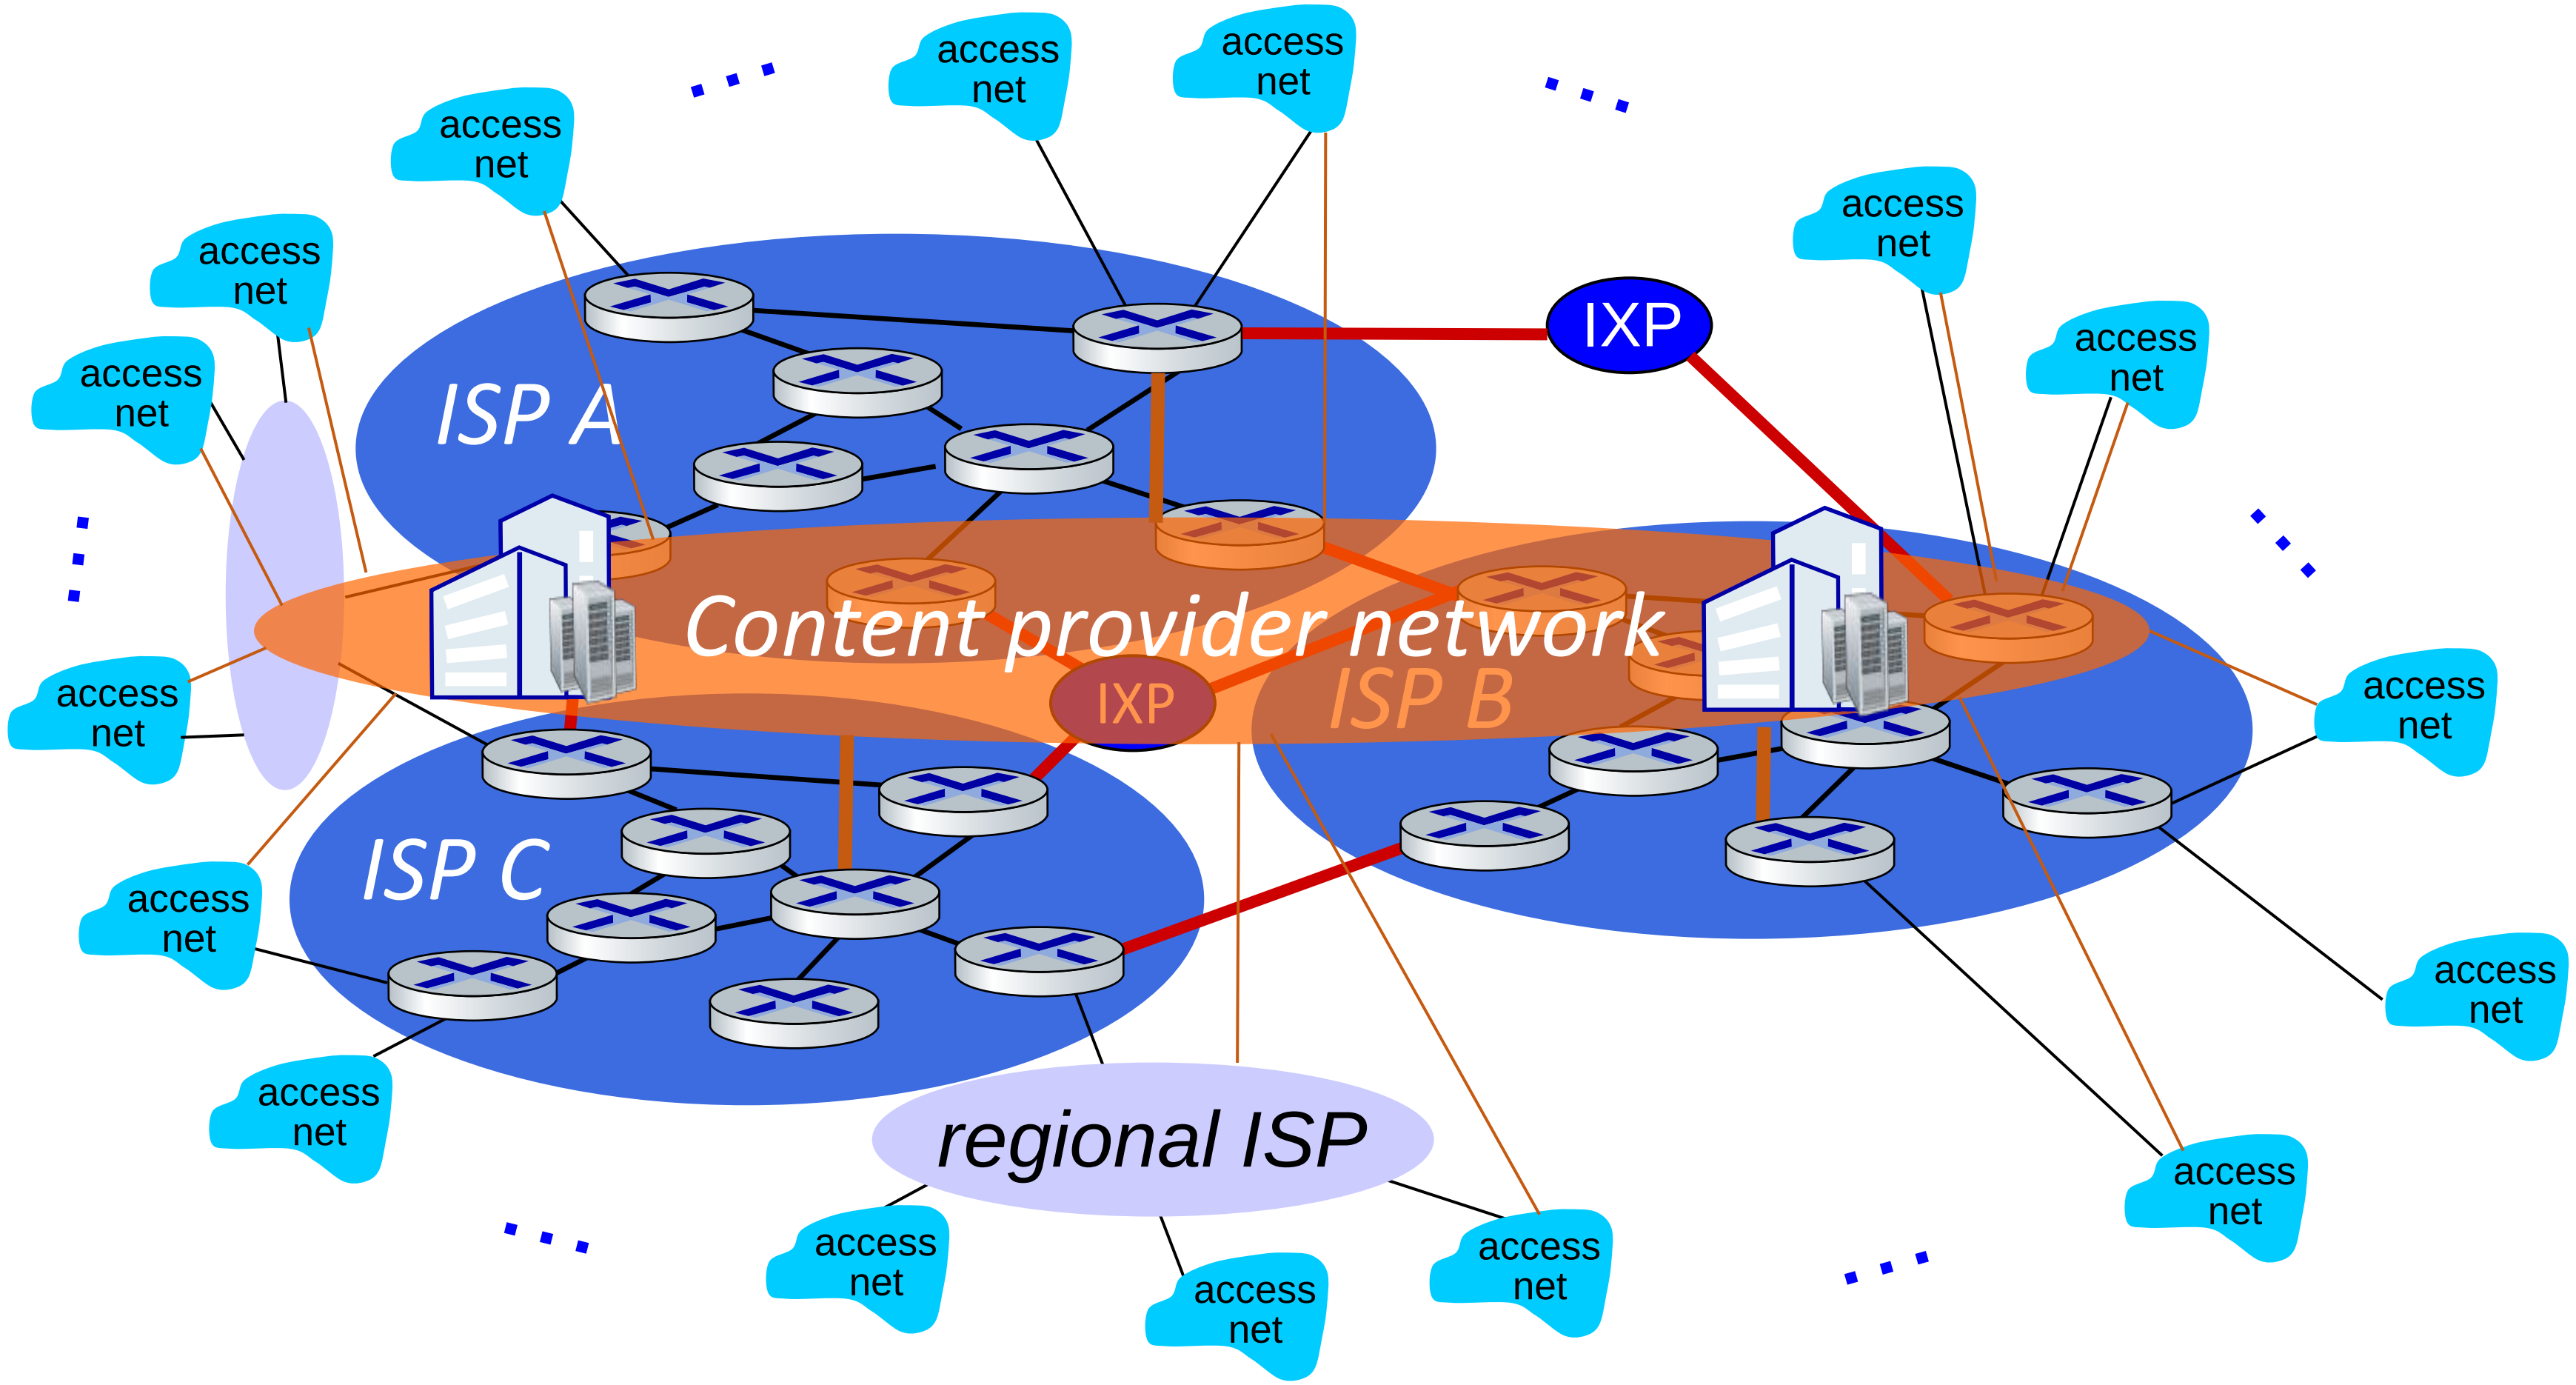

Internet structure: a "network of networks"

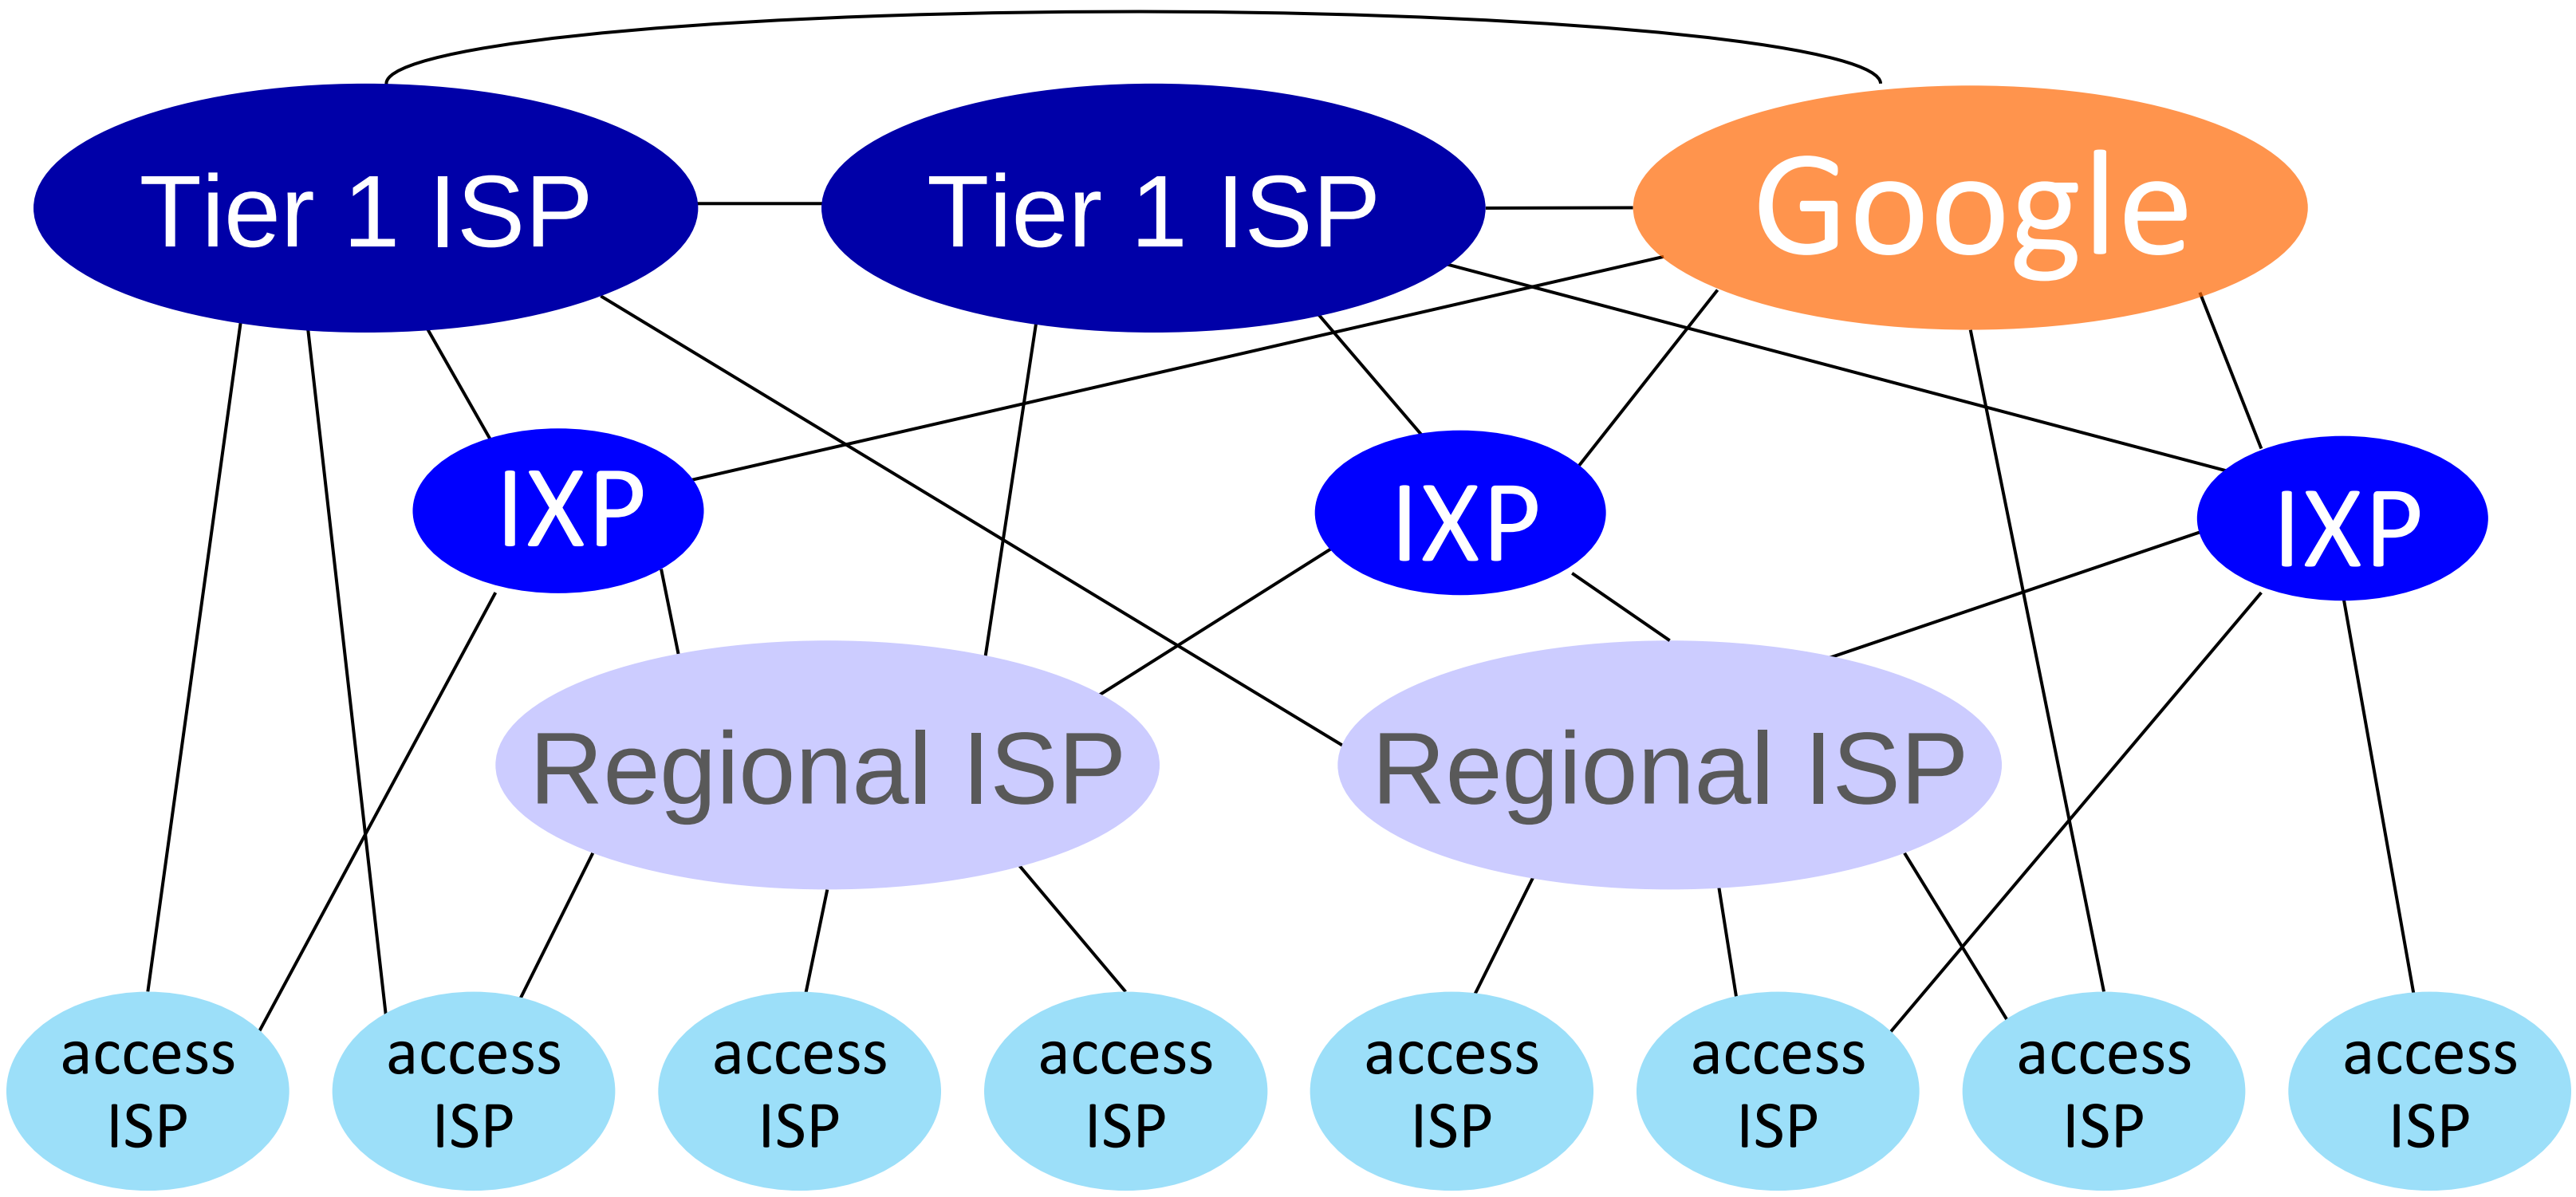

At "center": small # of well-connected large networks

- "tier-1" commercial ISPs (e.g., Level 3, Sprint, AT&T, NTT), national & international coverage
- content provider networks (e.g., Google, Facebook): private network that connects its data centers to Internet, often bypassing tier-1, regional ISPs

Chapter 1: roadmap

- What *is* the Internet?
- What *is* a protocol?
- Network edge: hosts, access network, physical media
- Network core: packet/circuit switching, internet structure
- **Performance: loss, delay, throughput**
- Security
- Protocol layers, service models
- History

Bandwidth and Throughput

- Bandwidth – capacity (theoretical). Maximum amount of data that could travel from one point in network to another in a given time.
- Throughput – amount (empirical). The actual amount of data transmitted and processed throughout the network.

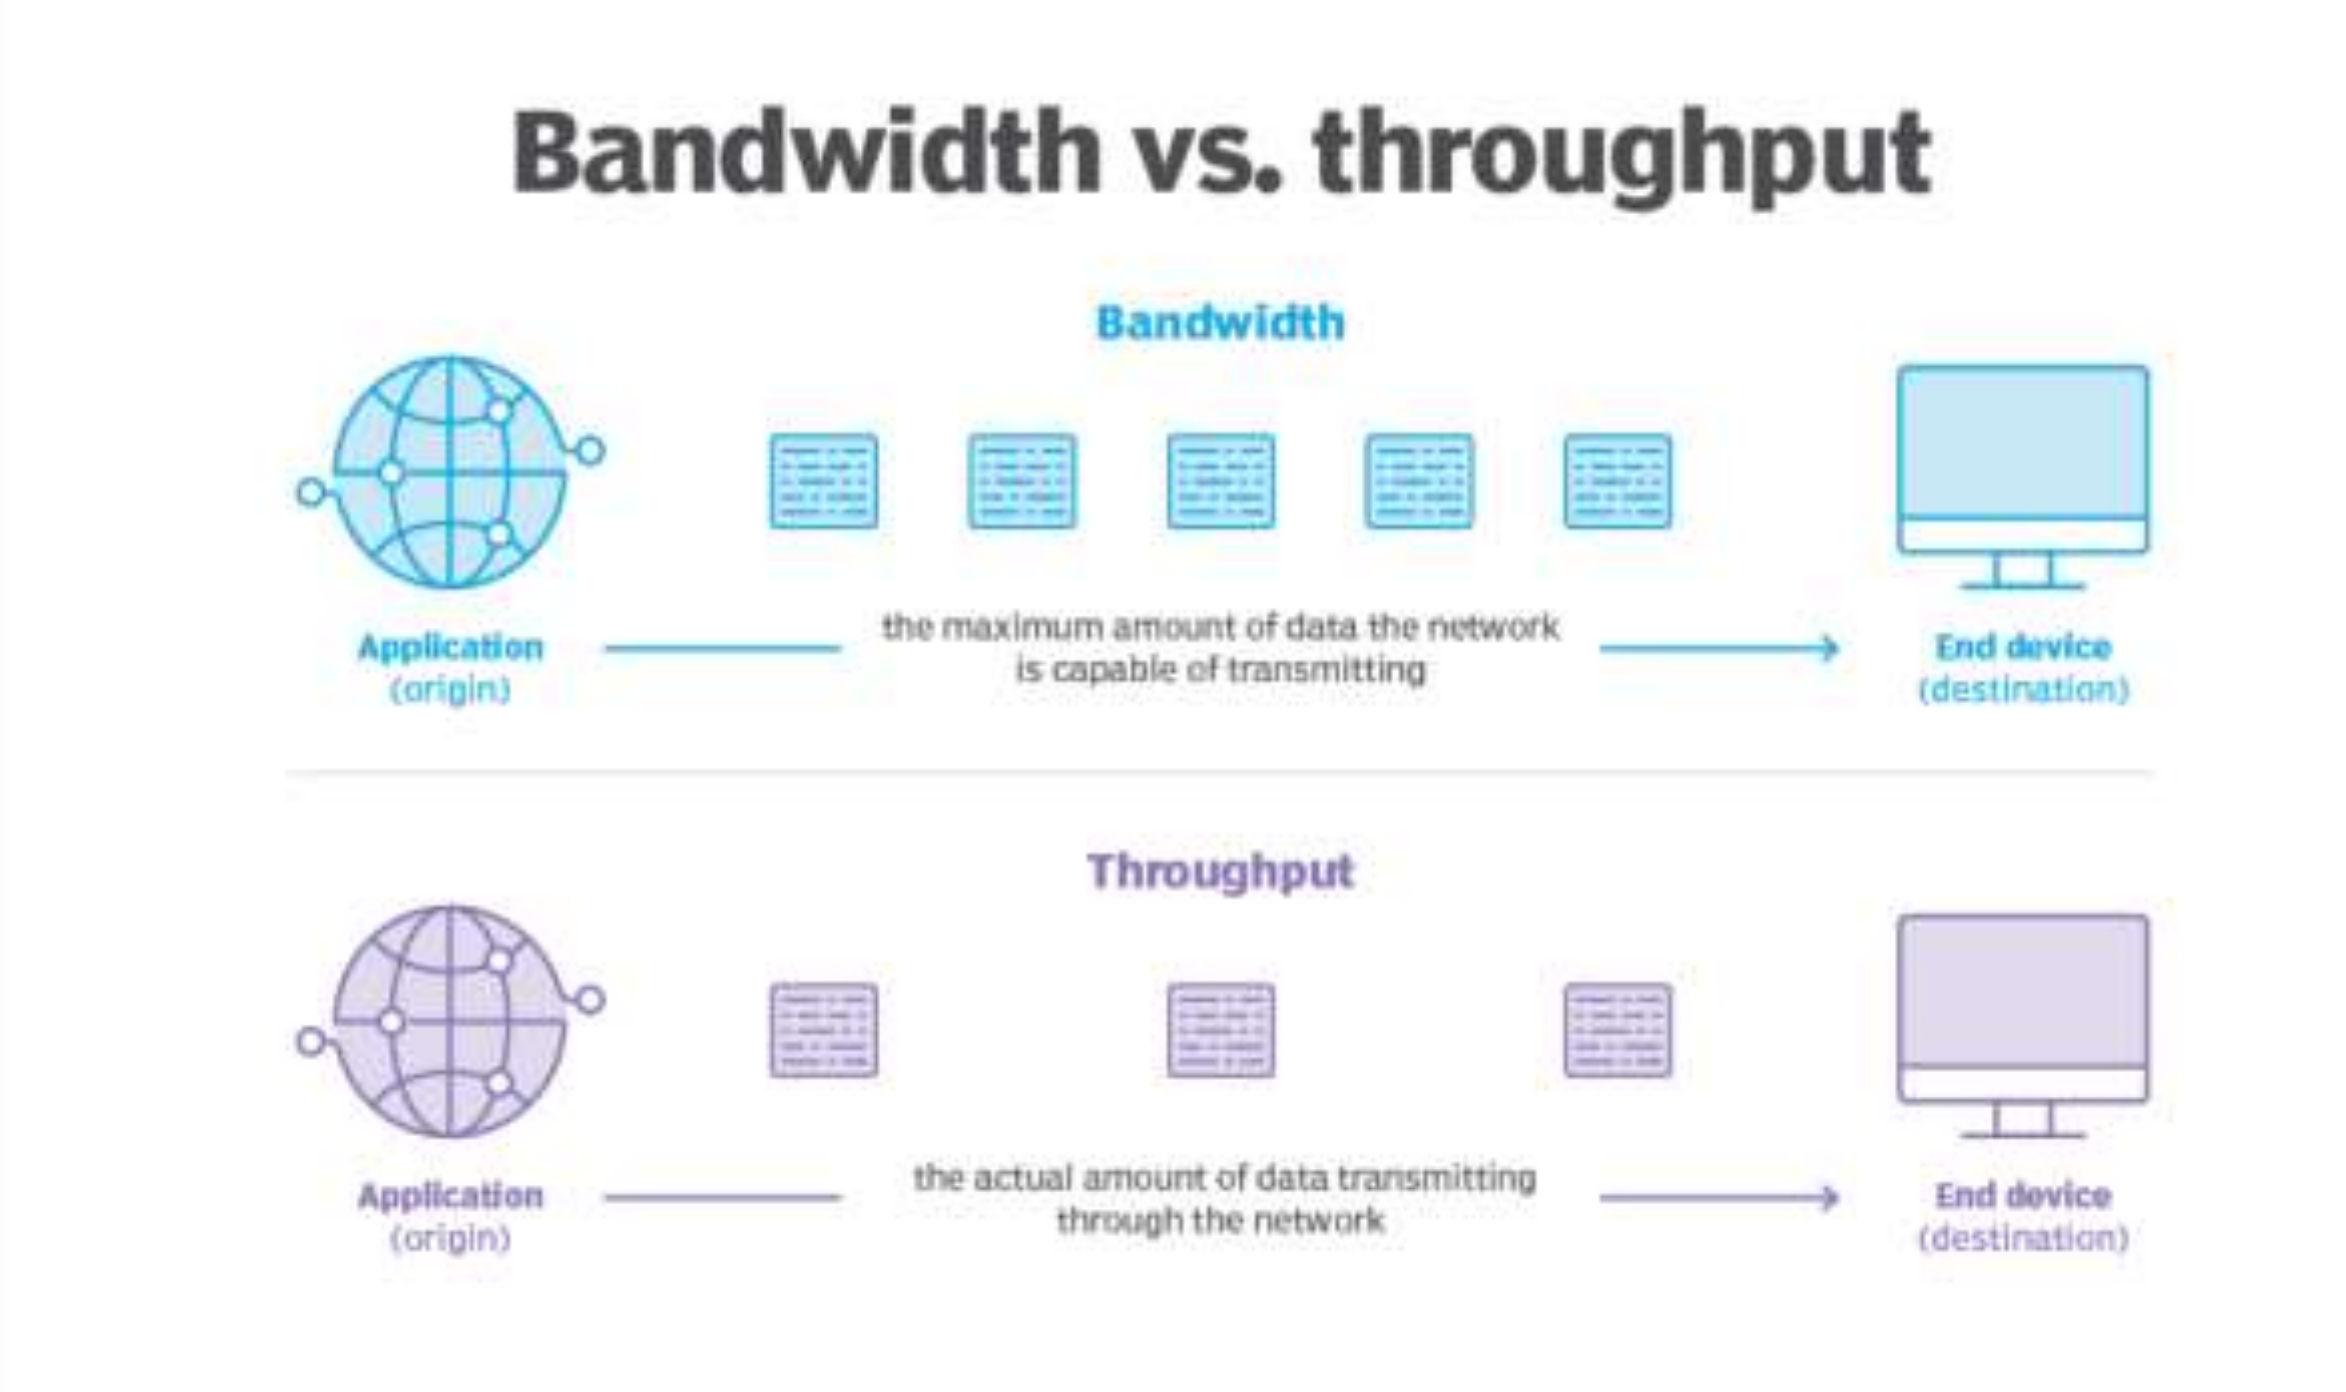

Throughput

- *throughput:* rate (bits/time unit) at which bits are being sent from sender to receiver
  - *instantaneous:* rate at given point in time
  - *average:* rate over longer period of time

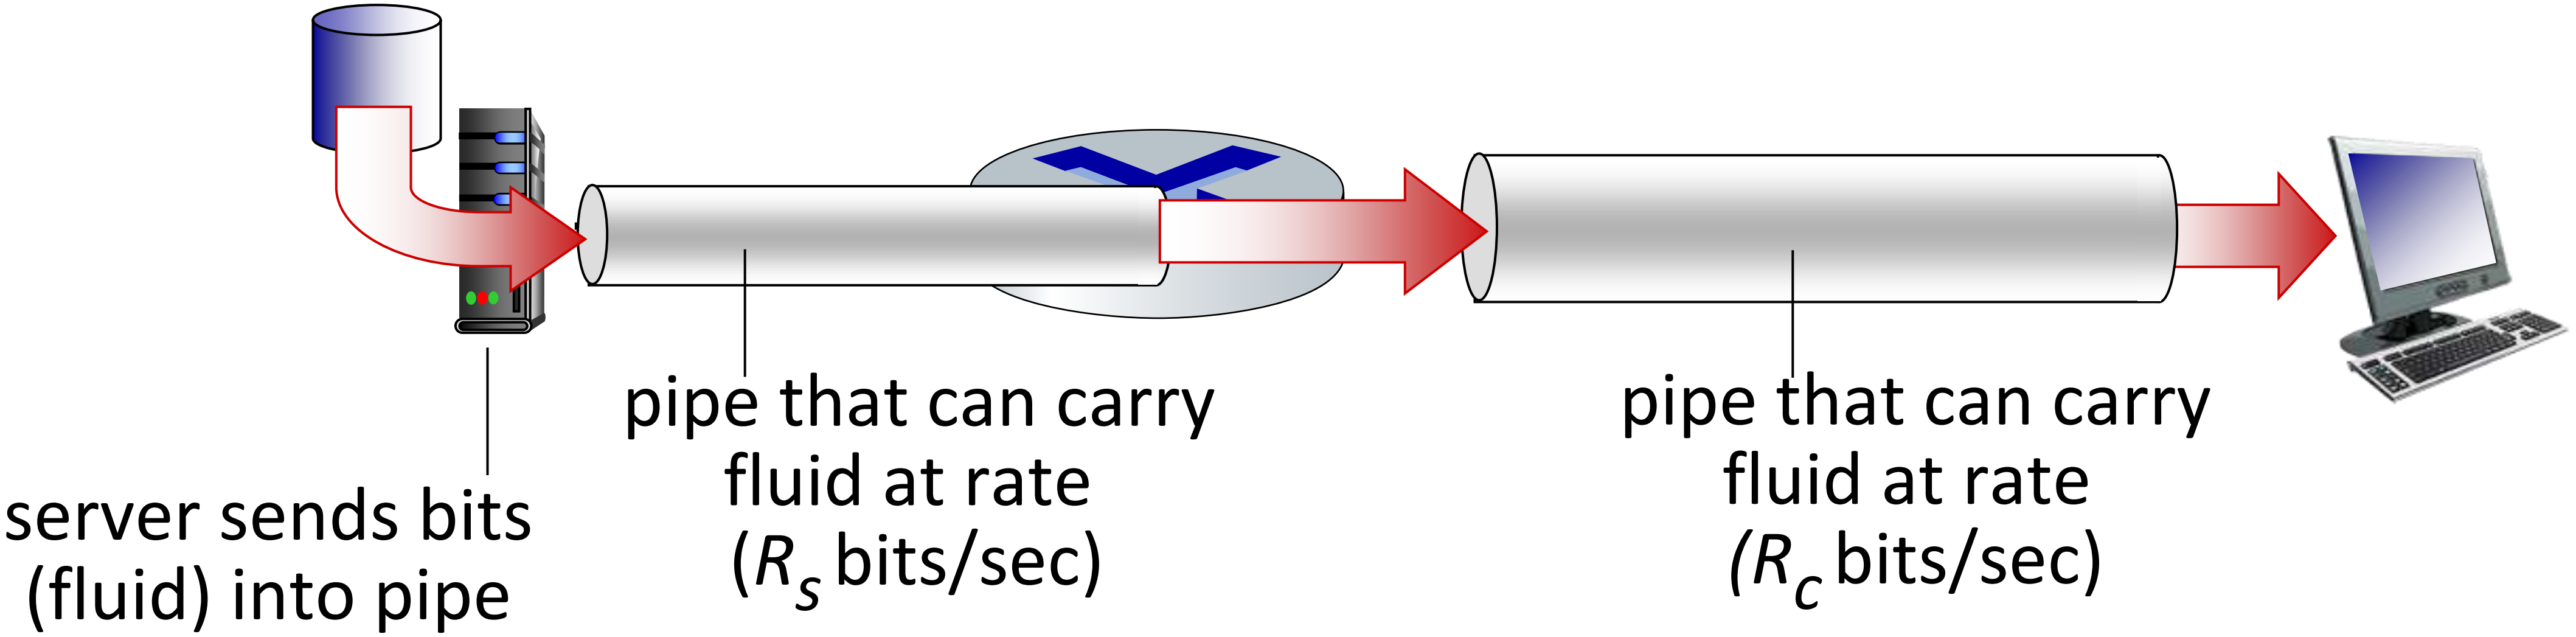

Throughput

$R_s < R_c$ What is average end-end throughput?

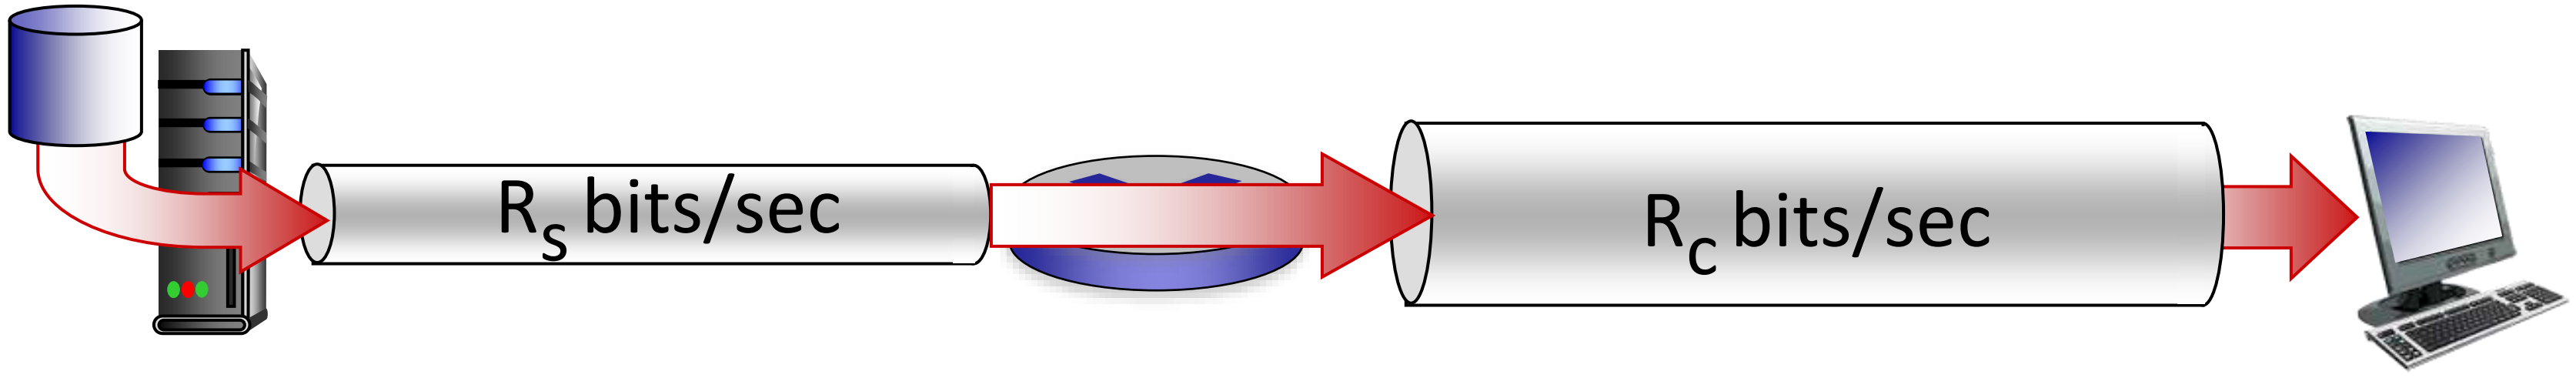

$R_s > R_c$ What is average end-end throughput?

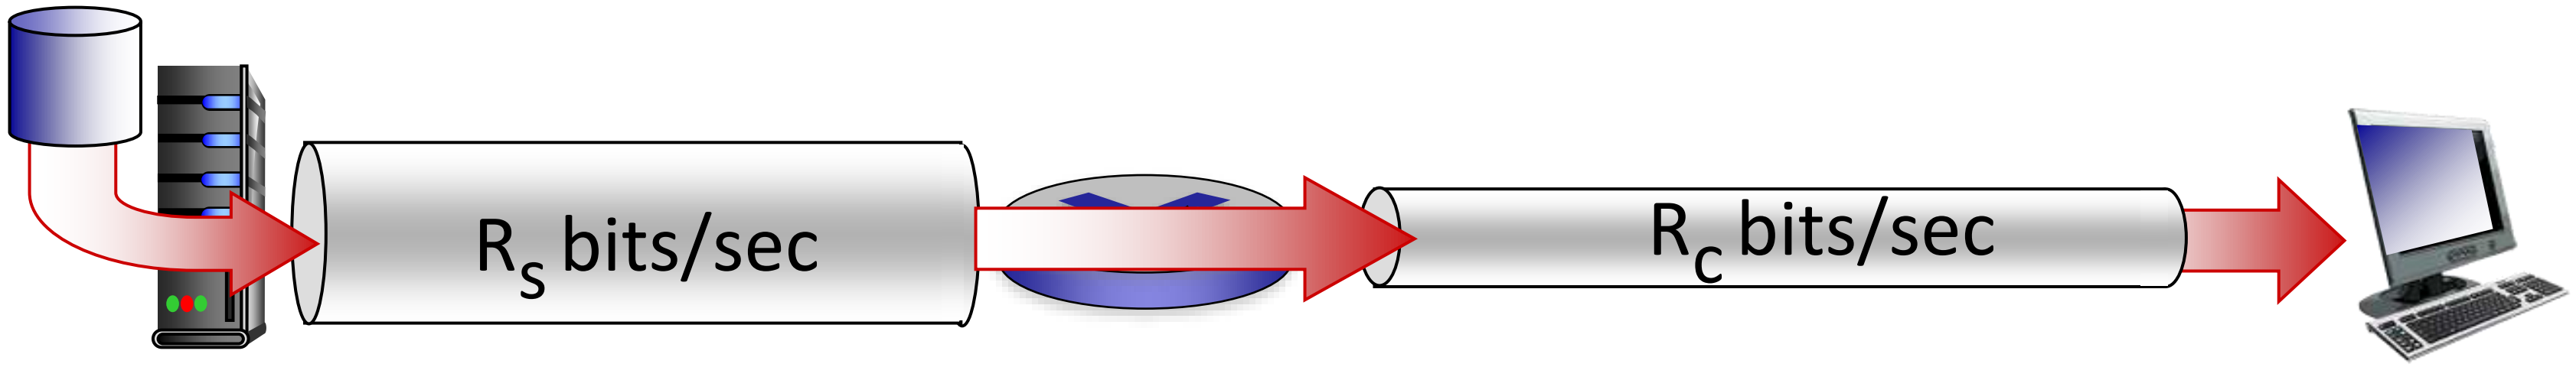

bottleneck link

link on end-end path that constrains end-end throughput

Throughput: network scenario

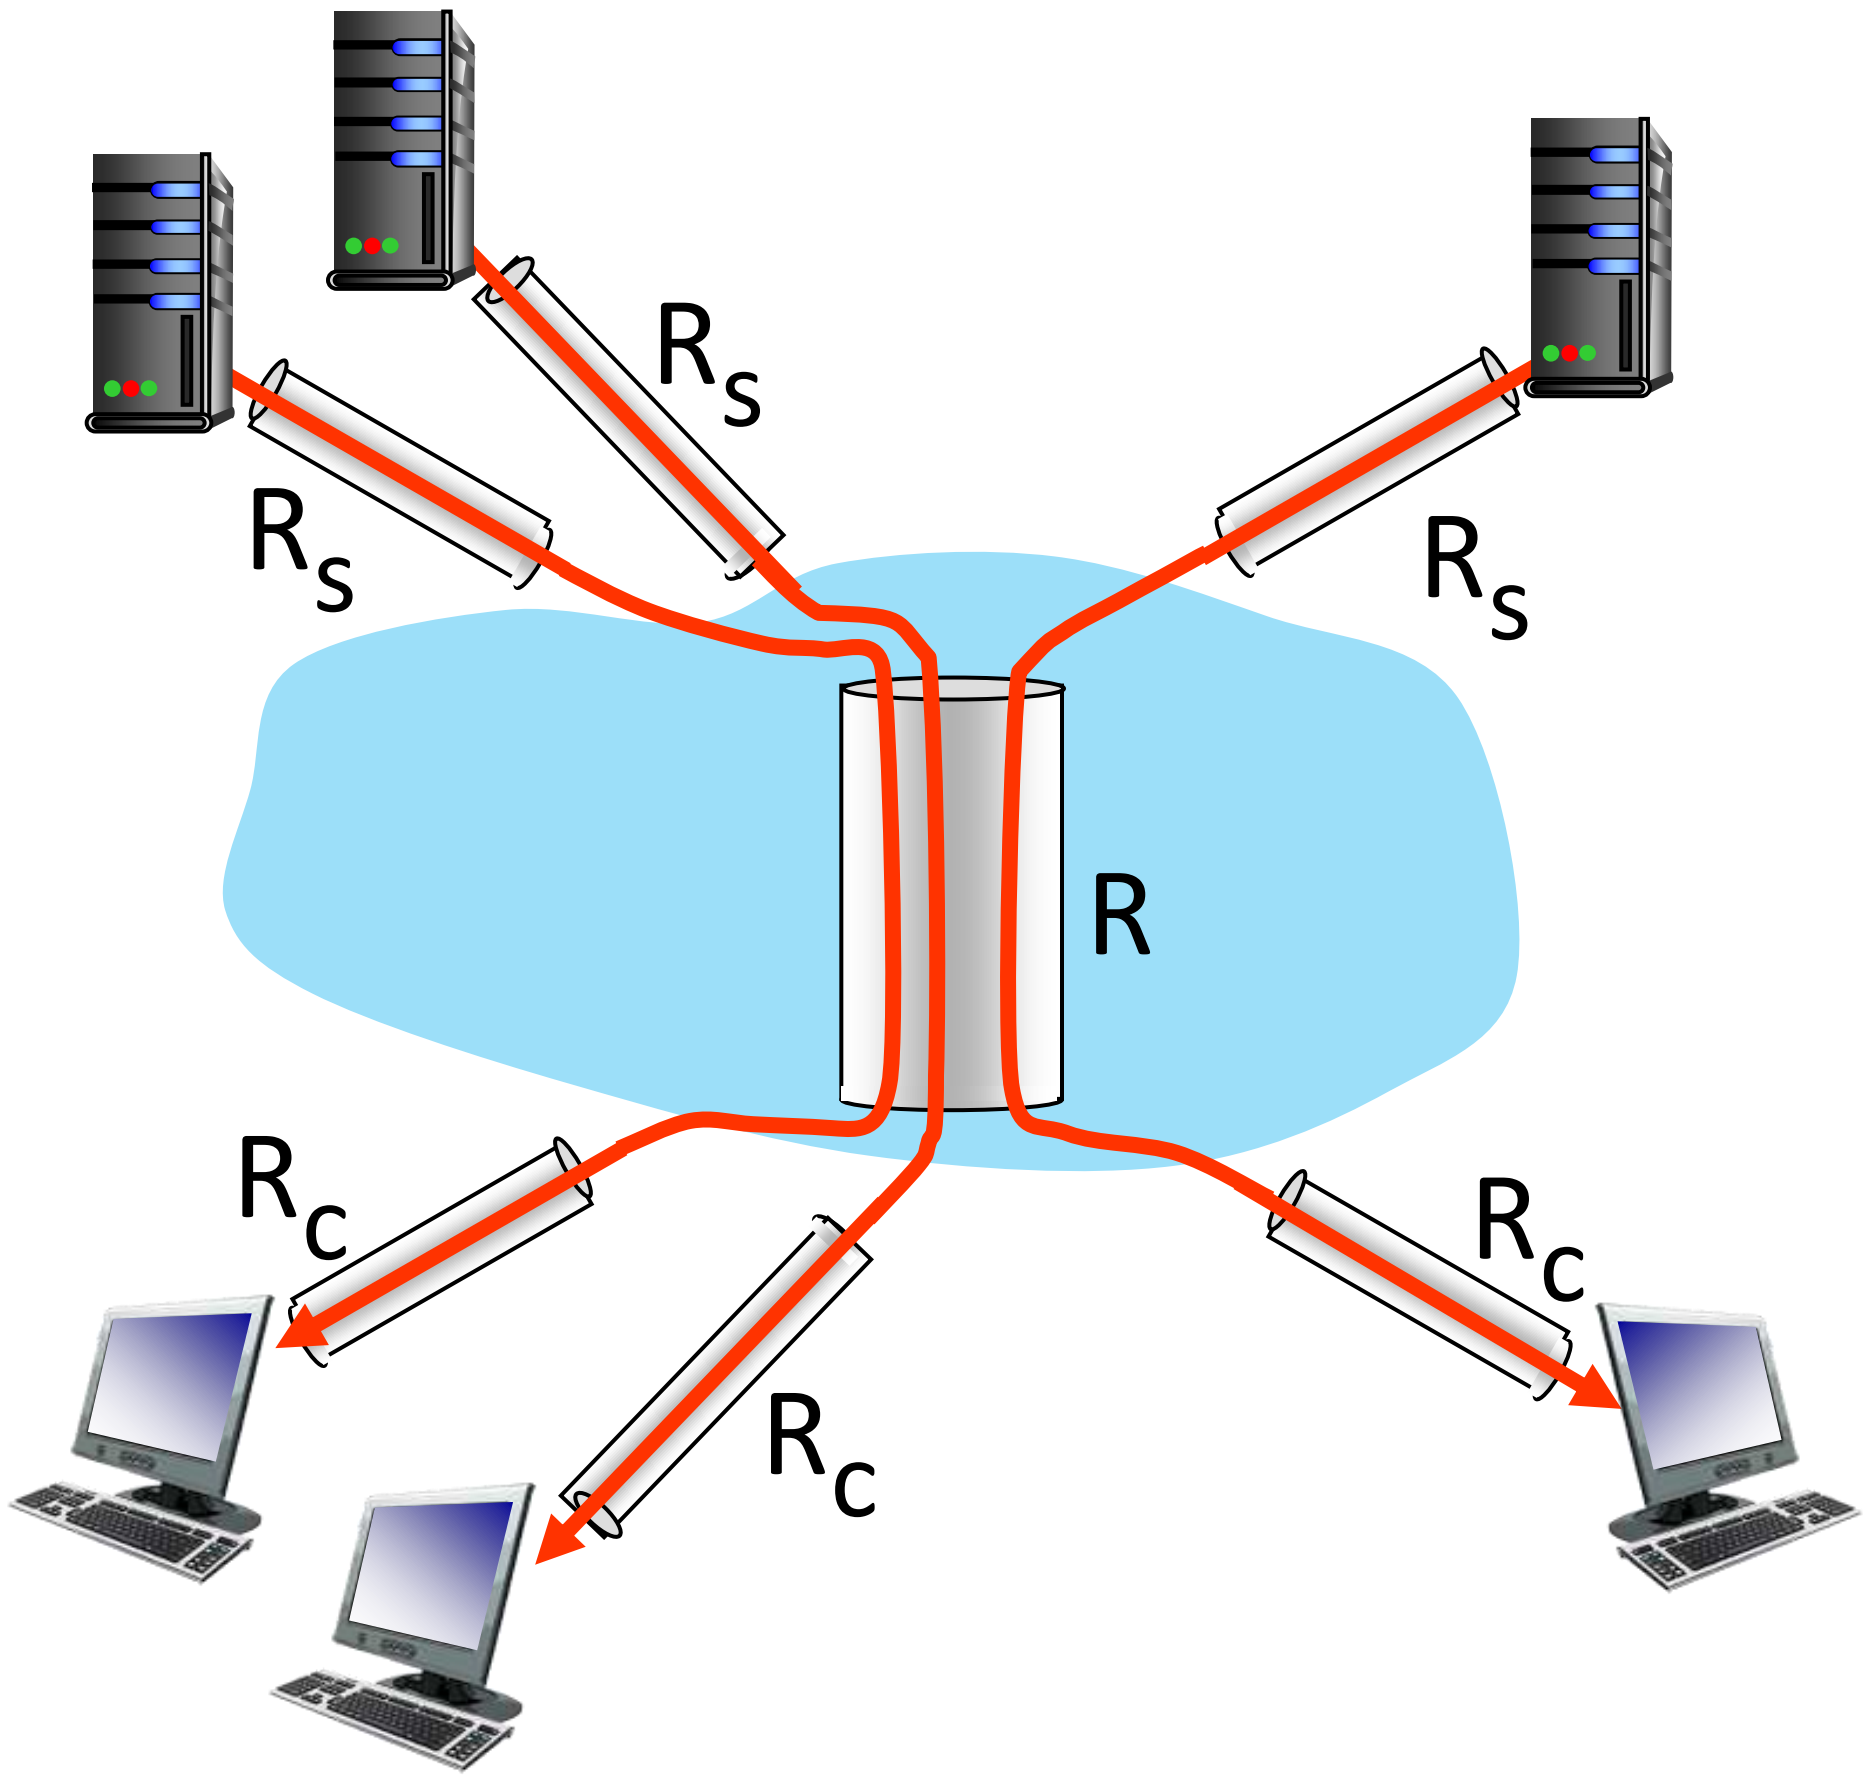

10 connections (fairly) share backbone bottleneck link *R* bits/sec

- per-connection end-end throughput: $min(R_c,R_s,R/10)$
- in practice: R_c or R_s is often bottleneck

* Check out the online interactive exercises for more examples: http://gaia.cs.umass.edu/kurose_ross/

How do packet delay and loss occur?

- packets *queue* in router buffers, waiting for turn for transmission
  - queue length grows when arrival rate to link (temporarily) exceeds output link capacity
- packet *loss* occurs when memory to hold queued packets fills up

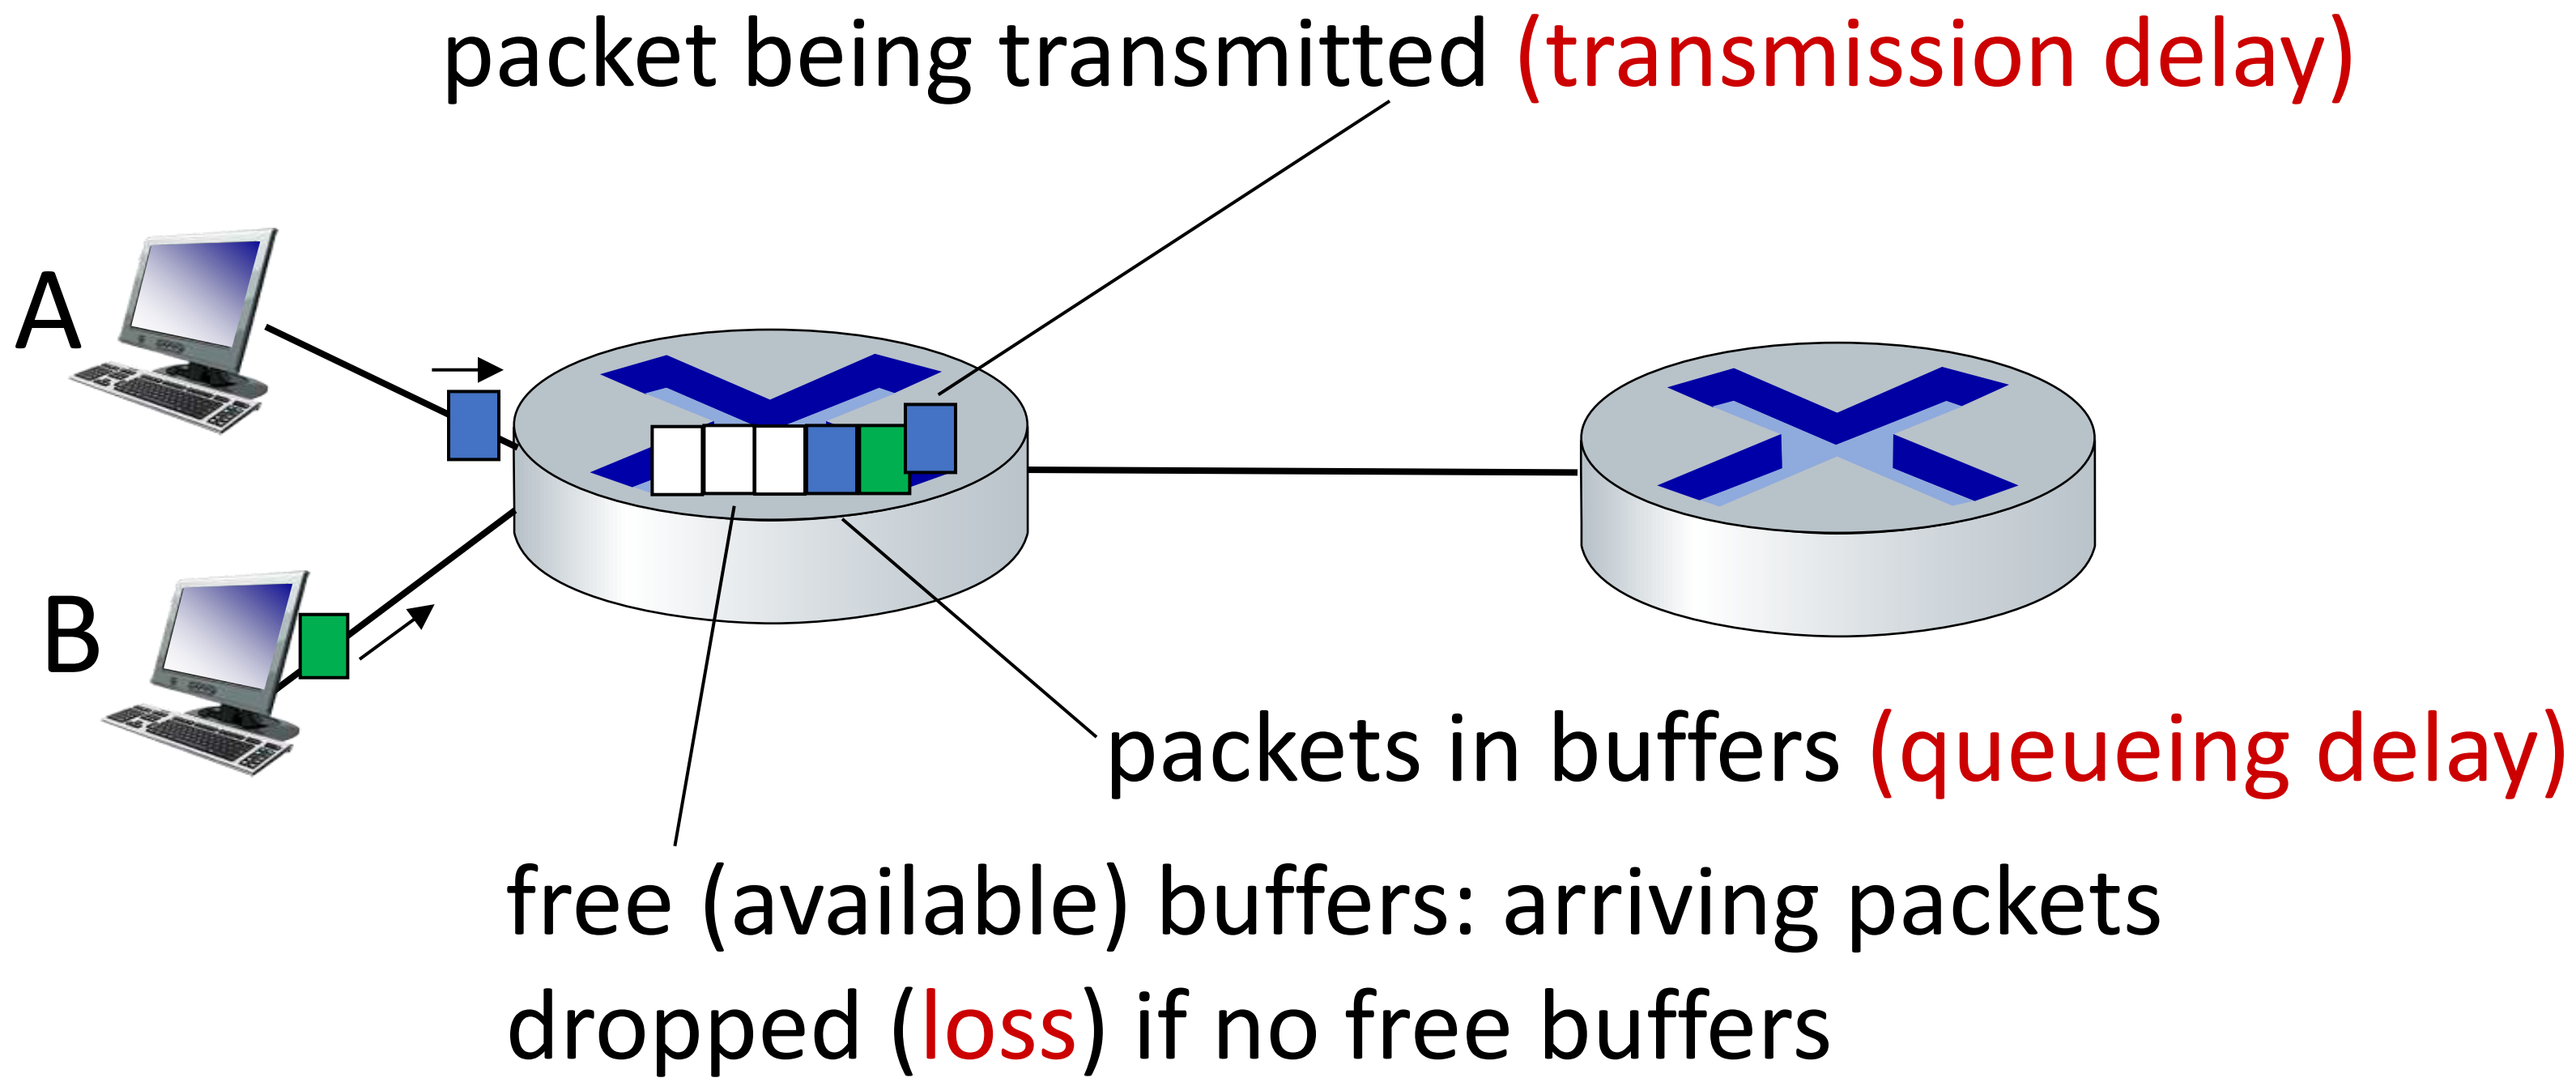

Packet delay: four sources

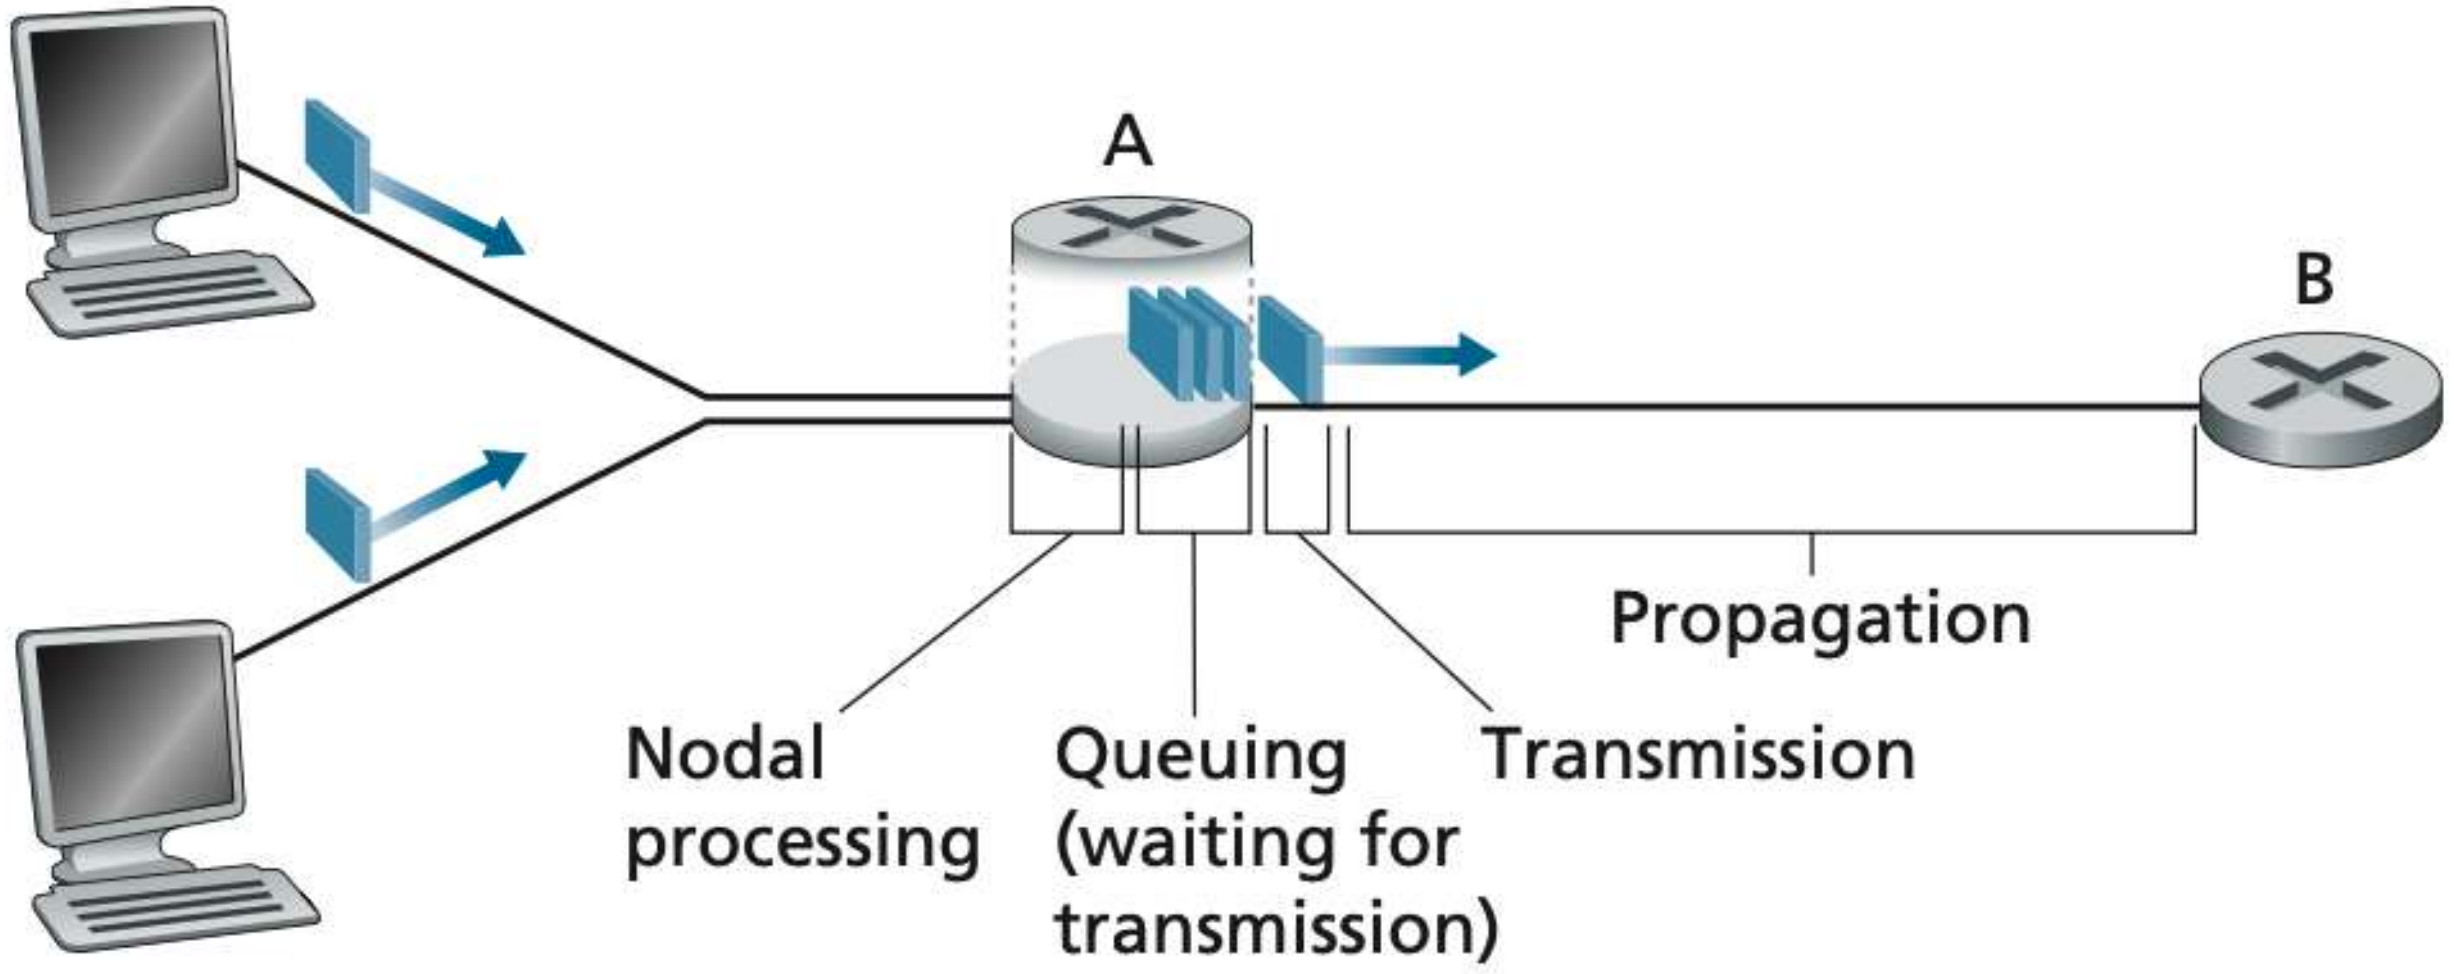

- Nodal Delay Router A: Nodel Processing, Queuing (buffer), Transmission, Propagation
- Nodal Processing: the time required to examine the packet's header, and determine the next route. Also, bit-level errors check.
- Queuing Delay – wait time before the packet is transmitted to another link
- Transmission Delay – amount of time required to transmit all of the packet's bits into the link (micro to milliseconds)
- Propagation – time required to propagate from the beginning of the link to router B

Packet delay: four sources

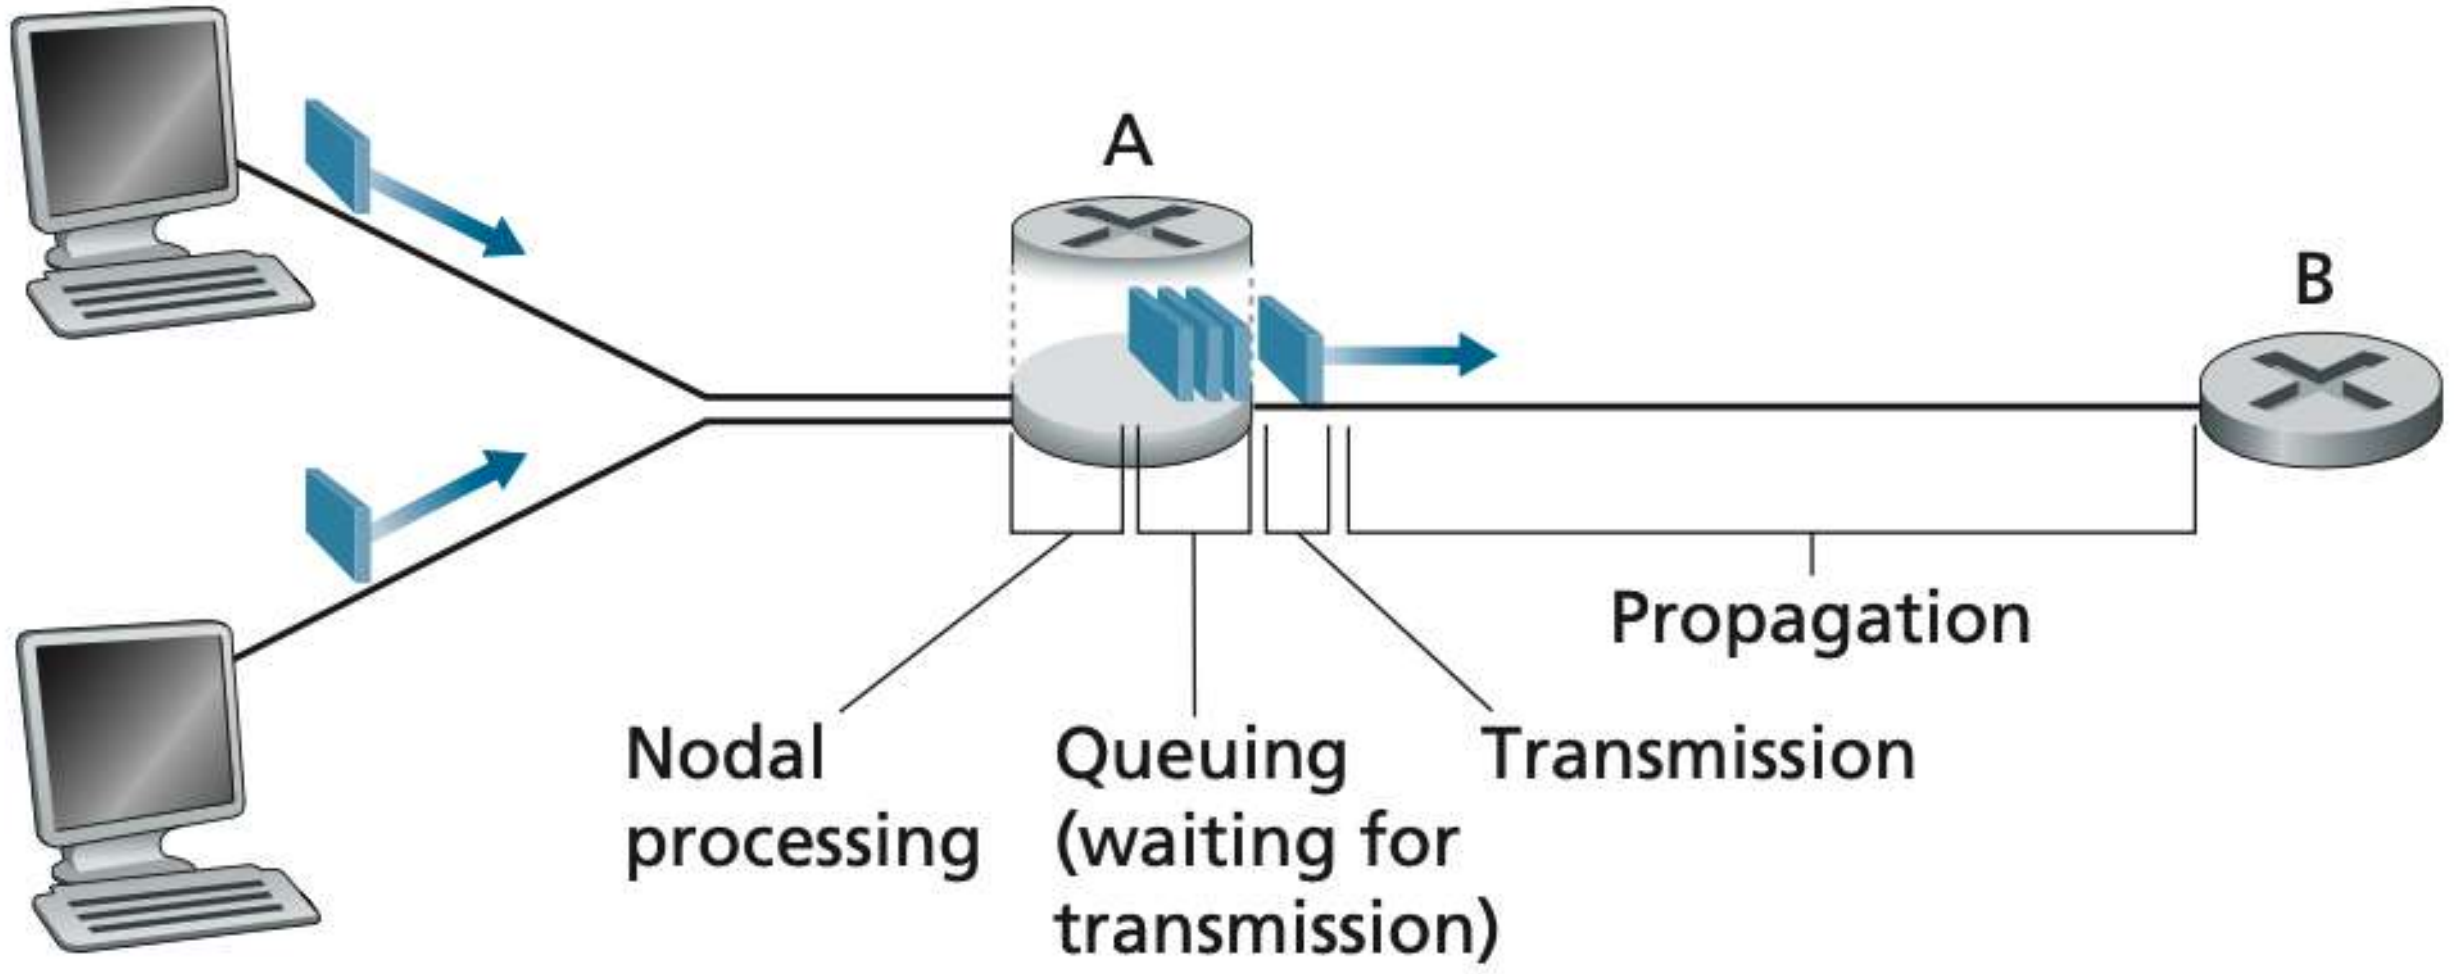

Transmission vs Propagation

- The transmission delay is a function of the packet’s length and the transmission rate of the link, but has nothing to do with the distance between the two routers.
- The propagation delay is a function of the distance between the two routers.

Caravan analogy

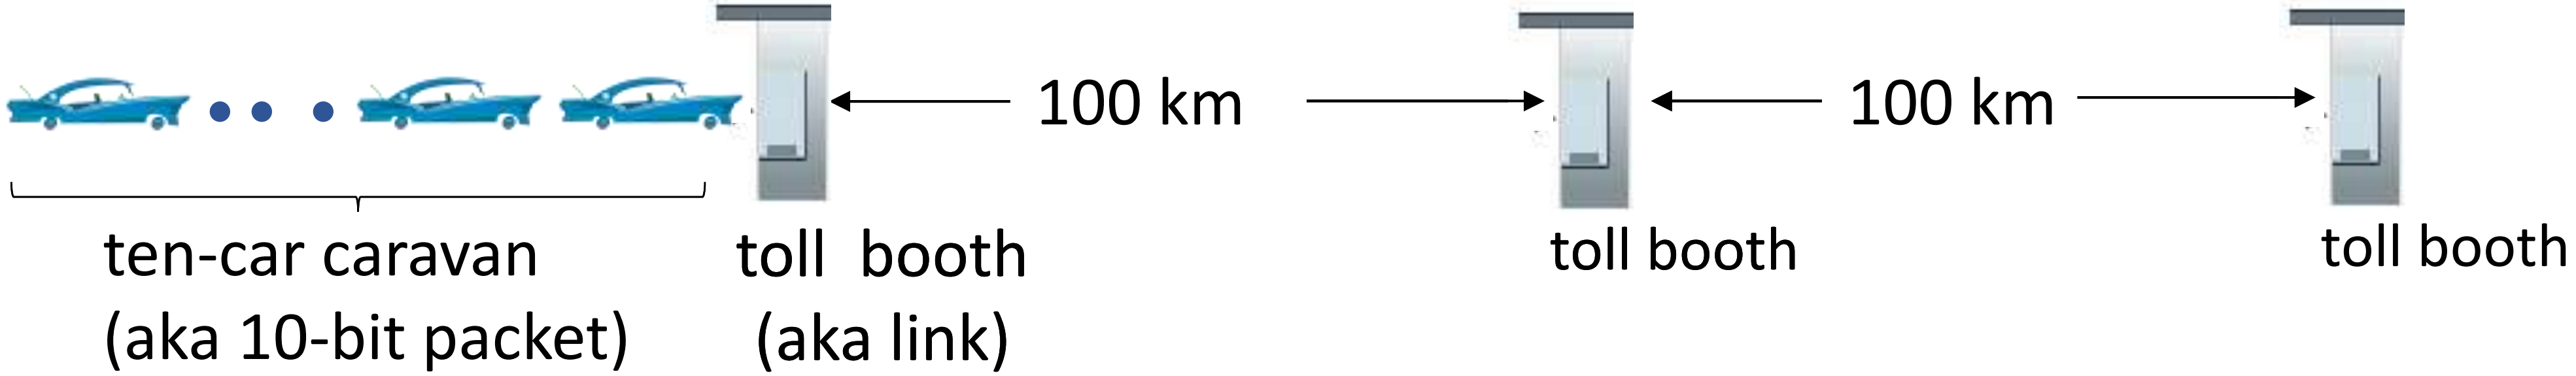

- If we let *d*proc, *d*queue, *d*trans, and *d*prop denote the processing, queuing, transmis- sion, and propagation delays, then the total nodal delay is given by
- *d*nodal = *d*proc + *d*queue + *d*trans + *d*prop

*d*queue :

- Delays range from 0 to significant delays
- Statistical measures are used: average queuing delays, variance probability that delays exceed some value, etc.

Factors impacting queuing delays:

- Rate at which traffic arrives at the queu

Caravan analogy

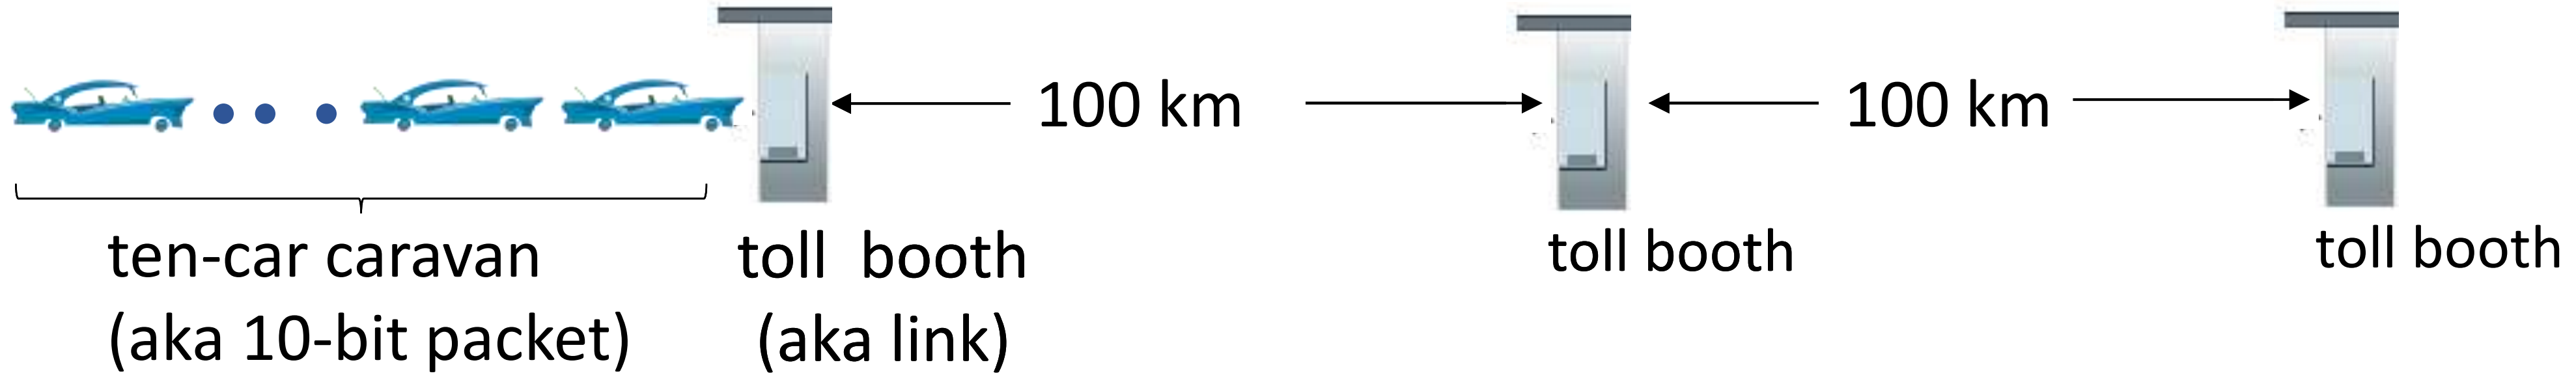

Factors impacting queuing delays:

- Rate at which traffic arrives at the queue
- Transmission rate of the link
- Patterns of traffic (continuous or bursts)

Packet queueing delay (revisited)

- *a:* average packet arrival rate (packets/sec)
- *L:* packet length (bits)
- *R:* link bandwidth (transmission rate bits/sec)

$$\frac{L \cdot a}{R} : \frac{\text{arrival rate of bits}}{\text{service rate of bits}}$$

"traffic intensity"

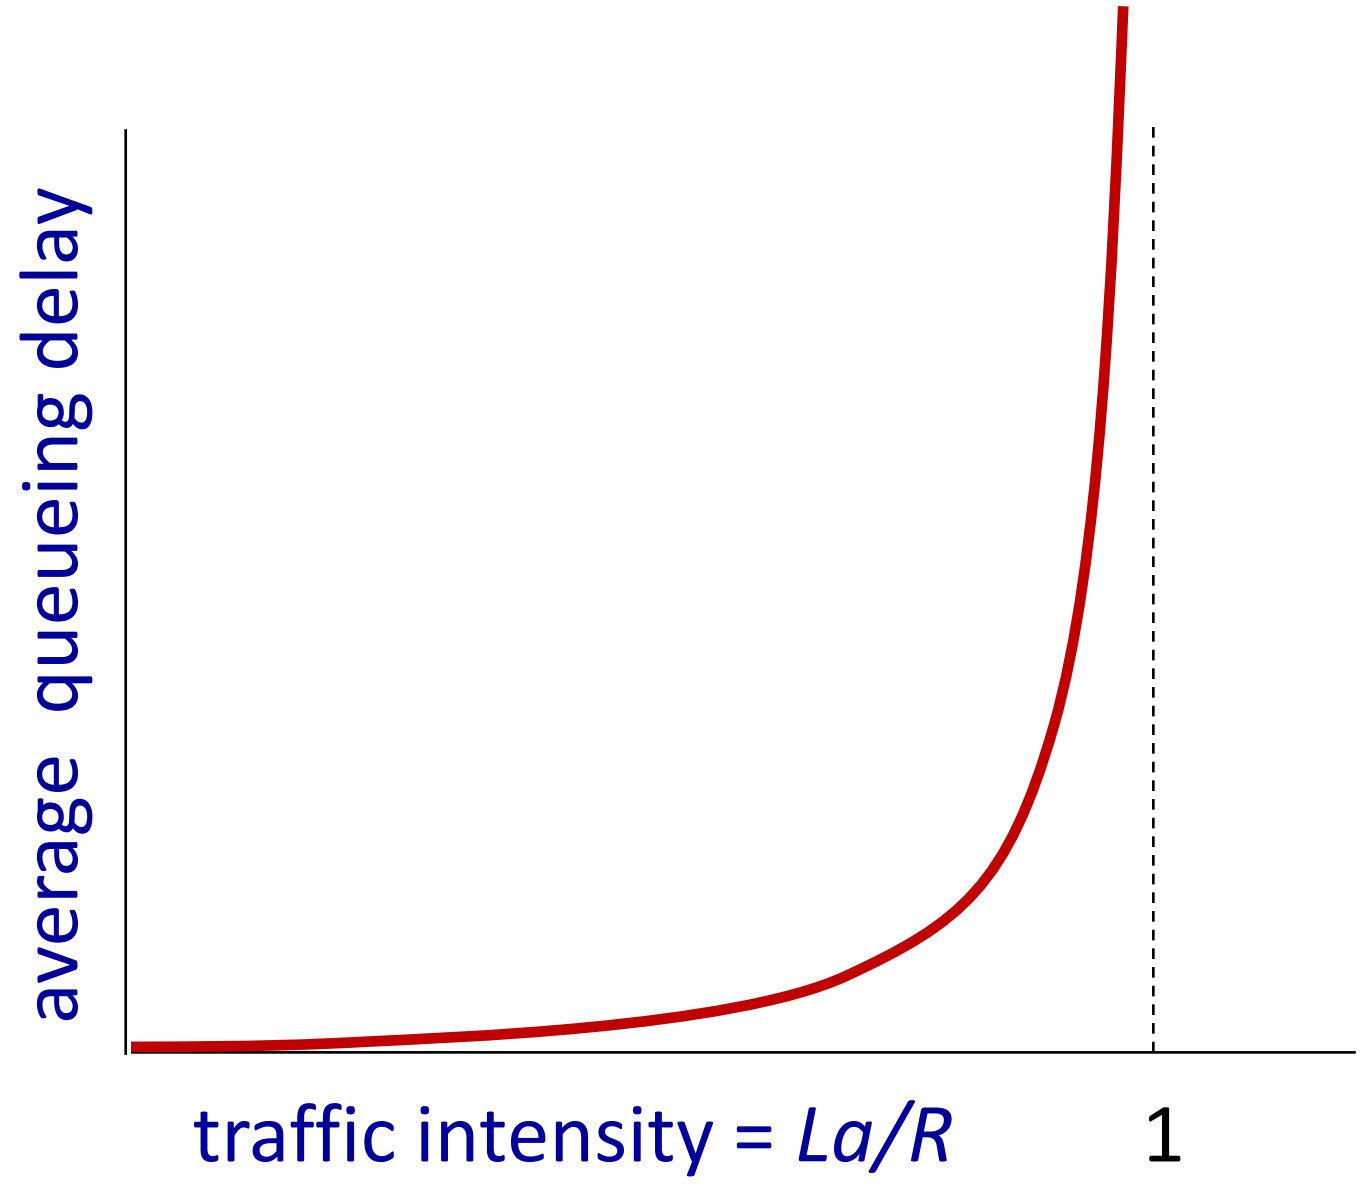

- *La/R* ~ 0: avg. queueing delay small
- *La/R* <= 1: avg. queueing delay large
- *La/R* > 1: more "work" arriving than can be serviced - average delay infinite!

La/R ~ 0

La/R > 1

Packet Loss

- Link has finite capacity
- If traffic intensity approaches 1, packet will arrive to find the queue full
- No place to store a packet router will drop that packet, and subsequently lost.
- Therefore, performance at a node is often measured not only in terms of delay, but also in terms of the probability of packet loss

"Real" Internet delays and routes

- Packets are sent to the destination host name
- **traceroute** program: provides delay measurement from source to router along end-end Internet path towards destination.
  - sends three packets that will reach router *i* on path towards destination (with time-to-live field value of *i*)
  - router *i* will return packets to sender
  - sender measures time interval between transmission and reply

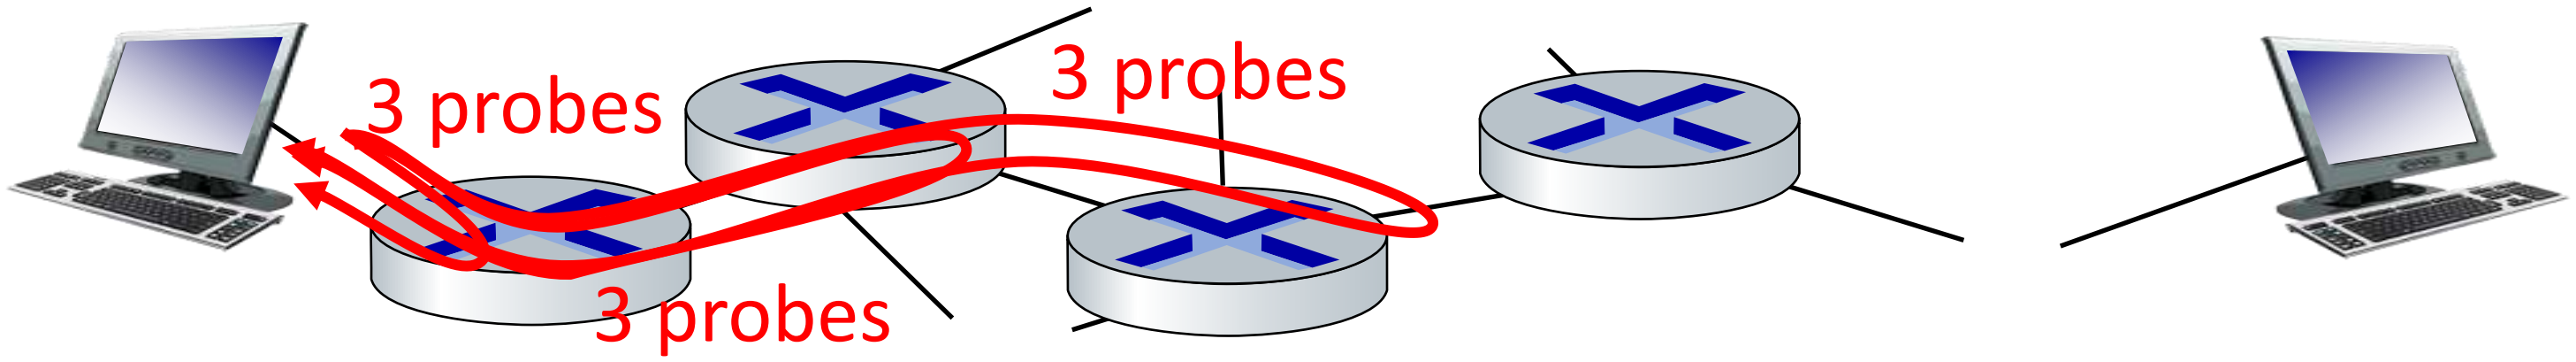

"Real" Internet delays and routes

- Router receives those packets
- Each router sends back to the source a short message (name and address of the router returning the message)
- The source can reconstruct the route taken by packets
- Traceroute – RFC1393

Traceroute

The output has six columns:

1. Number of router along the way
2. Name of the router along the way
3. IP address of the router

4-6 Round trip delays for the 3 packets traveled

If source receives less than 3 requests,
traceroute places “*” in the output

Real Internet delays and routes

traceroute: gaia.cs.umass.edu to www.eurecom.fr

3 delay measurements from
gaia.cs.umass.edu to cs-gw.cs.umass.edu

3 delay measurements
to border1-rt-fa5-1-0.gw.umass.edu

```
1  cs-gw (128.119.240.254)  1 ms  1 ms  2 ms
2  border1-rt-fa5-1-0.gw.umass.edu (128.119.3.145)  1 ms  1 ms  2 ms
3  cht-vbns.gw.umass.edu (128.119.3.130)  6 ms 5 ms 5 ms
4  jn1-at1-0-0-19.wor.vbns.net (204.147.132.129)  16 ms 11 ms 13 ms
5  jn1-so7-0-0-0.wae.vbns.net (204.147.136.136)  21 ms 18 ms 18 ms
6  abilene-vbns.abilene.ucaid.edu (198.32.11.9)  22 ms  18 ms  22 ms
7  nycm-wash.abilene.ucaid.edu (198.32.8.46)  22 ms  22 ms  22 ms
8  62.40.103.253 (62.40.103.253)  104 ms 109 ms 106 ms
9  de2-1.de1.de.geant.net (62.40.96.129)  109 ms 102 ms 104 ms
10  de.fr1.fr.geant.net (62.40.96.50)  113 ms 121 ms 114 ms
11  renater-gw.fr1.fr.geant.net (62.40.103.54)  112 ms  114 ms  112 ms
12  nio-n2.cssi.renater.fr (193.51.206.13)  111 ms  114 ms  116 ms
13  nice.cssi.renater.fr (195.220.98.102)  123 ms  125 ms  124 ms
14  r3t2-nice.cssi.renater.fr (195.220.98.110)  126 ms  126 ms  124 ms
15  eurecom-valbonne.r3t2.ft.net (193.48.50.54)  135 ms  128 ms  133 ms
16  194.214.211.25 (194.214.211.25)  126 ms  128 ms  126 ms
17  * * *
18  * * *
19  fantasia.eurecom.fr (193.55.113.142)  132 ms  128 ms  136 ms
```

transatlantic-fiber optics link

* means no response (probe lost, router not replying)

Chapter 1: roadmap

- What *is* the Internet?
- What *is* a protocol?
- Network edge: hosts, access network, physical media
- Network core: packet/circuit switching, internet structure
- Performance: loss, delay, throughput
- Security
- Protocol layers, service models
- History

Network security

- Internet not originally designed with (much) security in mind
  - *original vision:* "a group of mutually trusting users attached to a transparent network" ☺
  - Internet protocol designers playing "catch-up"
  - security considerations in all layers!
- We now need to think about:
  - how bad guys can attack computer networks
  - how we can defend networks against attacks
  - how to design architectures that are immune to attacks

Bad guys: packet interception

packet "sniffing":

- broadcast media (shared Ethernet, wireless)
- promiscuous network interface reads/records all packets (e.g., including passwords!) passing by

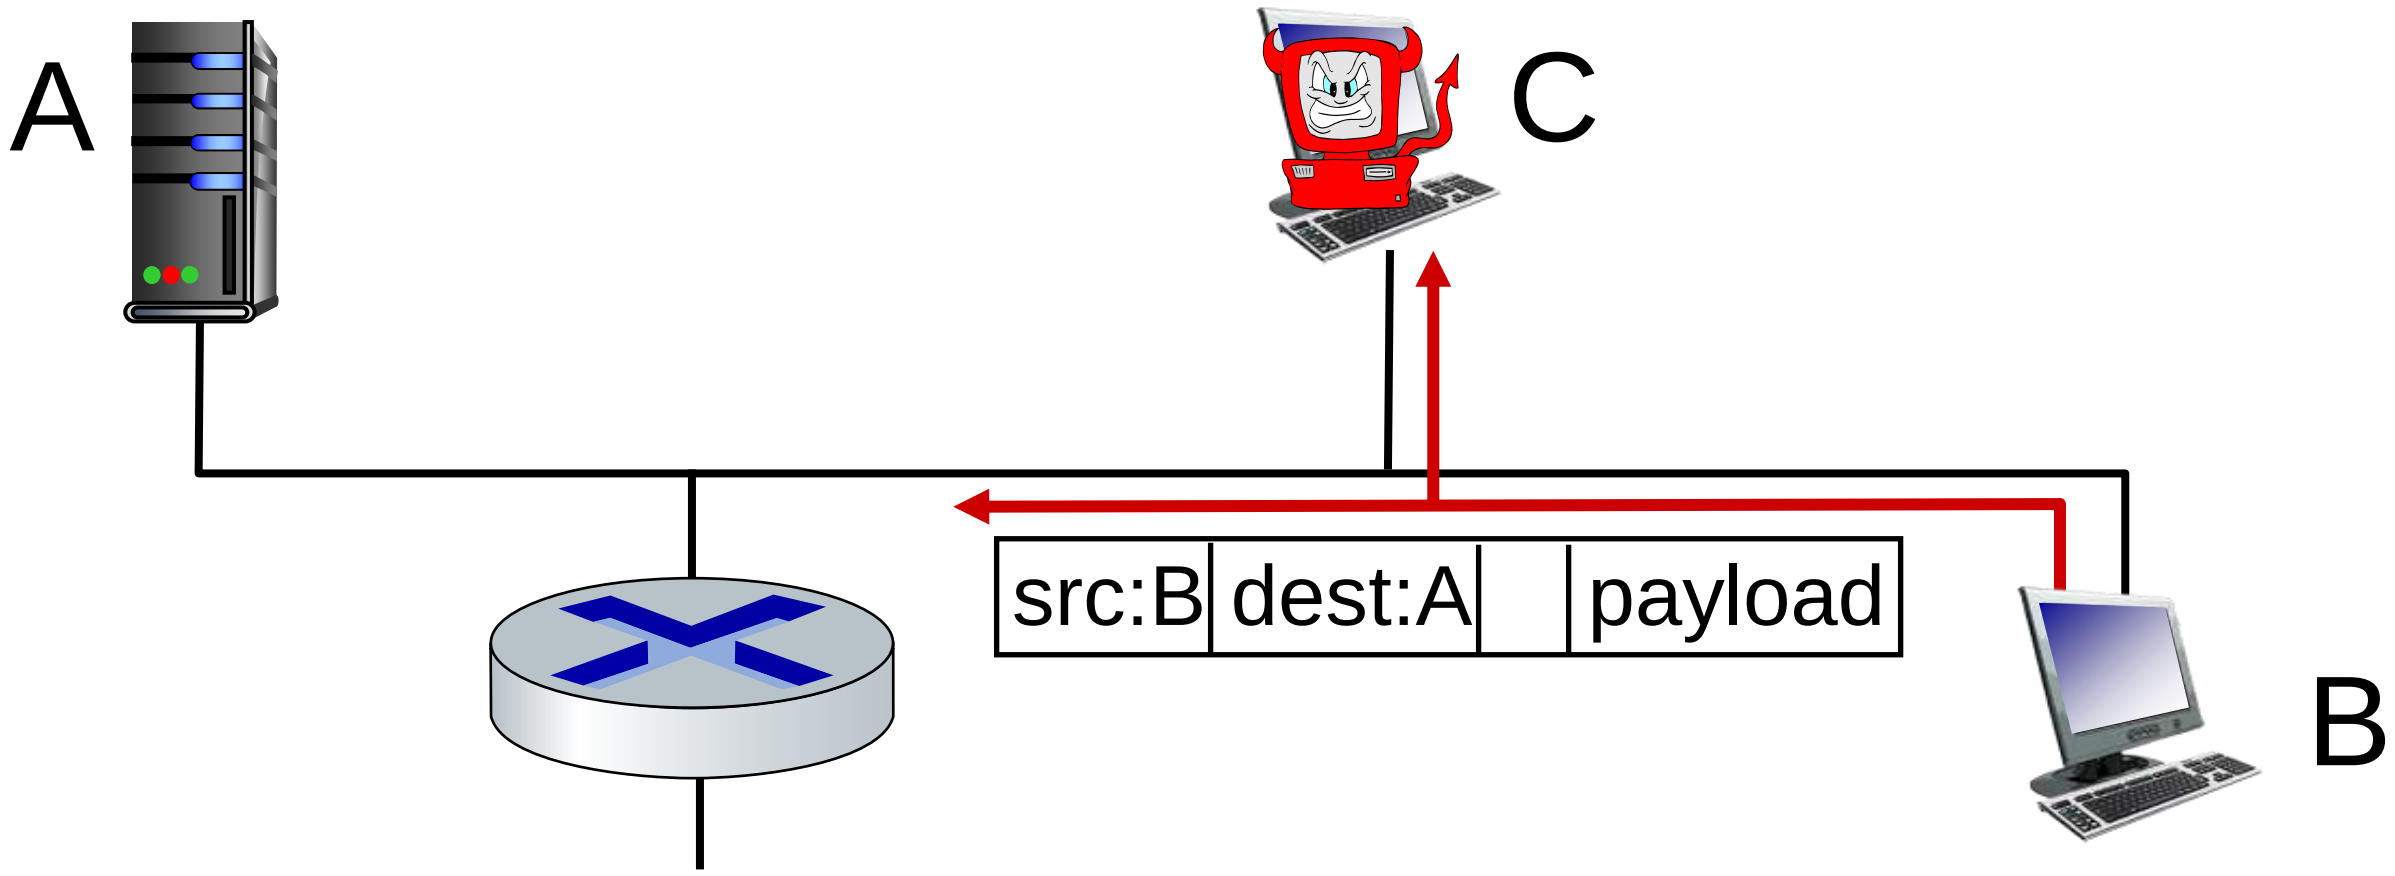

Wireshark software used for our end-of-chapter labs is a (free) packet-sniffer

Bad guys: fake identity

IP spoofing: injection of packet with false source address

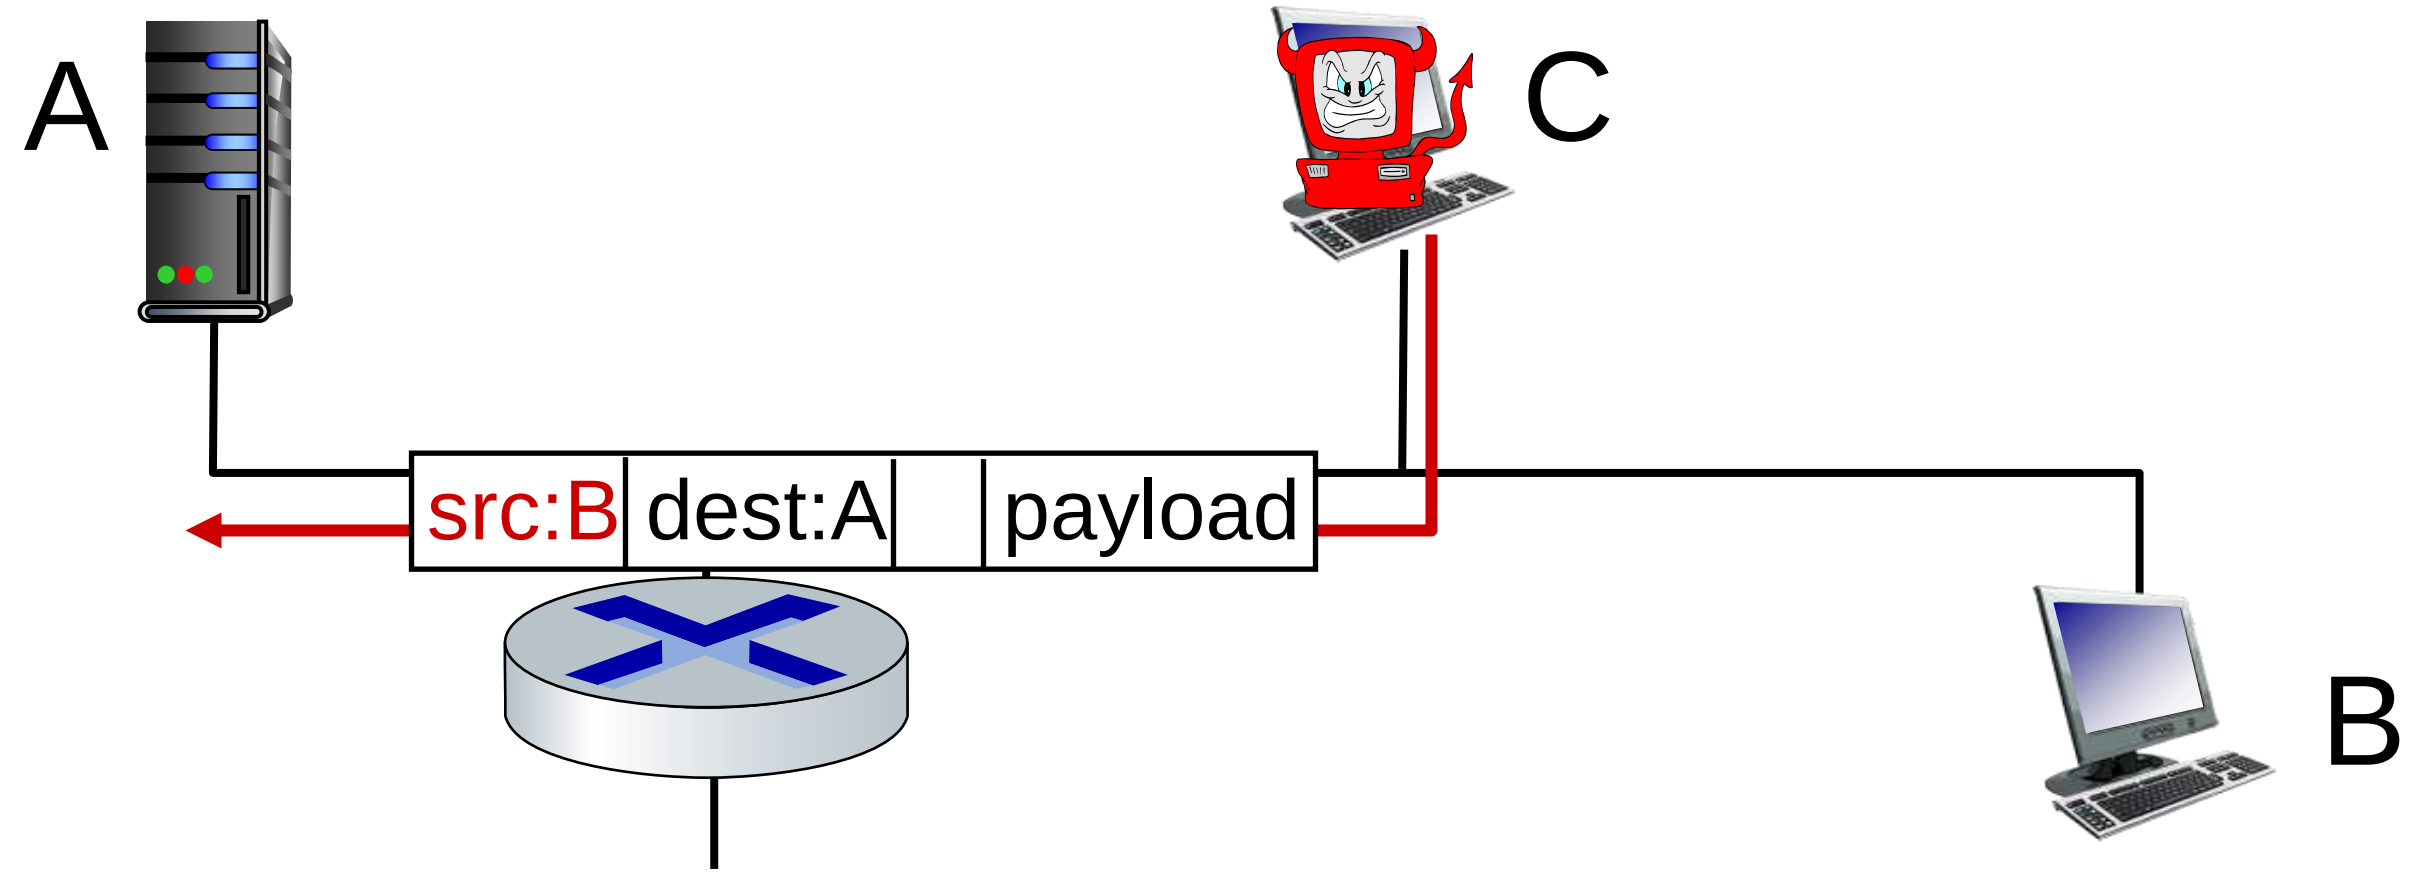

Bad guys: denial of service

Denial of Service (DoS): attackers make resources (server, bandwidth) unavailable to legitimate traffic by overwhelming resource with bogus traffic

1. select target
2. break into hosts around the network (see botnet)
3. send packets to target from compromised hosts

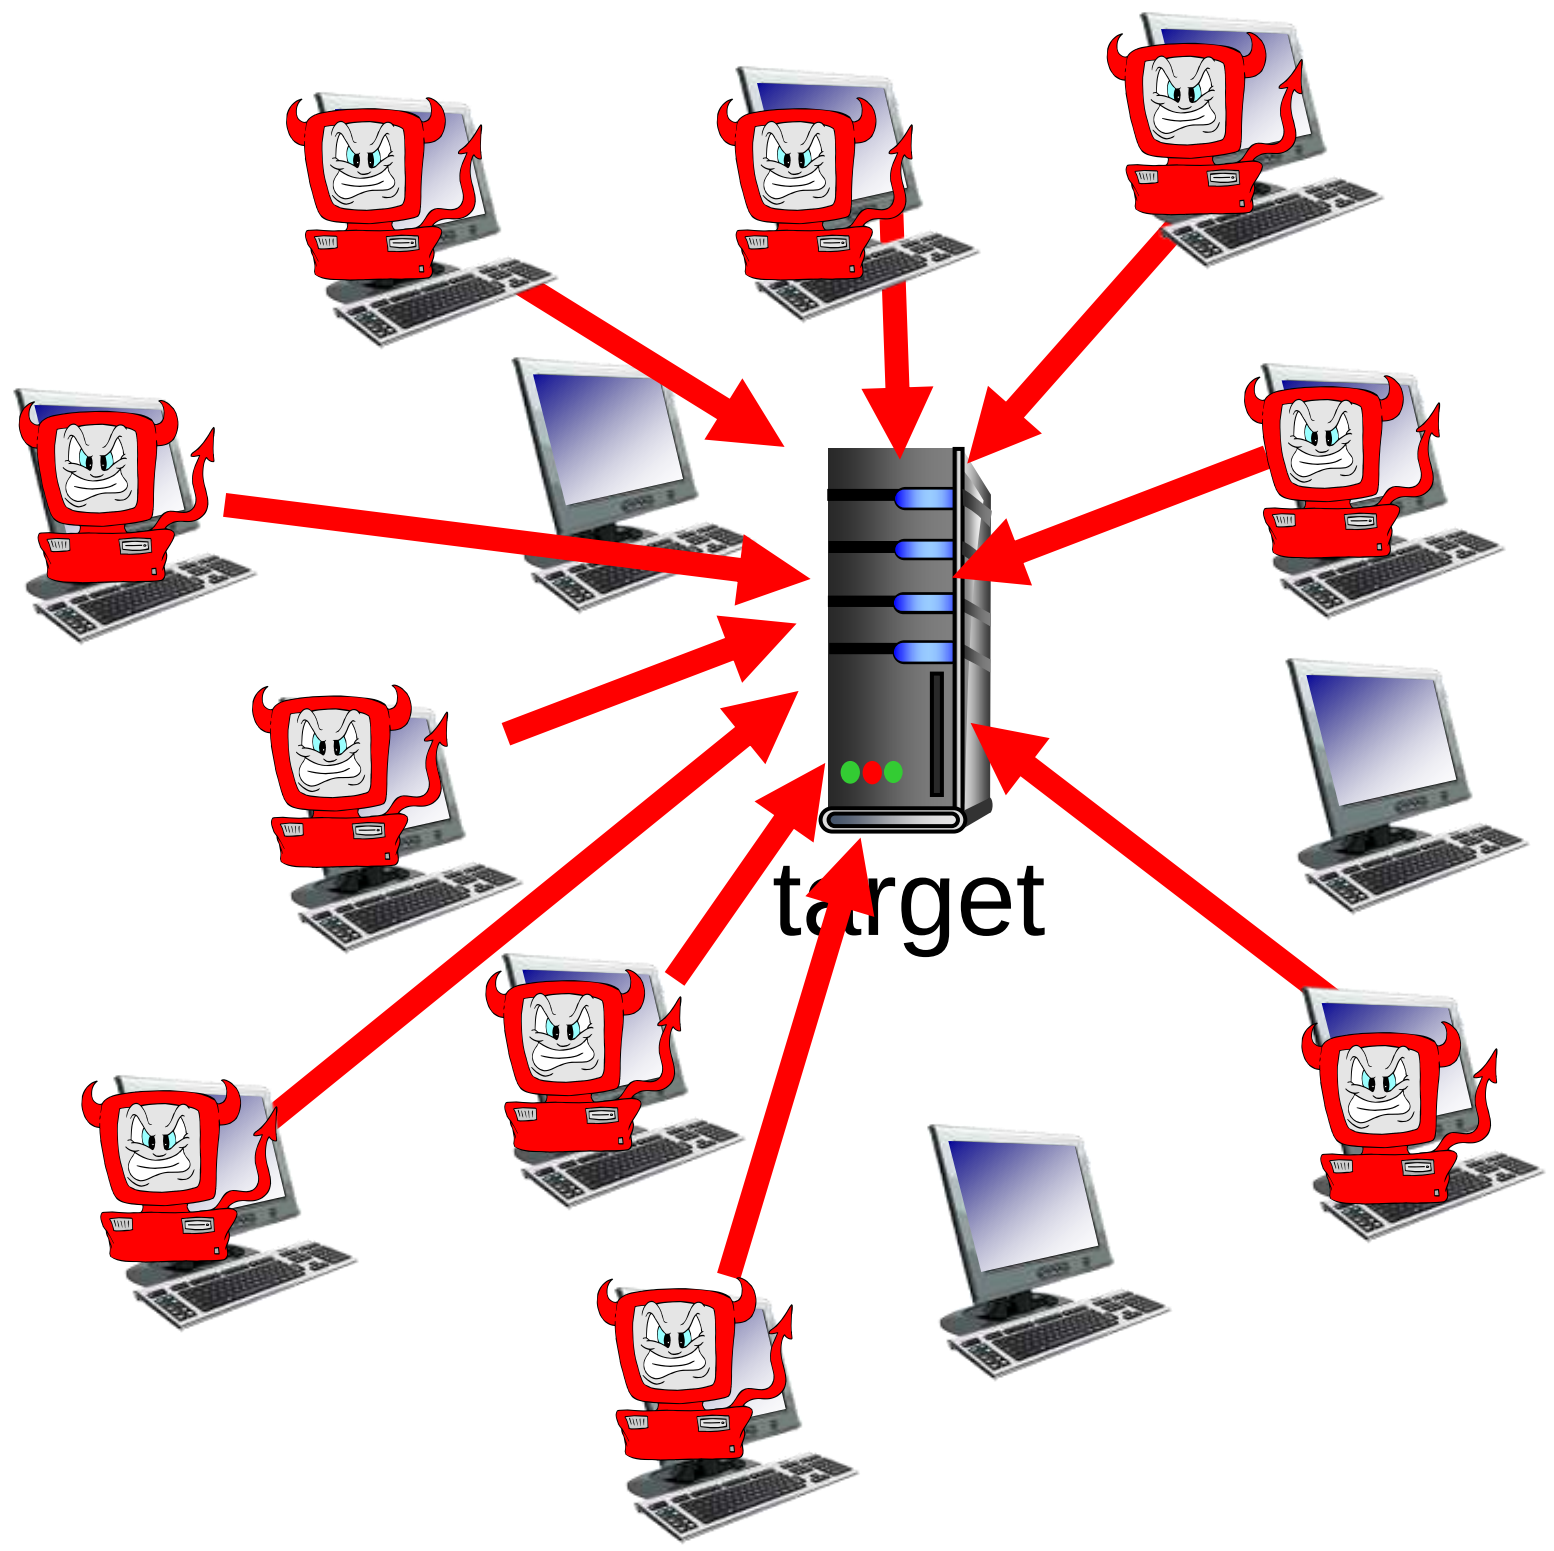

Lines of defense:

- authentication: proving you are who you say you are
  - cellular networks provides hardware identity via SIM card; no such hardware assist in traditional Internet
- confidentiality: via encryption
- integrity checks: digital signatures prevent/detect tampering
- access restrictions: password-protected VPNs
- firewalls: specialized “middleboxes” in access and core networks:
  - off-by-default: filter incoming packets to restrict senders, receivers, applications
  - detecting/reacting to DOS attacks

… lots more on security (throughout, Chapter 8)

Chapter 1: roadmap

- What *is* the Internet?
- What *is* a protocol?
- Network edge: hosts, access network, physical media
- Network core: packet/circuit switching, internet structure
- Performance: loss, delay, throughput
- Security
- Protocol layers, service models
- History

Protocol “layers” and service models

Networks are complex, with many “pieces”:

- hosts
- routers
- links of various media
- applications
- protocols
- hardware, software

Question: is there any hope of *organizing* structure of network?

- and/or our *discussion* of networks?

A: Layered Architecture

Example: organization of air travel

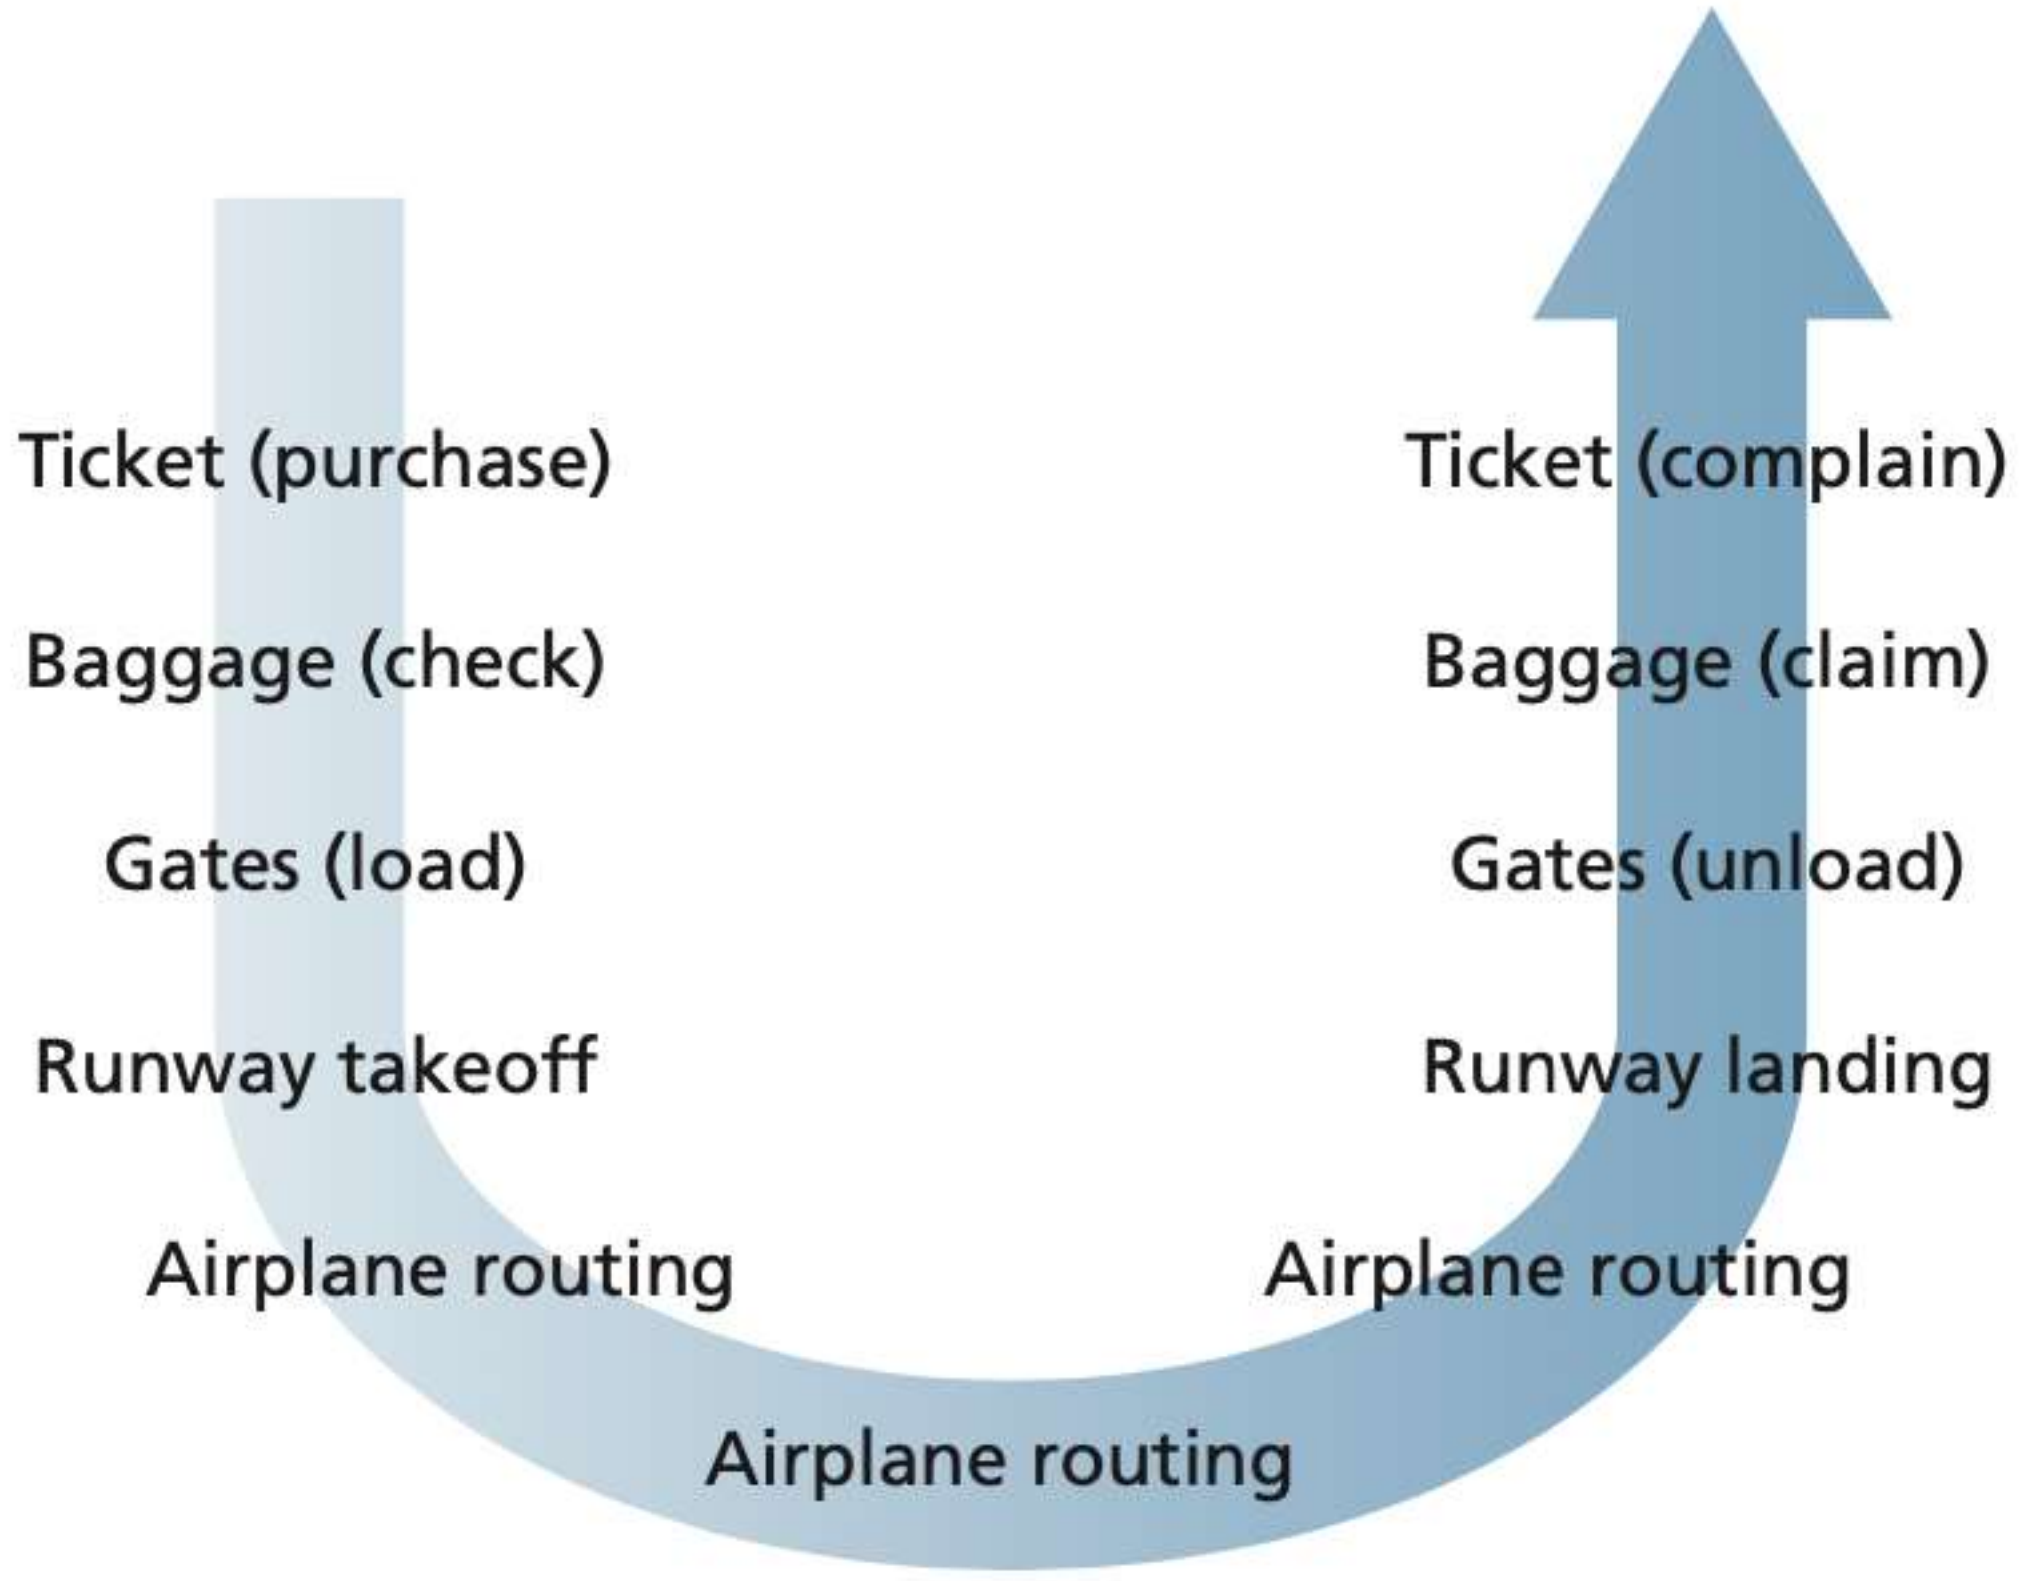

How would you *define/discuss* the *system* of airline travel?

- a series of steps, involving many services

Example: organization of air travel framework – horizontal layering

layers: each layer implements a service

- via its own internal-layer actions
- relying on services provided by layer below

Why layering?

Approach to designing/discussing complex systems:

- explicit structure allows identification, relationship of system's pieces
  - layered *service model, and the services it provides to the layer above* for discussion
- modularization eases maintenance, updating of system
  - change in layer's service *implementation*: transparent to rest of system
  - e.g., change in gate procedure doesn't affect rest of system

Service Model

- Each protocol belongs to one of the layers
- We are interested in the services in services that a layer offers to the layer above – service model
- Modularity makes it easy to update/modify each of the layers

Layered Internet protocol stack

- *application:* supporting network applications
  - HTTP, SMTP, DNS
- *transport:* process-process data transfer
  - TCP, UDP
- *network:* routing of datagrams from source to destination
  - IP, routing protocols
- *link:* data transfer between neighboring network elements
  - Ethernet, 802.11 (WiFi)
- *physical:* bits “on the wire”
- RFC 3439 – Protocol Layering

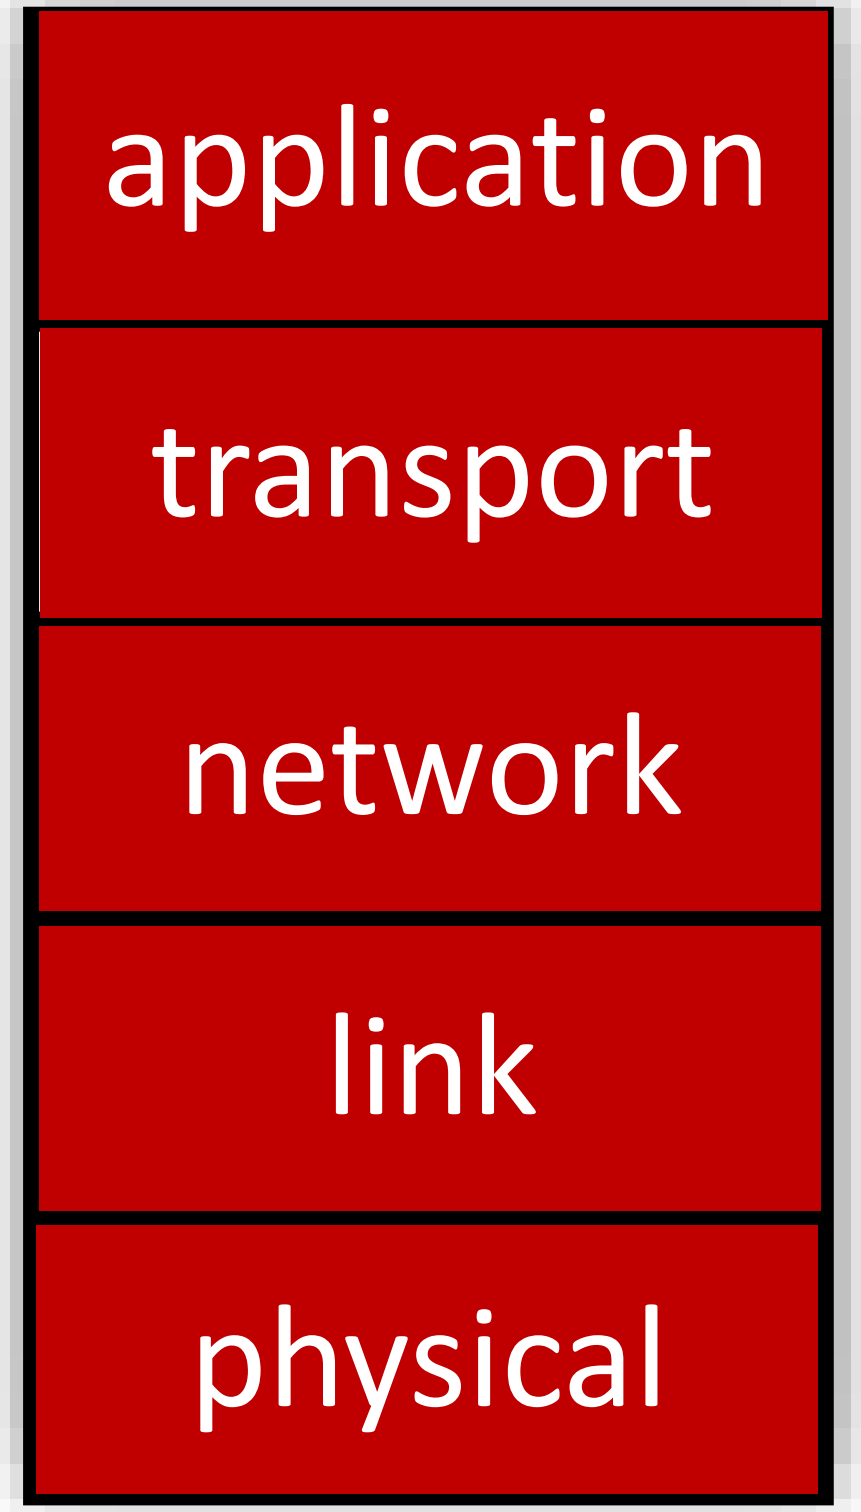

Services, Layering and Encapsulation

application

transport

network

link

physical

source

M

Application exchanges packet of information - messages to implement some application service using *services* of transport layer

H_t M

Transport-layer protocol transfers M (e.g., reliably) from one *process* to another, using services of network layer.
Segment – transport layer packet

- transport-layer protocol encapsulates application-layer message, M, with *transport* layer-layer header H_t to create a transport-layer segment
  - H_t used by transport layer protocol to implement its service

application

transport

network

link

physical



destination

Services, Layering and Encapsulation

source		destination
application	M	application
transport	H_t M	transport
network	H_n H_t M	network
link		link
physical		physical

source



destination

Transport-layer protocol transfers M (e.g., reliably) from one *process* to another, using services of network layer

Network-layer protocol transfers transport-layer segment [H_t | M] from one *host* to another, using link layer services

- network-layer protocol encapsulates transport-layer segment [H_t | M] with network layer-layer header H_n to create a network-layer datagram
  - H_n used by network layer protocol to implement its service

Services, Layering and Encapsulation

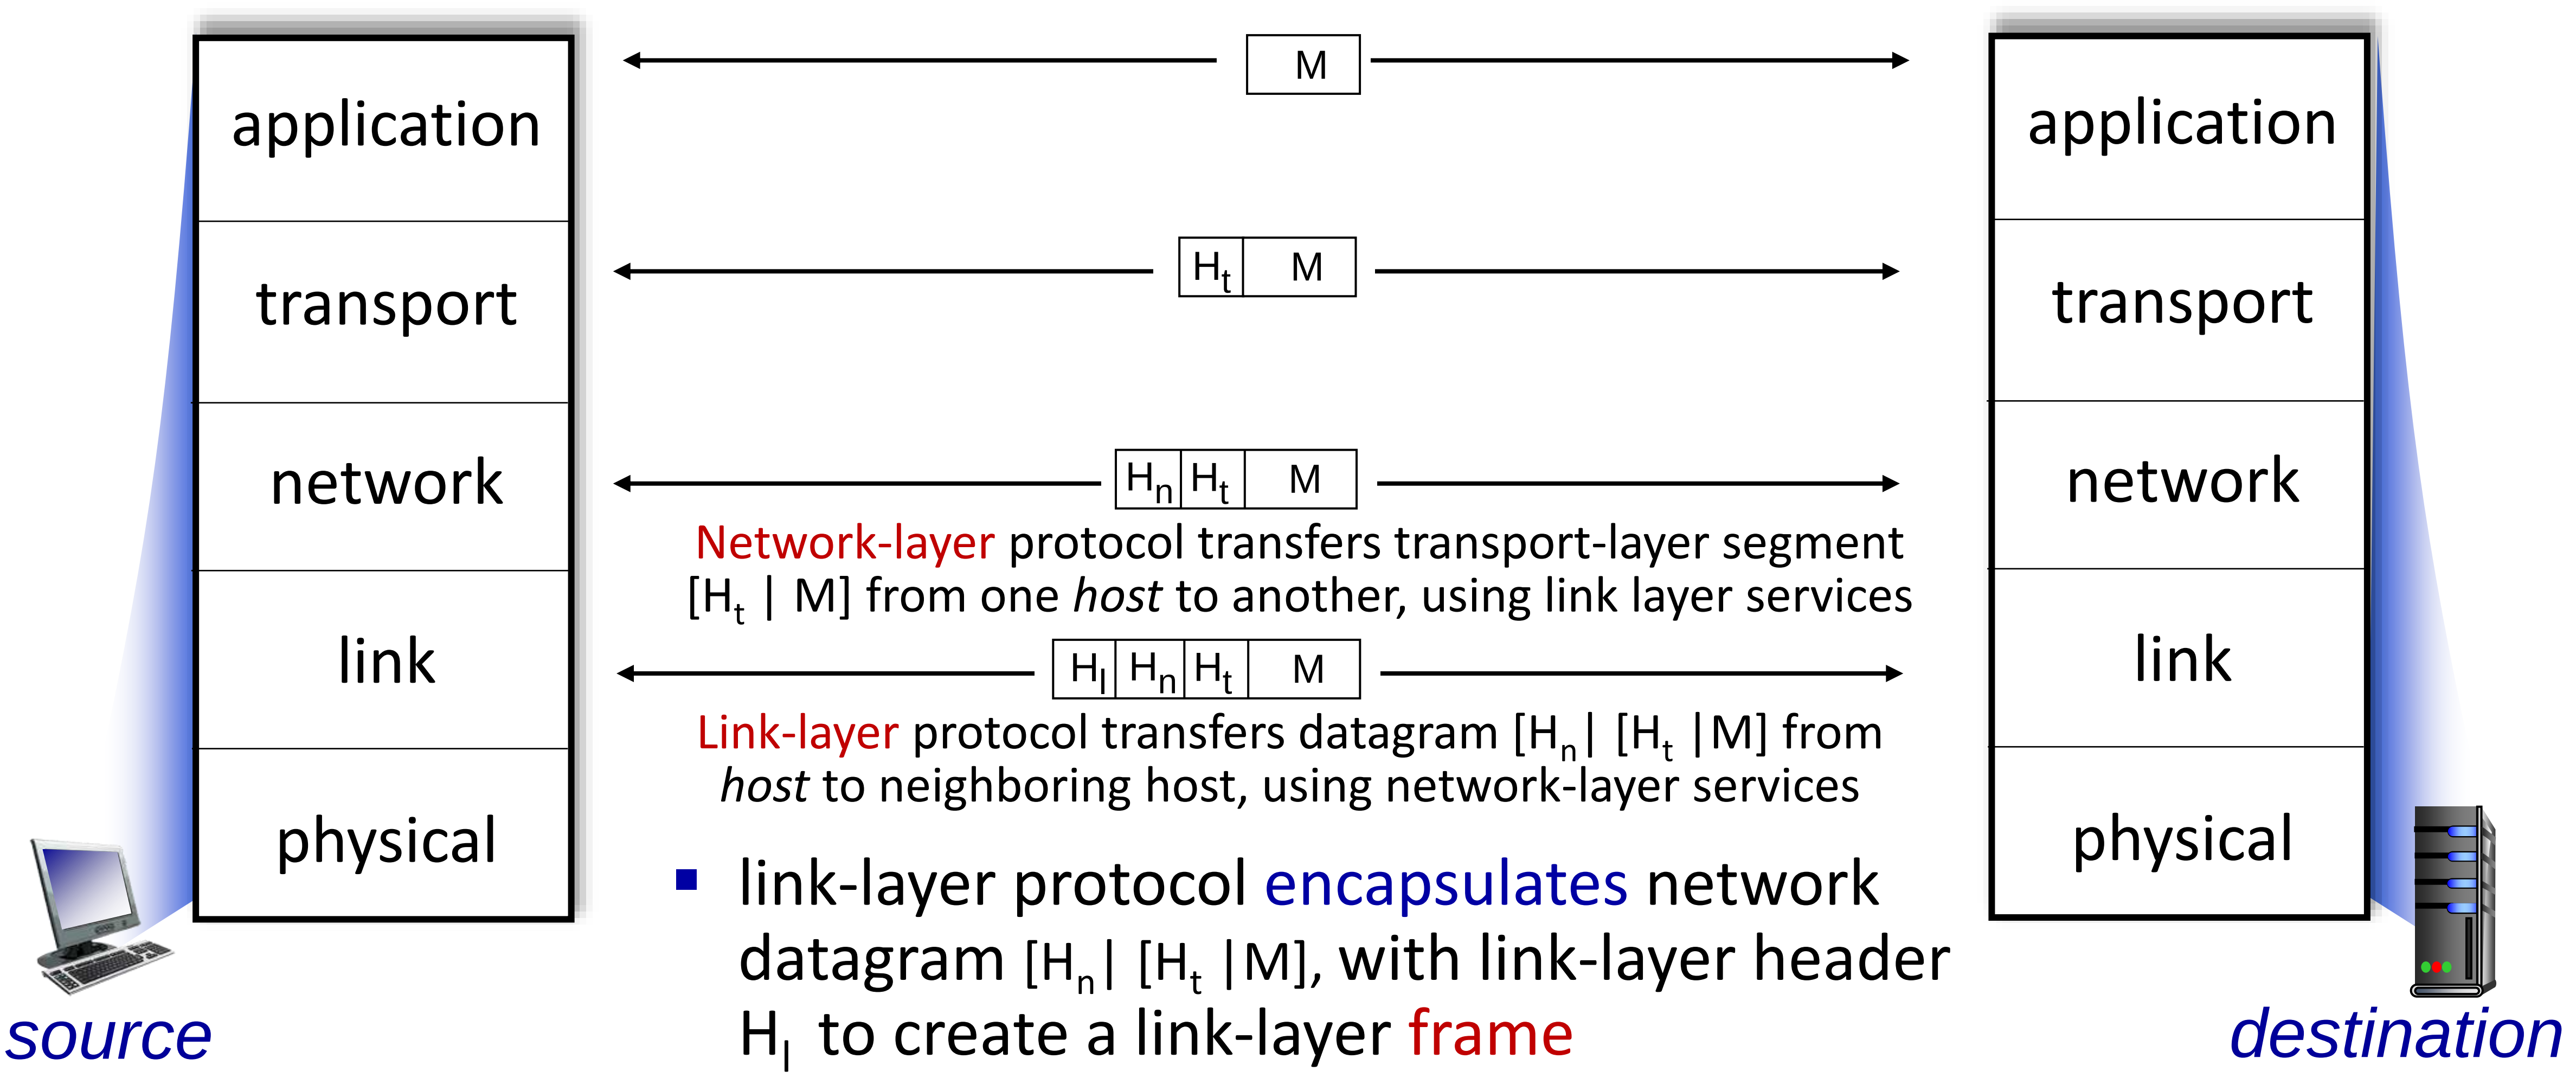

- link-layer protocol encapsulates network datagram $[H_n$| $[H_t$ |M], with link-layer header H_l to create a link-layer frame

Encapsulation

Matryoshka dolls (stacking dolls)

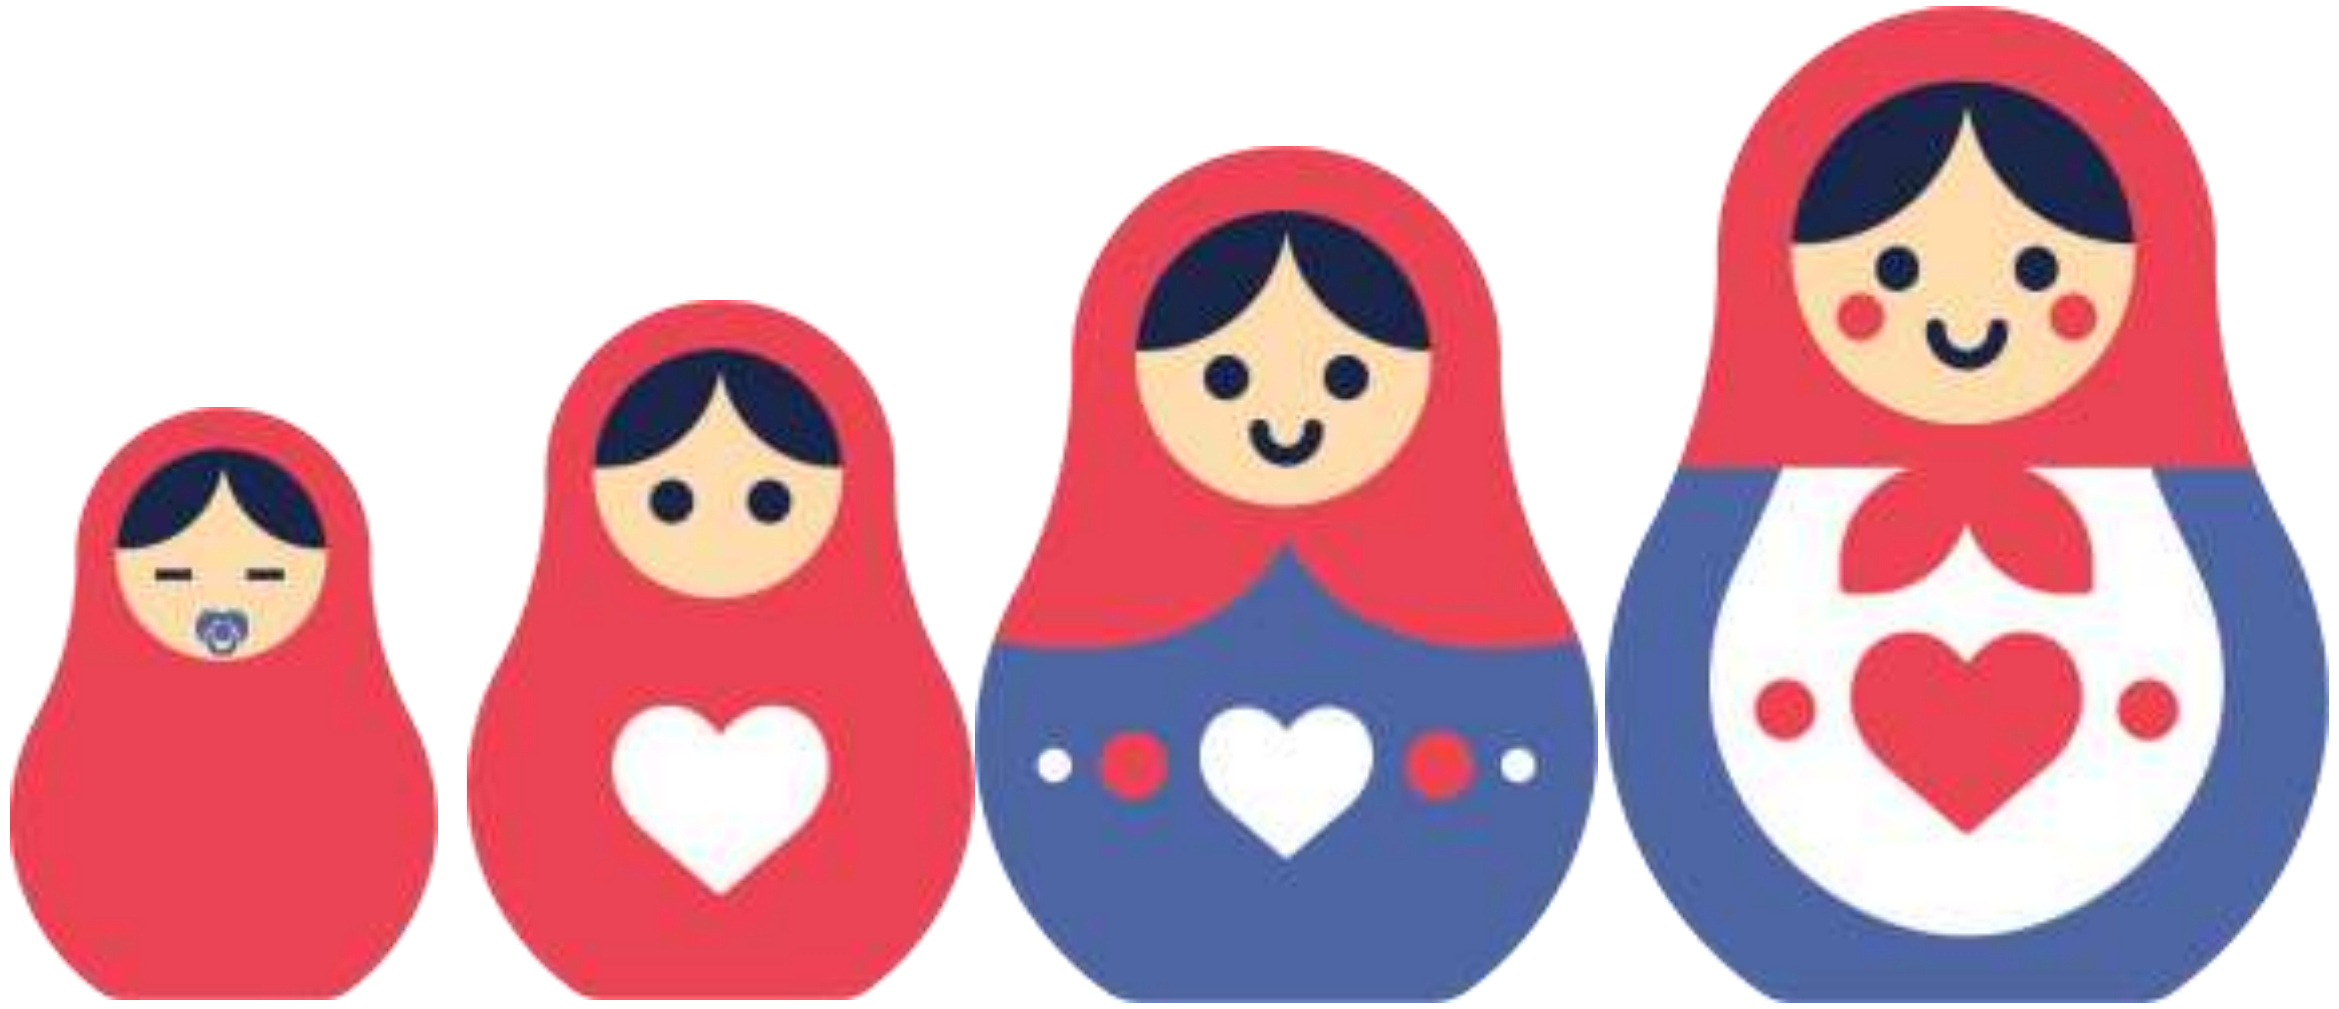

Credit: https://dribbble.com/shots/7182188-Babushka-Boi

Services, Layering and Encapsulation

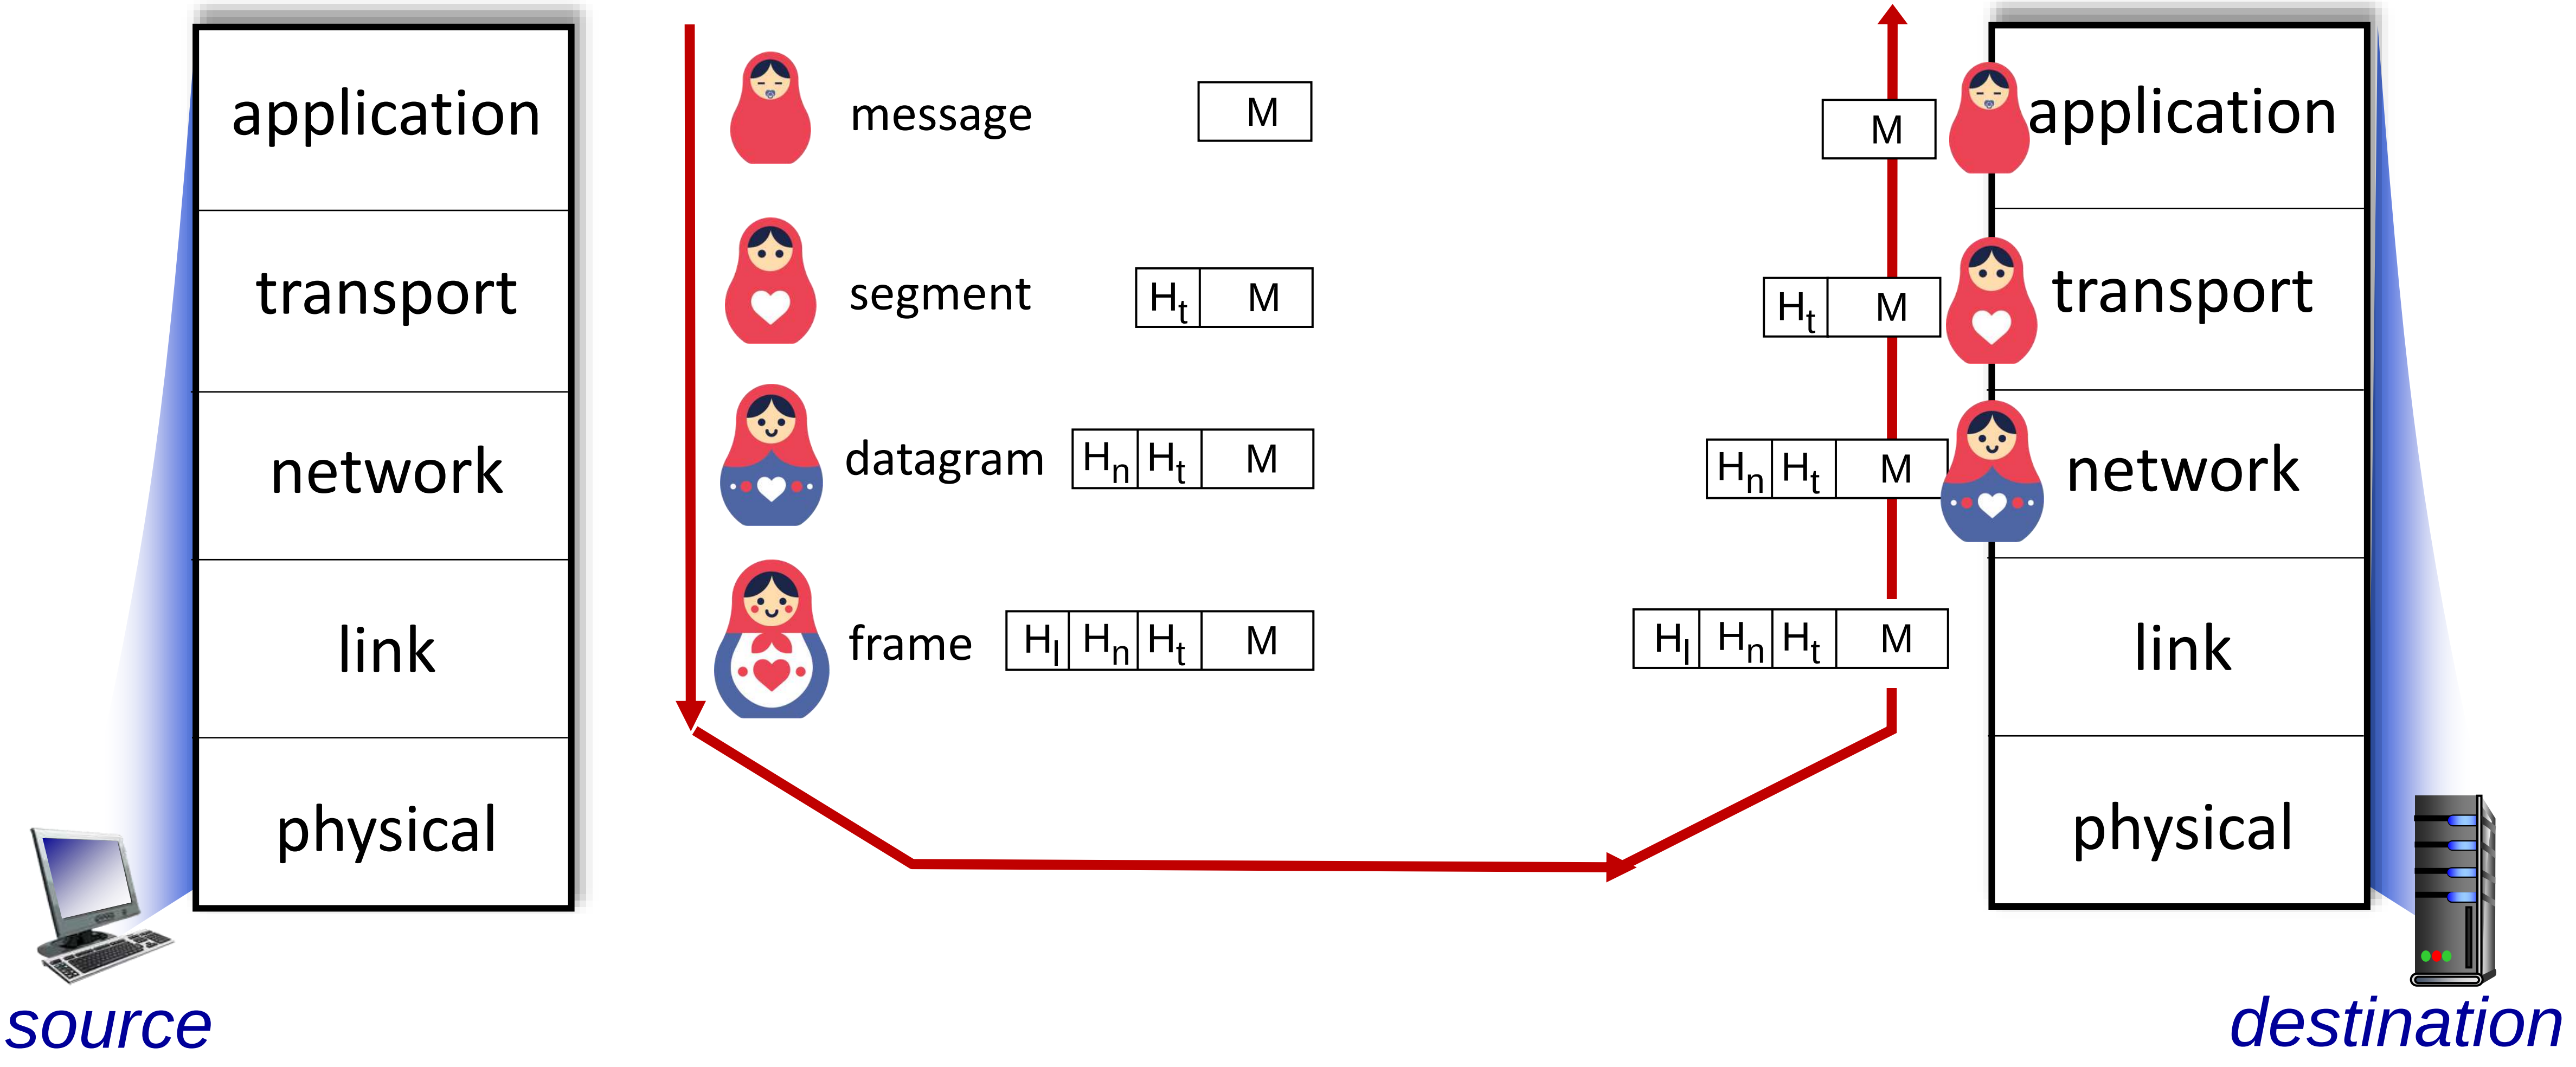

Encapsulation: an end-end view

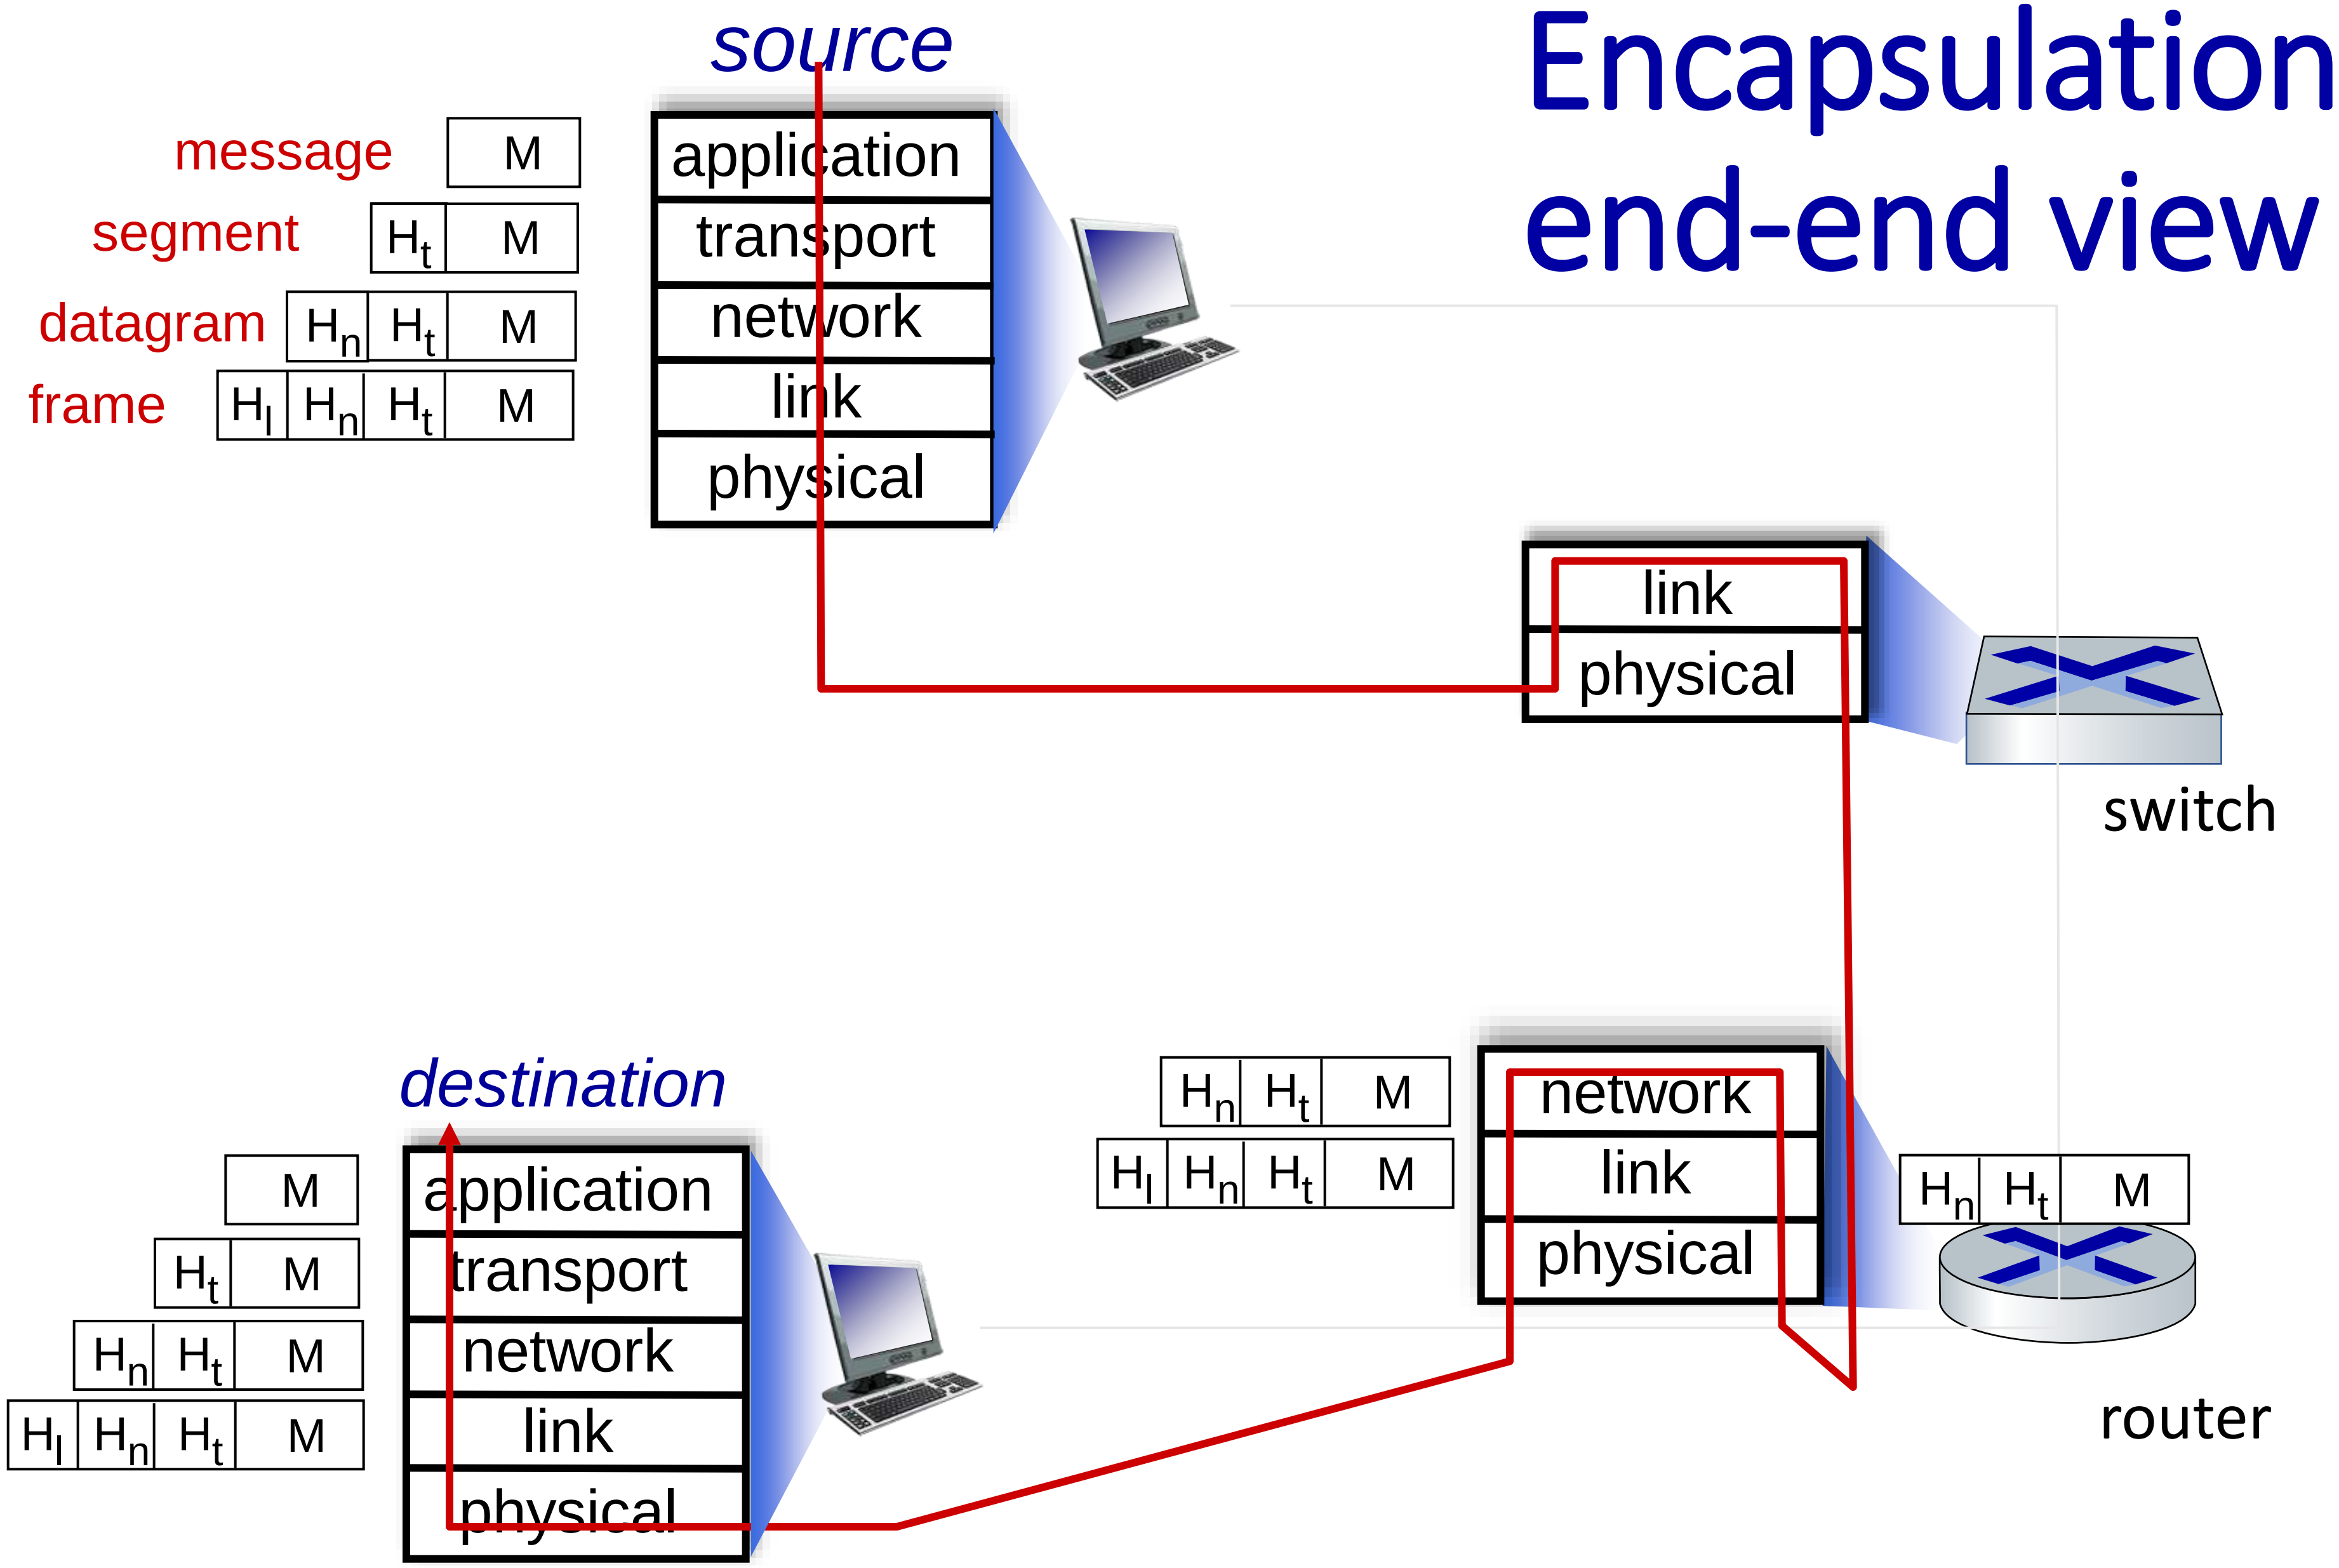

Chapter 1: roadmap

- What *is* the Internet?
- What *is* a protocol?
- Network edge: hosts, access network, physical media
- Network core: packet/circuit switching, internet structure
- Performance: loss, delay, throughput
- Security
- Protocol layers, service models
- History

Internet history

1961-1972: Early packet-switching principles

- 1961: Kleinrock - queueing theory shows effectiveness of packet-switching
- 1964: Baran - packet-switching in military nets
- 1967: ARPAnet conceived by Advanced Research Projects Agency
- 1969: first ARPAnet node operational
- 1972:
  - ARPAnet public demo
  - NCP (Network Control Protocol) first host-host protocol
  - first e-mail program
  - ARPAnet has 15 nodes

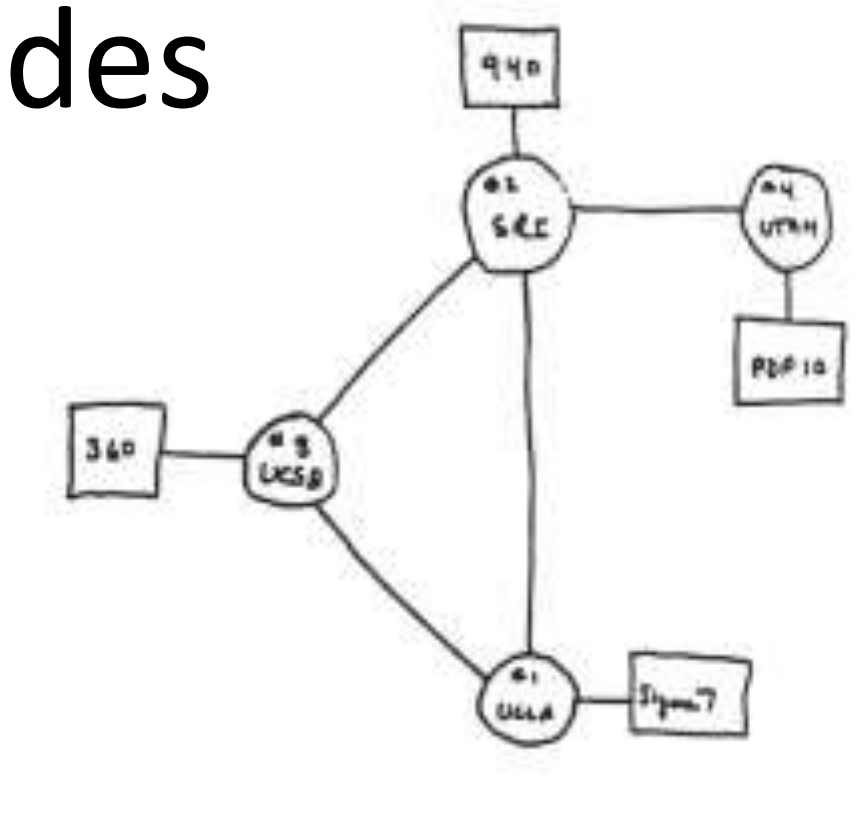

THE ARPA NETWORK

Internet history

1972-1980: Internetworking, new and proprietary networks

- 1970: ALOHAnet satellite network in Hawaii
- 1974: Cerf and Kahn - architecture for interconnecting networks
- 1976: Ethernet at Xerox PARC
- late70's: proprietary architectures: DECnet, SNA, XNA
- 1979: ARPAnet has 200 nodes

Cerf and Kahn's internetworking principles:

- minimalism, autonomy - no internal changes required to interconnect networks
- best-effort service model
- stateless routing
- decentralized control

define today's Internet architecture

Internet history

1980-1990: new protocols, a proliferation of networks

- 1983: deployment of TCP/IP
- 1982: smtp e-mail protocol defined
- 1983: DNS defined for name-to-IP-address translation
- 1985: ftp protocol defined
- 1988: TCP congestion control
- new national networks: CSnet, BITnet, NSFnet, Minitel
- 100,000 hosts connected to confederation of networks

NSFNET T1 Network 1991

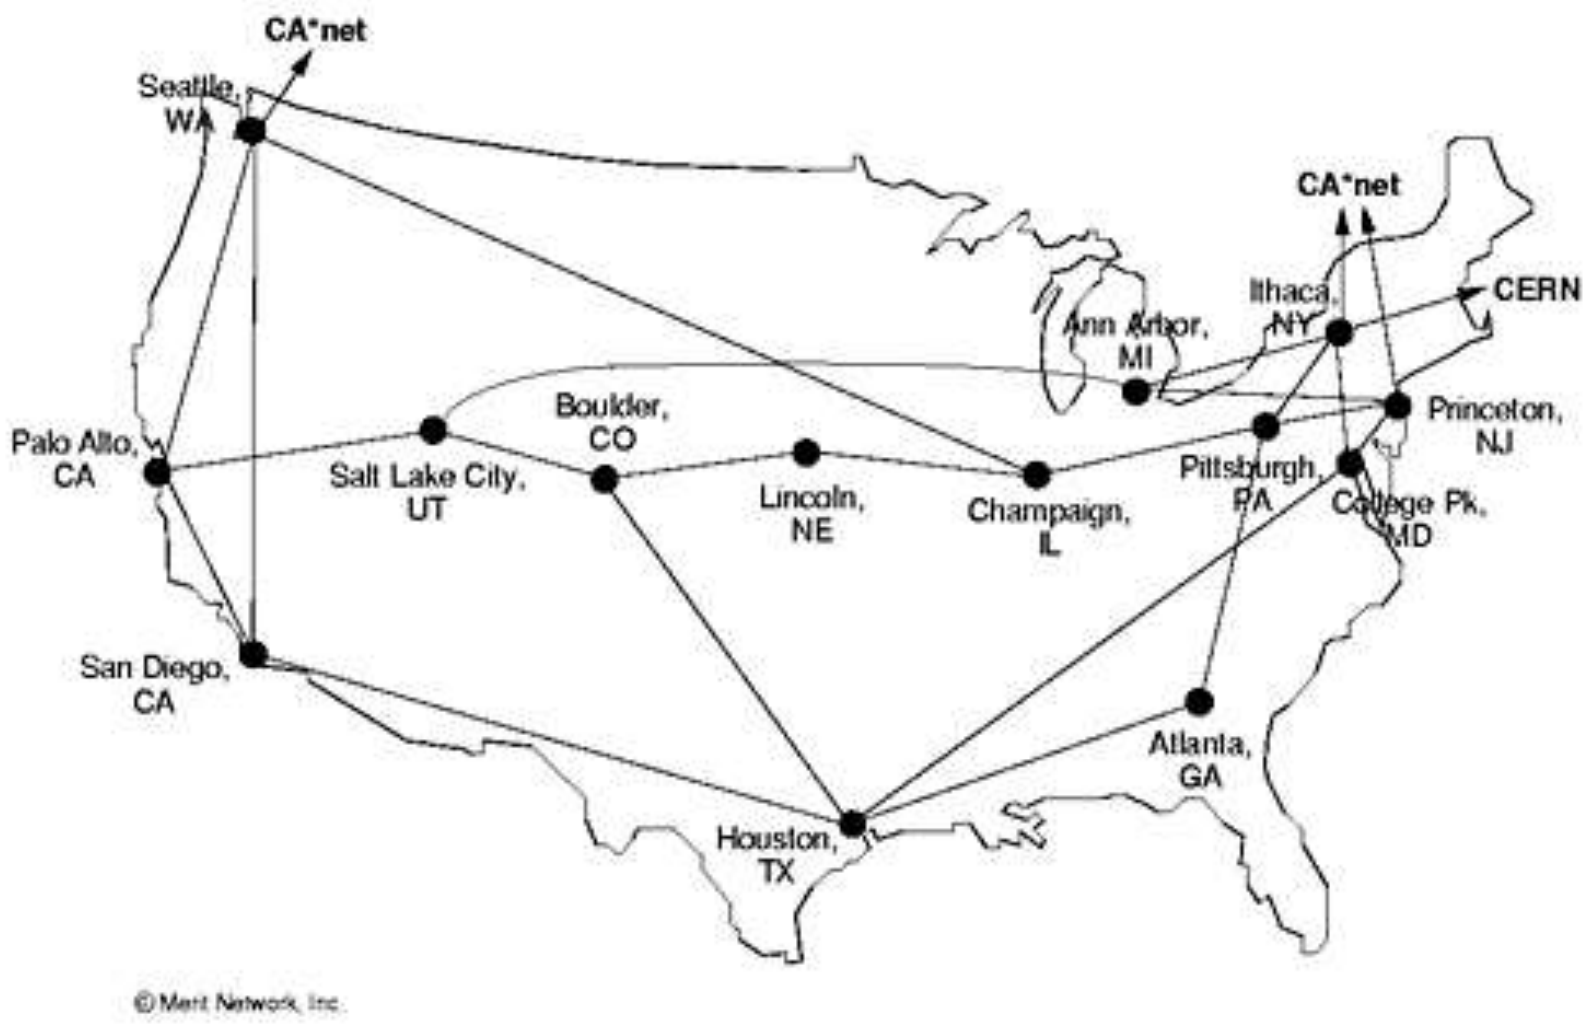

Internet history

1990, 2000s: commercialization, the Web, new applications

- early 1990s: ARPAnet decommissioned
- 1991: NSF lifts restrictions on commercial use of NSFnet (decommissioned, 1995)
- early 1990s: Web
  - hypertext [Bush 1945, Nelson 1960's]
  - HTML, HTTP: Berners-Lee
  - 1994: Mosaic, later Netscape
  - late 1990s: commercialization of the Web

late 1990s – 2000s:

- more killer apps: instant messaging, P2P file sharing
- network security to forefront
- est. 50 million host, 100 million+ users
- backbone links running at Gbps

Internet history

2005-present: scale, SDN, mobility, cloud

- aggressive deployment of broadband home access (10-100's Mbps)
- 2008: software-defined networking (SDN)
- increasing ubiquity of high-speed wireless access: 4G/5G, WiFi
- service providers (Google, FB, Microsoft) create their own networks
  - bypass commercial Internet to connect "close" to end user, providing "instantaneous" access to social media, search, video content, ...
- enterprises run their services in "cloud" (e.g., Amazon Web Services, Microsoft Azure)
- rise of smartphones: more mobile than fixed devices on Internet (2017)
- ~15B devices attached to Internet (2023, statista.com)

Chapter 1: summary

We’ve covered a “ton” of material!

- Internet overview
- what’s a protocol?
- network edge, access network, core
  - packet-switching versus circuit-switching
  - Internet structure
- performance: loss, delay, throughput
- layering, service models
- security
- history

You now have:

- context, overview, vocabulary, “feel” of networking
- more depth, detail, *and fun* to follow*!*

Additional Chapter 1 slides

ISO/OSI reference model

Two layers not found in Internet protocol stack!

- *presentation:* allow applications to interpret meaning of data, e.g., encryption, compression, machine-specific conventions
- *session:* synchronization, checkpointing, recovery of data exchange
- Internet stack "missing" these layers!
  - these services, *if needed,* must be implemented in application
  - needed?

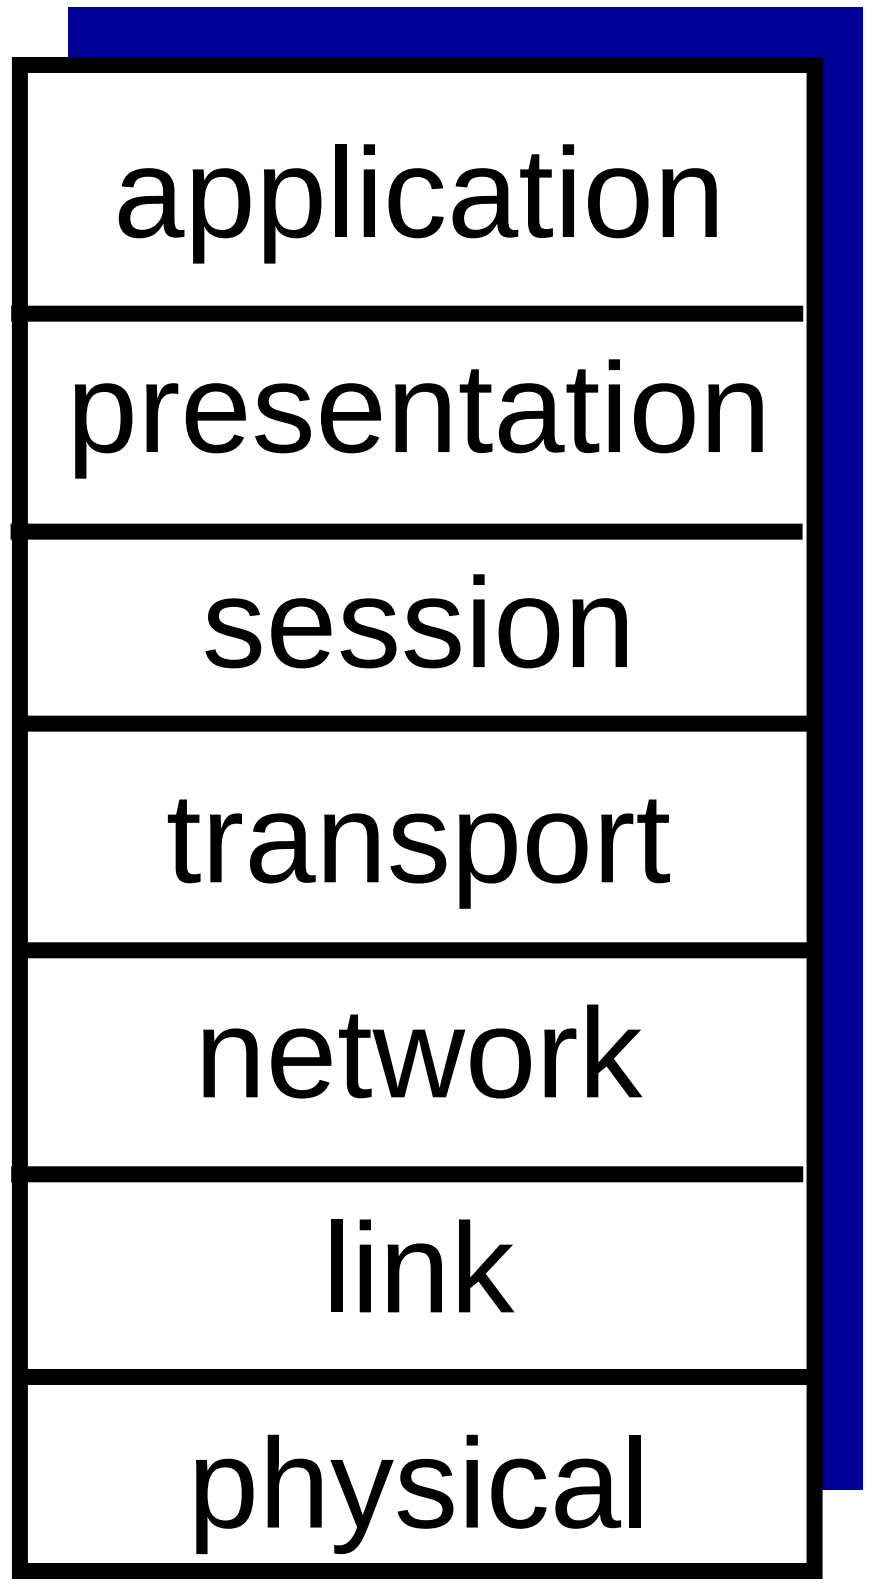

The seven layer OSI/ISO reference model

Services, Layering and Encapsulation

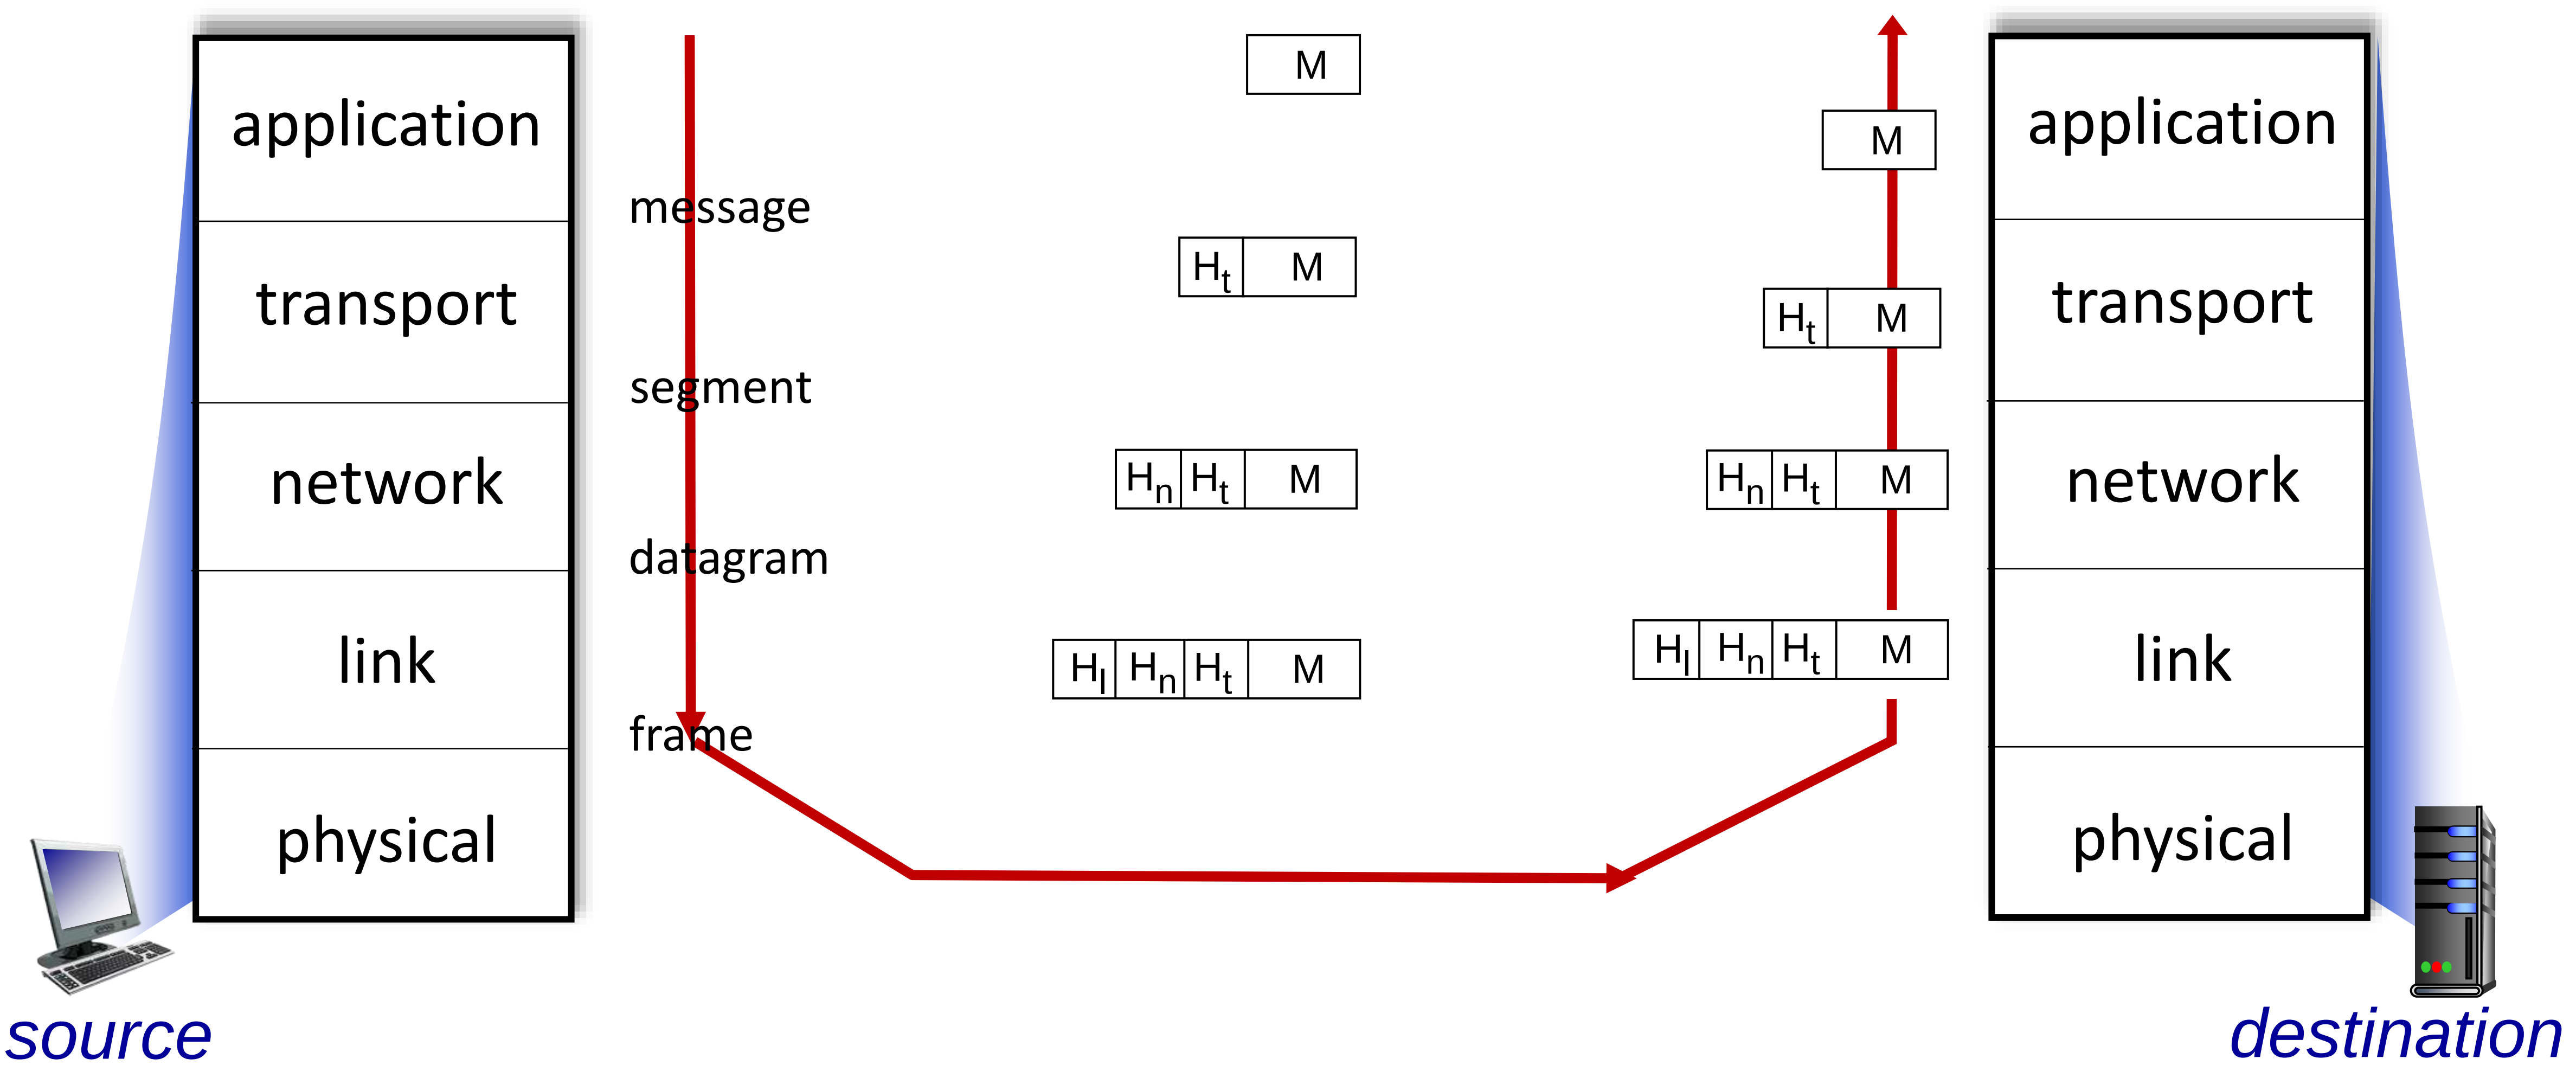

Wireshark

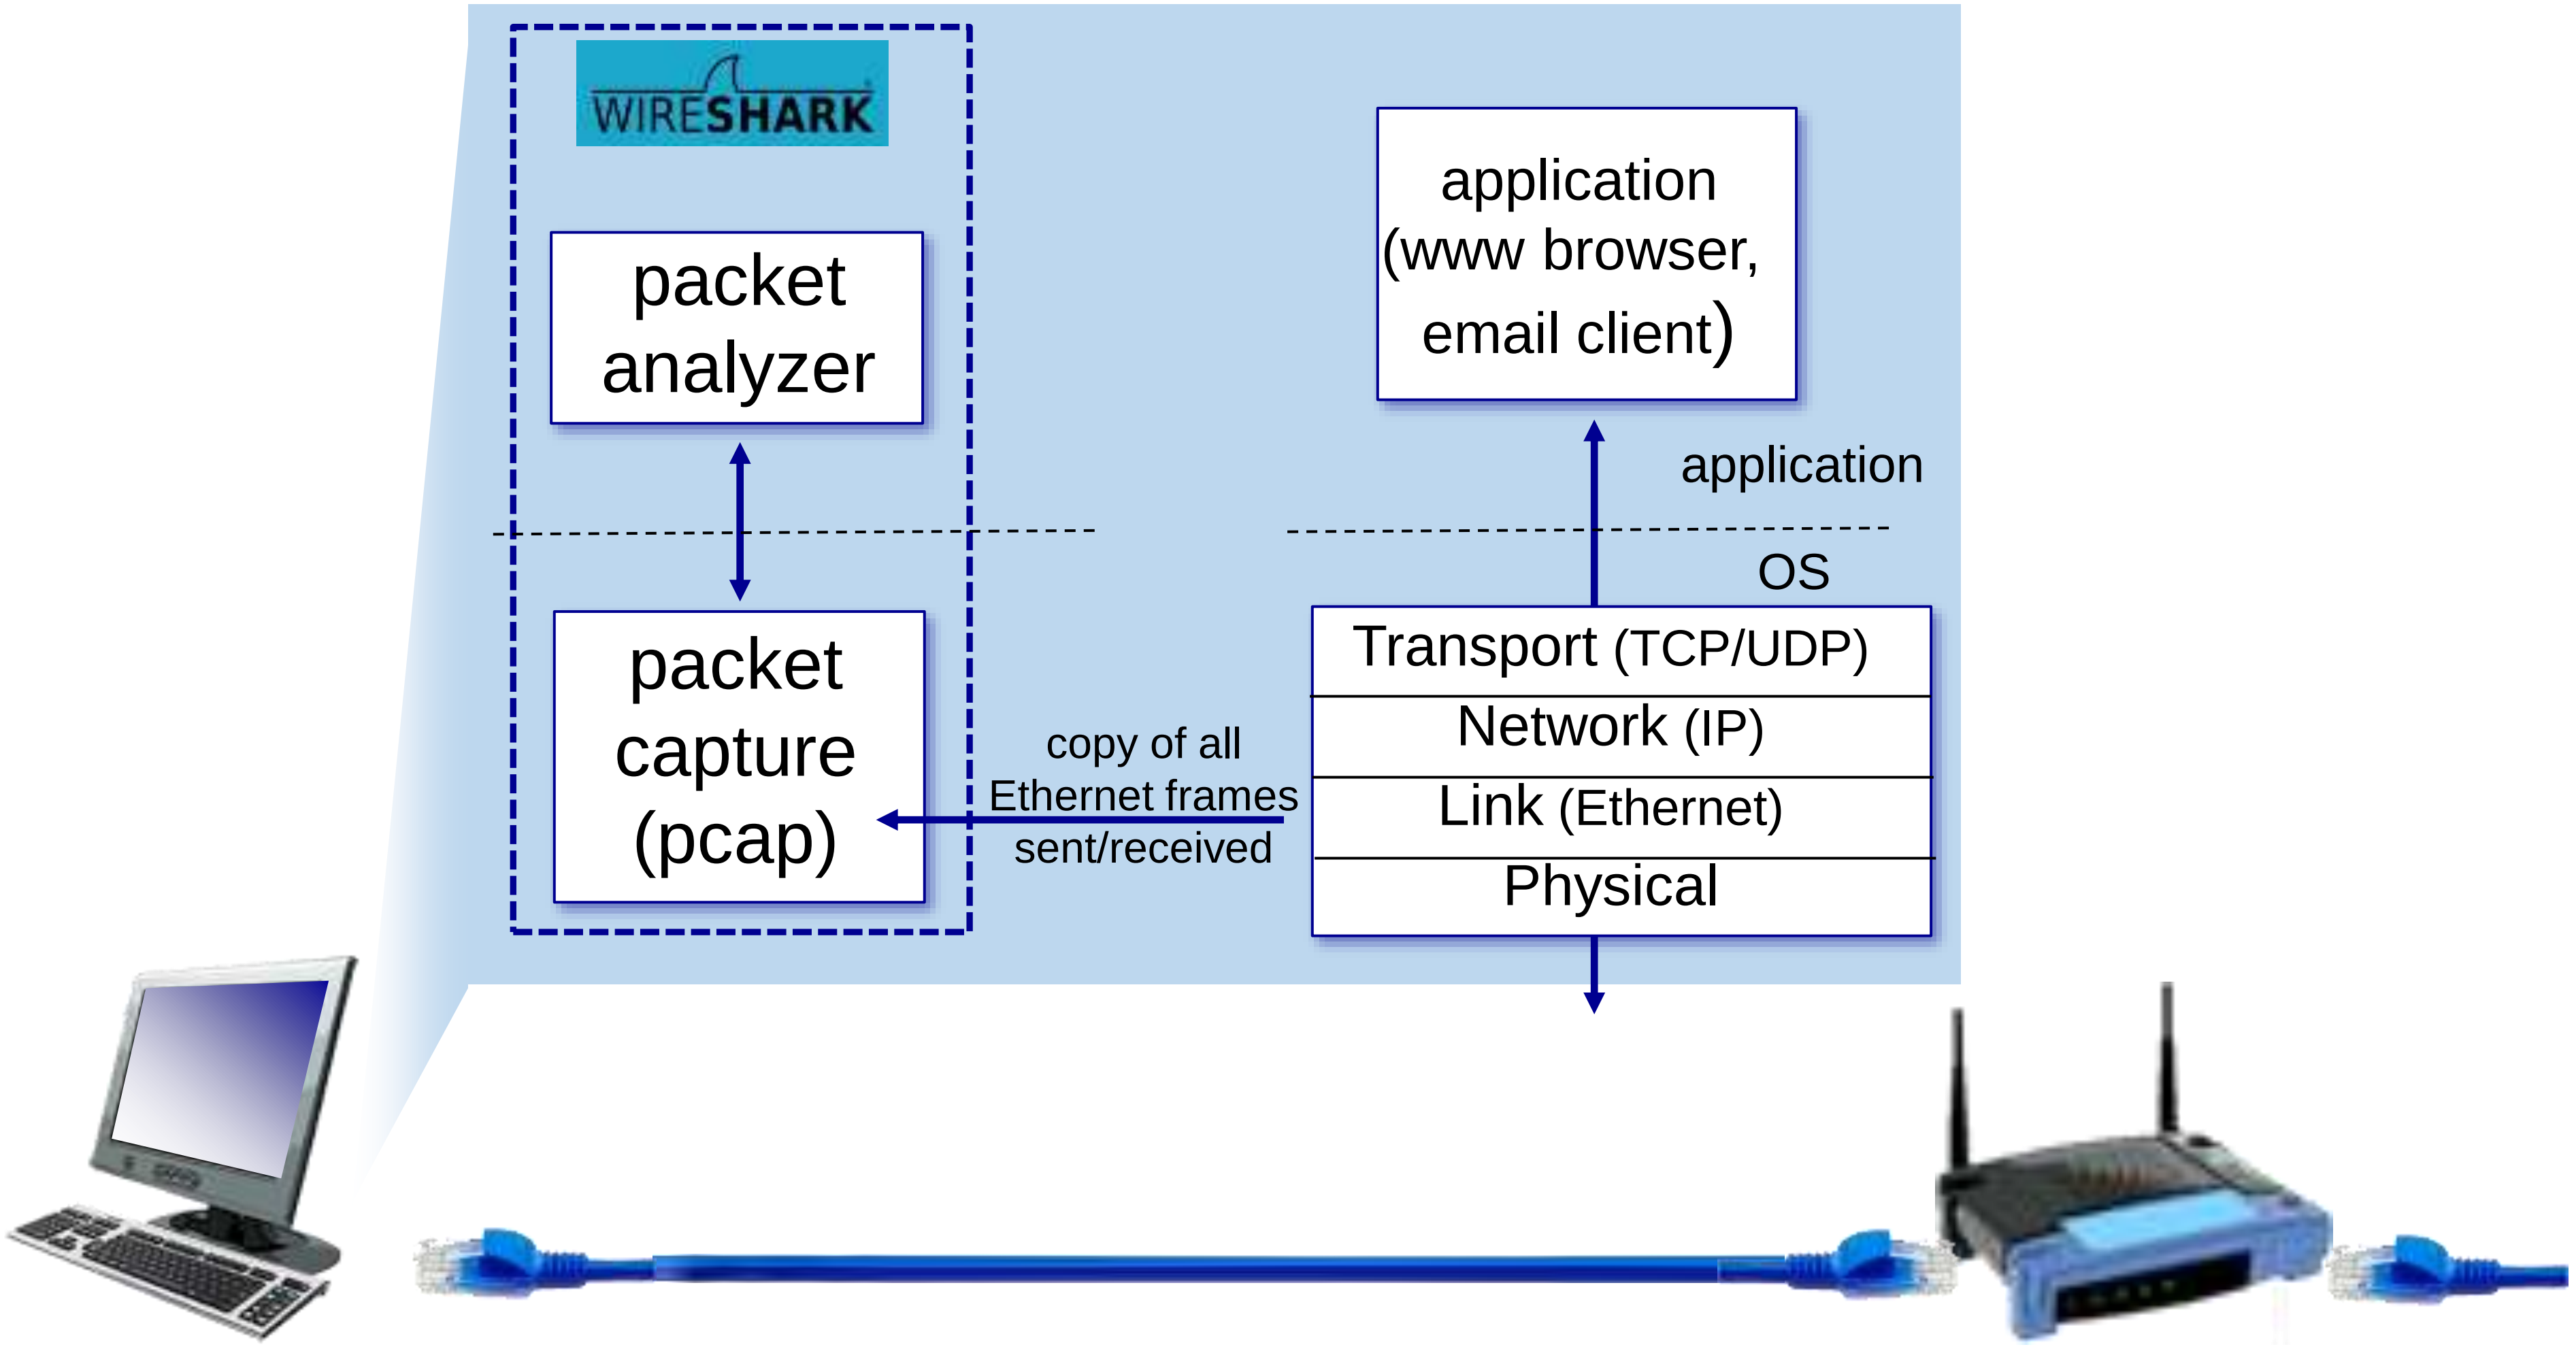
WIRESHARK
packet analyzer
packet capture (pcap)
copy of all Ethernet frames sent/received
application (www browser, email client)
application
OS
Transport (TCP/UDP)
Network (IP)
Link (Ethernet)
Physical