


STATEMENT SHOWING THE MODIFIED HYDRAULIC PARTICULARS OF S.S.G. CANAL FROM KM.0.00 TO KM.42.400

SI No.	Reach No as per Appd H.P.		Reach		Length	B.W. (M)	F.S.D(M)	Side slope	Surfae fall	Value of N	Discharge required in Cumces	Designed Discharge in Cumes	Velocity in M/Sec.	Free Board	Reach starting		Loss of Head				Reach Ending		
			From	To											Bed level	F.S.L.	Surface Loss	Loss due to Structure	Transiti on Loss	Total Loss of Head	Bed level	F.S.L.	Remarks
1	2		3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
35		(ii)	32.675	32.900 +0.500	725	20.20	4.00	1½ :1	1: 15000	0.018	99.110	99.470	0.949	2.000	57.727	61.727	0.048	SLB 32725 - 0.010 0.010	--	0.058	57.669	61.669	



REACH STARTING

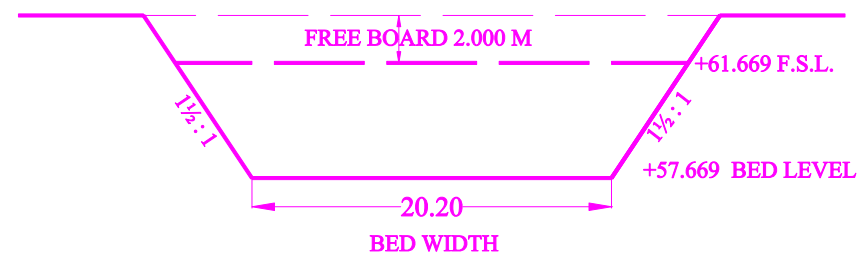

REACH ENDING