
STATEMENT SHOWING THE MODIFIED HYDRAULIC PARTICULARS OF S.S.G. CANAL FROM KM.0.00 TO KM.42.400

	Reach No as per Appd H.P.		Reach		Length	B.W. (M)	F.S.D(M)	Side	Surfae fall	Value of N	Discharge required in	Designed Discharge	Velocity	Free Board	Reach starting		Loss of Head				Reach Ending		
			From	То		(IVI)		slope	Iall	IN IN	Cumces	in Cumes	iii ivi/Sec.	Боага	Bed level	F.S.L.	Surface Loss	Loss due to Structure		Total Loss of Head	Bed level	F.S.L.	Remarks
1	2		3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23
44	13(a)	(l)	37.775	37.800	25	20.20 to 17.75	Transition				99.110			2.000	56.876	60.876	-	-	0.002	0.002	56.874	60.874	

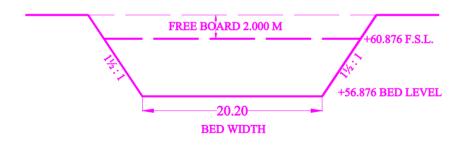

FREE BOARD 2.000 M +60.874 F.S.L. +56.874 BED LEVEL BED WIDTH

REACH STARTING

REACH ENDING