


## SECTION OF TROUGH WITH REINFORCEMENT DETAILS

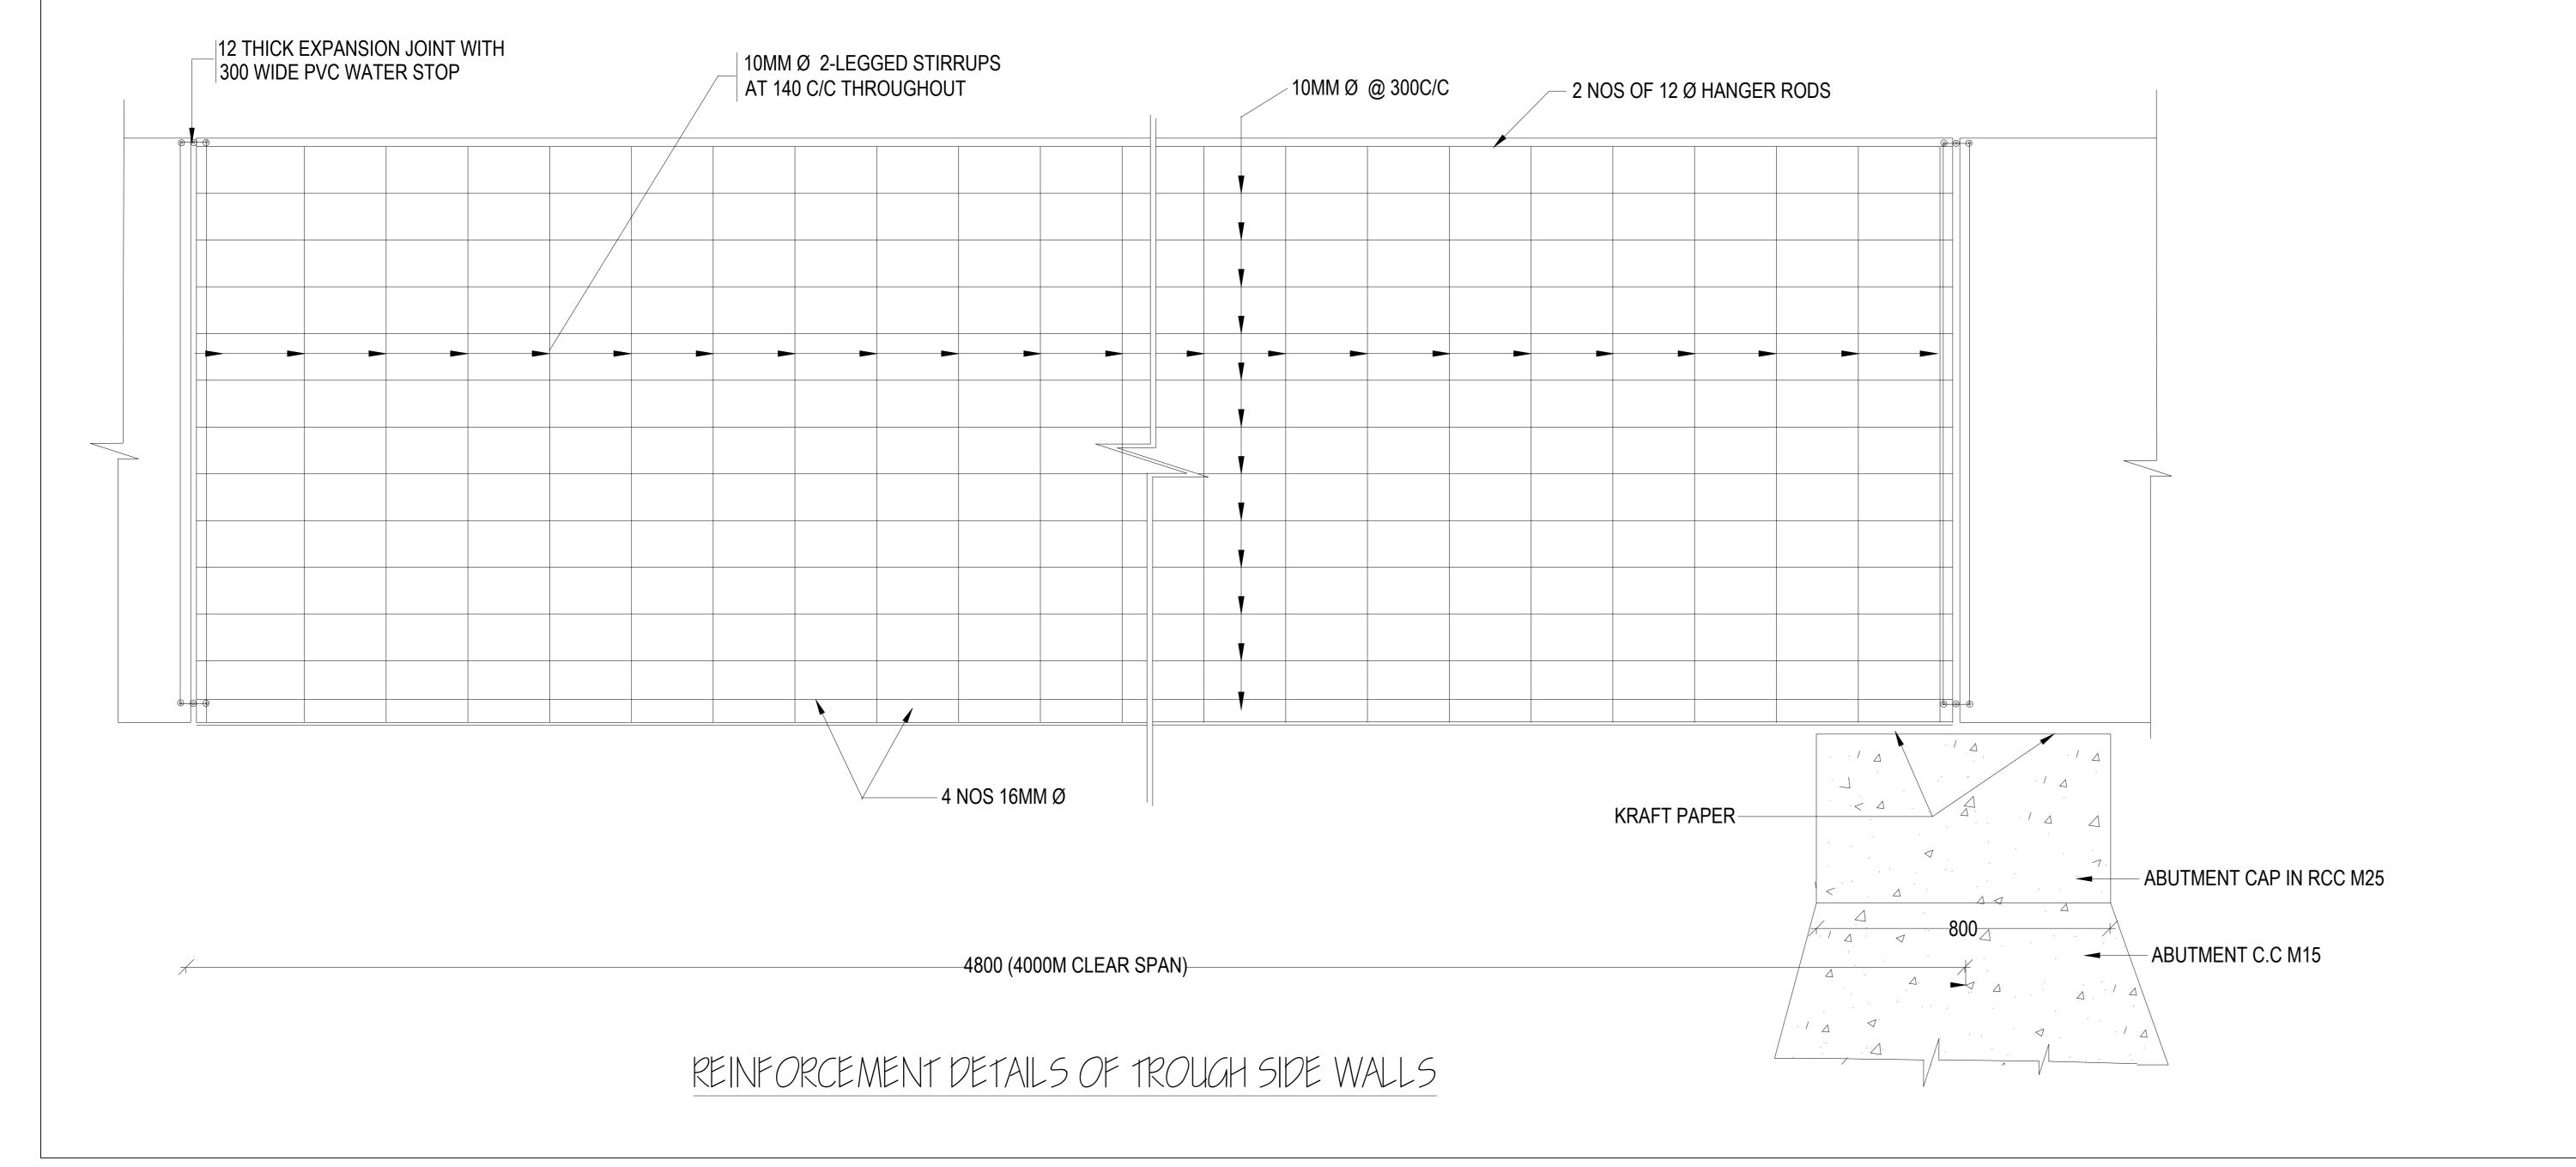

## NOTES AND SPECIFICATIONS

- 2/2
- 1. ALL DIMENSIONS ARE IN MILLIMETRES AND ALL LEVELS ARE IN METRES. ONLY FIGURED DIMENSIONS SHALL BE CONSIDERED
- 2. THE TROUGH BOTTOM SLAB, SIDE WALLS SHALL BE IN R.C.C. M25 GRADEUSING 20 MM GRADED AGGREGATE CONFORMING TO IS 383-1970.
- 3. H.Y.S.D BARS CONFORMING TO IS 1786-1985 SHALL ONLY BE USED UNLESS OTHERWISE SPECIFIED.
- 4. SPECIFICATIONS FOR RCC ITEMS SHALL BE AS PER I.S 456-2000.
- 5. OVER LAPPING OF BARS SHALL BE AVOIDED AS FAR AS POSSIBLE AT POINTS OF MAXIMUM STRESSES HOW EVER IF LAPS ARE INEVITABLE THE PROVISIONS IN CLAUSE 26 -2- 5-1 OF I.S : 456 2000 SHALL BE FOLLOWED.
- 6. COVER FOR REINFORCEMENT FOR TROUGH SLAB SHALL BE 30 MM AND SIDE WALLS SHALL BE 40 MM.
- 7. THE SEALING COAT OVER THE TROUGH FLOOR SLAB SHALL BE 40 MM THICK IN C.C M 25 GRADE RENDERED WATER PROOF BY ADDING SUITABLE ADMIXTURES AND SHALL BE LAID MONOLITHICALLY WITH SLAB CONCRETE.
- 9. OVER LAPPING OF BARS SHALL BE AVOIDED AS FAR AS POSSIBLE AT POINTS OF MAXIMUM STRESSES.

  HOW EVER IF LAPS ARE INEVITABLE THE SAME ARE PROPOSED AS PER PROVISIONS IN CLAUSE 26 -2- 5-1 OF I.S: 456 2000.

## REFERENCE DRAWINGS

1. GLIS/HLC/SP-16.825/001/2011 - GENERAL PLAN AND SECTIONS.

REVISION NO:	DRAWN	CHECKED	APPROVED	DATE	
CLIENT	GOVERNMENT OF ANDHRA PRADESH IRRIGATION & CAD DEPARTMENT				
PROJECT	GANDIKOTA LIFT IRRIGATION PROJECT MALYALA SUPLLY CHANNEL				
TITLE	SUPER PASSAGE AT KM. 19.000 RCC DETAILS OF TROUGH SLAB				
CONTRACTORS	M/S MCCL - KBL PUNE				
DRAWING NO:	50	TALE	Į.	DATE	
GLIS/HLC/SP-16.825/ 002/2011	AS IN	DICATED			