



STATEMENT SHOWING THE MODIFIED HYDRAULIC PARTICULARS OF S.K.F.F CANAL FROM KM 43.000 TO 45.125/45.000																					
SL.NO	Reach	Length of reach Mtrs.	Discharge required M3/Sec	Discharge Designed M3/Sec	Bed width in M	F.S depth M	Surfae fall	Side slope		Velocity in M/Sec.	Value of N	Free Board 'M'	Bed level		Losses				F.S levels		Remarks
								Left Side	Right Side				At beginning	At End	Due to Surfae fall	Due to Structures	Due to Transitions	Total Losses	At beginnin g	At End	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
36	KM 43.000 TO 45.125/45.000	2125	339.80	342.17	14.10	6.80	1 in 5000	11/2:1	11/2:1	2.0707	0.018	2.00	78.892	78.372	0.425	43125-0.095		0.520	85.692	85.172	

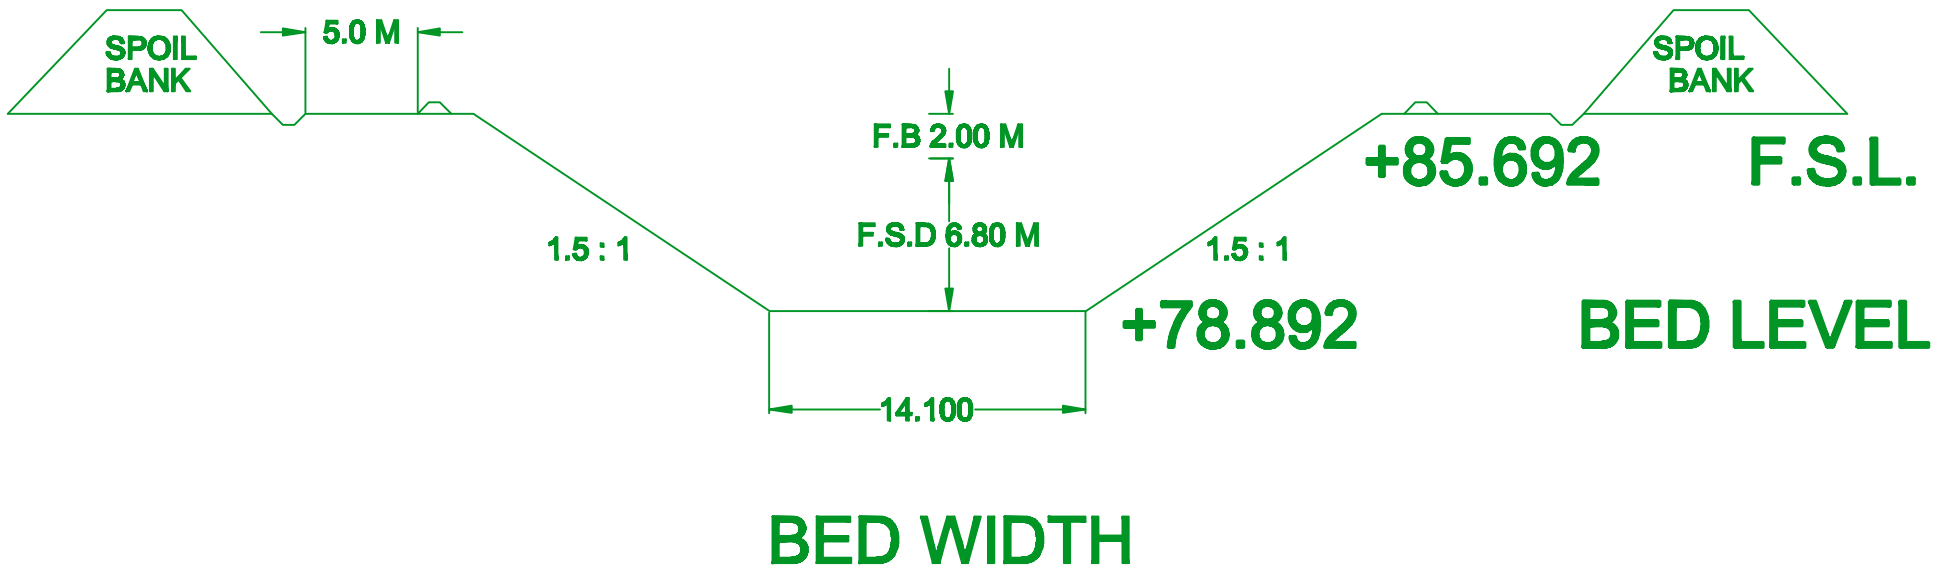

REACH STARTING

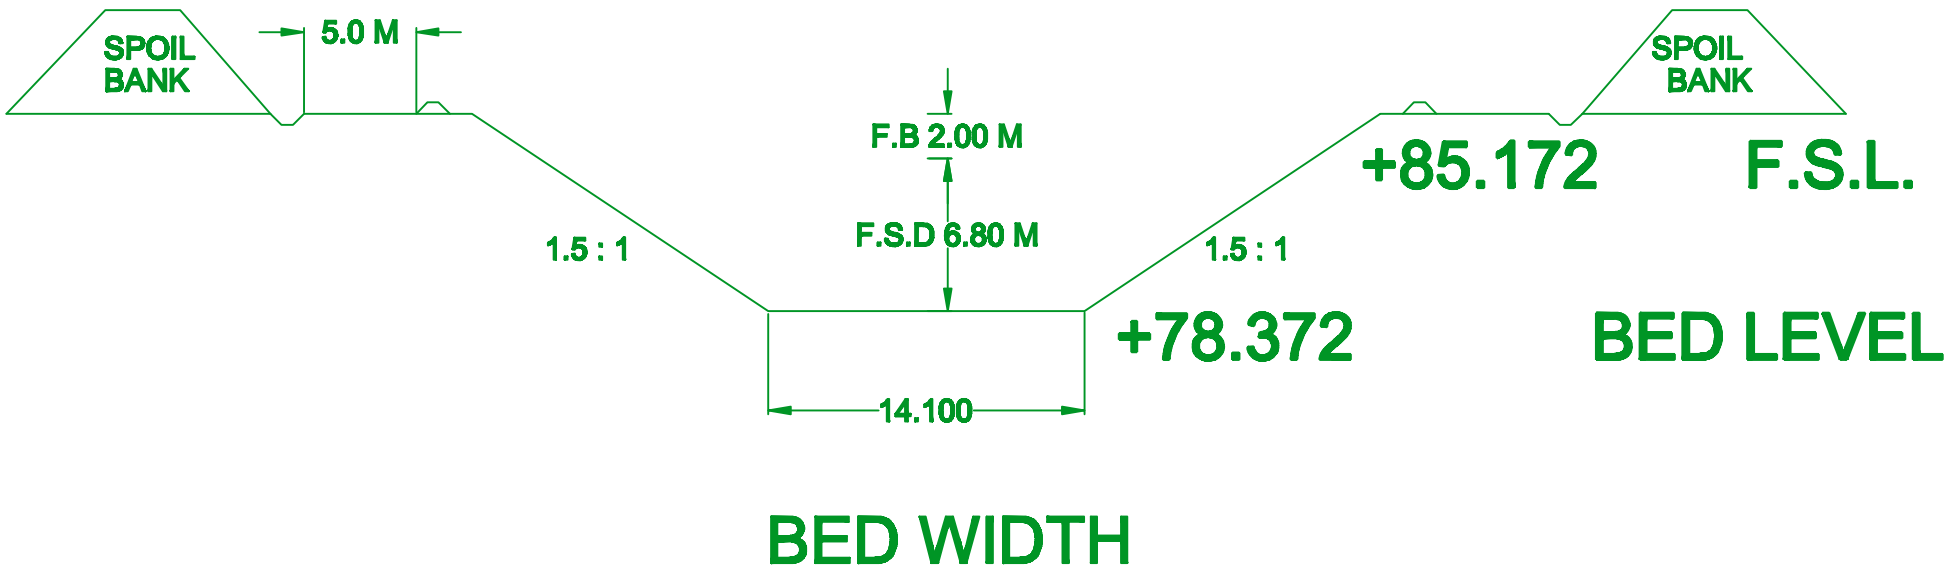

REACH ENDING