




Atmel® | SMART ARM® Cortex®-M4 - based Flash MCU SAM G55

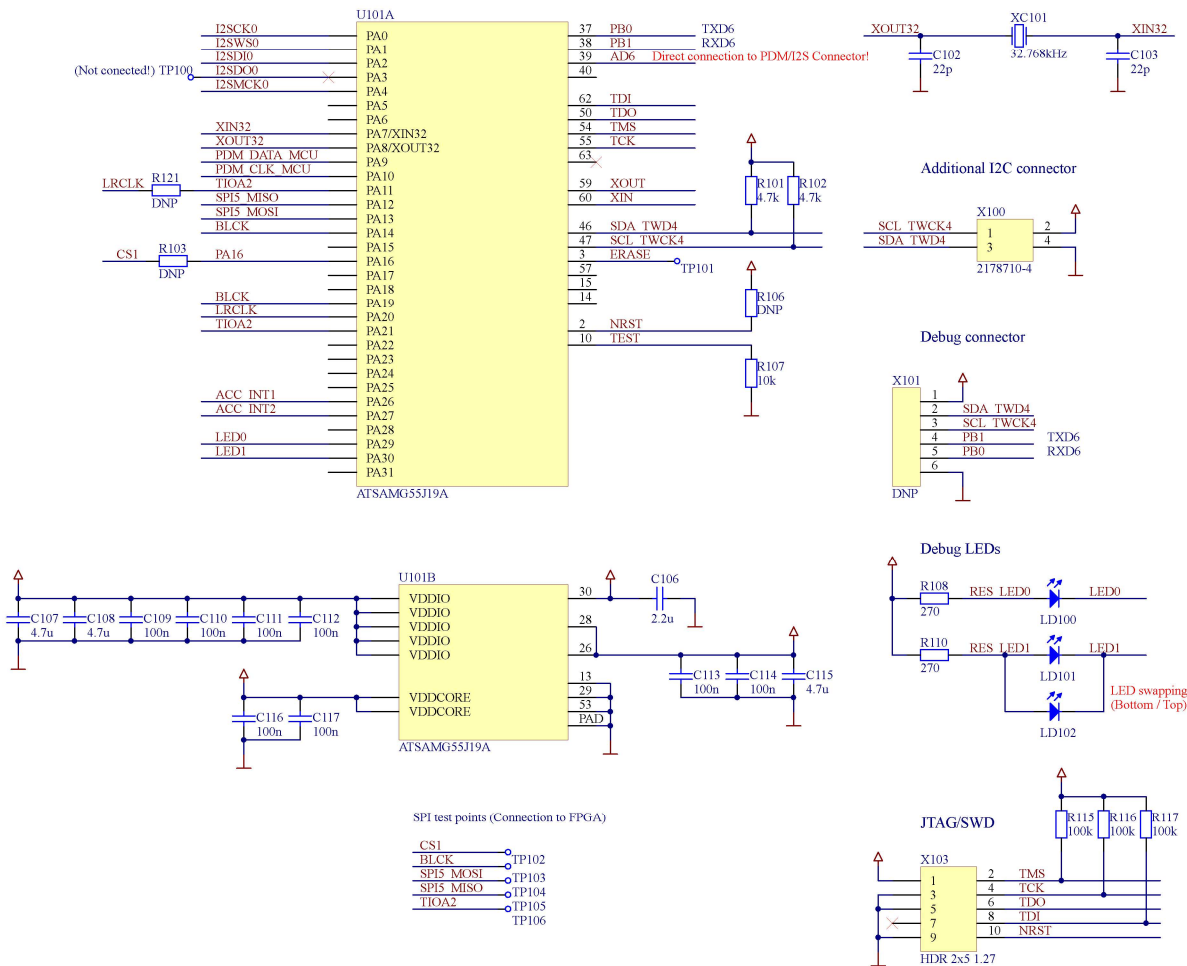


Input connector (Power supply and SPI)

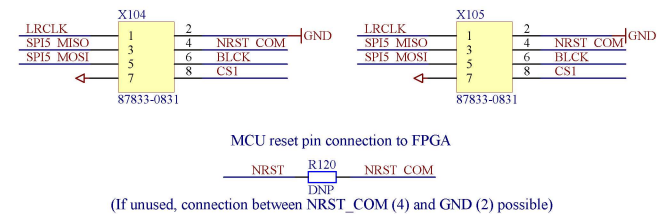


Board power (5V to 3V3)

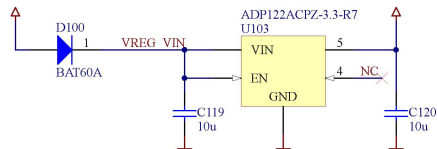

MEMS digital output motion sensor: ultra-low-power high-performance three-axis "nano" accelerometer

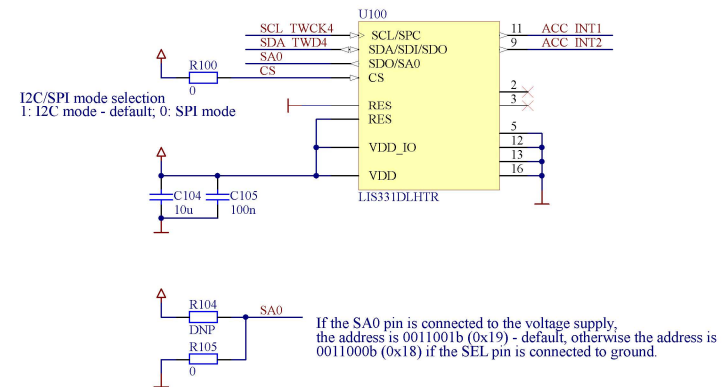

PDM/I2S Connector

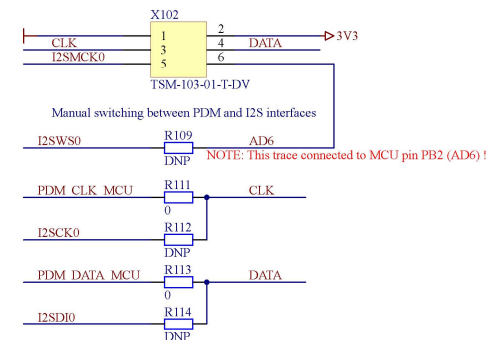

+3V3 Power On Reset

