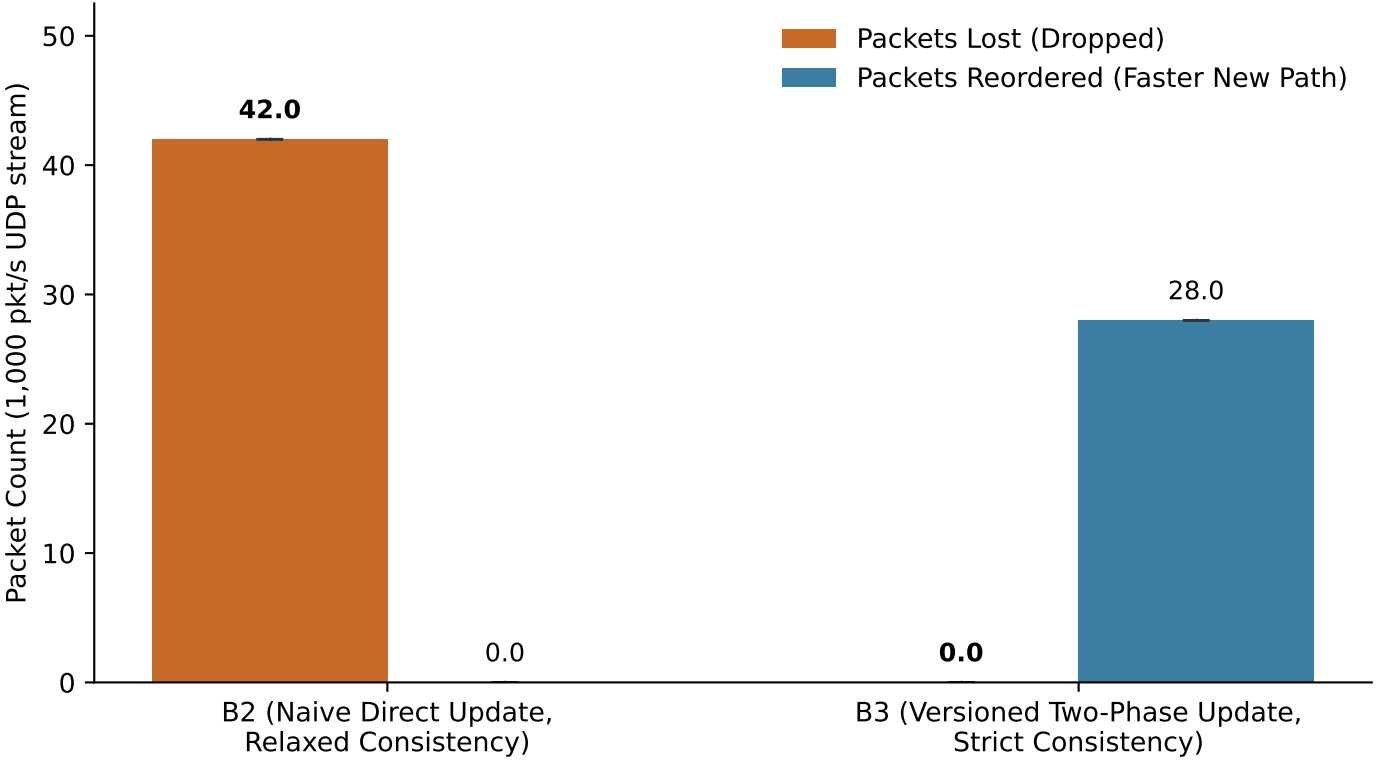
E4 (Headline): Packet Loss & Reordering During Reconfiguration (n=10, 95% CI)
Consistent Two-Phase Updates (Reitblatt et al., SIGCOMM 2012)
Packets Lost (Dropped)
Packets Reordered (Faster New Path)
Packet Count (1,000 pkt/s UDP stream)
0
10
20
30
40
50
42.0
0.0
0.0
28.0
B2 (Naive Direct Update,
Relaxed Consistency)
B3 (Versioned Two-Phase Update,
Strict Consistency)