

TN-10HD300

10" LF LOUDSPEAKER

350W RMS capacity
75mm(3in) inside-outside PISV VC
55-4200Hz response
98dB sensitivity
8Ω nominal impedance



ELECTRO ACOUSTIC SPECIFICATIONS

Nominal Chassis Diameter	10/254 in/mm
MAX Power	500 Watts
RMS Power	350 Watts
Impedance	8 Ohm
Resonance(natural) Frequency	55 Hz
Frequency Response	55-42000 Hz
Sensitivity(1W/1m)	98 dB
Voice Coil Diameter	3/75 in/mm
Winding material	PISV(inside-outside)
Magnet	97 Oz 190X90X25 mm

MOUNTING/SHIPPING INFORMATION


Overall Diameter	10.4/264 in/mm
Bolt Circle Diameter	9.6/245 in/mm
Baffle cutout Diameter	9.2/235 in/mm
Depth	5.5/142 in/mm

Net Weight	7.95 kgs
Shipping Weight	8.5 kgs
Shipping Box	29X29X17cm


THIELE SMALL PARAMETERS

FS Hz	68 Hz
Vas	23.3 L
RE Ohms	5.2 ohm
Qms	13.5
Qes	0.3
Qts	0.29
BL T·m	18.1 T·m
MMS	43.9
Xmax(mm)	2.5 mm
Sd	366 cm ²
Efficiency %	2.36 %
EBP	226

FREQUENCY RESPONSE DATA

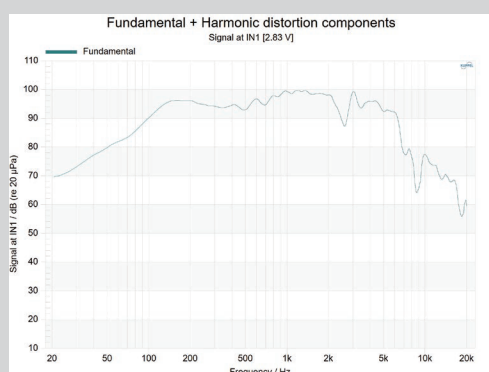

IMPEDANCE DATA

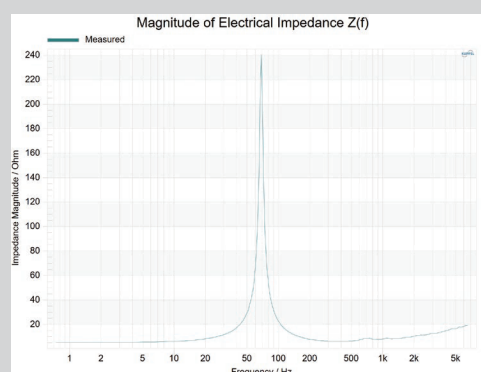

THE LF LOUDSPEAKER | TN-10HD300