TN-10LF89

10" LF LOUDSPEAKER

600W RMS capacity
89mm(3.5 in) inside-outside PICCAW VC
63-4000Hz response
97dB sensitivity
8Ω nominal impedance

ELECTRO ACOUSTIC SPECIFICATIONS

Nominal Chassis Diameter	10/254 in/mm
MAX Power	1200 Watts
RMS Power	600 Watts
Impedance	8 Ohm
Resonance(natural) Frequency	63 Hz
Frequency Response	63-4000 Hz
Sensitivity(1W/1m)	97 dB
Voice Coil Diameter	3.5"/89mm
Windling material	PICCAW (inside-outside)
Magnet	136 Oz 220X95X25mm

MOUNTING/SHIPPING INFORMATION

Overall Diameter	10.4/265 in/mm
Bolt Circle Diameter	9.6/245 in/mm
Baffle cutout Diameter	9/228 in/mm
Depth	5.7/145 in/mm

Net Weight	10 kgs
Shipping Weight	10.5 kgs
Shipping Box	29X29X16 cm

THIELE SMALL PARAMETERS

FS Hz	63 Hz
Vas	24 dm^3
RE Ohms	5.4 ohm
Qms	4.9
Qes	0.24
Qts	0.23
BL T/m	20 T/m
MMS(grms)	47 grams
Xmax(mm)	3.7 mm
Sd	300 cm^2
Efficiency %	2.5 %
EBP	262

FREQUENCY RESPONSE DATA

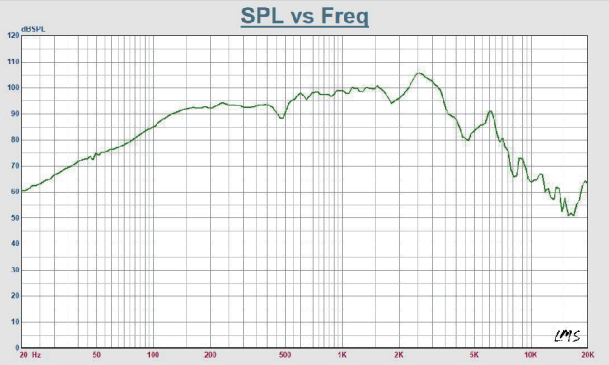

IMPEDANCE DATA

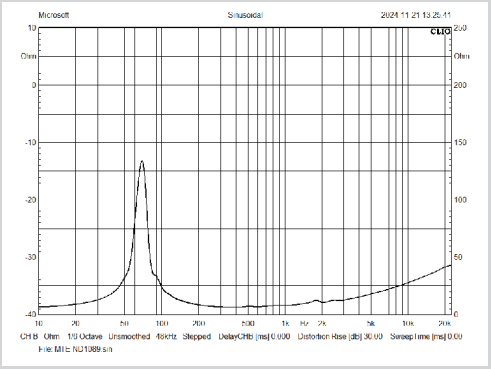

©Copyright ZTZ. • All rights reserved
www.ztzaudio.com