

TN-10MD300

10" LF LOUDSPEAKER

400W RMS capacity
75mm(3 in) inside-outside PI VC
72-3500Hz response
97dB sensitivity
8Ω nominal impedance



ELECTRO ACOUSTIC SPECIFICATIONS

Nominal Chassis Diameter	10/254 in/mm
MAX Power	800 Watts
RMS Power	400 Watts
Impedance	8 Ohm
Resonance(natural) Frequency	72 Hz
Frequency Response	72-3500 Hz
Sensitivity(1W/1m)	97 dB
Voice Coil Diameter	3/75 in/mm
Winding material	PI(inside-outside)
Magnet	97 Oz 190X90X25 mm

MOUNTING/SHIPPING INFORMATION


Overall Diameter	10.3/263 in/mm
Bolt Circle Diameter	9.7/247 in/mm
Baffle cutout Diameter	9.1/230 in/mm
Depth	5.6/143 in/mm

Net Weight	7.72/17.02 kgs
Shipping Weight	8.32/18.34 kgs
Shipping Box	29X29X16 cm 11.42X11.42X6.30 in


THIELE SMALL PARAMETERS

FS Hz	72 Hz
Vas	19.2 dm³
RE Ohms	5.2 ohm
Qms	8.1
Qes	0.20
Qts	0.19
BL T·m	23.8 T·m
MMS	46.9
Xmax(mm)	5.1 mm
Sd	363 cm²
Efficiency %	3.48 %
EBP	360

FREQUENCY RESPONSE DATA

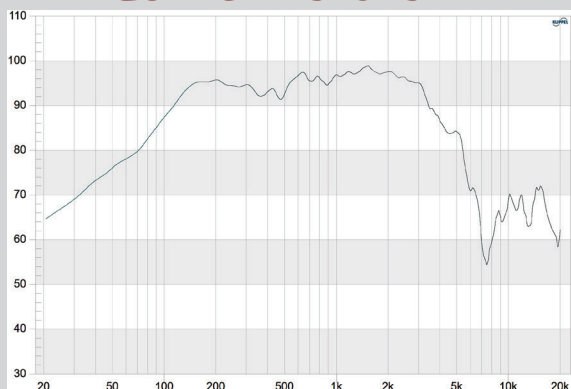

IMPEDANCE DATA

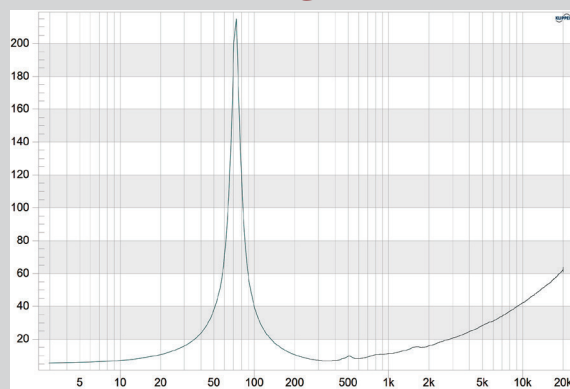

THE LF LOUDSPEAKER | TN-10MD300