

TN-10ZM85

10" LF LOUDSPEAKER

400W RMS capacity

75.5mm(3 in) inside-outside GPI VC

66-4000Hz response

98 dB sensitivity

8Ω nominal impedance



ELECTRO ACOUSTIC SPECIFICATIONS

Nominal Chassis Diameter	10/254 in/mm
MAX Power	800 Watts
RMS Power	400 Watts
Impedance	8 Ohm
Resonance(natural) Frequency	66 Hz
Frequency Response	66-4000 Hz
Sensitivity(1W/1m)	98 dB
Voice Coil Diameter	3"/75.5mm
Windling material	GPI(inside-outside)
Magnet	112 Oz 200*86*25mm

MOUNTING/SHIPPING INFORMATION

Overall Diameter	10.3/262 in/mm
Bolt Circle Diameter	9.5/242 in/mm
Baffle cutout Diameter	9.1/232 in/mm
Depth	5.1/130 in/mm

Net Weight	8.35 kgs
Shipping Weight	8.85 kgs
Shipping Box	28X28X16cm


THIELE SMALL PARAMETERS

FS Hz	66 Hz
Vas	25 dm ³
RE Ohms	5.2 ohm
Qms	5.7
Qes	0.23
Qts	0.22
BL T/m	20 T/m
MMS(grms)	40 grams
Xmax(mm)	4.7 mm
Sd(cm ²)	366 cm ²
Efficiency %	3.2 %
Le(1k Hz)	52 mH
EBP	287

FREQUENCY RESPONSE DATA



IMPEDANCE DATA

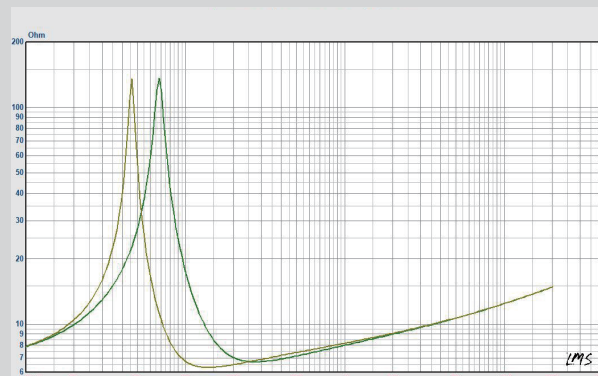

THE LF LOUDSPEAKER | TN-10ZM85