

TN-10ZW100

10" LF LOUDSPEAKER

800W RMS capacity
100.8mm(4 in) inside-outside GPI VC
56-3300Hz response
96 dB sensitivity
8Ω nominal impedance



ELECTRO ACOUSTIC SPECIFICATIONS

Nominal Chassis Diameter	10/254 in/mm
MAX Power	1600 Watts
RMS Power	800 Watts
Impedance	8 Ohm
Resonance(natural) Frequency	56 Hz
Frequency Response	56-3300 Hz
Sensitivity(1W/1m)	96 dB
Voice Coil Diameter	4"/100.8mm
Winding material	GPI(inside-outside)
Magnet	125 Oz

MOUNTING/SHIPPING INFORMATION


Overall Diameter	10.3/262 in/mm
Bolt Circle Diameter	9.6/245 in/mm
Baffle cutout Diameter	9.4/238 in/mm
Depth	5.2/132 in/mm

Net Weight	8.9 kgs
Shipping Weight	9.9 kgs
Shipping Box	28.5X28.5X15cm


THIELE SMALL PARAMETERS

FS Hz	54 Hz
Vas	27 dm ³
RE Ohms	5.6 ohm
Qms	7.8
Qes	0.23
Qts	0.22
BL T/m	22 T/m
MMS(grms)	57 grams
Xmax(mm)	6.1 mm
Sd	363 cm ²
Efficiency %	1.87 %
EBP	234

FREQUENCY RESPONSE DATA

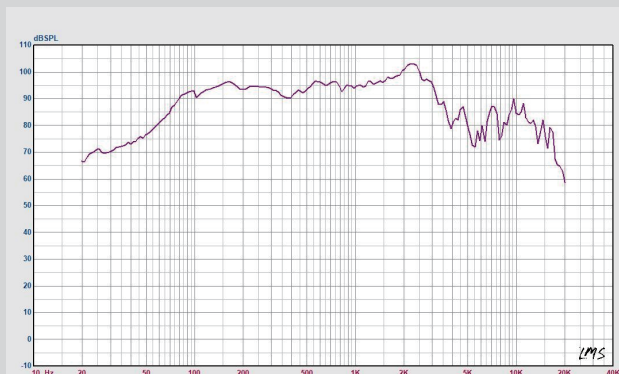

IMPEDANCE DATA

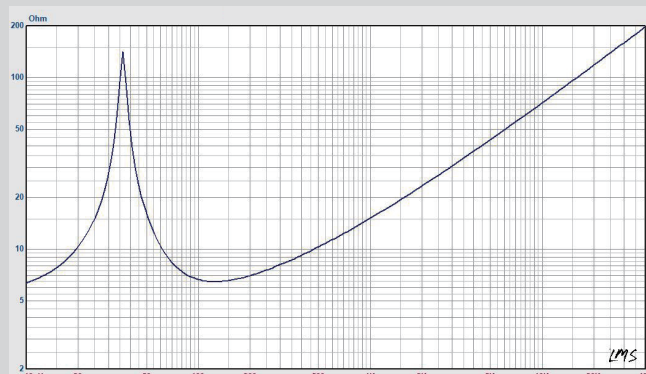

THE LF LOUDSPEAKER | TN-10ZW100