

TN-12HD300

12" LF LOUDSPEAKER

400W RMS capacity
75mm(3 in) inside-outside GPI VC
43-4000Hz response
98dB sensitivity
8Ω nominal impedance



ELECTRO ACOUSTIC SPECIFICATIONS

Nominal Chassis Diameter	12/305 in/mm
MAX Power	700 Watts
RMS Power	400 Watts
Impedance	8 Ohm
Resonance(natural) Frequency	43 Hz
Frequency Response	43-4000 Hz
Sensitivity(1W/1m)	98 dB
Voice Coil Diameter	3/75 in/mm
Winding material	PLSV(inside-outside)
Magnet	97 Oz 190X90X25 mm

MOUNTING/SHIPPING INFORMATION


Overall Diameter	12.5/318 in/mm
Bolt Circle Diameter	11.8/300 in/mm
Baffle cutout Diameter	11.2/285 in/mm
Depth	6.6/168 in/mm

Net Weight	8.9 kgs
Shipping Weight	9.9 kgs
Shipping Box	34X34X18 cm


THIELE SMALL PARAMETERS

FS Hz	43 Hz
Vas	70.2 dm³
RE Ohms	4.7 ohm
Qms	11.2
Qes	0.2
Qts	0.2
BL T·m	21.3 T·m
MMS	77.2
Xmax(mm)	4 mm
Sd	539 cm²
Efficiency %	2.7 %
EBP	215

FREQUENCY RESPONSE DATA

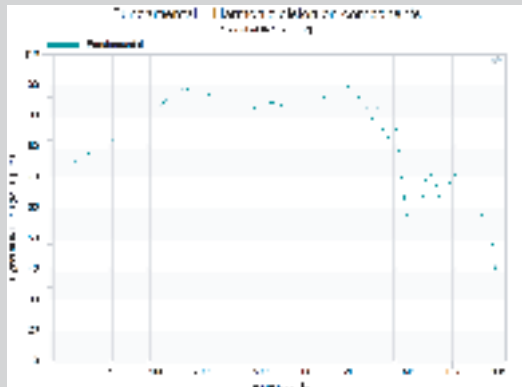

IMPEDANCE DATA

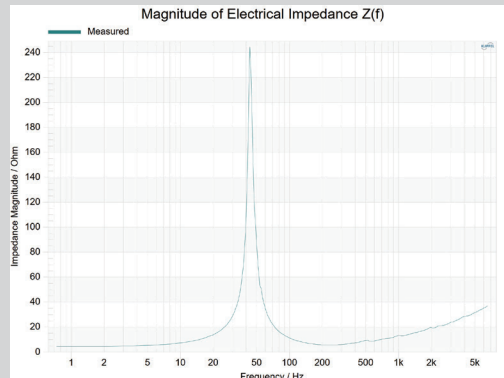

THE LF LOUDSPEAKER | TN-12HD300