

TN-12LF89

12" LF LOUDSPEAKER

800W RMS capacity
89mm(3.5 in) inside-outside PICCAW VC
50-4000Hz response
97dB sensitivity
8Ω nominal impedance



ELECTRO ACOUSTIC SPECIFICATIONS

Nominal Chassis Diameter	12/305 in/mm
MAX Power	1600 Watts
RMS Power	800 Watts
Impedance	8 Ohm
Resonance(natural) Frequency	50 Hz
Frequency Response	50-4000 Hz
Sensitivity(1W/1m)	97 dB
Voice Coil Diameter	3.5"/89mm
Windling material	PICCAW (inside-outside)
Magnet	136 Oz 220X95X25mm

MOUNTING/SHIPPING INFORMATION


Overall Diameter	12.4/317 in/mm
Bolt Circle Diameter	11.8/300 in/mm
Baffle cutout Diameter	11.2/285 in/mm
Depth	63/160 in/mm

Net Weight	10.7 kgs
Shipping Weight	11.3 kgs
Shipping Box	33.5X33.5X17cm


THIELE SMALL PARAMETERS

FS Hz	50 Hz
Vas	52 dm ³
RE Ohms	5.4 ohm
Qms	6.5
Qes	0.24
Qts	0.23
BL T/m	22 T/m
MMS(grms)	70 grams
Xmax(mm)	3.7 mm
Sd	500 cm ²
Efficiency %	2.9 %
EBP	208

FREQUENCY RESPONSE DATA

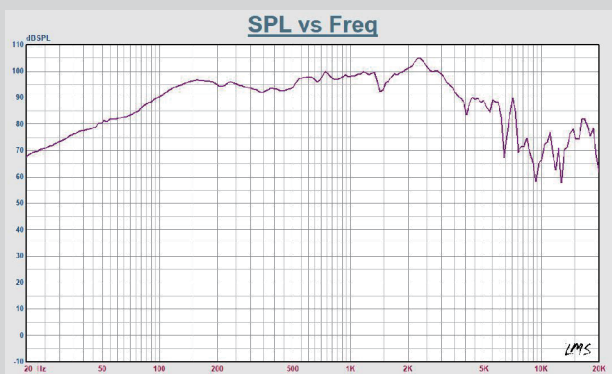

IMPEDANCE DATA

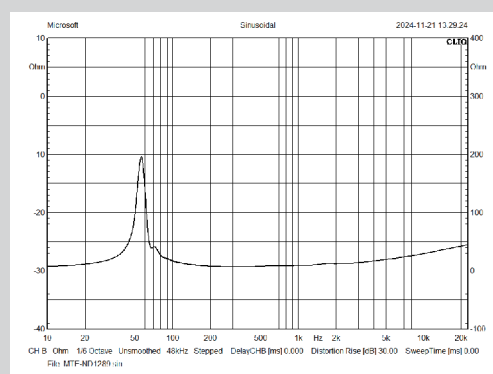

THE LF LOUDSPEAKER | TN-12LF89