

TN-12MD300

12" LF LOUDSPEAKER

400W RMS capacity
75mm(3 in) inside-outside PI VC
58-4000Hz response
98dB sensitivity
8Ω nominal impedance



ELECTRO ACOUSTIC SPECIFICATIONS

Nominal Chassis Diameter	12/305 in/mm
MAX Power	800 Watts
RMS Power	400 Watts
Impedance	8 Ohm
Resonance(natural) Frequency	58 Hz
Frequency Response	58-4000 Hz
Sensitivity(1W/1m)	98 dB
Voice Coil Diameter	3/75 in/mm
Winding material	PI(inside-outside)
Magnet	97 Oz 190X90X25 mm

MOUNTING/SHIPPING INFORMATION


Overall Diameter	12.5/317 in/mm
Bolt Circle Diameter	11.8/300 in/mm
Baffle cutout Diameter	11.1/283 in/mm
Depth	6.3/159 in/mm

Net Weight	7.95/15.53 kgs
Shipping Weight	8.45/18.63 kgs
Shipping Box	34X34X18 cm 13.86X13.85X7.09 in


THIELE SMALL PARAMETERS

FS Hz	58 Hz
Vas	43.1 dm ³
RE Ohms	5.2 ohm
Qms	13.3
Qes	0.25
Qts	0.24
BL T·m	23.6 T·m
MMS	70
Xmax(mm)	4.1 mm
Sd	539 cm ²
Efficiency %	3.4 %
EBP	232

FREQUENCY RESPONSE DATA

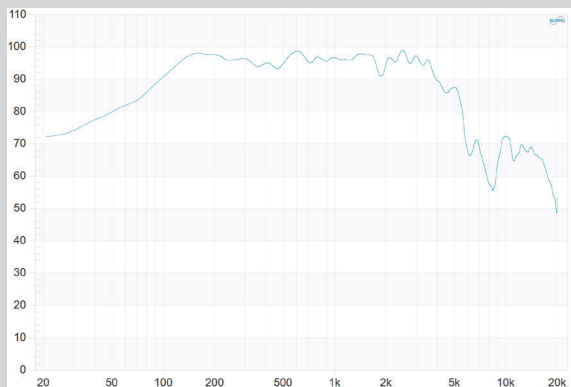

IMPEDANCE DATA

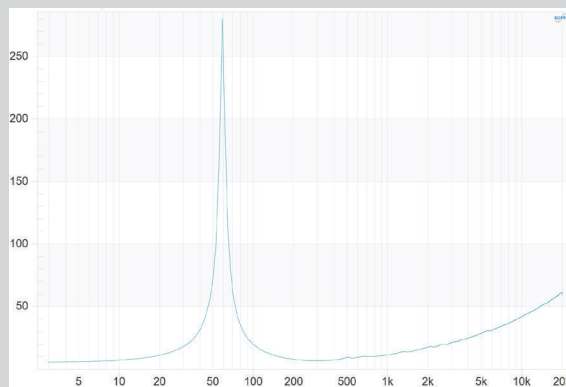

THE LF LOUDSPEAKER | TN-12MD300