

TN-12ZM85

12" LF LOUDSPEAKER

500W RMS capacity

75.5mm(3 in) inside-outside GPI VC

55-4000Hz response

99 dB sensitivity

8Ωnominal impedance



ELECTRO ACOUSTIC SPECIFICATIONS

Nominal Chassis Diameter	12/305 in/mm
MAX Power	1000 Watts
RMS Power	500 Watts
Impedance	8 Ohm
Resonance(natural) Frequency	55 Hz
Frequency Response	55-4000 Hz
Sensitivity(1W/1m)	99 dB
Voice Coil Diameter	3"/75.5mm
Winding material	GPI(inside-outside)
Magnet	112 Oz 200*86*25mm

MOUNTING/SHIPPING INFORMATION

Overall Diameter	12.4/316 in/mm
Bolt Circle Diameter	11.8/300 in/mm
Baffle cutout Diameter	11.2/285 in/mm
Depth	5.7/146 in/mm

Net Weight	8.7 kgs
Shipping Weight	9.1 kgs
Shipping Box	33.5X33.5X17cm


THIELE SMALL PARAMETERS

FS Hz	55 Hz
Vas	66 dm ³
RE Ohms	5.2 ohm
Qms	9.5
Qes	0.2
Qts	0.23
BL T/m	20 T/m
MMS(grms)	48 grams
Xmax(mm)	4.7 mm
Sd	530 cm ²
Efficiency %	4.5 %
Le(1k Hz)	61 mH
EBP	275

FREQUENCY RESPONSE DATA



IMPEDANCE DATA

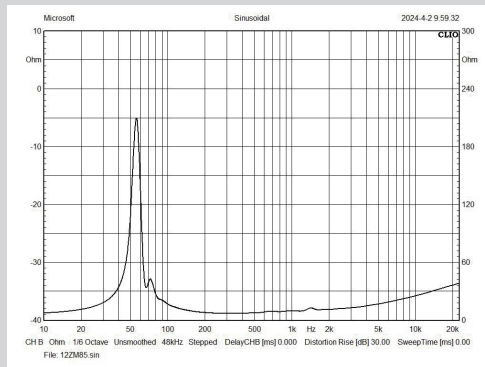

THE LF LOUDSPEAKER | TN-12ZM85



©Copyright ZTZ. • All rights reserved
www.ztzaudio.com