

TN-12ZW100

12" LF LOUDSPEAKER

800W RMS capacity
100.8mm(4 in) inside-outside GPI VC
62- 3500Hz response
97 dB sensitivity
8Ω nominal impedance

ELECTRO ACOUSTIC SPECIFICATIONS

Nominal Chassis Diameter	12/305 in/mm
MAX Power	1600 Watts
RMS Power	800 Watts
Impedance	8 Ohm
Resonance(natural) Frequency	62 Hz
Frequency Response	62-3500 Hz
Sensitivity(1W/1m)	97 dB
Voice Coil Diameter	4"/100.8mm
Windling material	GPI(inside-outside)
Magnet	125 Oz 220*110*25mm

MOUNTING/SHIPPING INFORMATION

Overall Diameter	12.4/315 in/mm
Bolt Circle Diameter	11.8/300 in/mm
Baffle cutout Diameter	11.2/285 in/mm
Depth	5.6/142 in/mm




Net Weight	9 kgs
Shipping Weight	10 kgs
Shipping Box	33.5X33.5X17cm


THIELE SMALL PARAMETERS

FS Hz	62 Hz
Vas	62.5 dm ³
RE Ohms	5.6 ohm
Qms	9.1
Qes	0.23
Qts	0.22
BL T/m	22 T/m
MMS(gms)	66 grams
Xmax(mm)	6.1 mm
Sd	531 cm ²
Efficiency %	3.11 %
EBP	213

FREQUENCY RESPONSE DATA

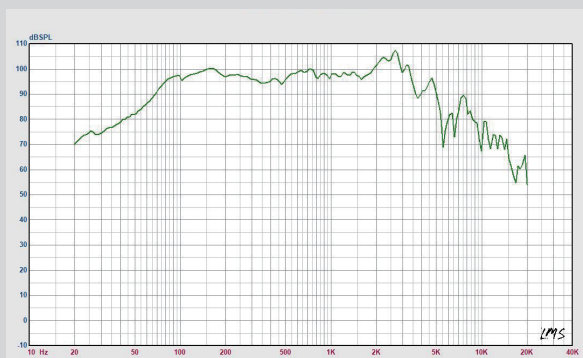

IMPEDANCE DATA

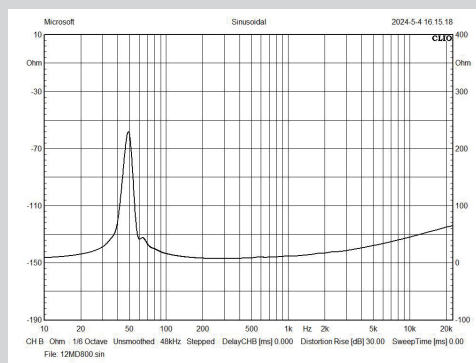

THE LF LOUDSPEAKER | TN-12ZW100