

TN-15FW400

15" LF LOUDSPEAKER

1000W RMS capacity
100mm(4 in) inside-outside PI VC
41-2000Hz response
97dB sensitivity
8Ω nominal impedance



ELECTRO ACOUSTIC SPECIFICATIONS

Nominal Chassis Diameter	15/385 in/mm
MAX Power	2000 Watts
RMS Power	1000 Watts
Impedance	8 Ohm
Resonance(natural) Frequency	41 Hz
Frequency Response	41-2000 Hz
Sensitivity(1W/1m)	97 dB
Voice Coil Diameter	4/100 in/mm
Winding material	PI(inside-outside)
Magnet	125 Oz 220X110X25 mm

MOUNTING/SHIPPING INFORMATION


Overall Diameter	15.4/392 in/mm
Bolt Circle Diameter	14.8/377 in/mm
Baffle cutout Diameter	14/356 in/mm
Depth	7.5/191 in/mm

Net Weight	13.13/28.95 kgs
Shipping Weight	13.83/30.49 kgs
Shipping Box	42X42X20 cm 16.54X16.54X7.87 in


THIELE SMALL PARAMETERS

FS Hz	41 Hz
Vas	81.5 dm³
RE Ohms	5.6 ohm
Qms	16.1
Qes	0.42
Qts	0.41
BL T·m	24.4 T·m
MMS	189.9
Xmax(mm)	9.6 mm
Sd	855 cm²
Efficiency %	1.28 %
EBP	98

FREQUENCY RESPONSE DATA

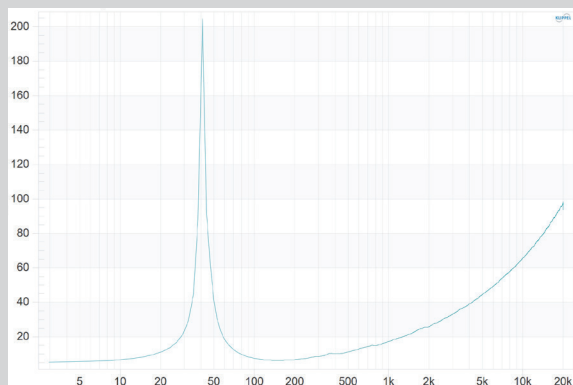

IMPEDANCE DATA

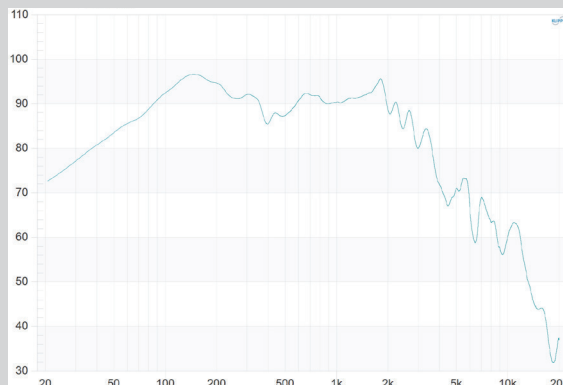

THE LF LOUDSPEAKER | TN-15FW400