

TN-15HD300

15" LF LOUDSPEAKER

500W RMS capacity
75mm(3 in) inside-outside GPI VC
40-3000Hz response
100dB sensitivity
8Ω nominal impedance



ELECTRO ACOUSTIC SPECIFICATIONS

Nominal Chassis Diameter	15/385 in/mm
MAX Power	1000 Watts
RMS Power	500 Watts
Impedance	8 Ohm
Resonance(natural) Frequency	40 Hz
Frequency Response	40-3000 Hz
Sensitivity(1W/1m)	100 dB
Voice Coil Diameter	3/75 in/mm
Winding material	GPI(inside-outside)
Magnet	97 Oz 190X190X25 mm

MOUNTING/SHIPPING INFORMATION


Overall Diameter	15.4/392 in/mm
Bolt Circle Diameter	14.8/377 in/mm
Baffle cutout Diameter	13.9/355 in/mm
Depth	7.5/190 in/mm

Net Weight	9.75 kgs
Shipping Weight	10.75 kgs
Shipping Box	42X42X20 cm


THIELE SMALL PARAMETERS

FS Hz	40 Hz
Vas	152 dm ³
RE Ohms	4.7 ohm
Qms	8.7
Qes	0.28
Qts	0.27
BL T·m	21.1 T·m
MMS	111
Xmax(mm)	3.4 mm
Sd	870 cm ²
Efficiency %	3.3 %
EBP	142

FREQUENCY RESPONSE DATA

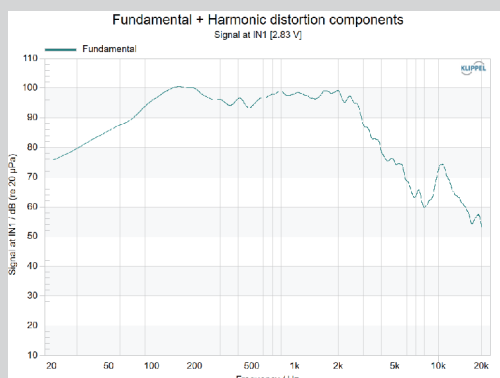

IMPEDANCE DATA

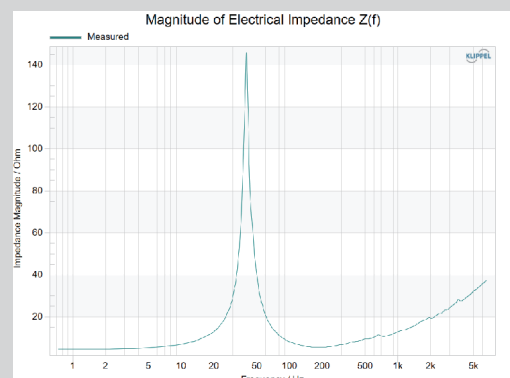

THE LF LOUDSPEAKER | TN-15HD300